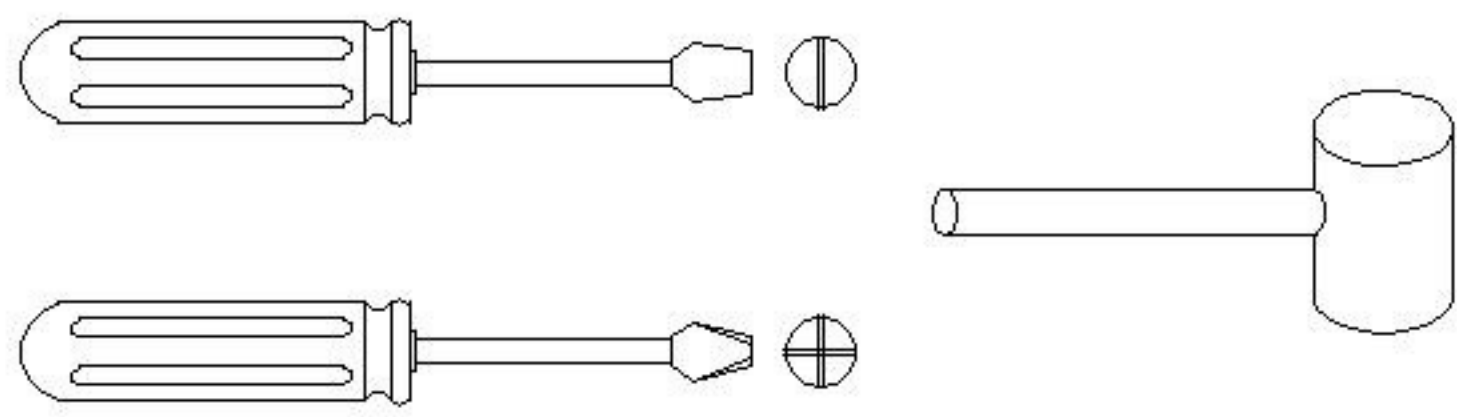


ASSEMBLY INSTRUCTIONS

8 DRAWER DRESSER

ASSEMBLY REQUIREMENTS	2 – Person Assembly	2.5Hour Assembly Time (Approximate)	Tool Required (Not Provided)	
--------------------------	------------------------	---	---------------------------------	---

Thank you for purchasing our product!

Please refer and use this assembly instruction to assemble the product.
Contact our customer service department in case there are any missing or damage parts or hardware.
Replacement parts are normally shipped within 2 or 3days.

ASSEMBLY PREPARATION:

- 1. Remove all packaging materials ,staples and packing straps from the carton.
- 2. Refer to Part List and Hardware List and ensure parts and hardware are correct before assembly.
Contact customer service for missing parts.
- 3. Place all wooden parts on clean, flat and soft surface (e.g .carpet or rug) to prevent scratch and damage to parts.

SAFETY PRECAUTION:

- 1. Keep ALL HARDWARE PART OUT OF REACH OF CHILDREN.
- 2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS

TIPS FOR ASSEMBLY:


- 1. Allow ample room for assembly and in close proximity to where product will be placed.
- 2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
- 3. Identify all the parts, hardware and quantities required for each step.
- 4. During assembly, do not over-tighten any fittings as this may cause damage.
- 5. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
- 6. Always place the product on a flat, level surface.
- 7. Do not sit or stand on the partially assembled product ;only use the product for which it is intended.

CARE AND MAINTENANCE:


- Use a slightly damp cloth to clean the product. Do not use bleach or abrasive cleaning material.
- Check all the fittings periodically and re-tighten as necessary. Do not use the product if any of the parts is damaged or broken.
- Never allow any kind of liquids to remain on your furniture. Absorption can cause wood to warp or delaminate.
- Do not place hot items (e.g hot drinks)directly onto the wood surface.
- Do not drag and pull your furniture.

This product is for indoor and household use only –not for commercial or industrial use.

INSTRUCTION FOR CAM-BOLT & CAM-LOCK


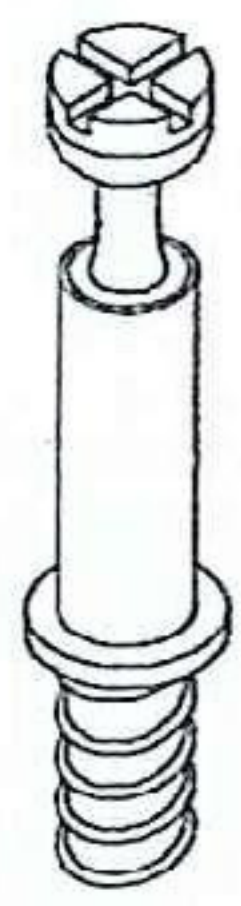


CAM-BOLT

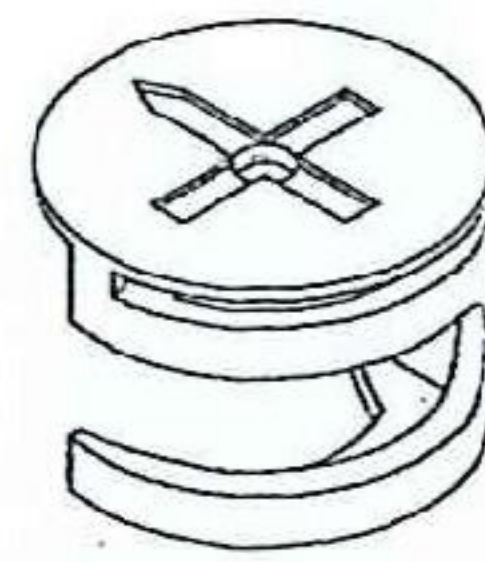


CAM-LOCK


Tools Required

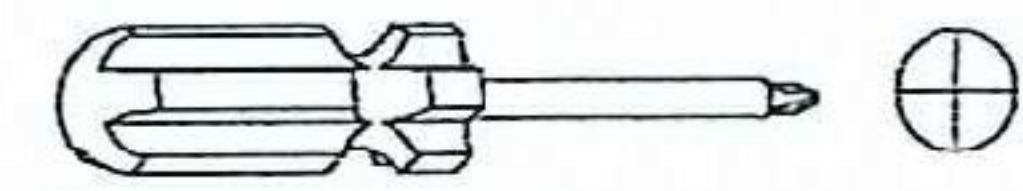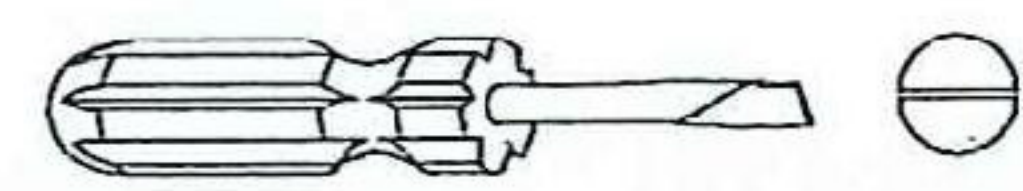


INSERTING AND TIGHTENING CAM-BOLT

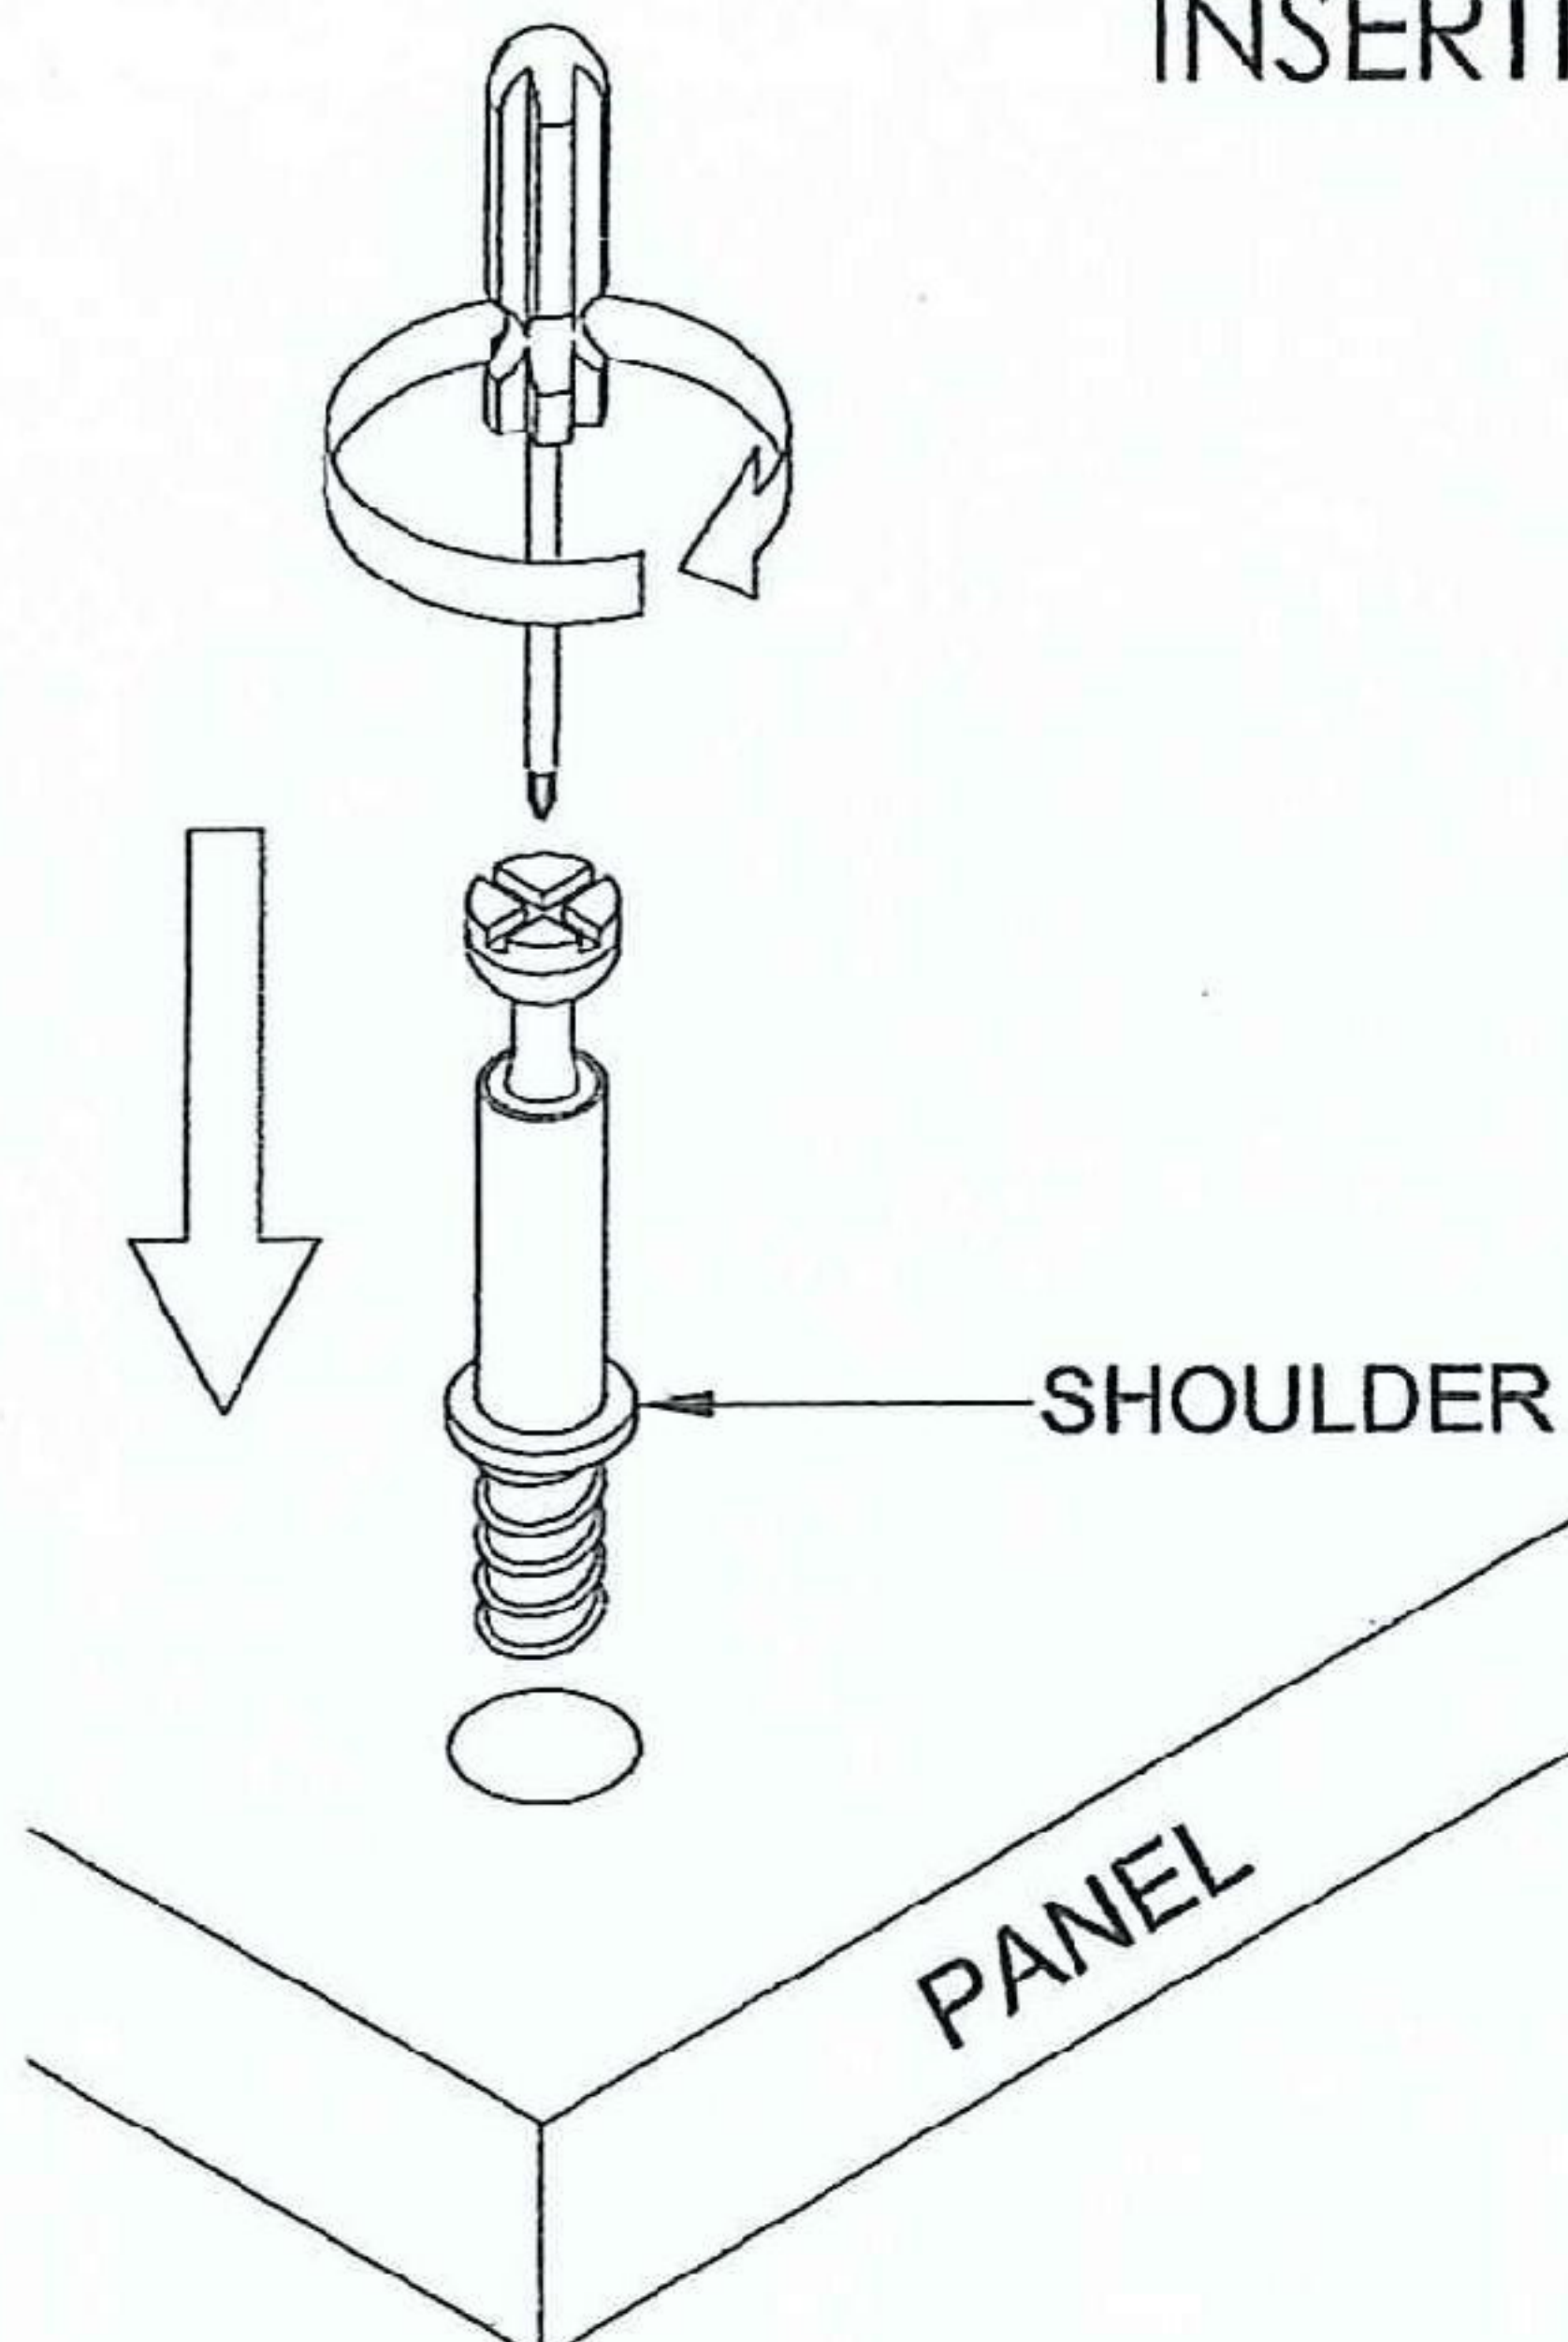

Place Cam-bolt on pre-drilled hole and screw in vertically

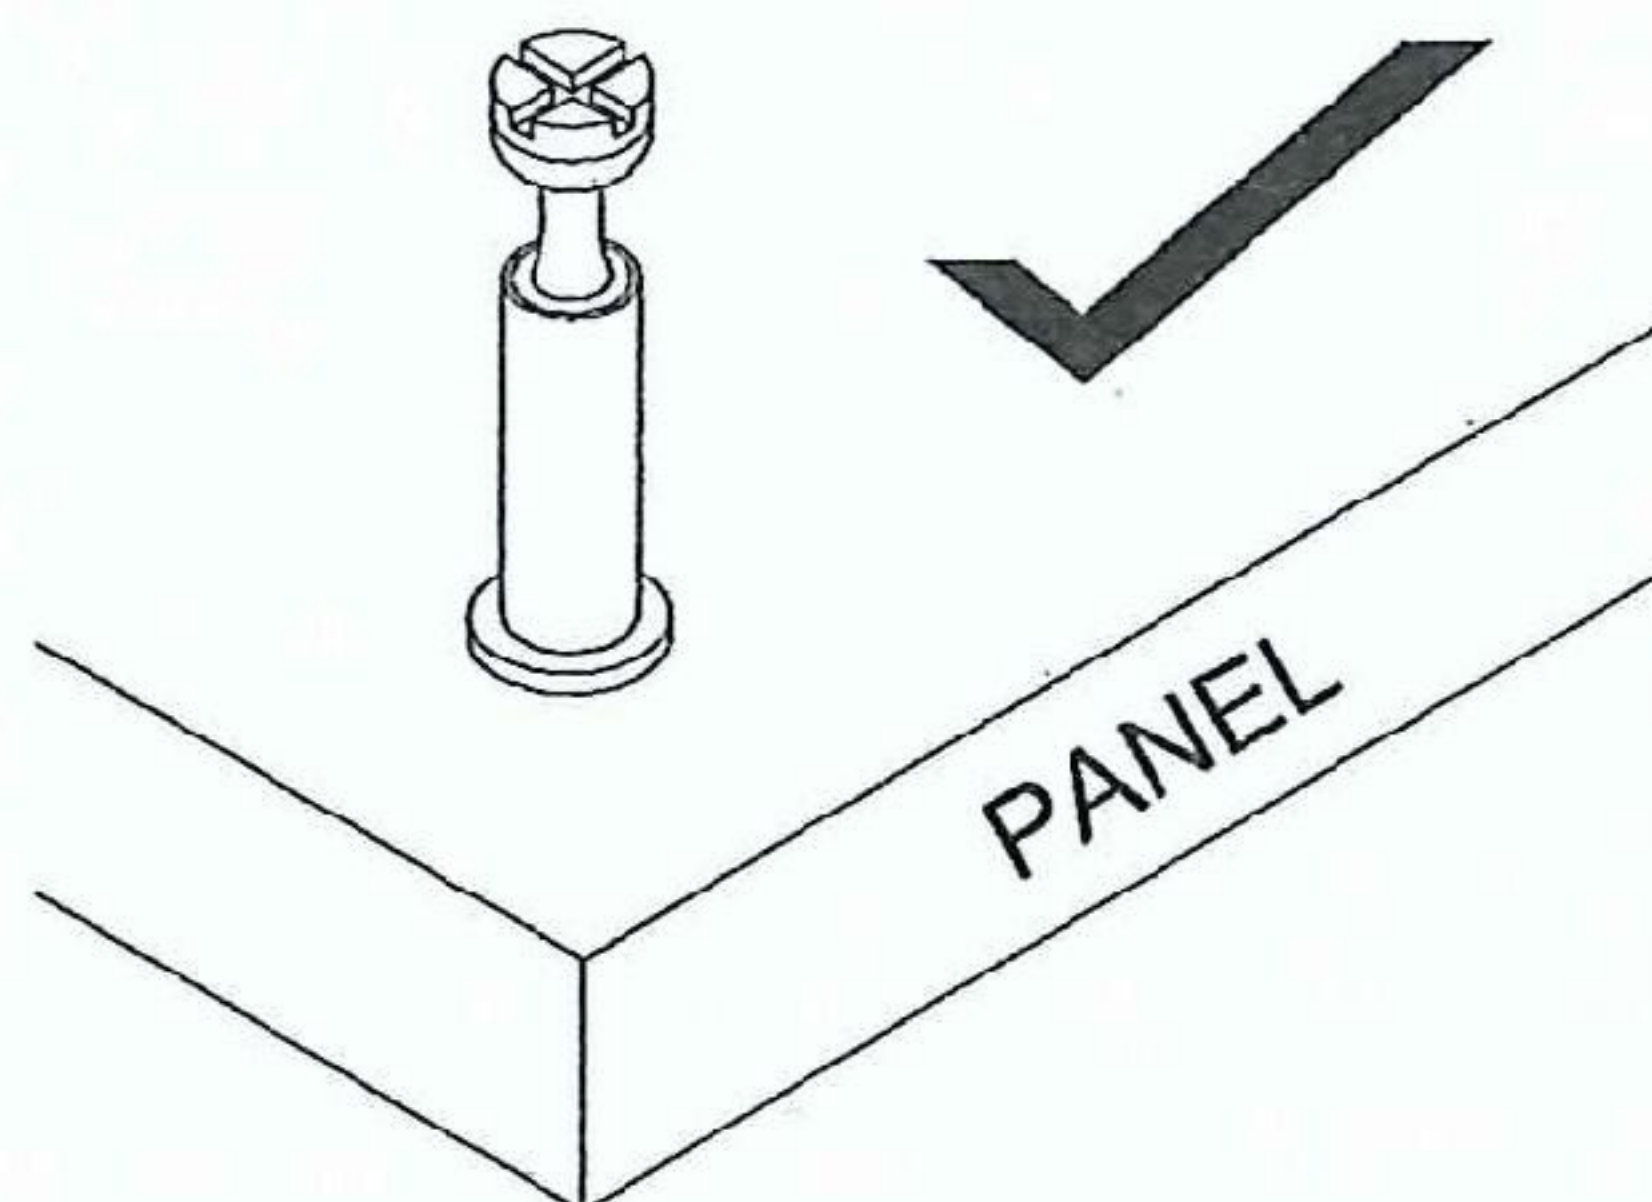


Shoulder is flushed (on the same level) with the panel.

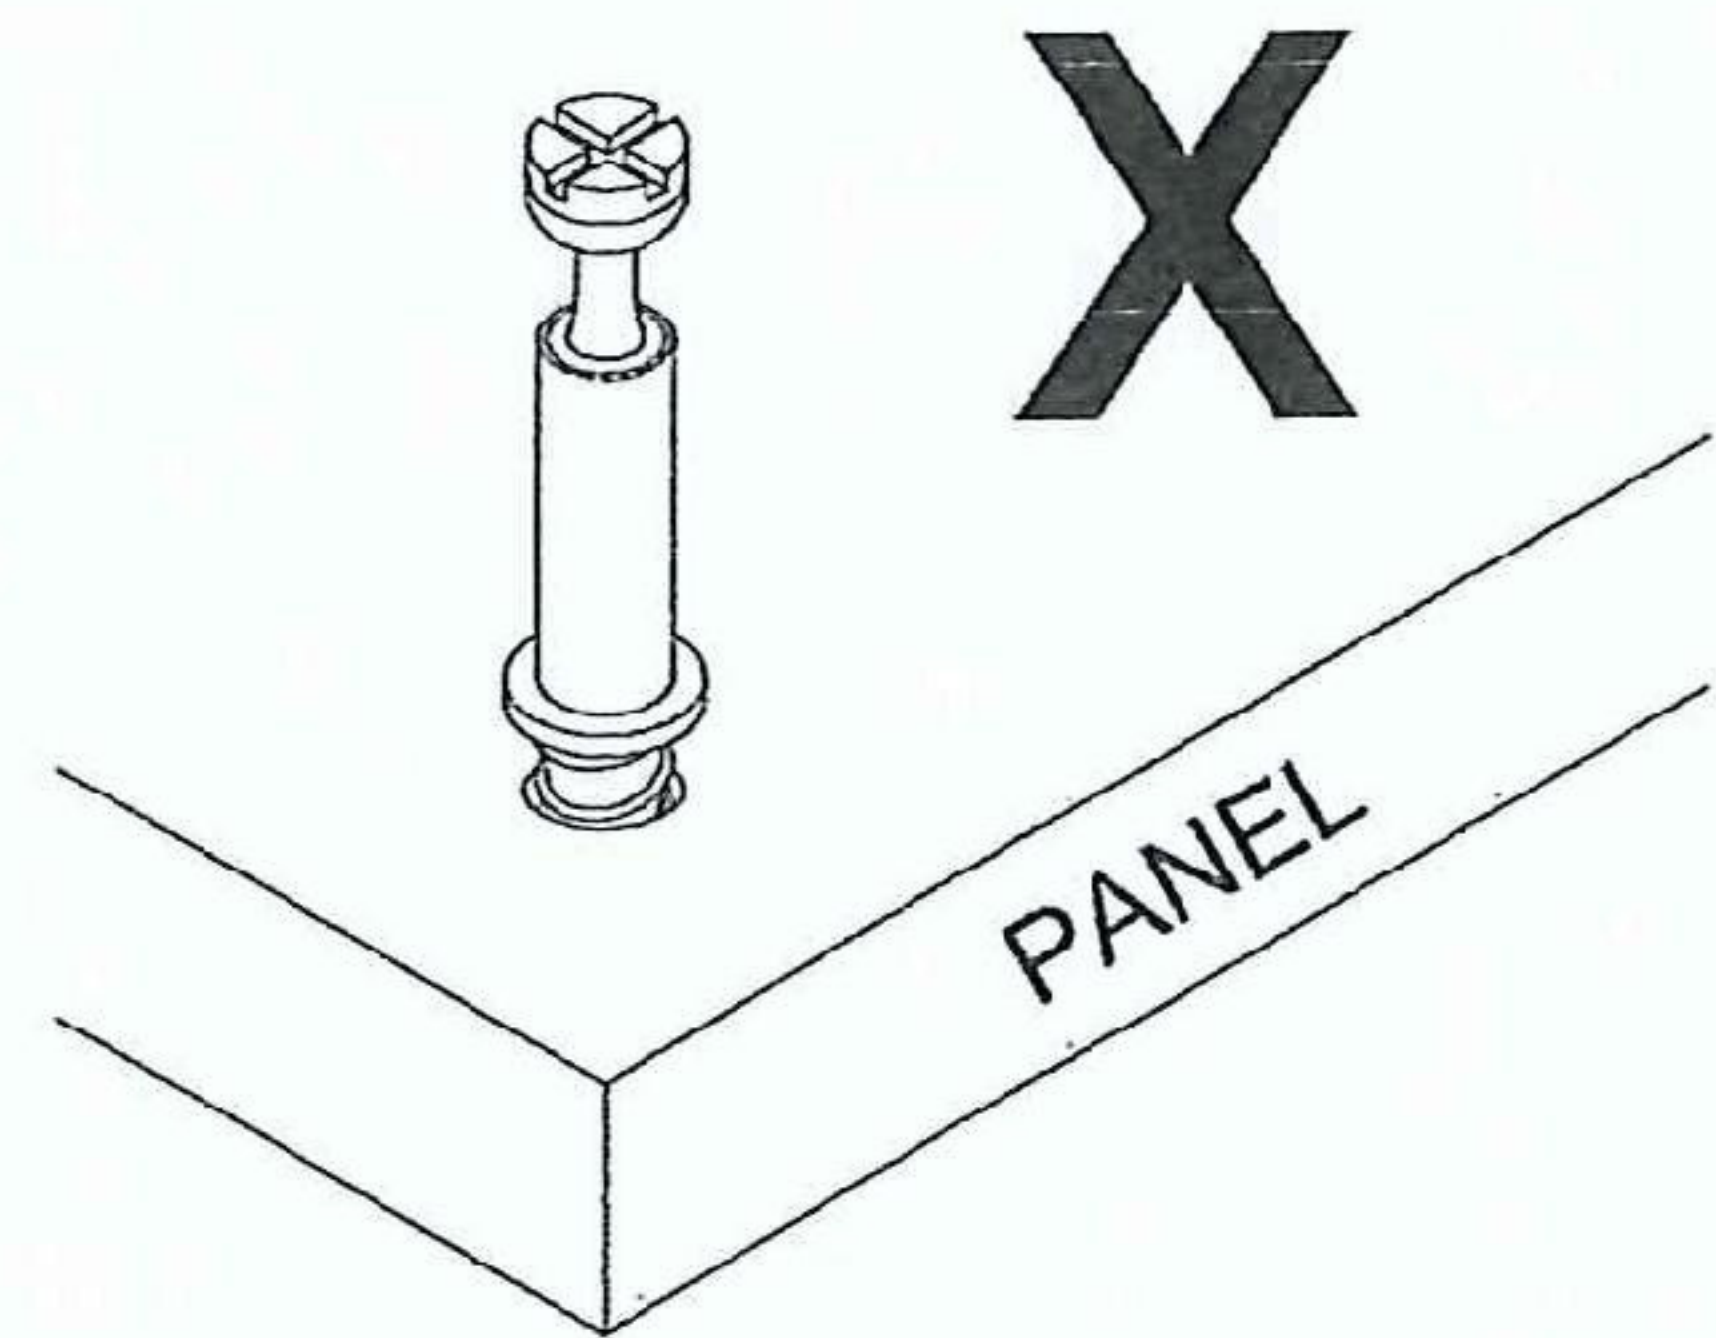

Shoulder is above the panel.

Place Cam-bolt on the designated pre-drilled holes on the panel. Use a Phillips Screwdriver to screw-in Cam-bolt vertically until shoulder is flushed (on the same level) with panel.

INSERTING CAM-LOCK

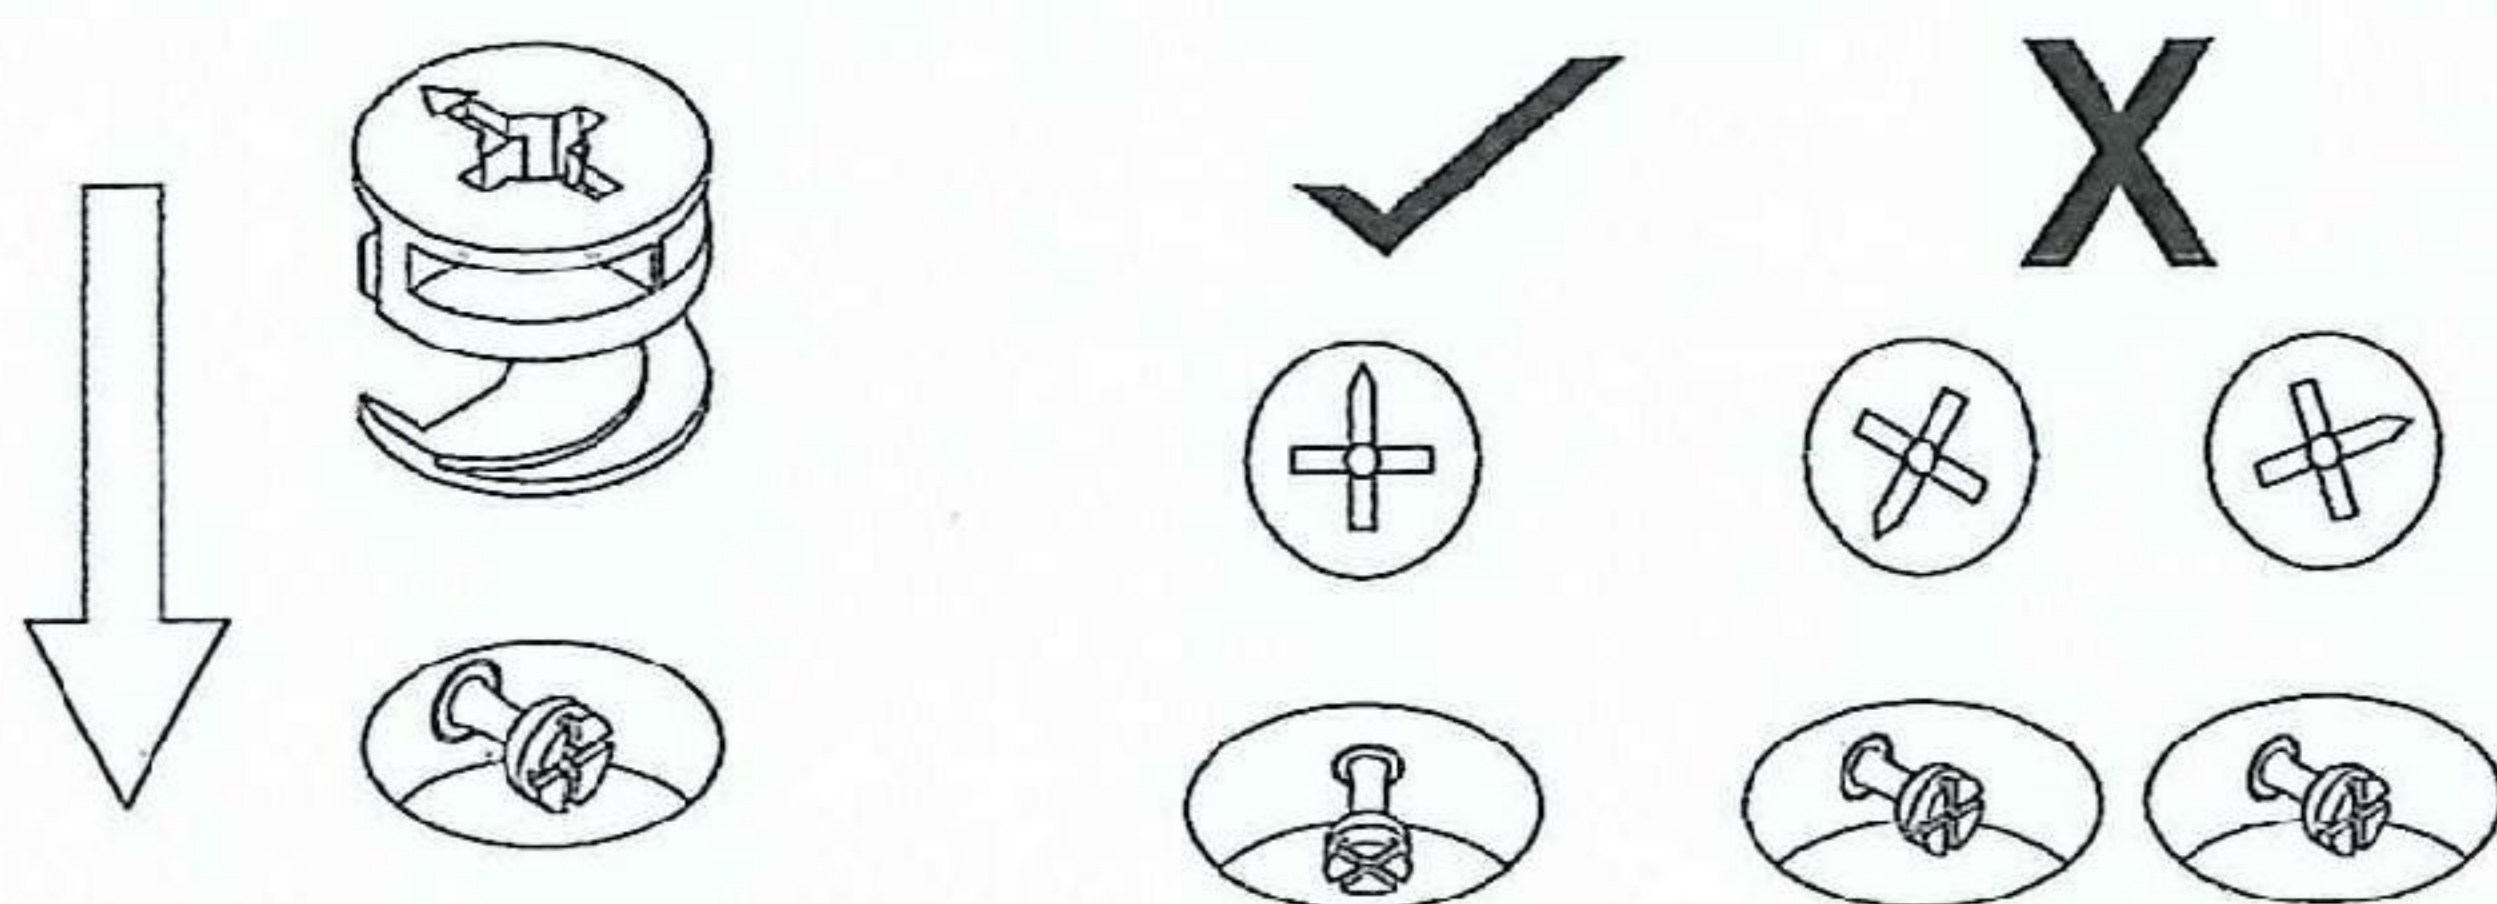


Insert Cam-lock with arrow align to Cam-bolt head

CORRECT

WRONG

TIGHTENING CAM-LOCK

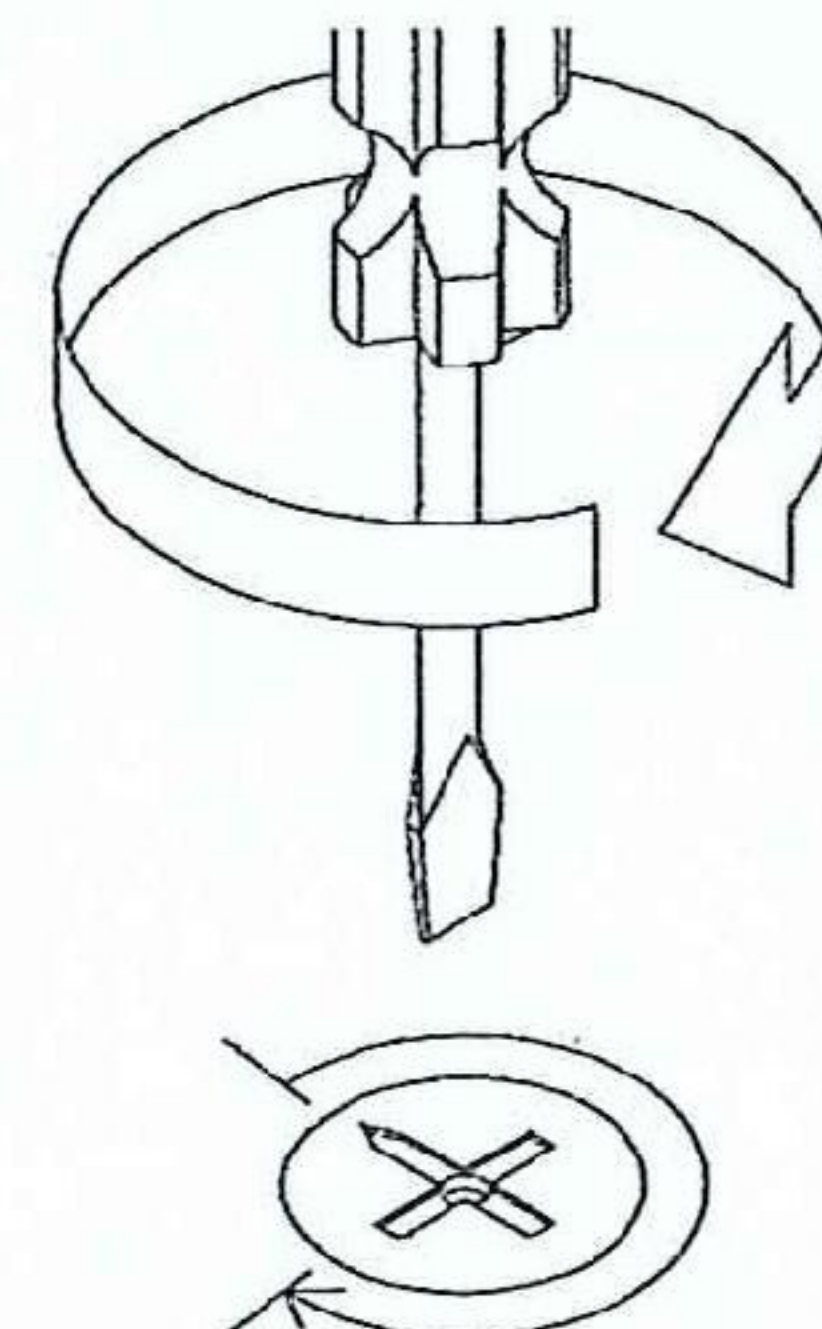


Use a Flat-head Screwdriver to turn Cam-lock clockwise so it locks onto the head of the Cam-bolt. Turn until it is snug (about 3/4ths of a turn) -- over-tightening could damage Cam-lock or/and Cam-bolt.

CAM-LOCK


Align the arrow on the Cam-lock to the Cam-bolt head and insert the Cam-lock. Ensure Cam-lock is fully inserted.




PARTS LIST

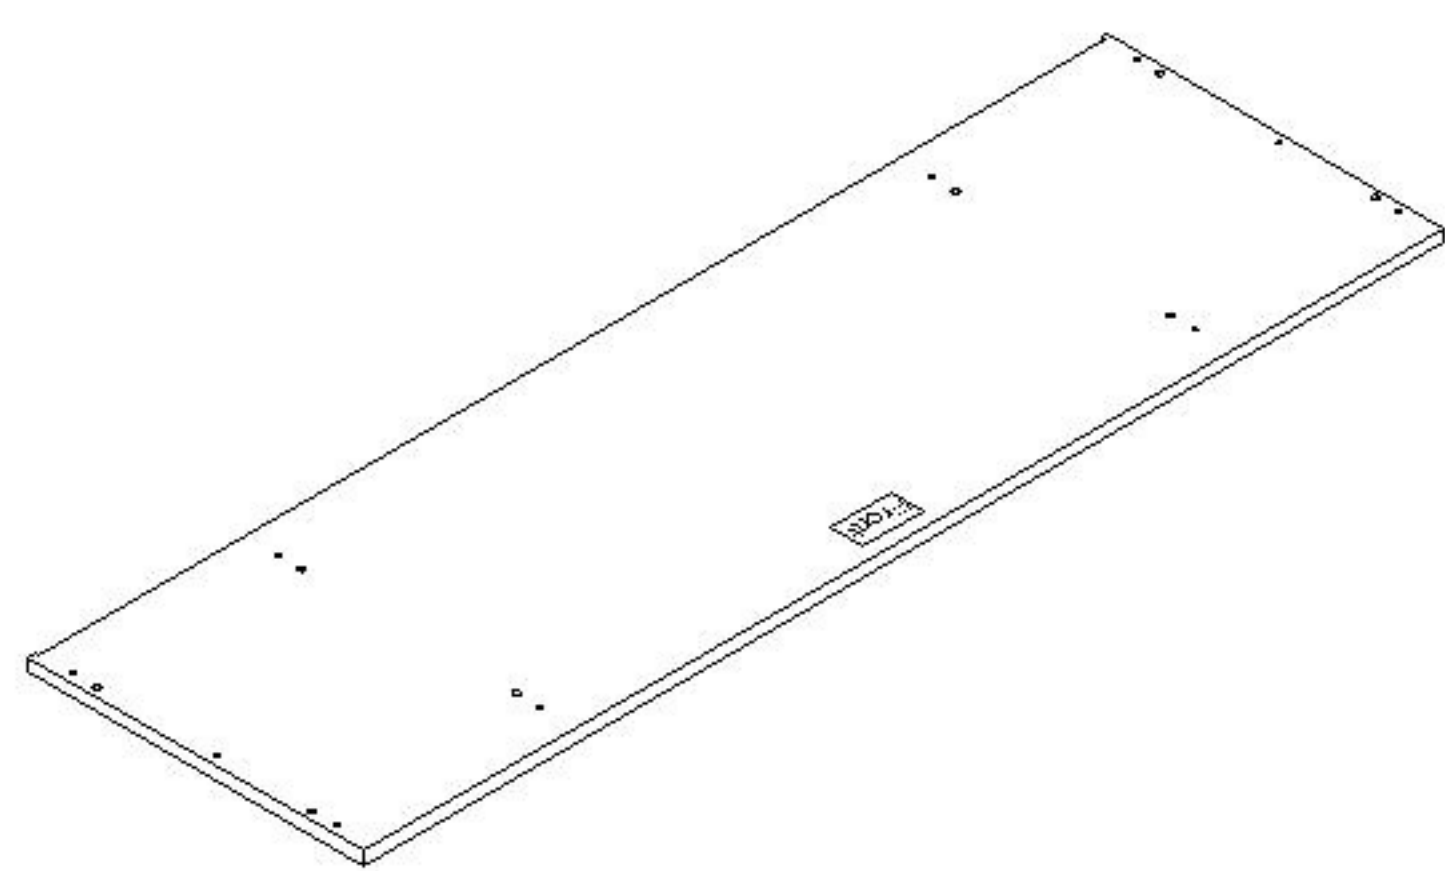


NAME: TOP PANEL
CODE: 1
QTY: 1Pc

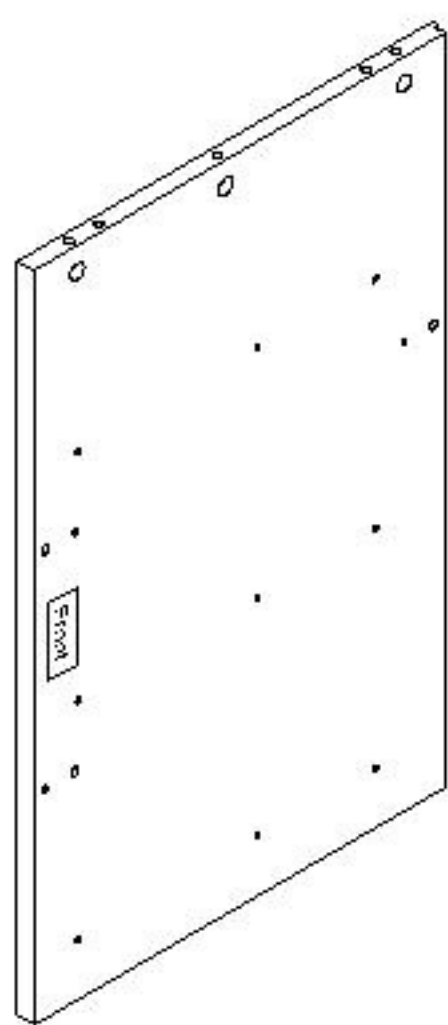


NAME: SIDE PANEL(LEFT)
CODE: 2
QTY: 1Pc

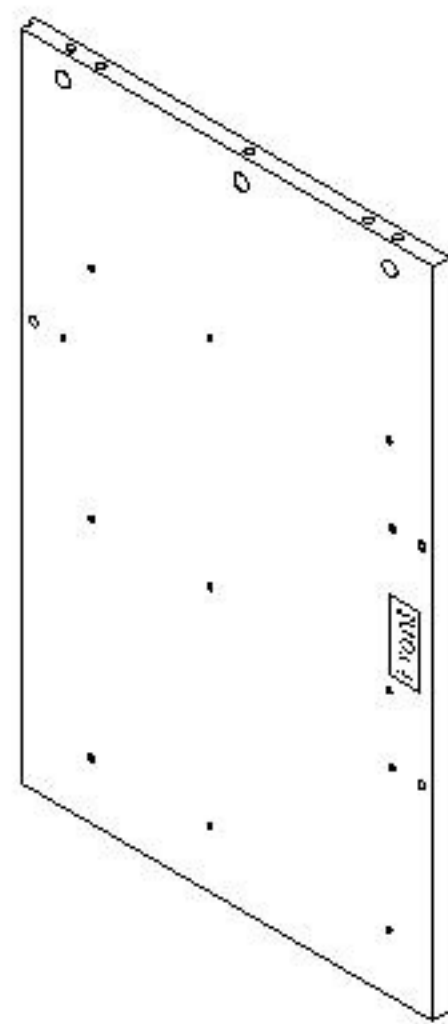


NAME: SIDE PANEL(RIGHT)
CODE: 3
QTY: 1Pc

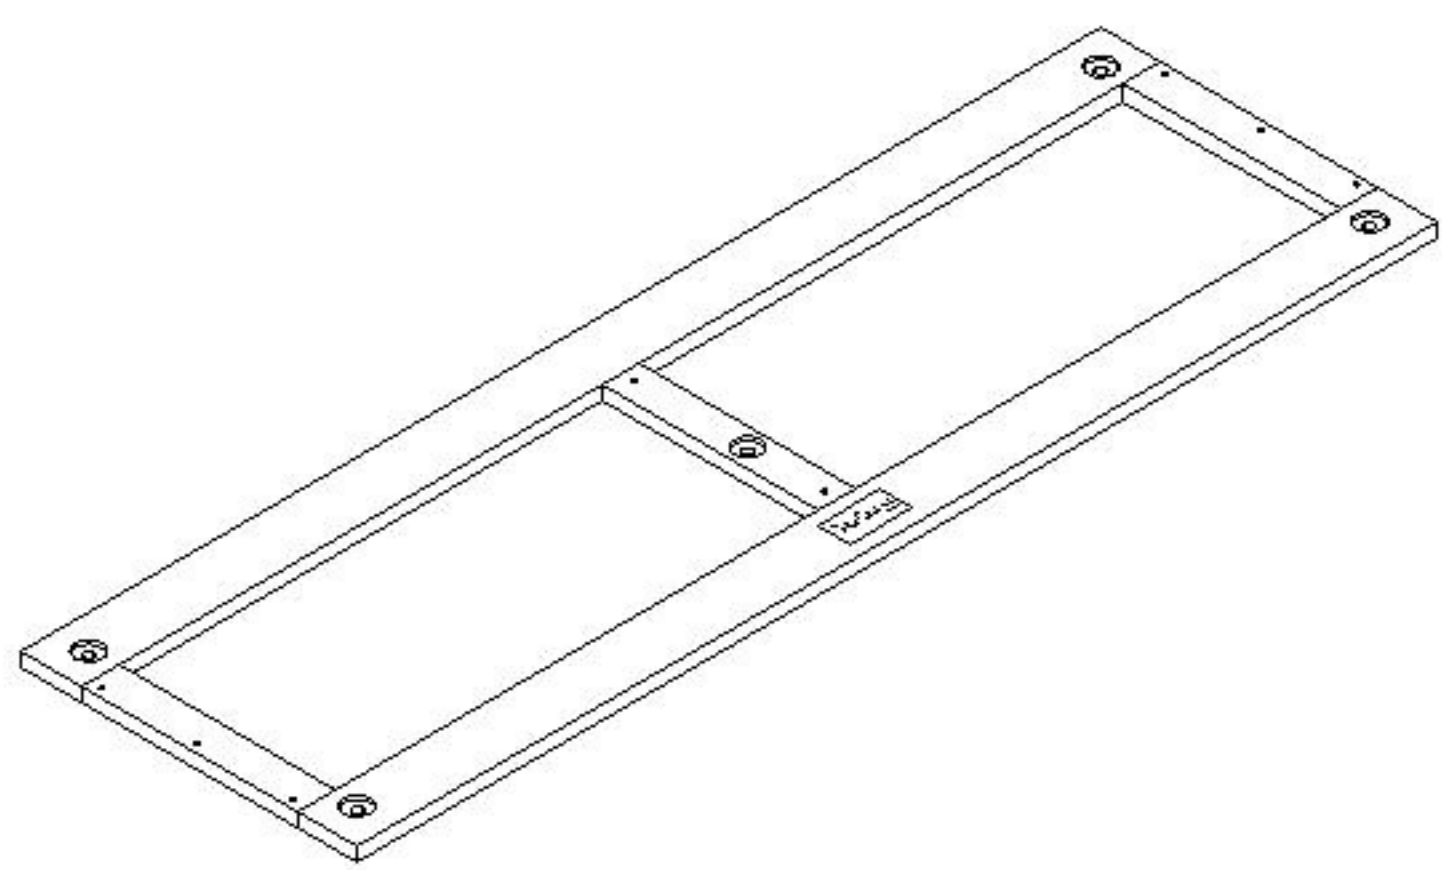


NAME: BOTTOM FRAME
CODE: 4
QTY: 1Pc

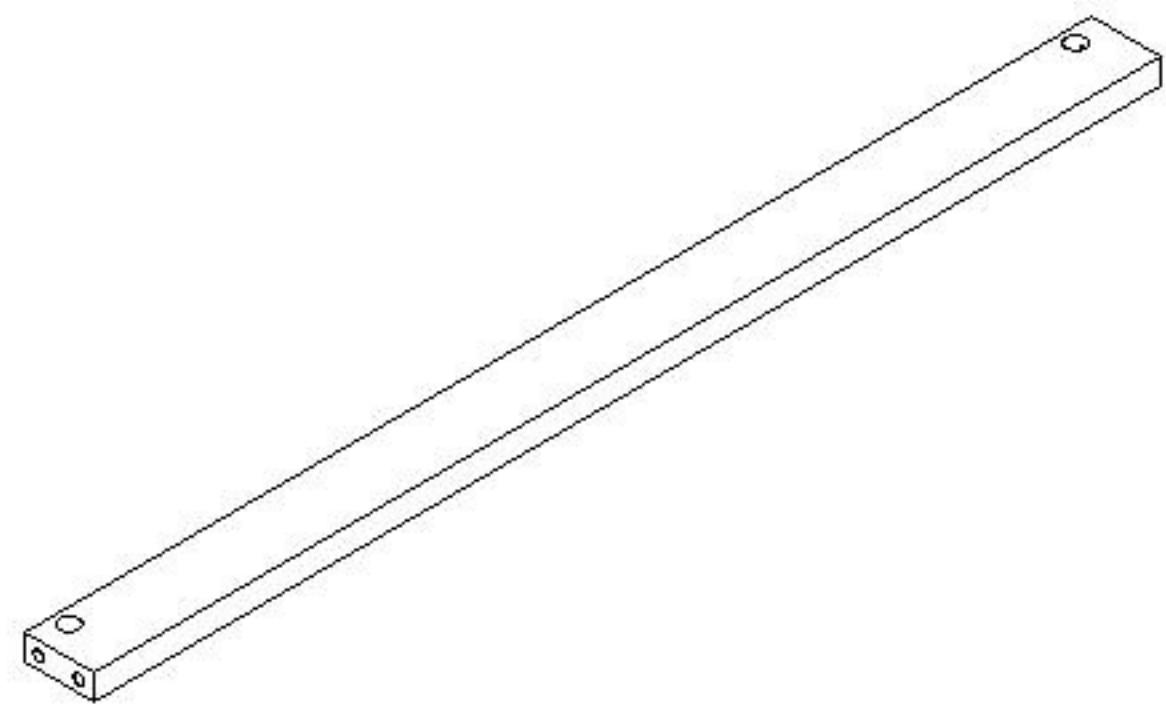


NAME: TOP BAR
CODE: 5
QTY: 1Pc

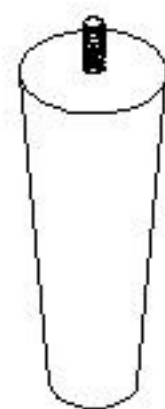


NAME: LEG
CODE: 6
QTY: 5Pcs

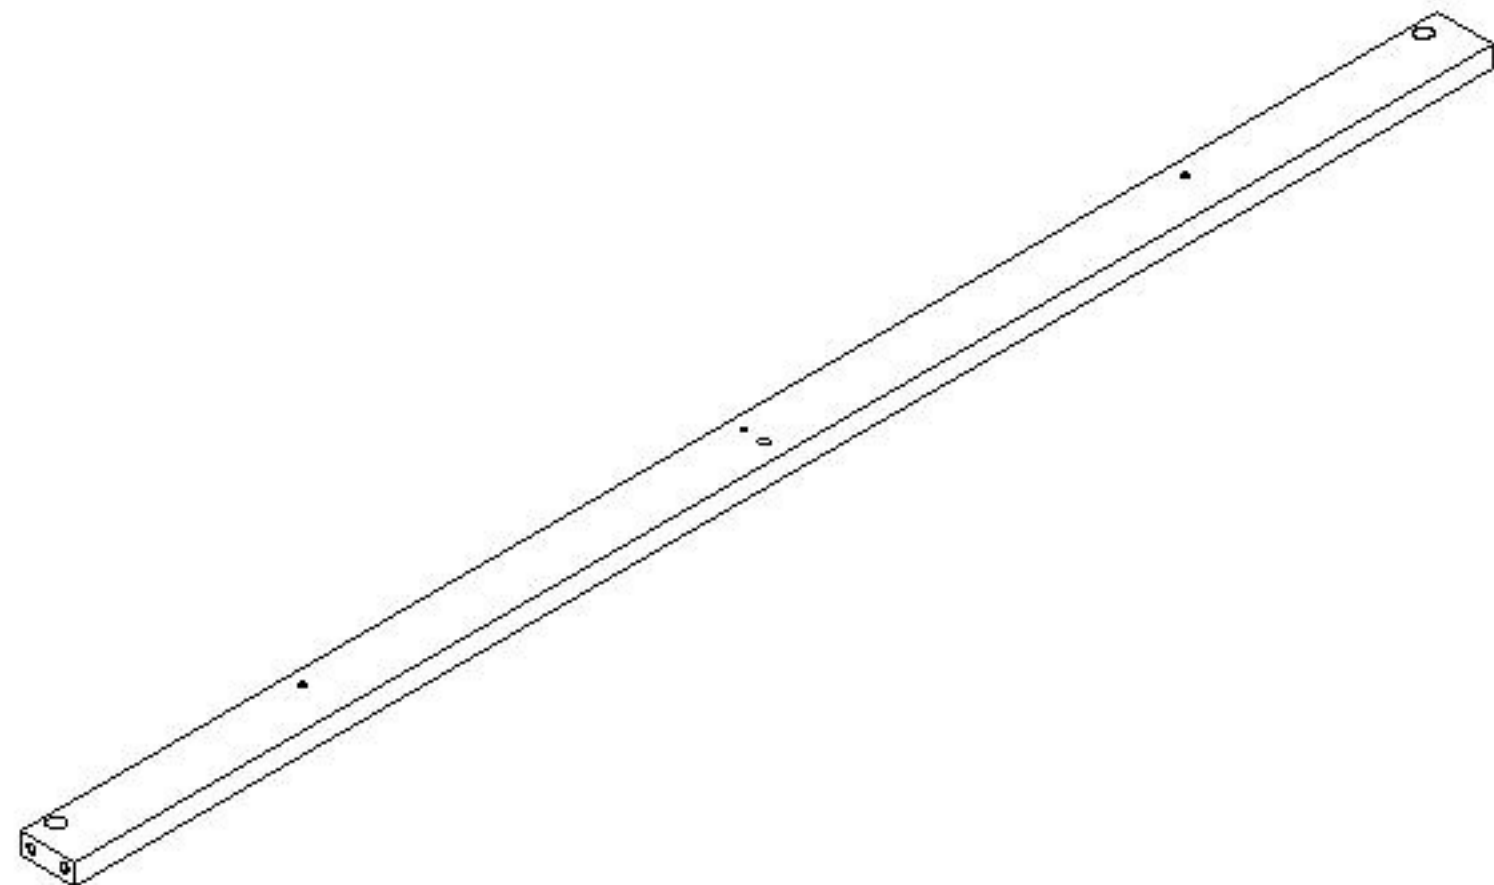


NAME: CENTER BAR
CODE: 7
QTY: 2Pcs

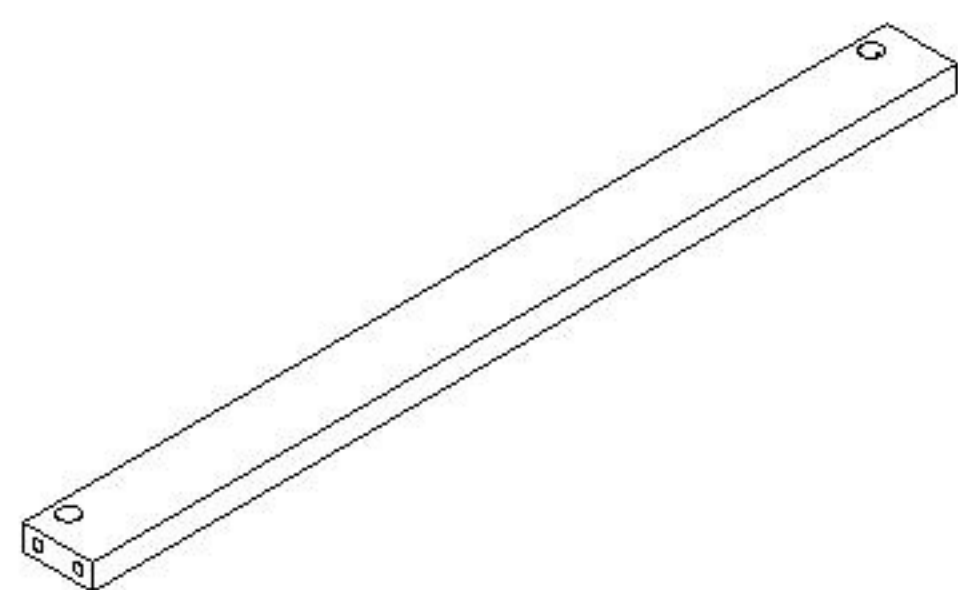


NAME: BOTTOM BAR
CODE: 8
QTY: 2Pcs

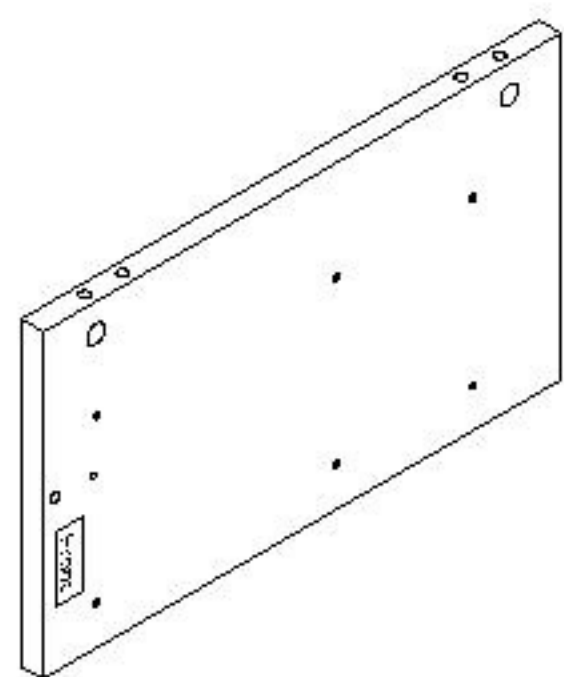


NAME: SMALL PARTITION(LEFT)
CODE: 9
QTY: 1Pc

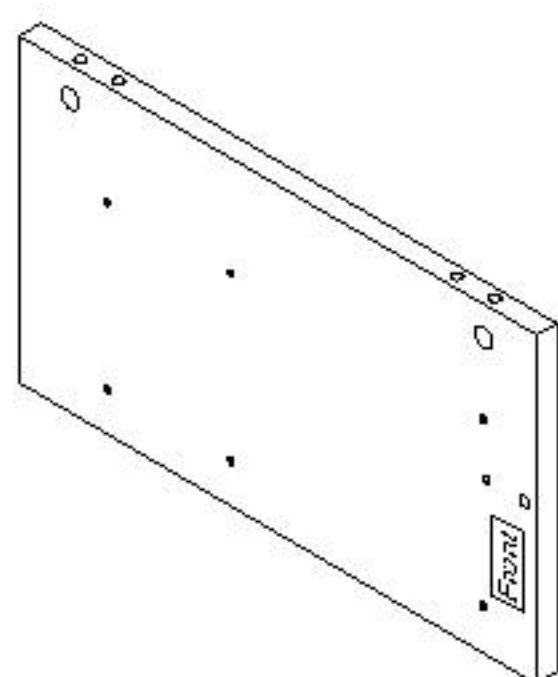


NAME: SMALL PARTITION(RIGHT)
CODE: 10
QTY: 1Pc

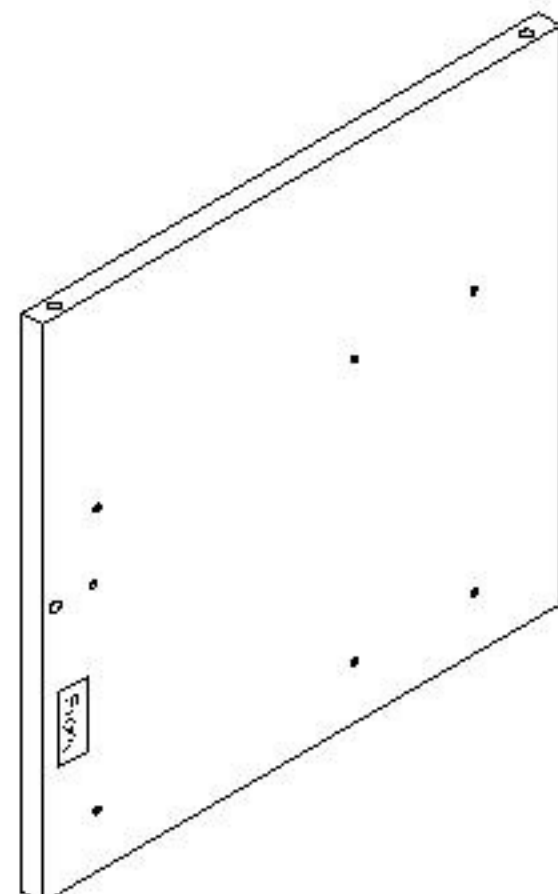


NAME: BIG PARTITION
CODE: 11
QTY: 1Pc

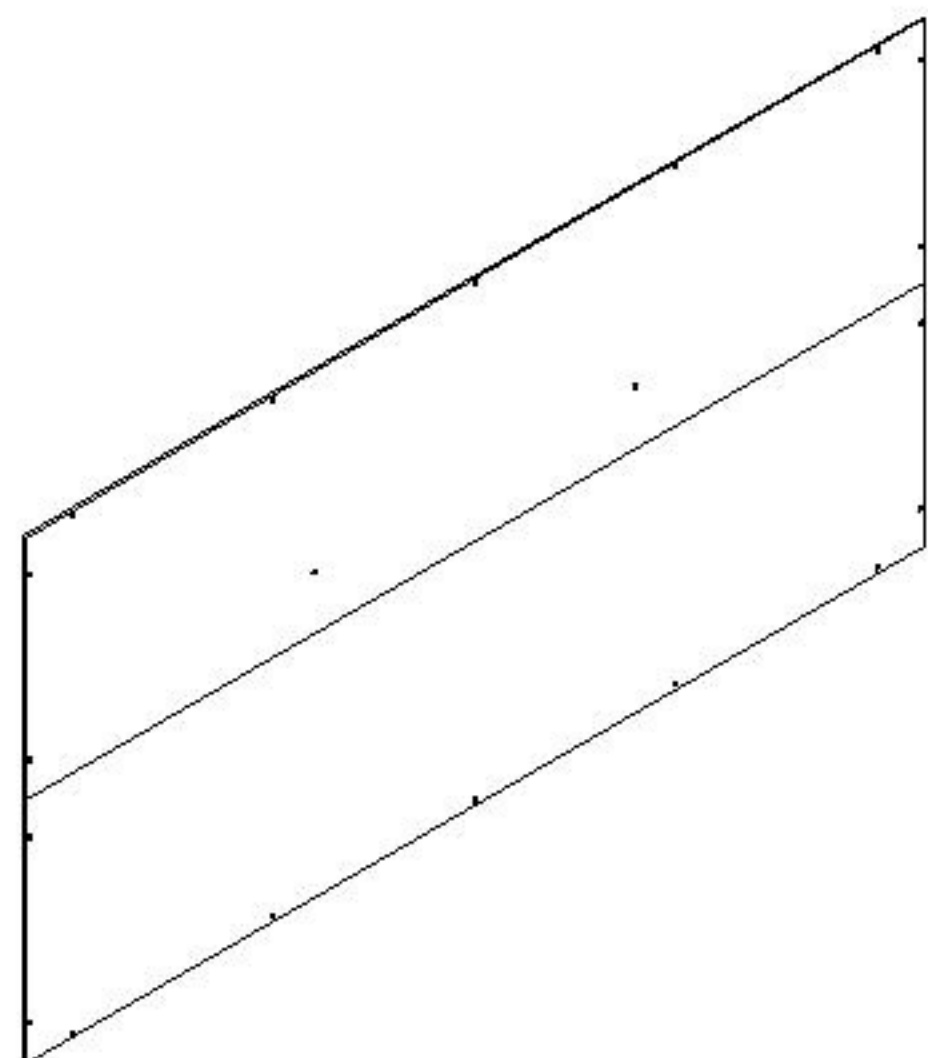


NAME: BACK PLY
CODE: 12
QTY: 1Pc

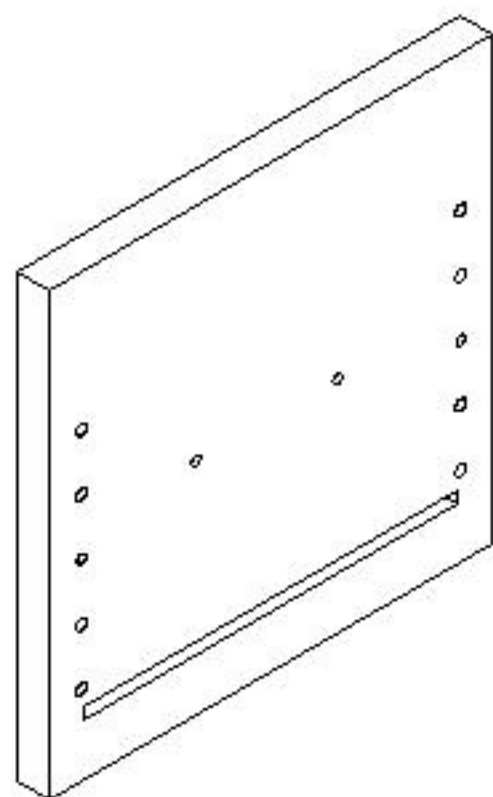


NAME: SMALL DRAWER FRONT
CODE: 101
QTY: 2Pcs

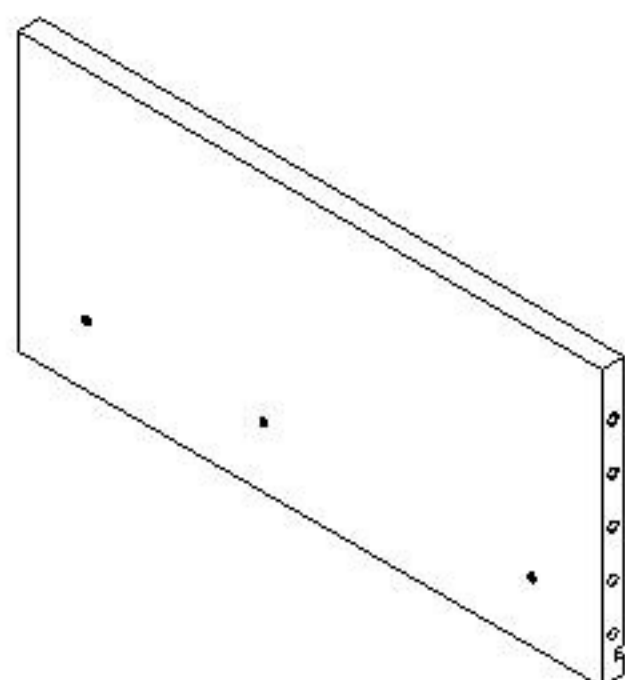


NAME: SMALL DRAWER SIDE(LEFT)
CODE: 102
QTY: 2Pcs

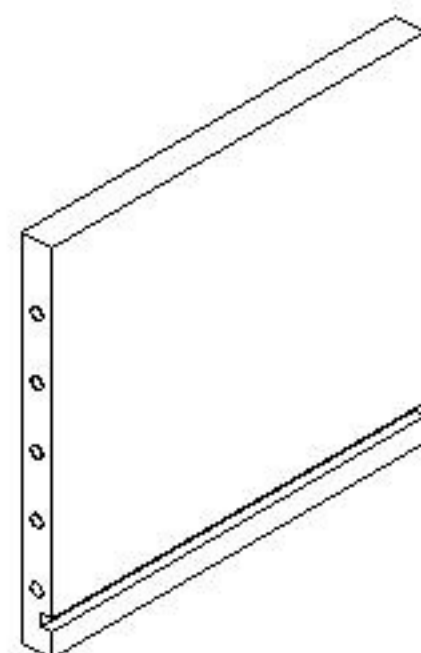


NAME: SMALL DRAWER BACK
CODE: 103
QTY: 2Pcs

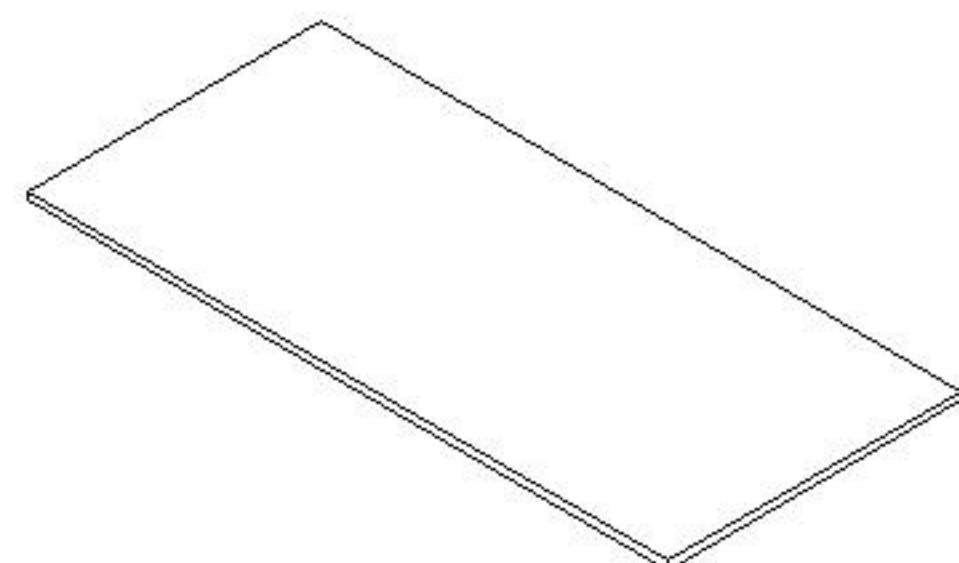


NAME: SMALL DRAWER BASE
CODE: 104
QTY: 2Pcs

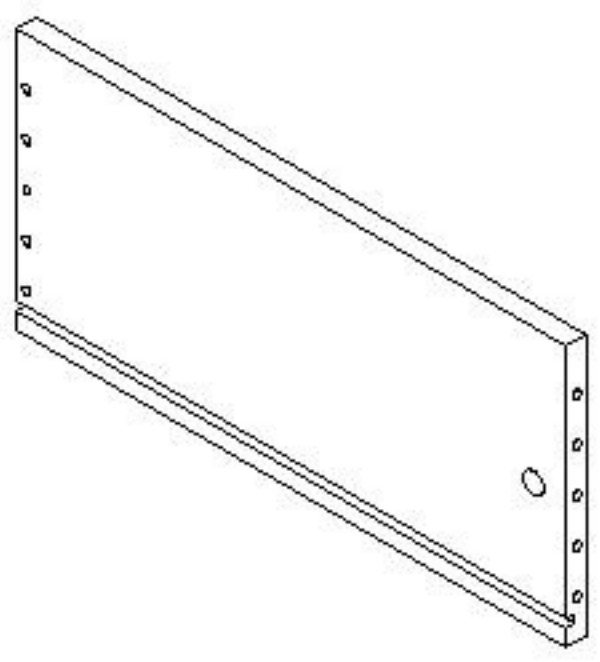


NAME: SMALL DRAWER SIDE(RIGHT)
CODE: 105
QTY: 2Pcs

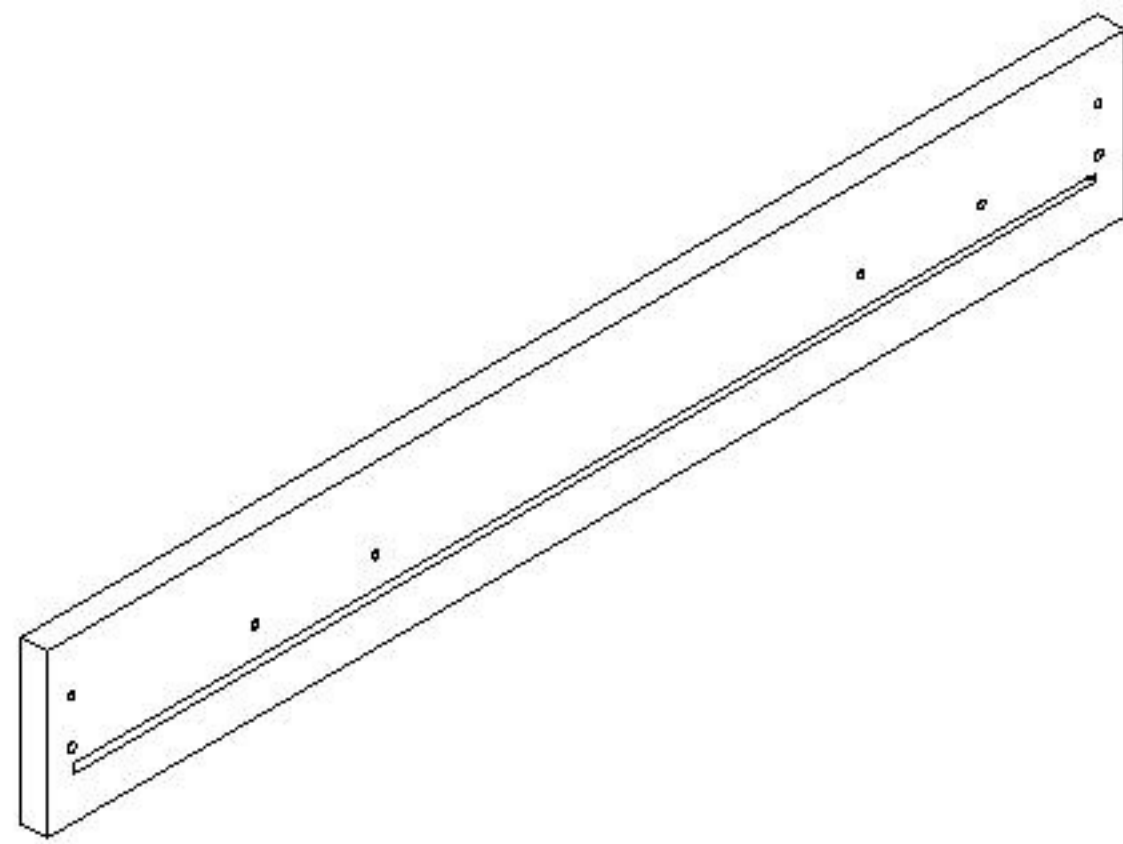


NAME: MEDIUM DRAWER FRONT
CODE: 106
QTY: 2Pcs

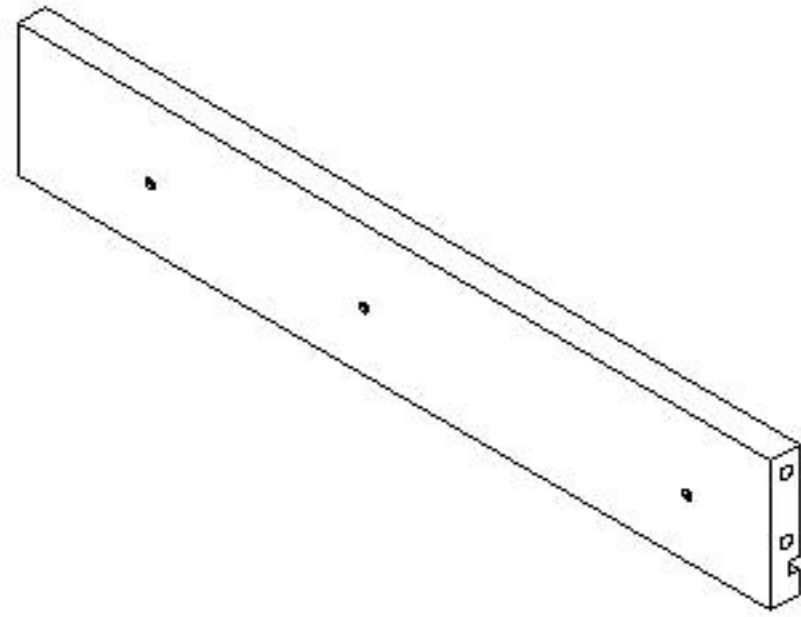


NAME: MEDIUM DRAWER SIDE(LEFT)
CODE: 107
QTY: 2Pcs

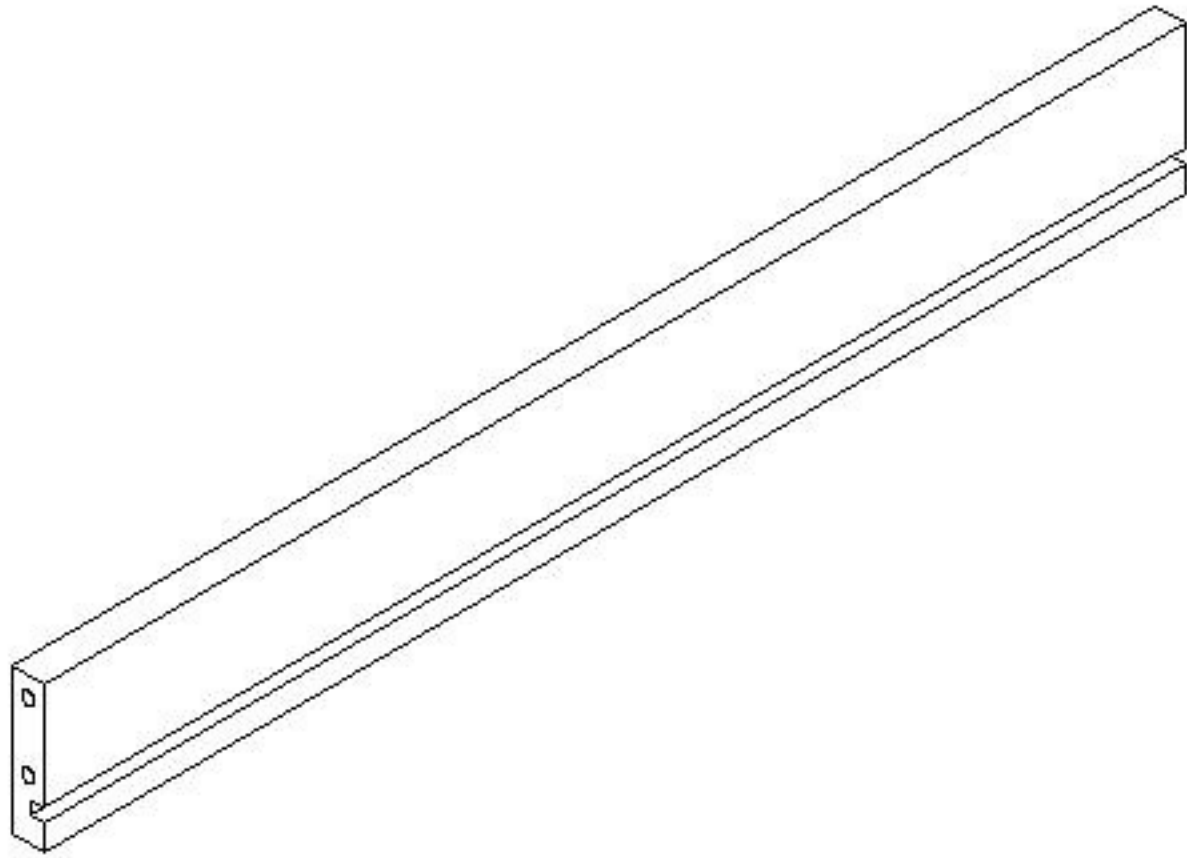


NAME: MEDIUM DRAWER BACK
CODE: 108
QTY: 2Pcs

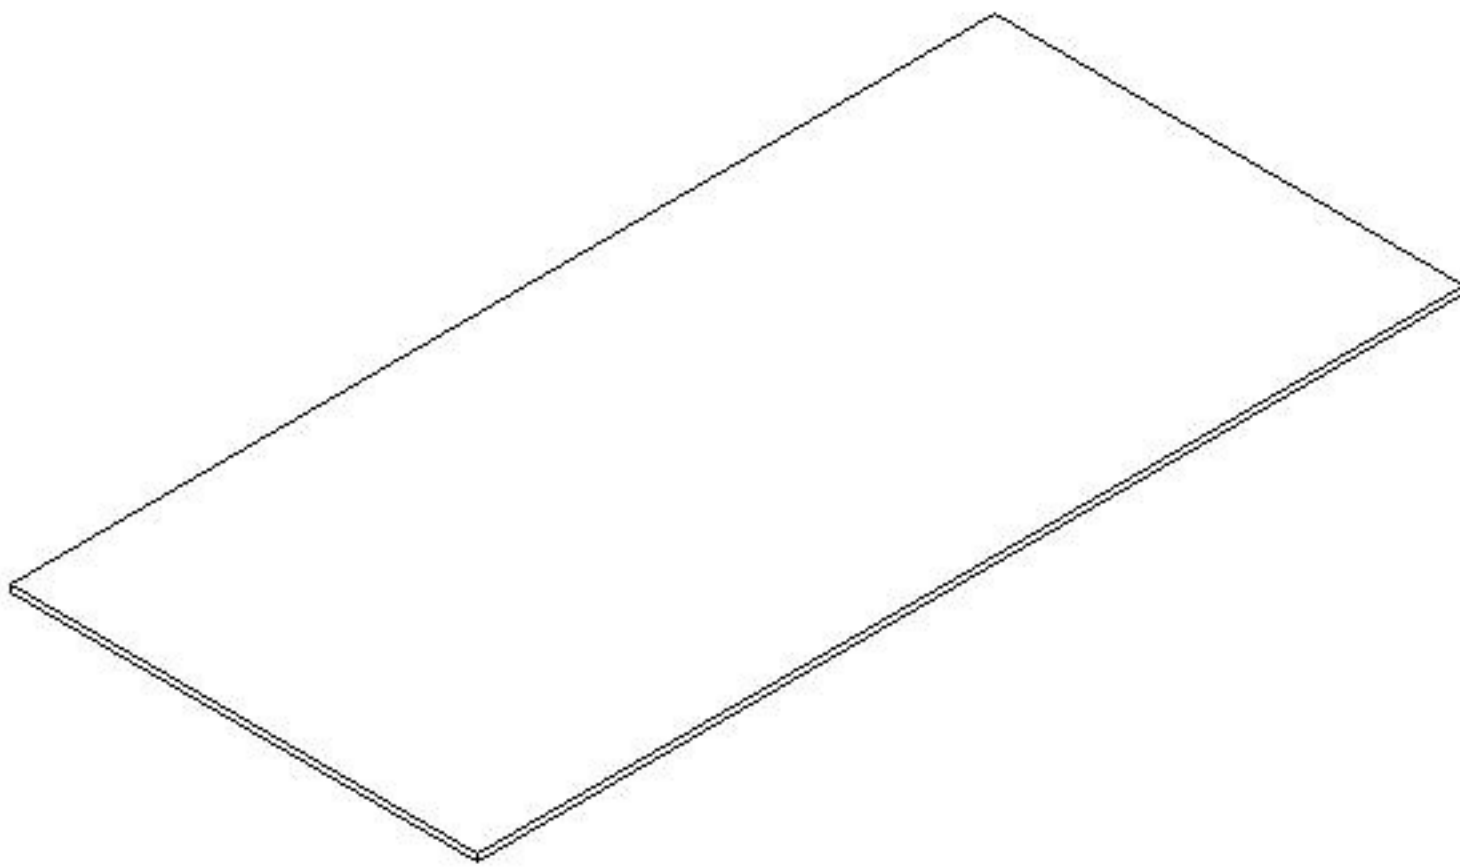


NAME: MEDIUM DRAWER BASE
CODE: 109
QTY: 2Pcs

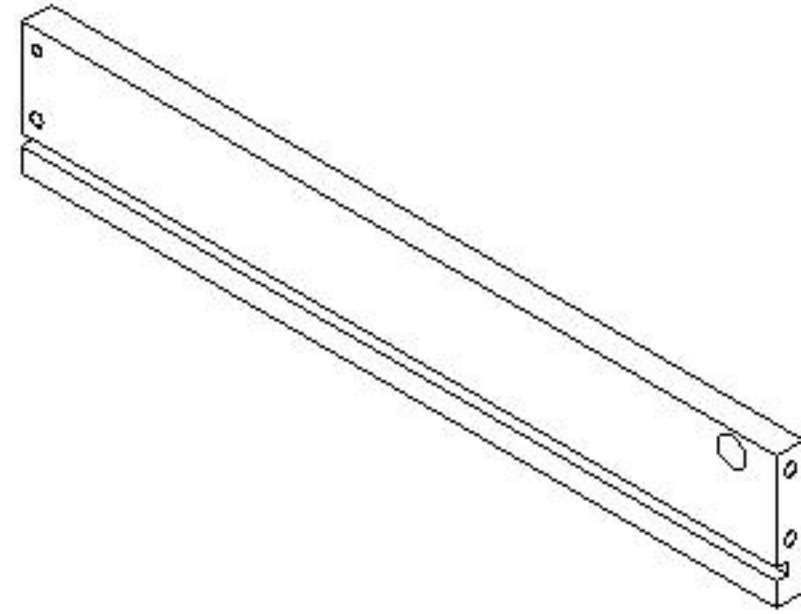


NAME: MEDIUM DRAWER SIDE(RIGHT)
CODE: 110
QTY: 2Pcs

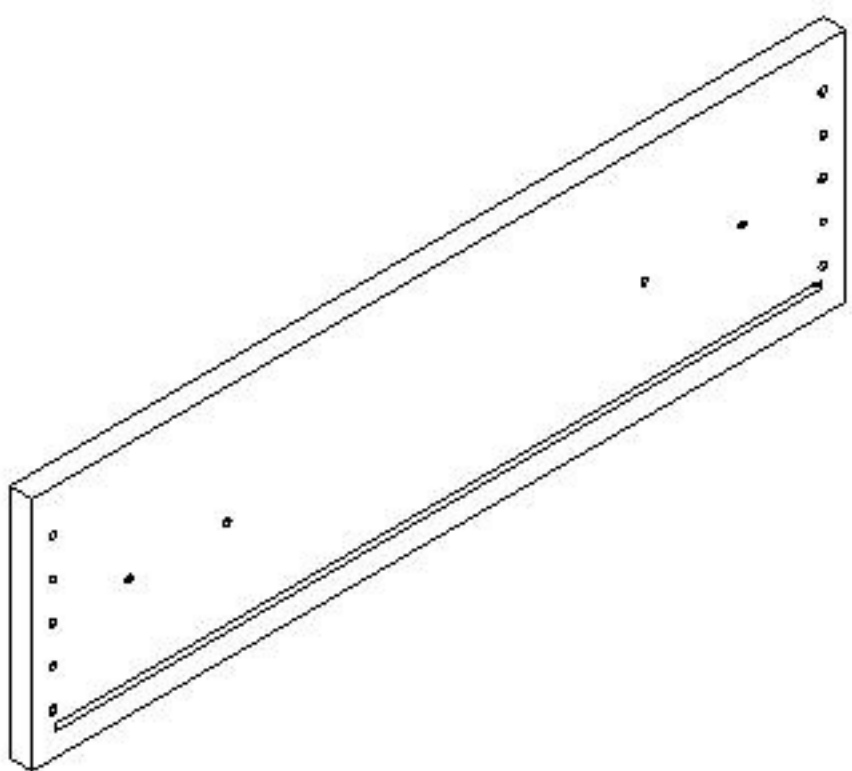


NAME: BIG DRAWER FRONT
CODE: 111
QTY: 4Pcs

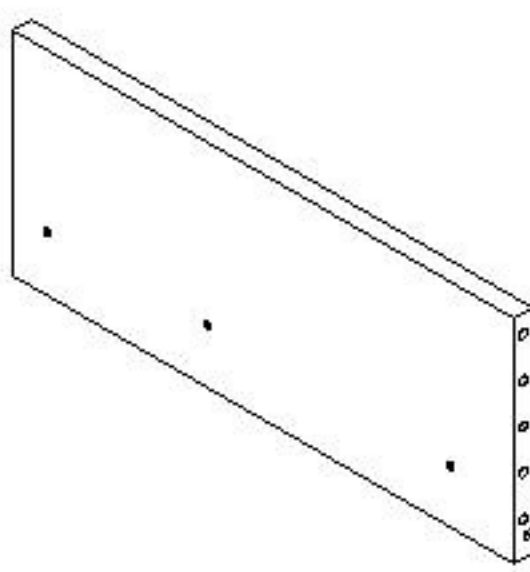


NAME: BIG DRAWER SIDE(LEFT)
CODE: 112
QTY: 4Pcs

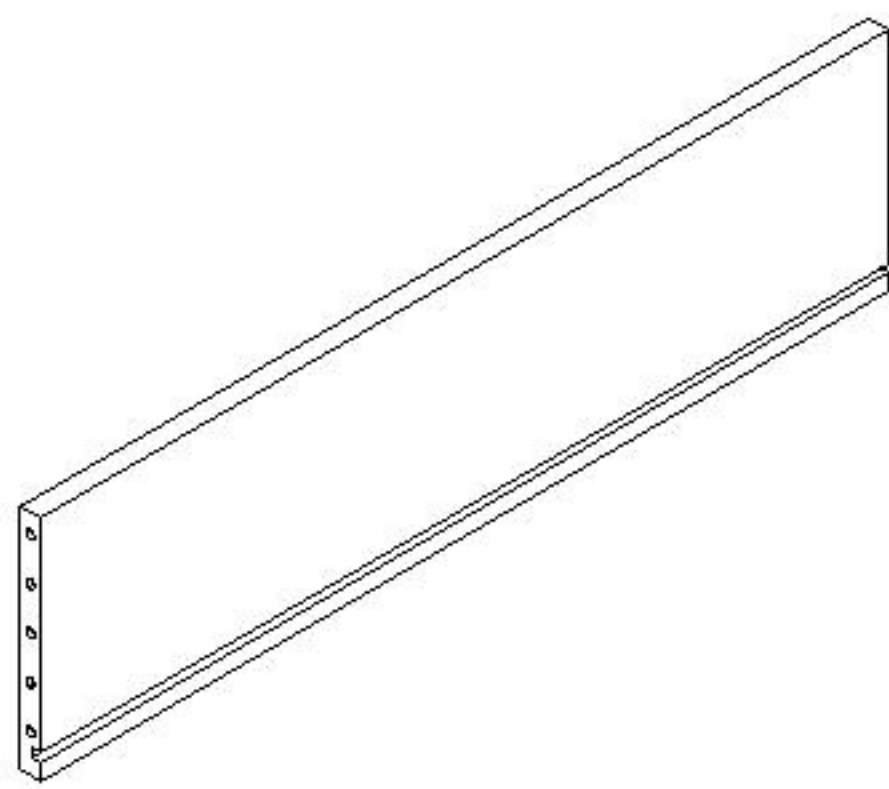

NAME: BIG DRAWER BACK
CODE: 113
QTY: 4Pcs

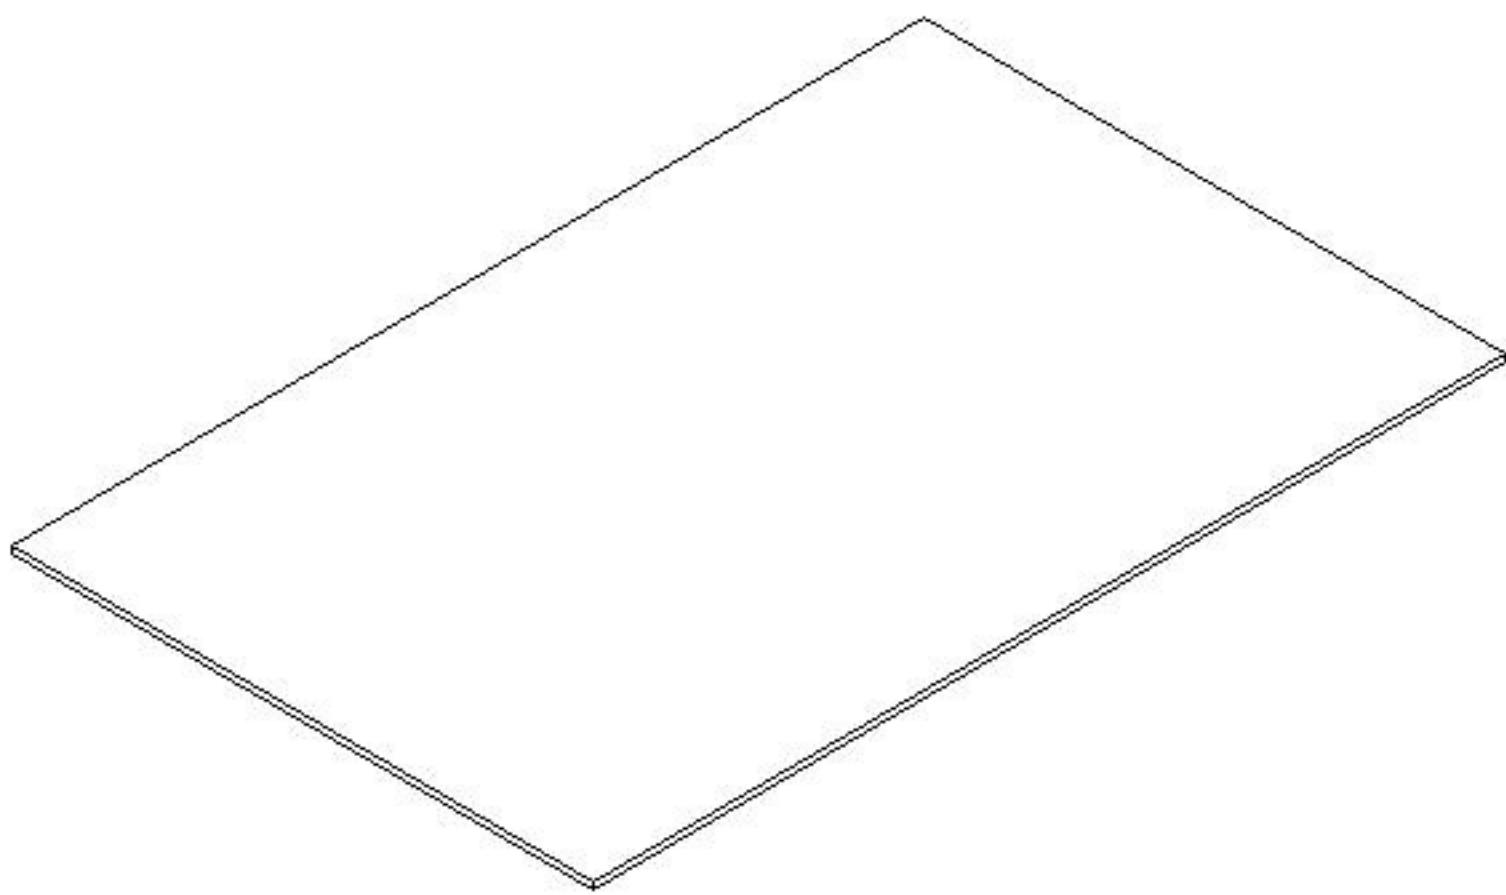

NAME: BIG DRAWER BASE
CODE: 114
QTY: 4Pcs

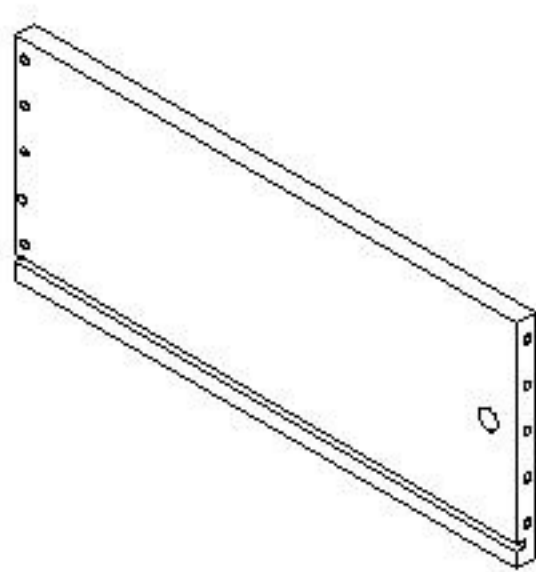

NAME: BIG DRAWER SIDE(RIGHT)
CODE: 115
QTY: 4Pcs

PARTS IN BOX 1

NAME: SIDE PANEL(LEFT)	QTY: 1Pc	CODE: 2
NAME: SIDE PANEL(RIGHT)	QTY: 1Pc	CODE: 3
NAME: SMALL PARTITION(LEFT)	QTY: 1Pc	CODE: 9
NAME: SMALL PARTITION(RIGHT)	QTY: 1Pc	CODE: 10
NAME: BIG PARTITION	QTY: 1Pc	CODE: 11
NAME: SMALL DRAWER SIDE(LEFT)	QTY: 2Pcs	CODE: 102
NAME: SMALL DRAWER SIDE(RIGHT)	QTY: 2Pcs	CODE: 105
NAME: MEDIUM DRAWER SIDE(LEFT)	QTY: 2Pcs	CODE: 107
NAME: MEDIUM DRAWER SIDE(RIGHT)	QTY: 2Pcs	CODE: 110
NAME: BIG DRAWER SIDE(LEFT)	QTY: 4Pcs	CODE: 112
NAME: BIG DRAWER SIDE(RIGHT)	QTY: 4Pcs	CODE: 115
NAME: RUNNER	QTY: 2Pack	CODE:
NAME: HARDWARE + AI	QTY: 1Pack	CODE:
NAME: HANDLE	QTY: 1Pack	CODE:


PARTS IN BOX 2

NAME: TOP PANEL	QTY: 1Pc	CODE: 1
NAME: BOTTOM FRAME	QTY: 1Pc	CODE: 4
NAME: TOP BAR	QTY: 1Pc	CODE: 5
NAME: CENTER BAR	QTY: 2Pcs	CODE: 7
NAME: BOTTOM BAR	QTY: 2Pcs	CODE: 8
NAME: BACK PLY	QTY: 1Pc	CODE: 12


PARTS IN BOX 3

NAME: LEG	QTY: 5Pcs	CODE: 6
NAME: SMALL DRAWER FRONT	QTY: 2Pcs	CODE: 101
NAME: SMALL DRAWER BACK	QTY: 2Pcs	CODE: 103
NAME: SMALL DRAWER BASE	QTY: 2Pcs	CODE: 104
NAME: MEDIUM DRAWER FRONT	QTY: 2Pcs	CODE: 106
NAME: MEDIUM DRAWER BACK	QTY: 2Pcs	CODE: 108
NAME: MEDIUM DRAWER BASE	QTY: 2Pcs	CODE: 109
NAME: BIG DRAWER FRONT	QTY: 4Pcs	CODE: 111
NAME: BIG DRAWER BACK	QTY: 4Pcs	CODE: 113
NAME: BIG DRAWER BASE	QTY: 4Pcs	CODE: 114


HARDWARE LIST

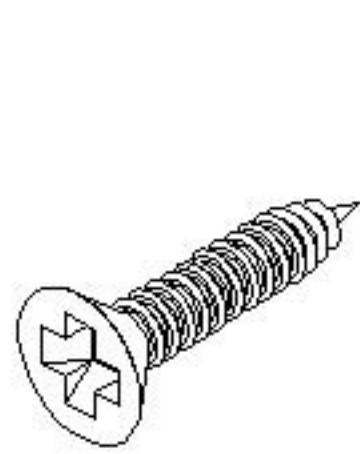


NAME: CHIPBOARD SCREW M4X16mm
CODE: A
QTY: 96Pcs

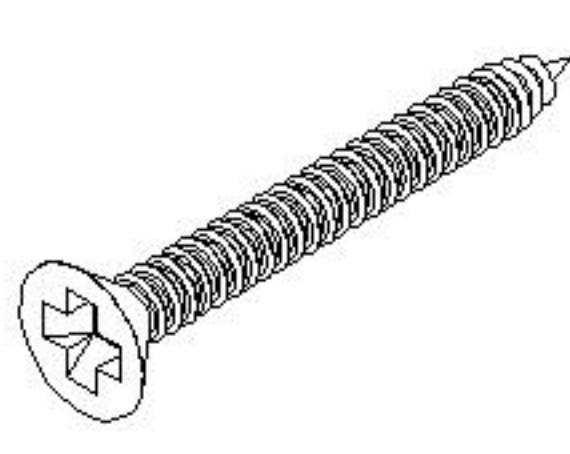


NAME: CHIPBOARD SCREW M4X38mm
CODE: B
QTY: 14Pcs

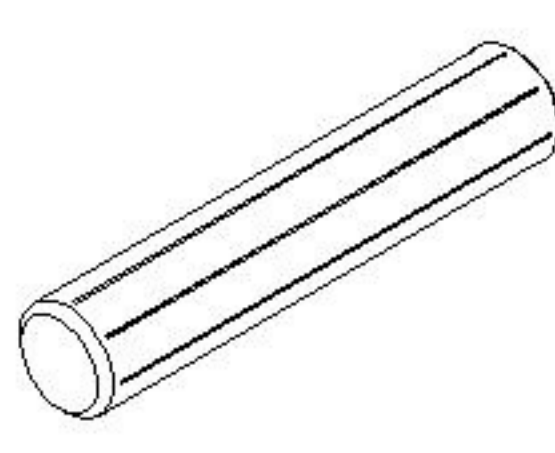


NAME: WOOD DOWEL M8X35mm
CODE: C
QTY: 30Pcs

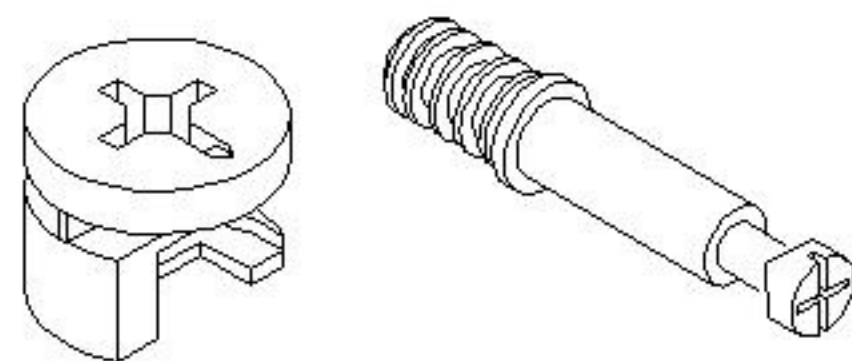


NAME: CAM LOCK & CAM BOLT
CODE: D
QTY: 52Sets

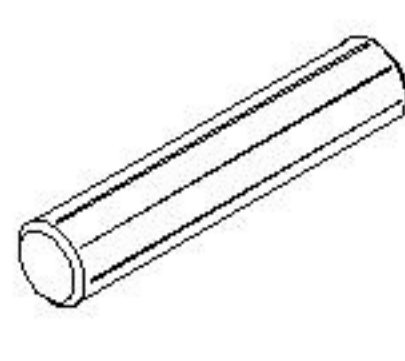


NAME: WOOD DOWEL M6X30mm
CODE: E
QTY: 104Pcs

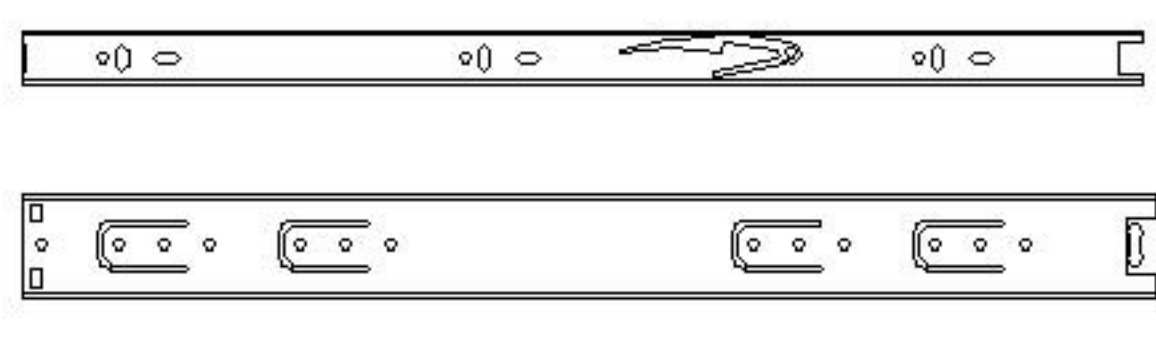


NAME: EXTENSION RUNNER 400mm
CODE: F
QTY: 8Sets

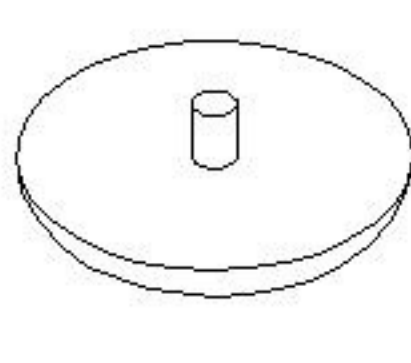


NAME: CAM LOCK COVER
CODE: G
QTY: 52Pcs

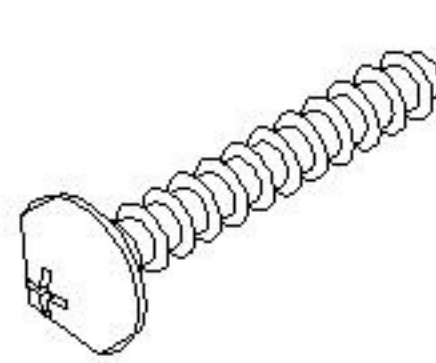


NAME: PANHEAD SCREW M4X22mm
CODE: H
QTY: 28Pcs

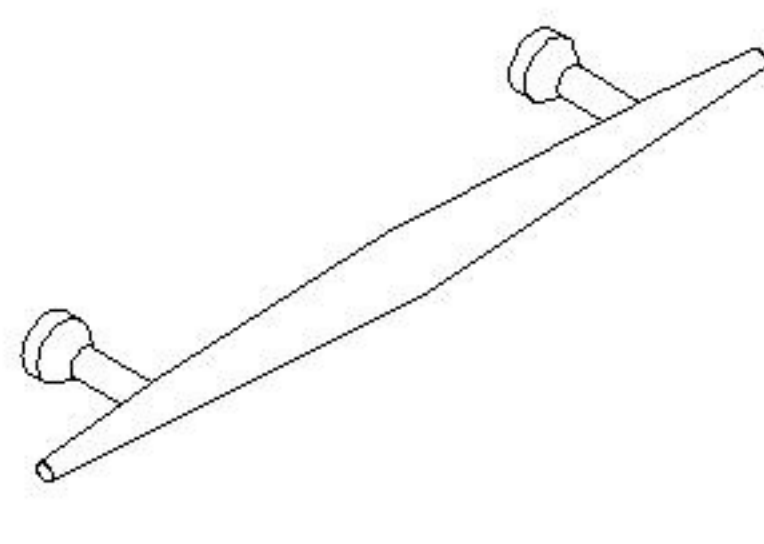


NAME: HANDLE
CODE: I
QTY: 14Pcs

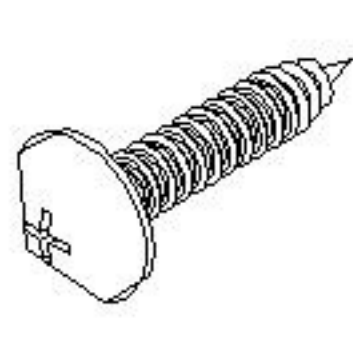


NAME: PANHEAD CHIPBOARD SCREW M4X16mm(BLACK)
CODE: J
QTY: 20Pcs

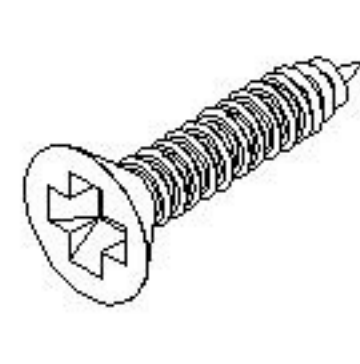


NAME: CHIPBOARD SCREW M4X25mm
CODE: W
QTY: 4Pcs



NAME: FLAT WASHER M4
CODE: X
QTY: 2Pcs

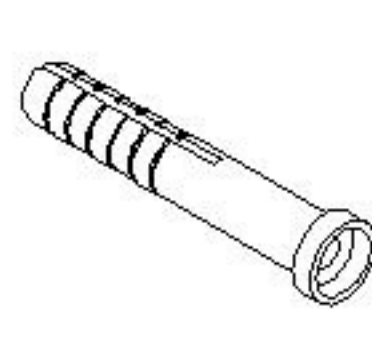


NAME: SCREW PLUG
CODE: Y
QTY: 2Pcs

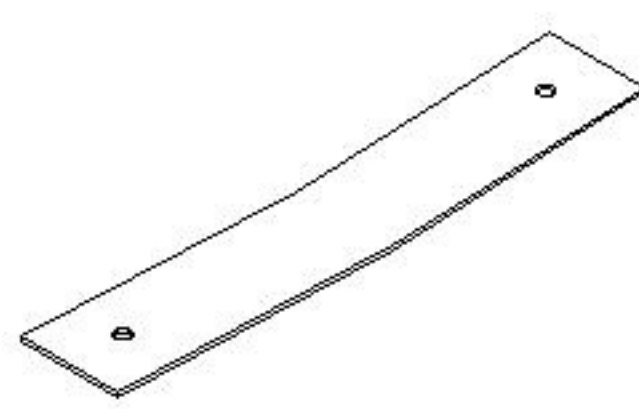

NAME: SAFETY BELT (150mm)
CODE: Z
QTY: 2Pcs

STEP 1


- A) Insert & secure Cam Bolt(D) to Top Panel(1)

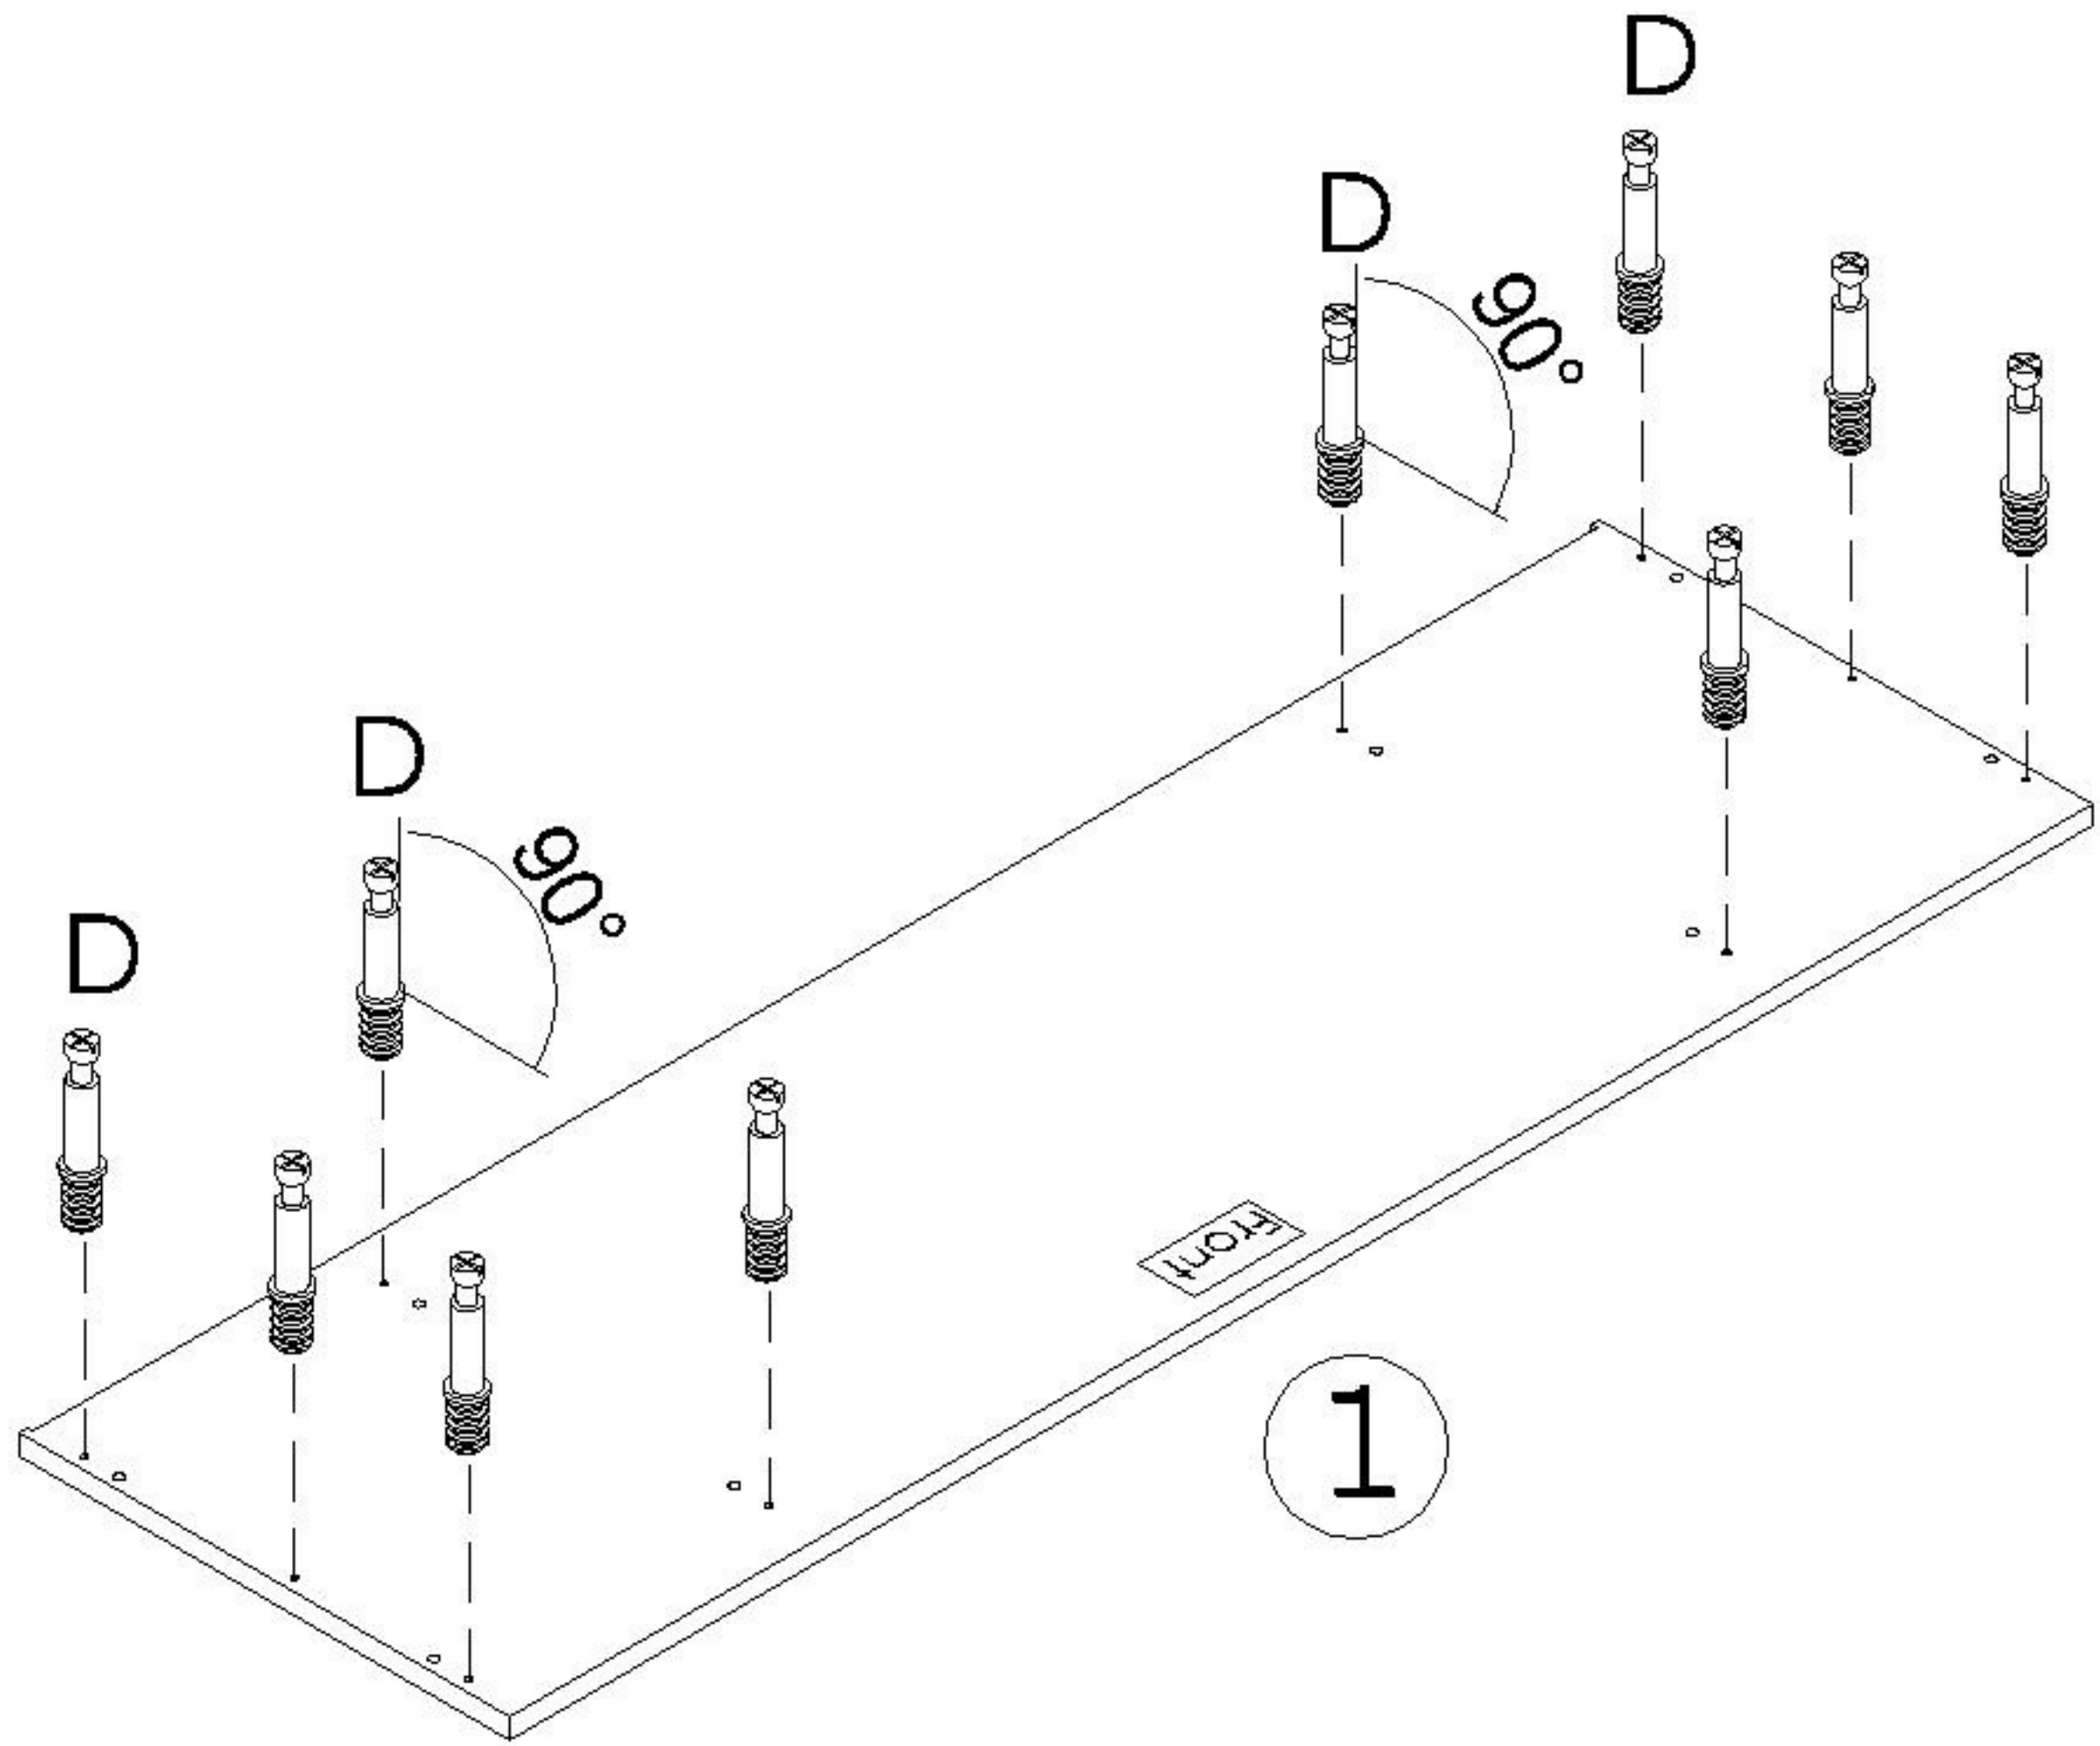

STEP 2

- A) Insert Wood Dowel(C) to Left,Right Side Panel(2,3)
- B) Attach Cam Lock(D) to Left,Right Side Panel(2,3)
- C) Insert & secure Cam Bolt(D) to Left,Right Side Panel(2,3)

Note : Make sure arrows on each Cam Lock point towards nearest edge with holes



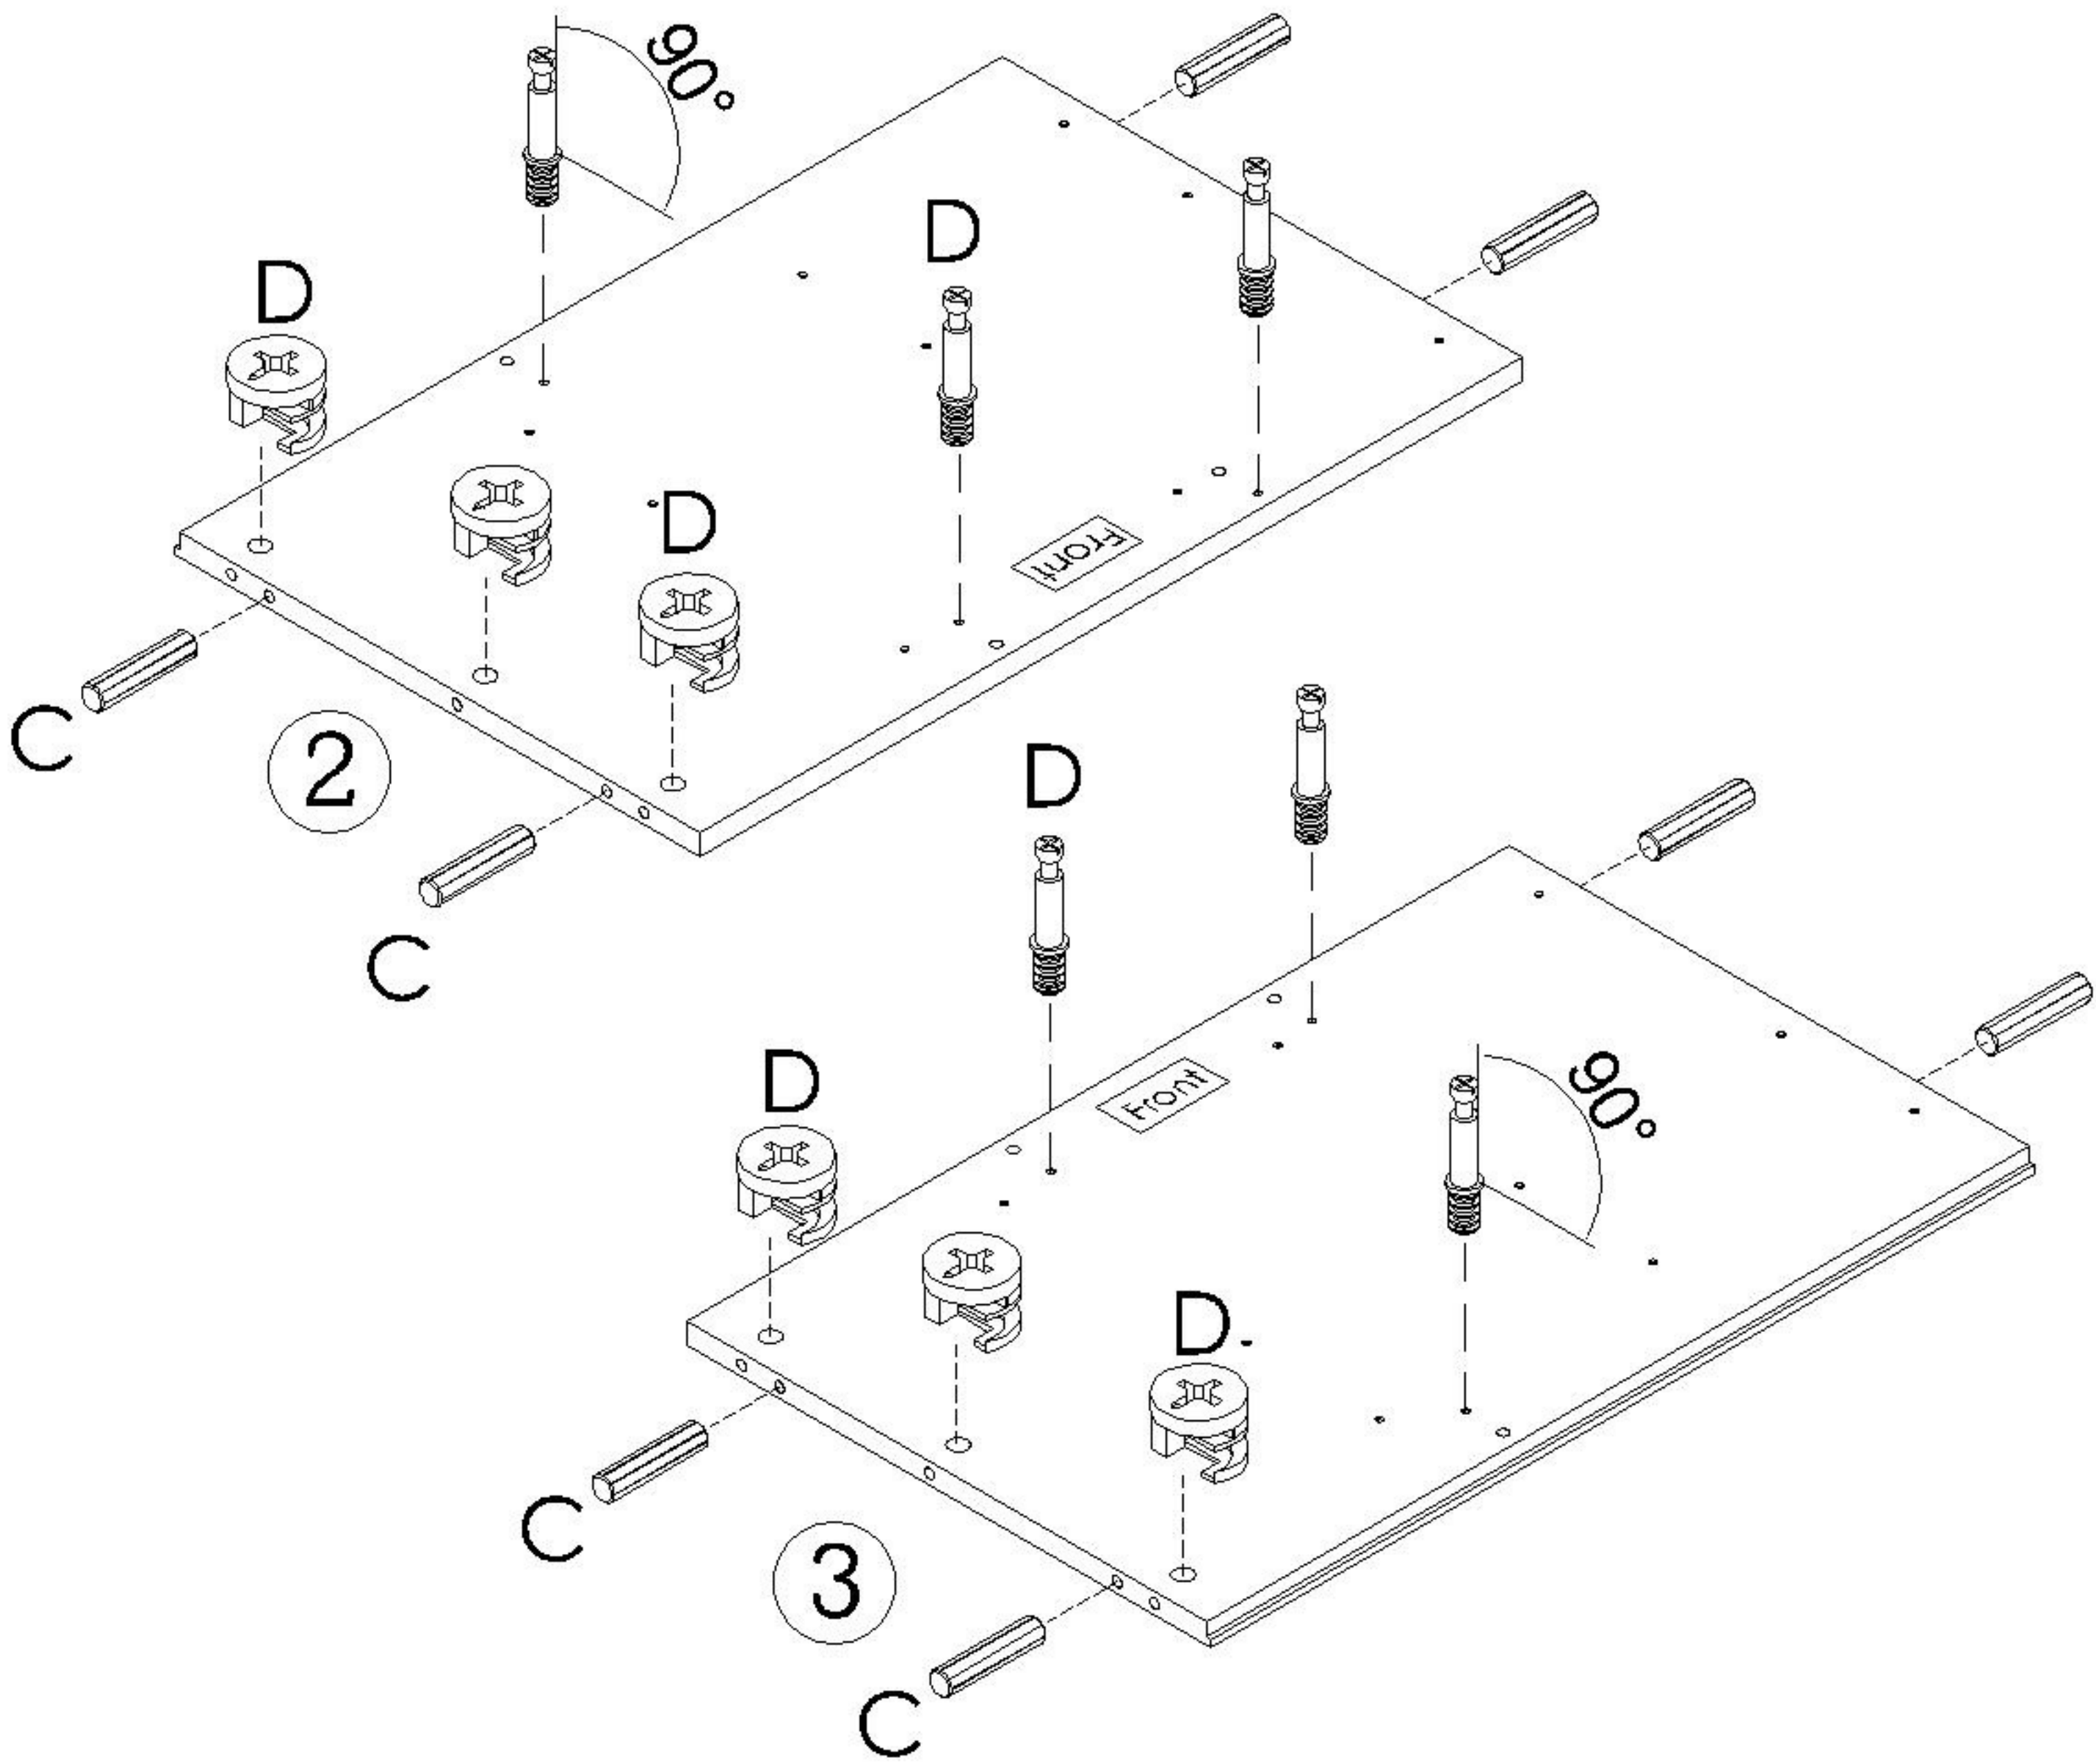


STEP 3


- A) Attach Extension Runner(F) to Left,Right Side Panel(2,3) using Chipboard Screw(A) to secure

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A¹, A² then A³

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

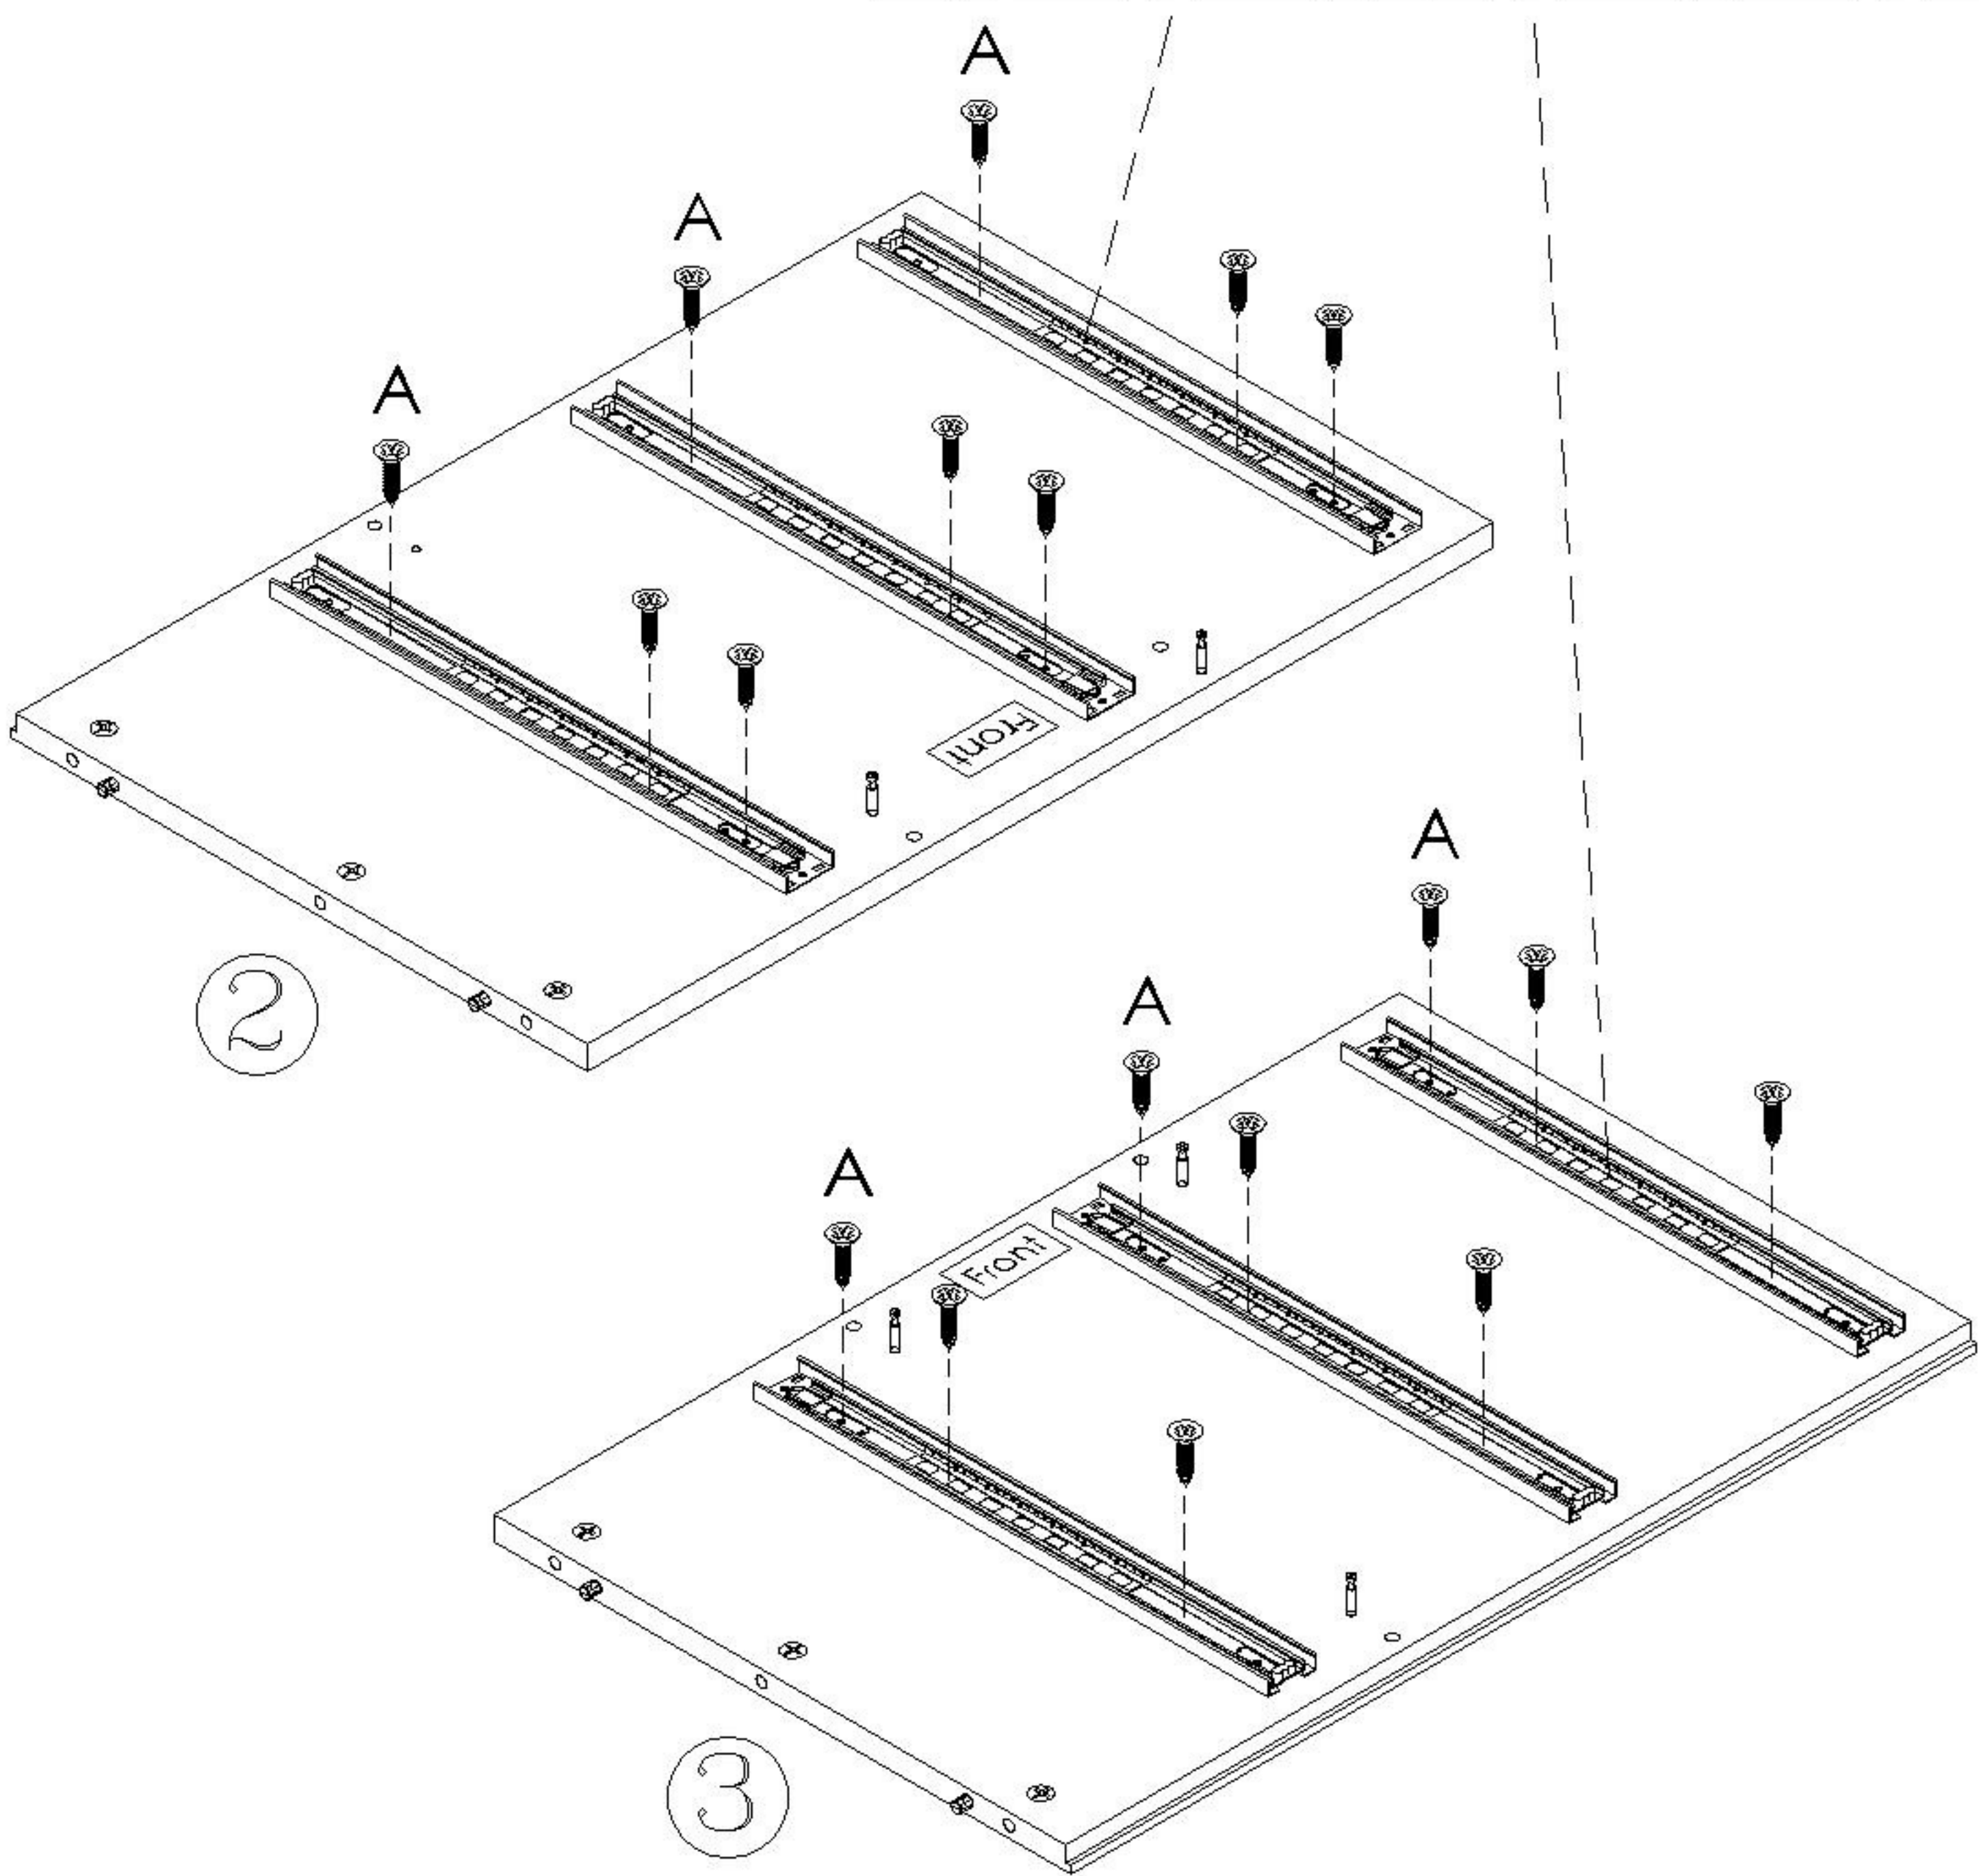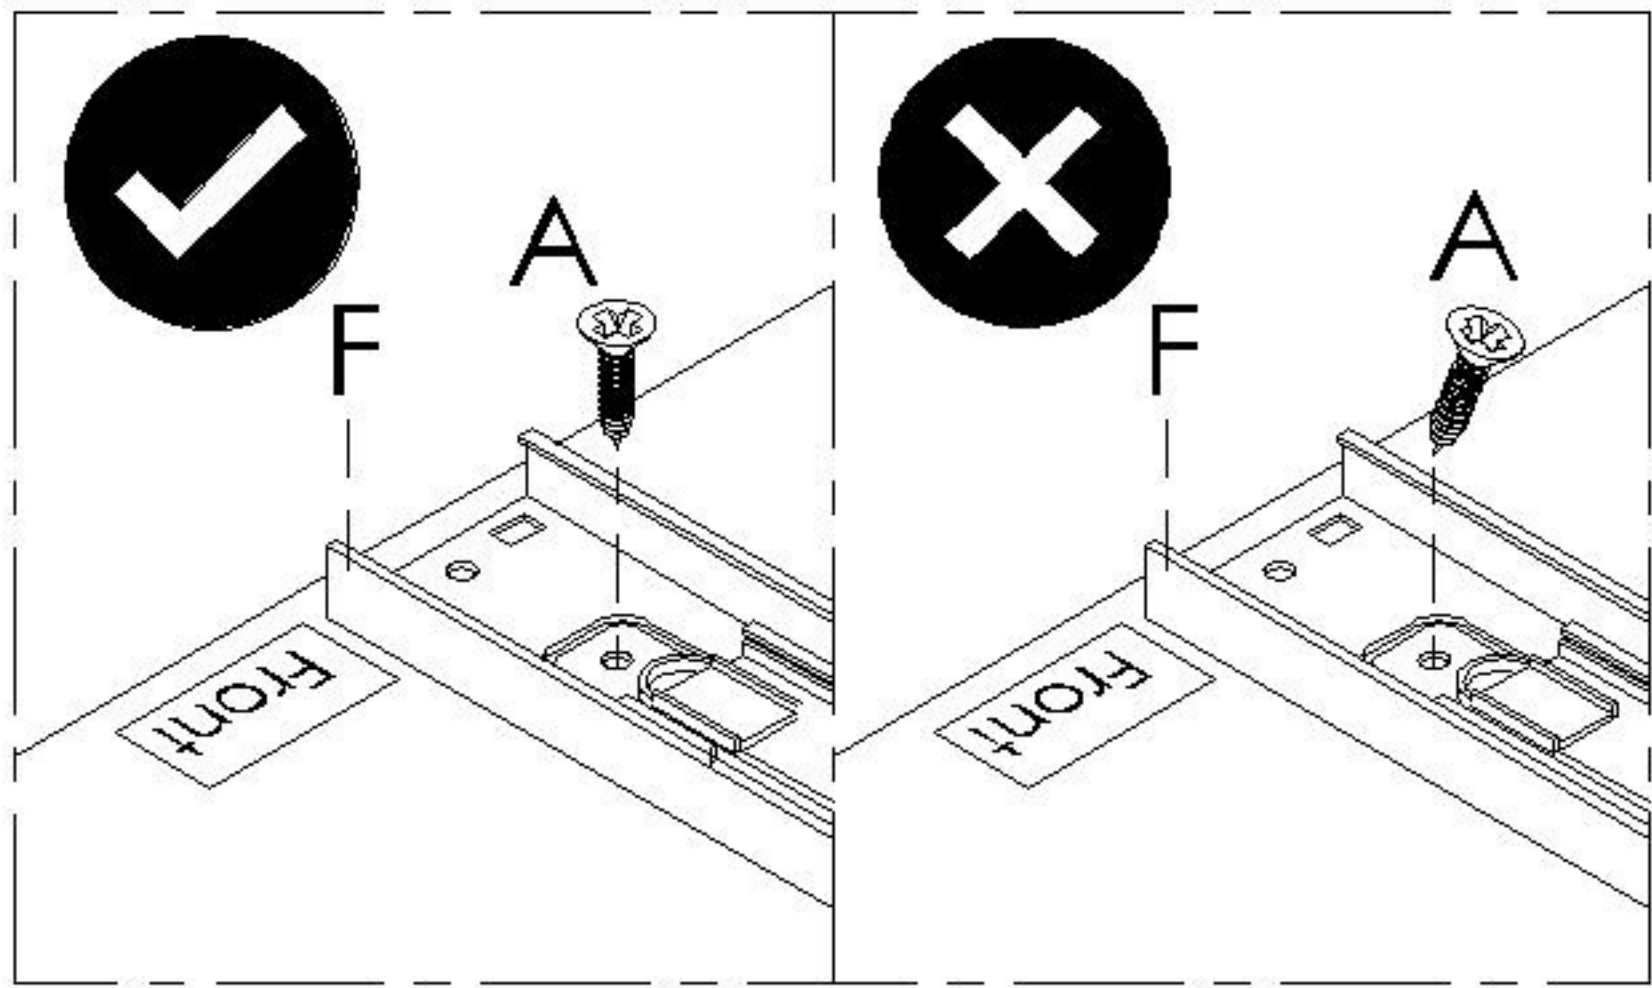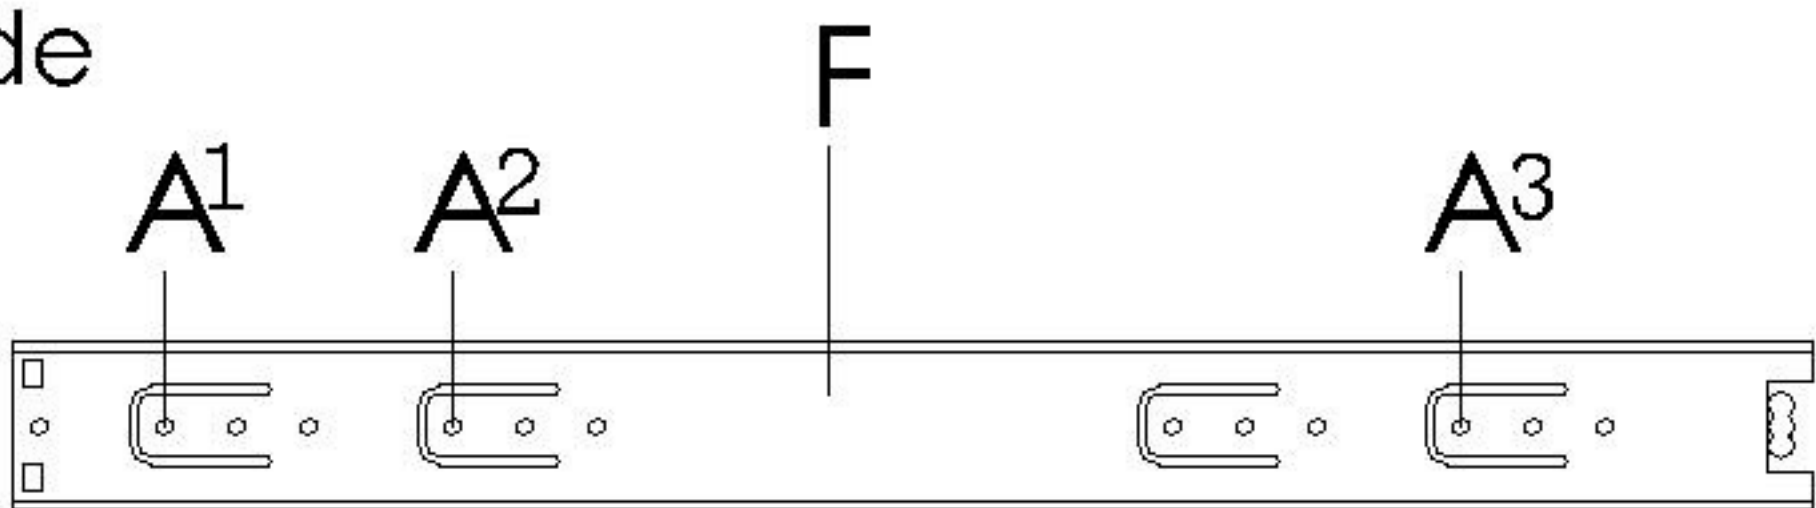


EXTENSION RUNNER DISASSEMBLE STEPS:

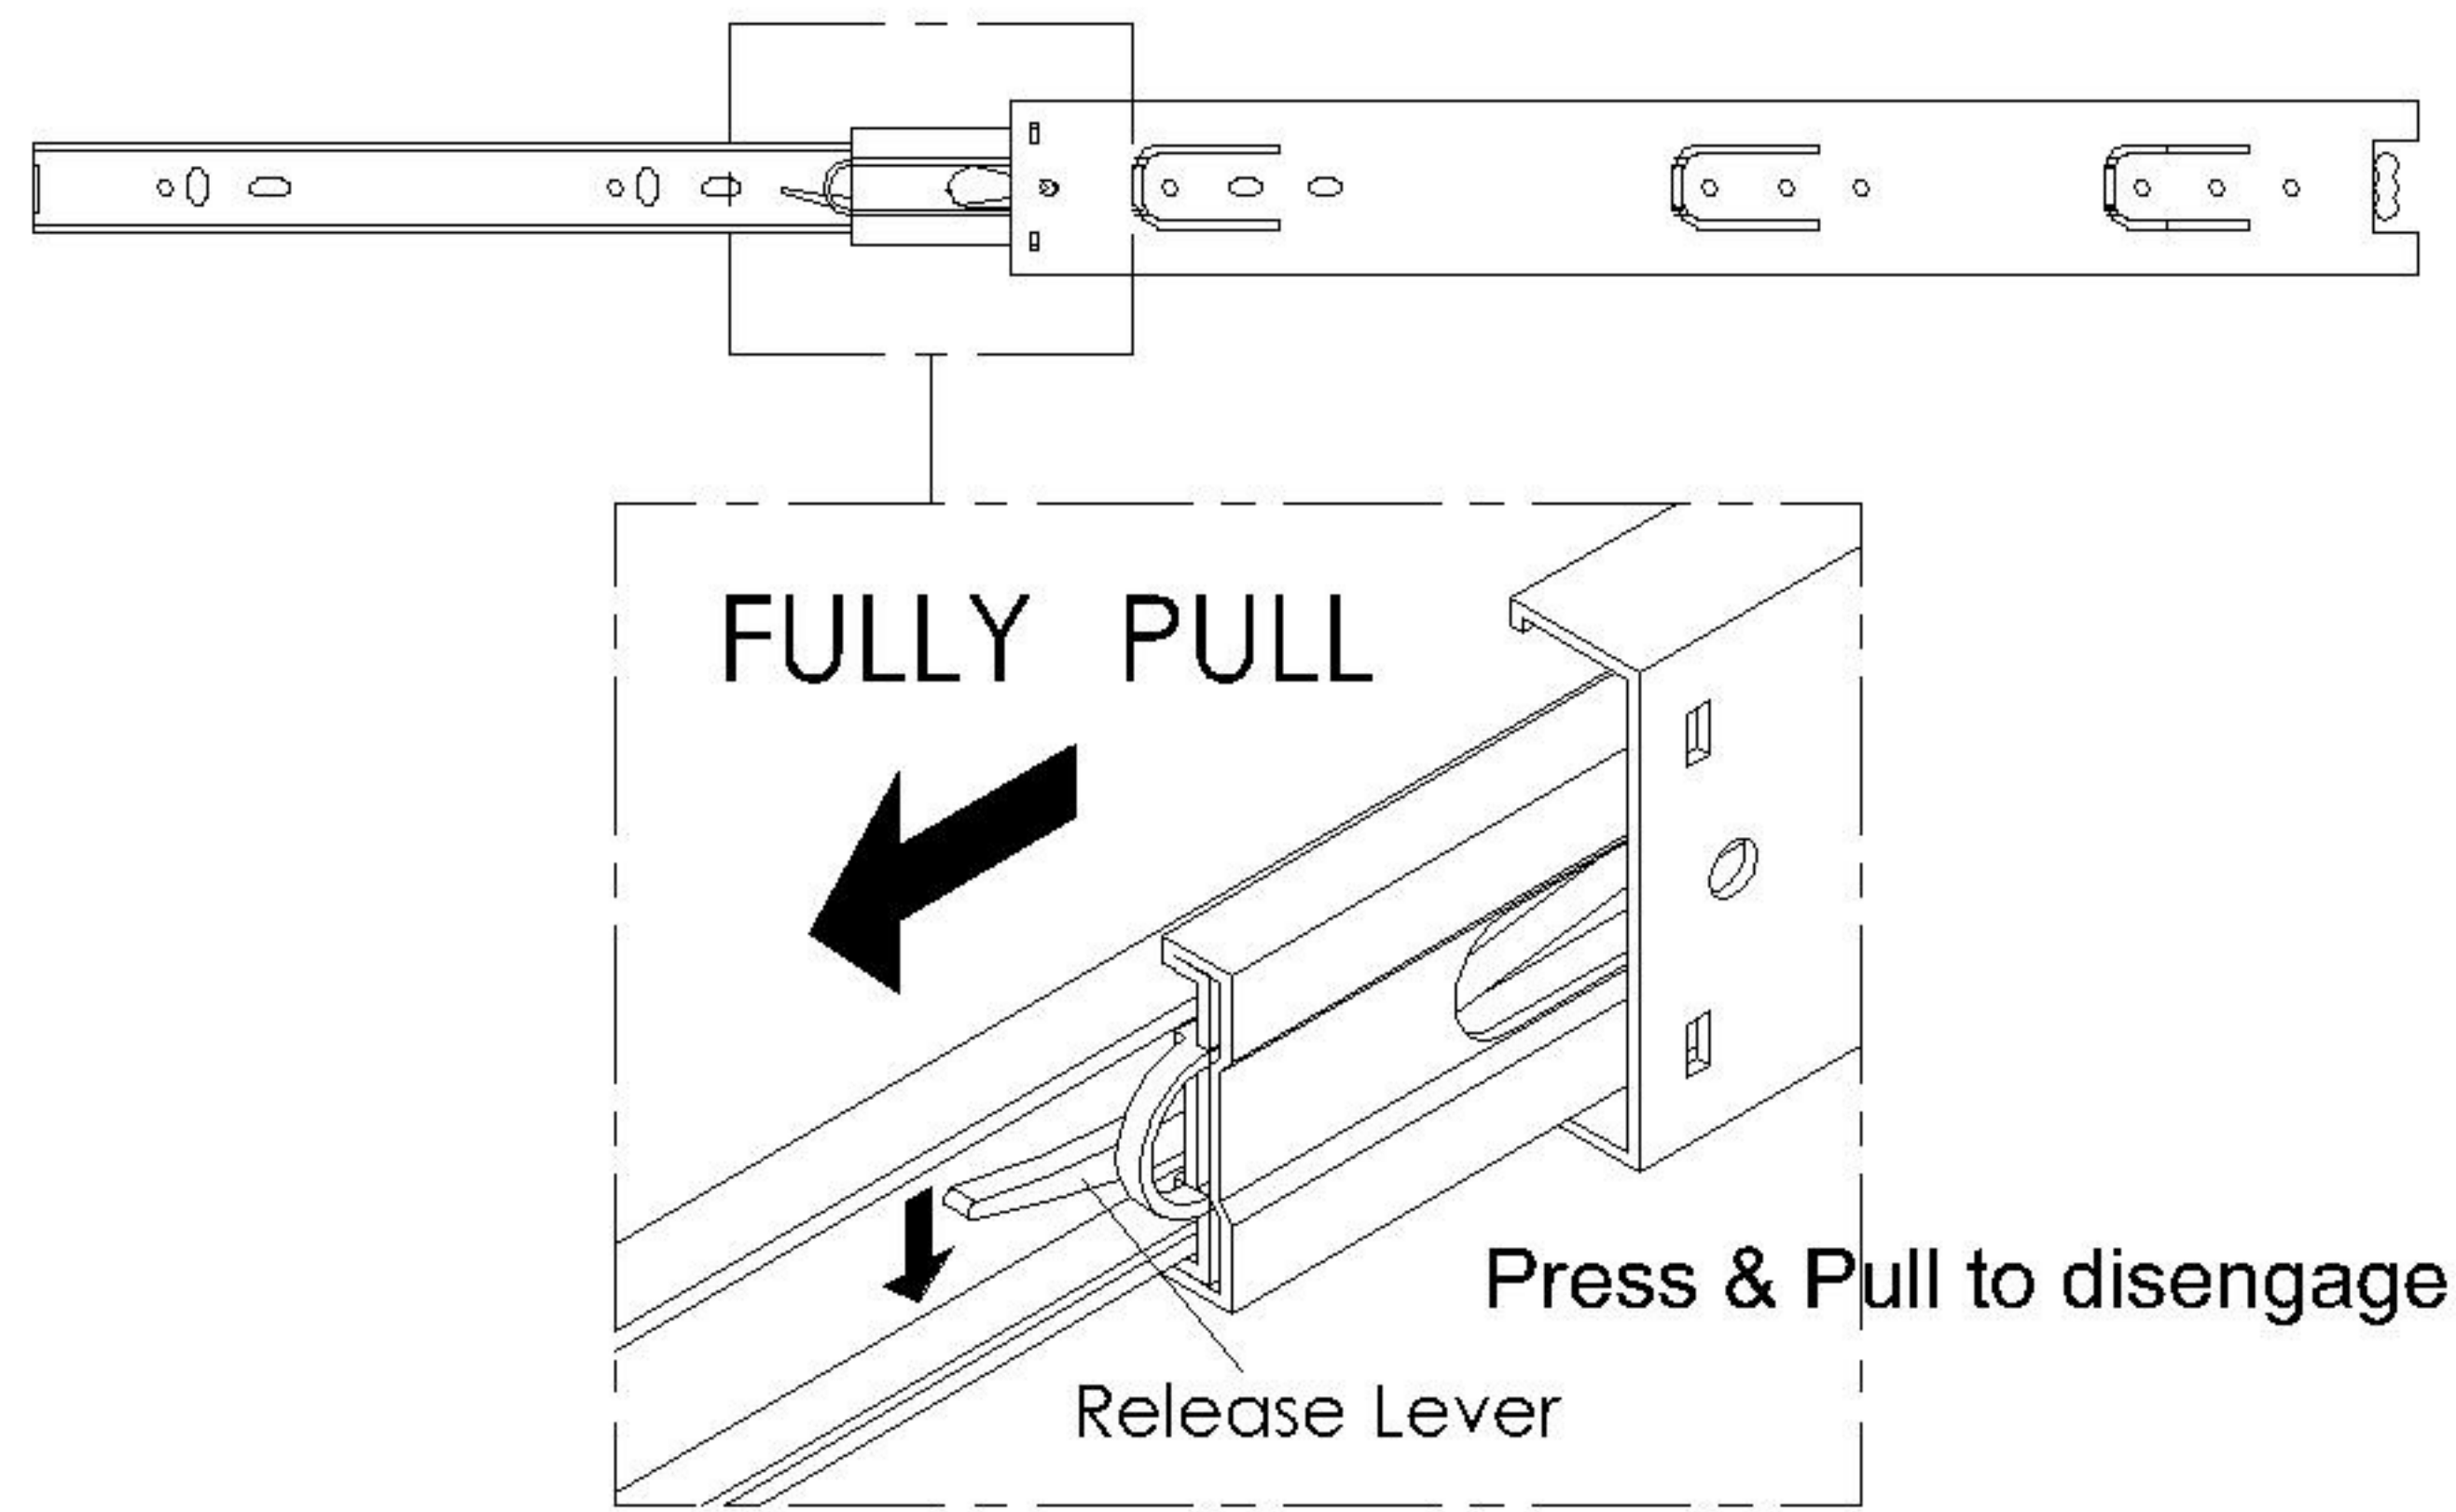

STEP 4

- A) Insert Wood Dowel(C) to Left,Right Small Partition(9,10)
- B) Attach Cam Lock(D) to Left,Right Small Partition(9,10)

Note : Make sure arrows on each Cam Lock point towards nearest edge with holes

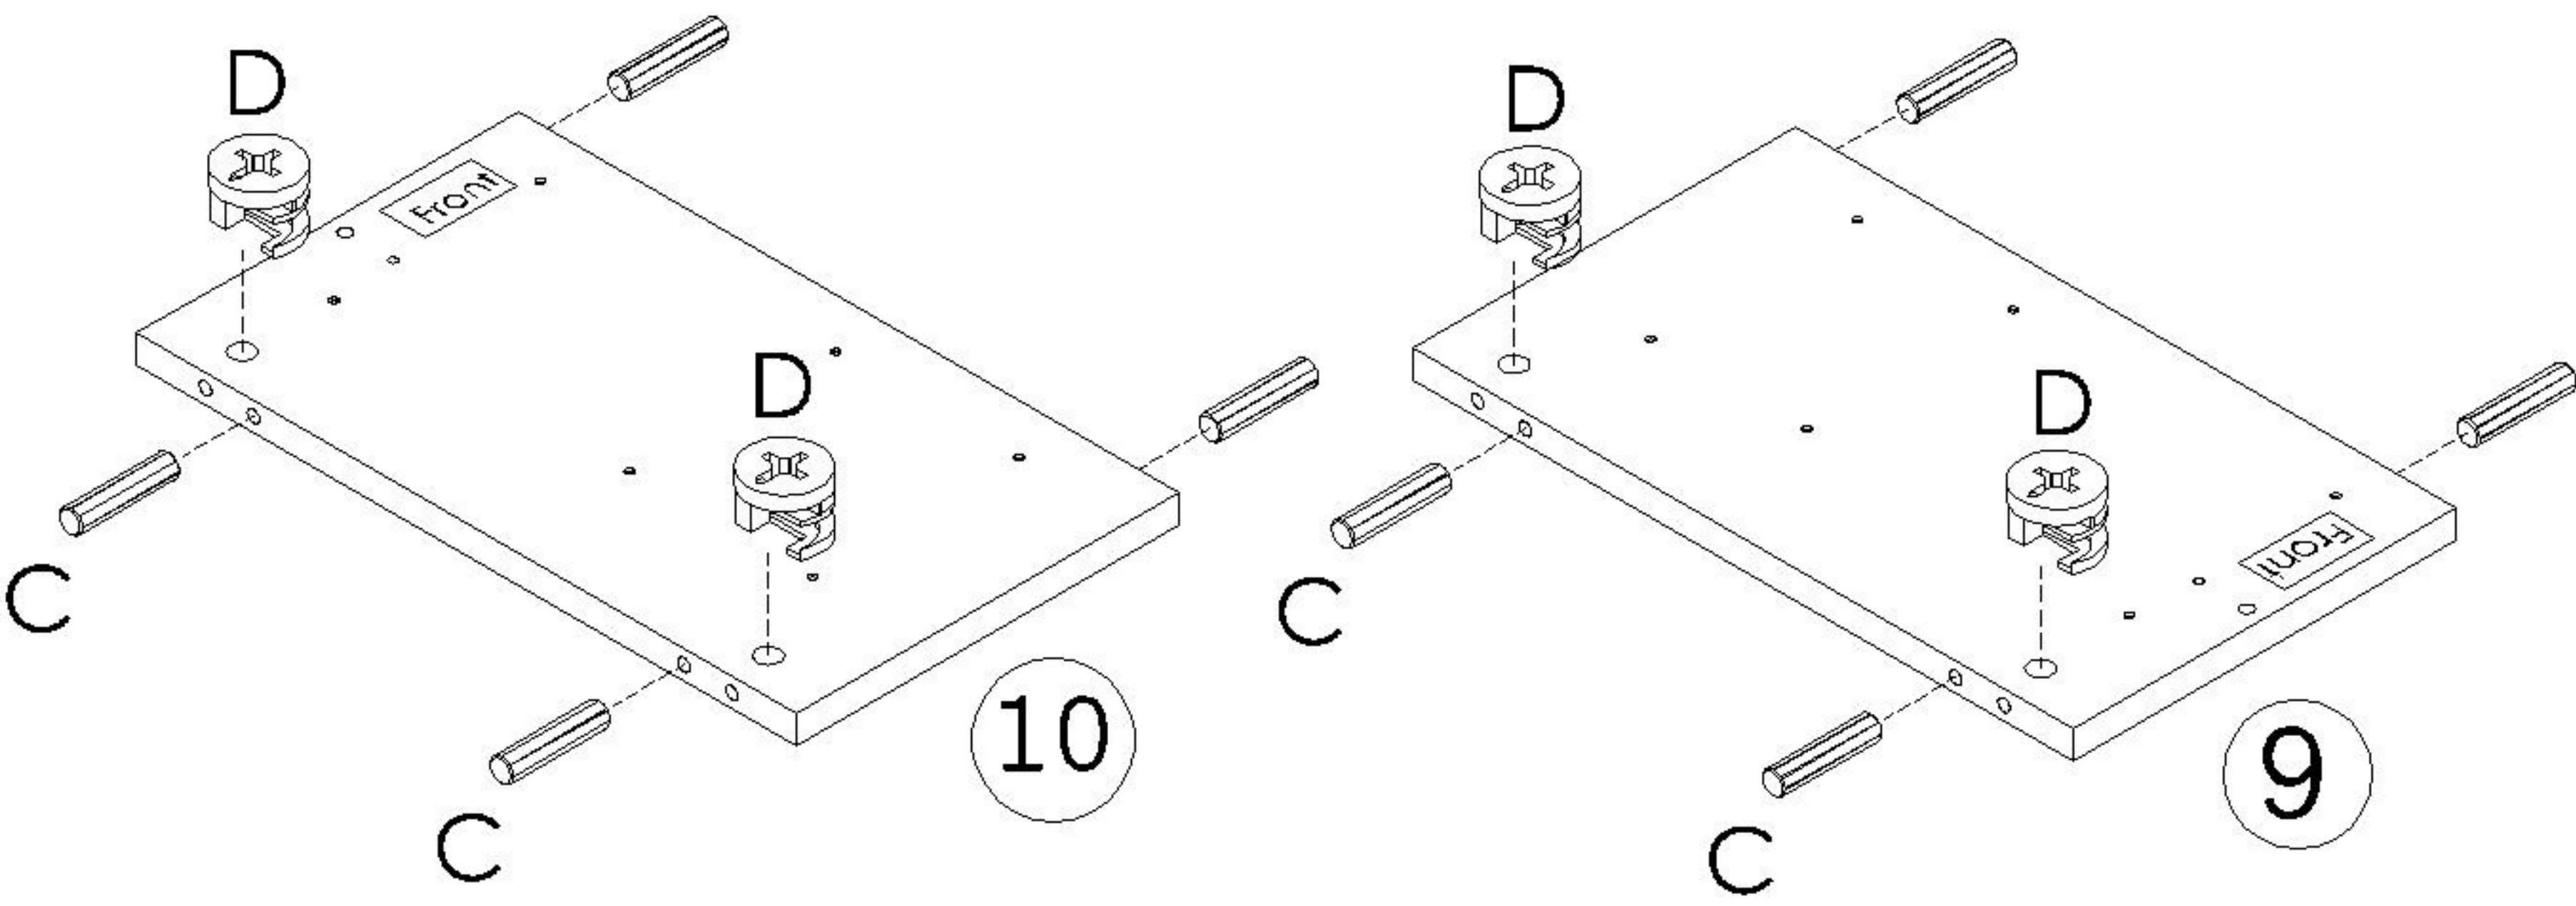


STEP 5


- A) Attach Extension Runner(F) to both sides of Left Small Partition(9) using Chipboard Screw(A) to secure
- B) Insert & secure Cam Bolt(D) to Left Small Partition(9)

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A¹, A² then A³

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

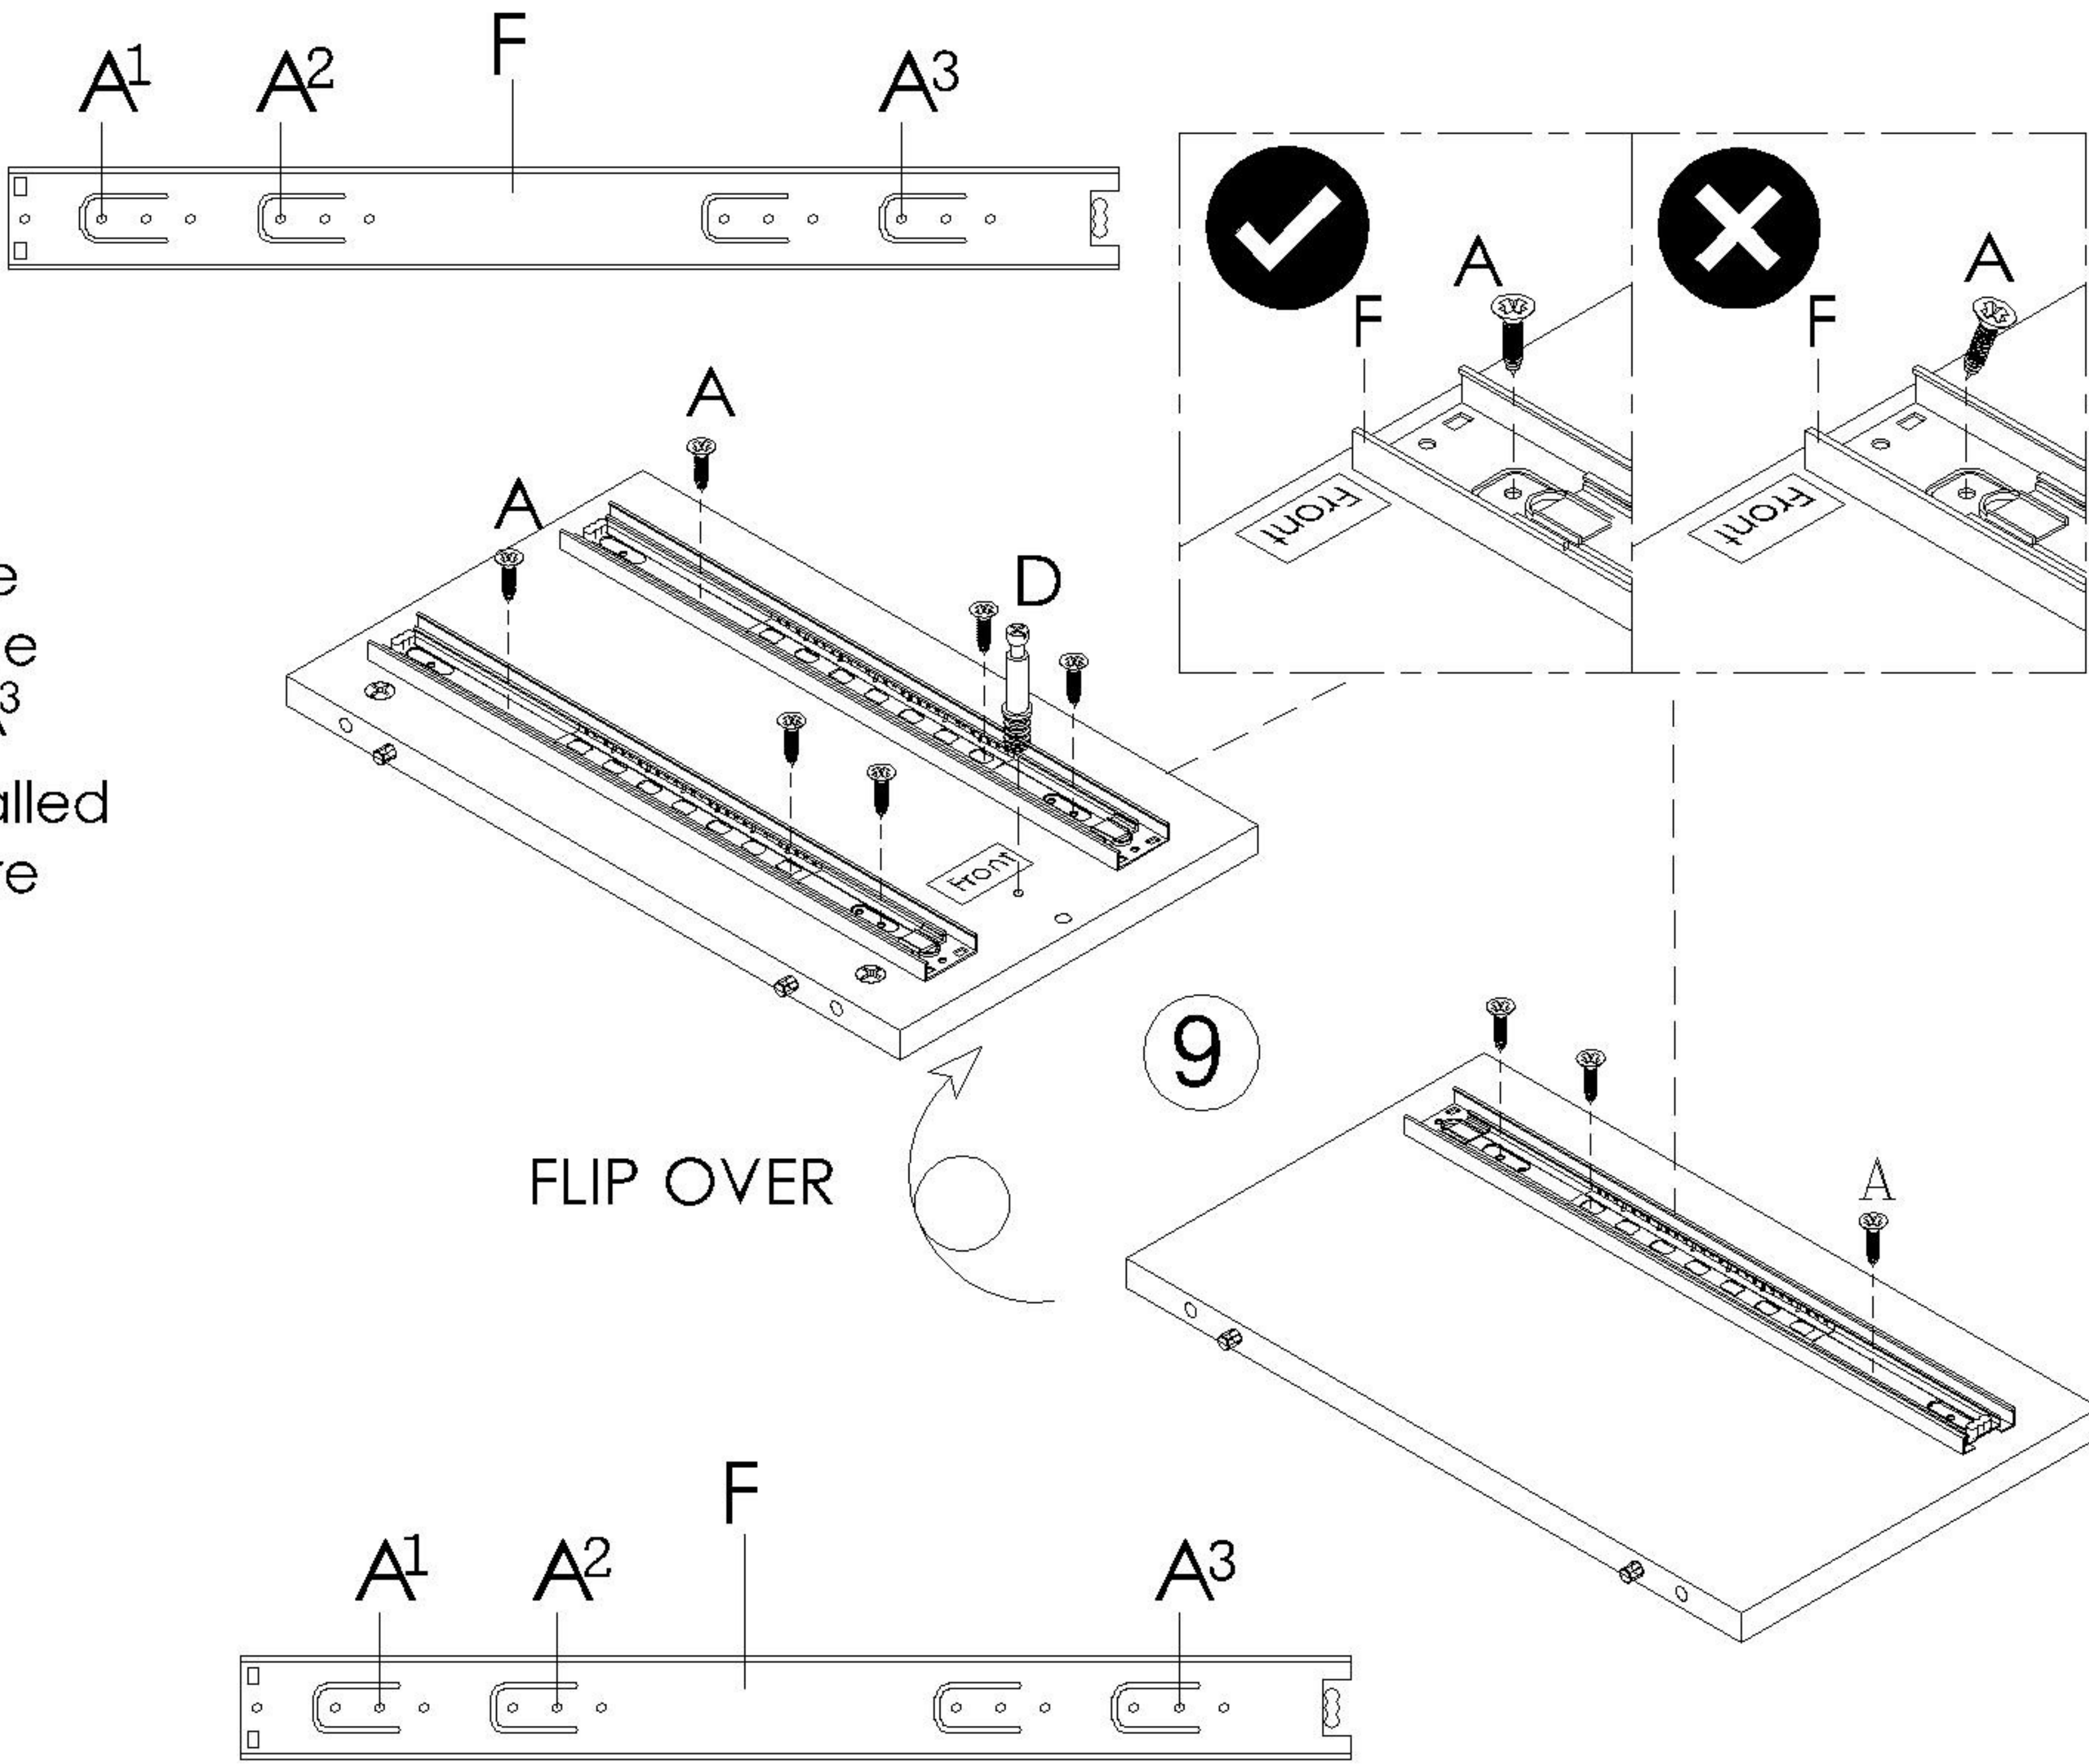

EXTENSION RUNNER DISASSEMBLE STEPS:

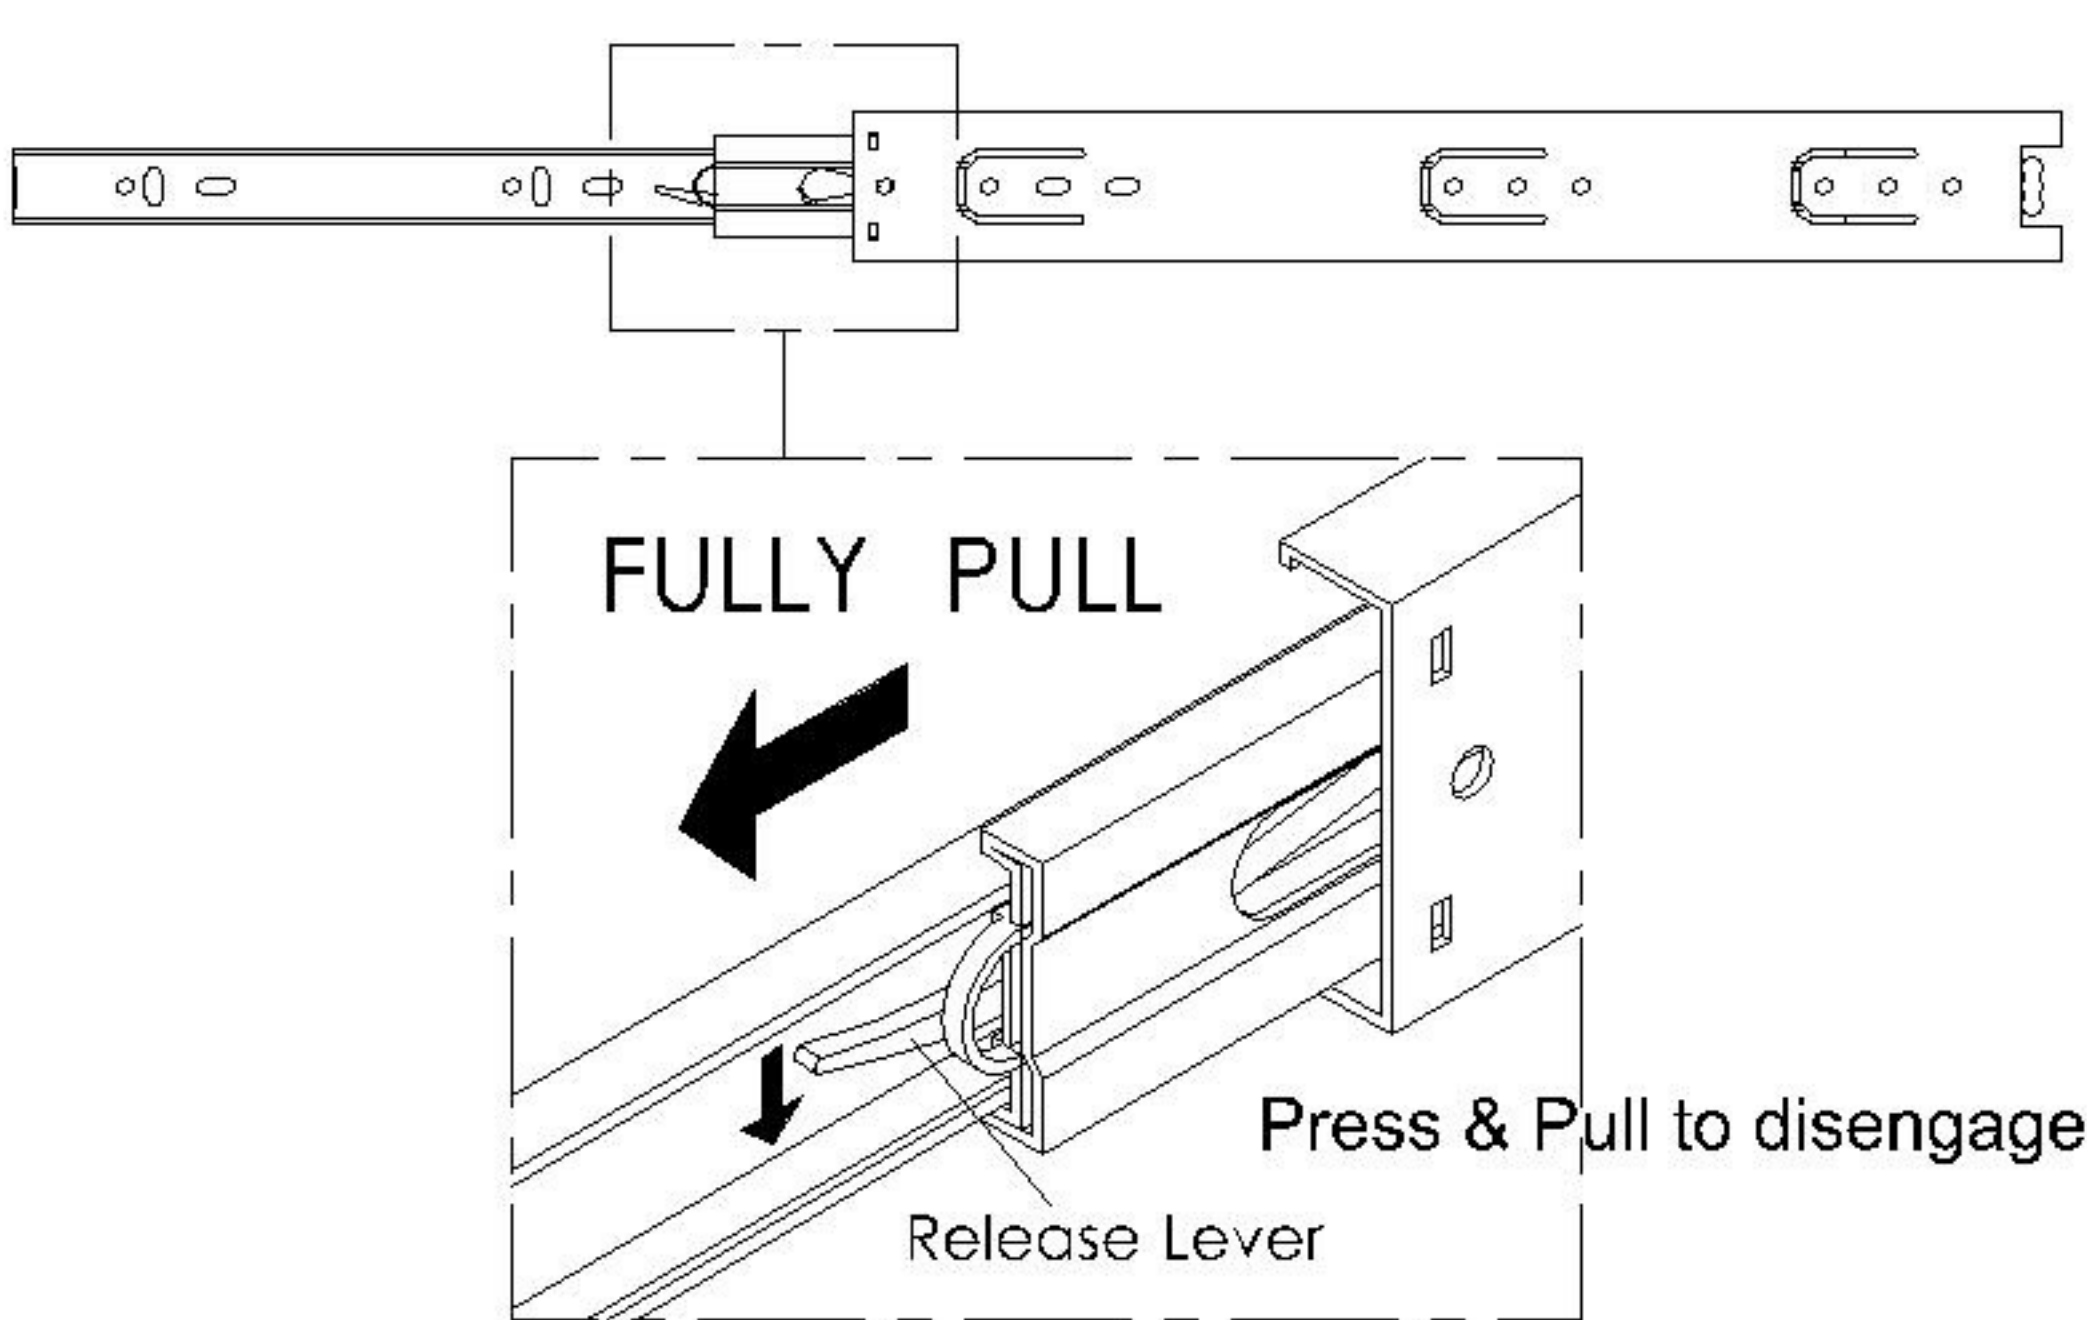


STEP 6


- A) Attach Extension Runner(F) to both sides of Right Small Partition(10) using Chipboard Screw(A) to secure
- B) Insert & secure Cam Bolt(D) to Right Small Partition(10)

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A¹, A² then A³

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

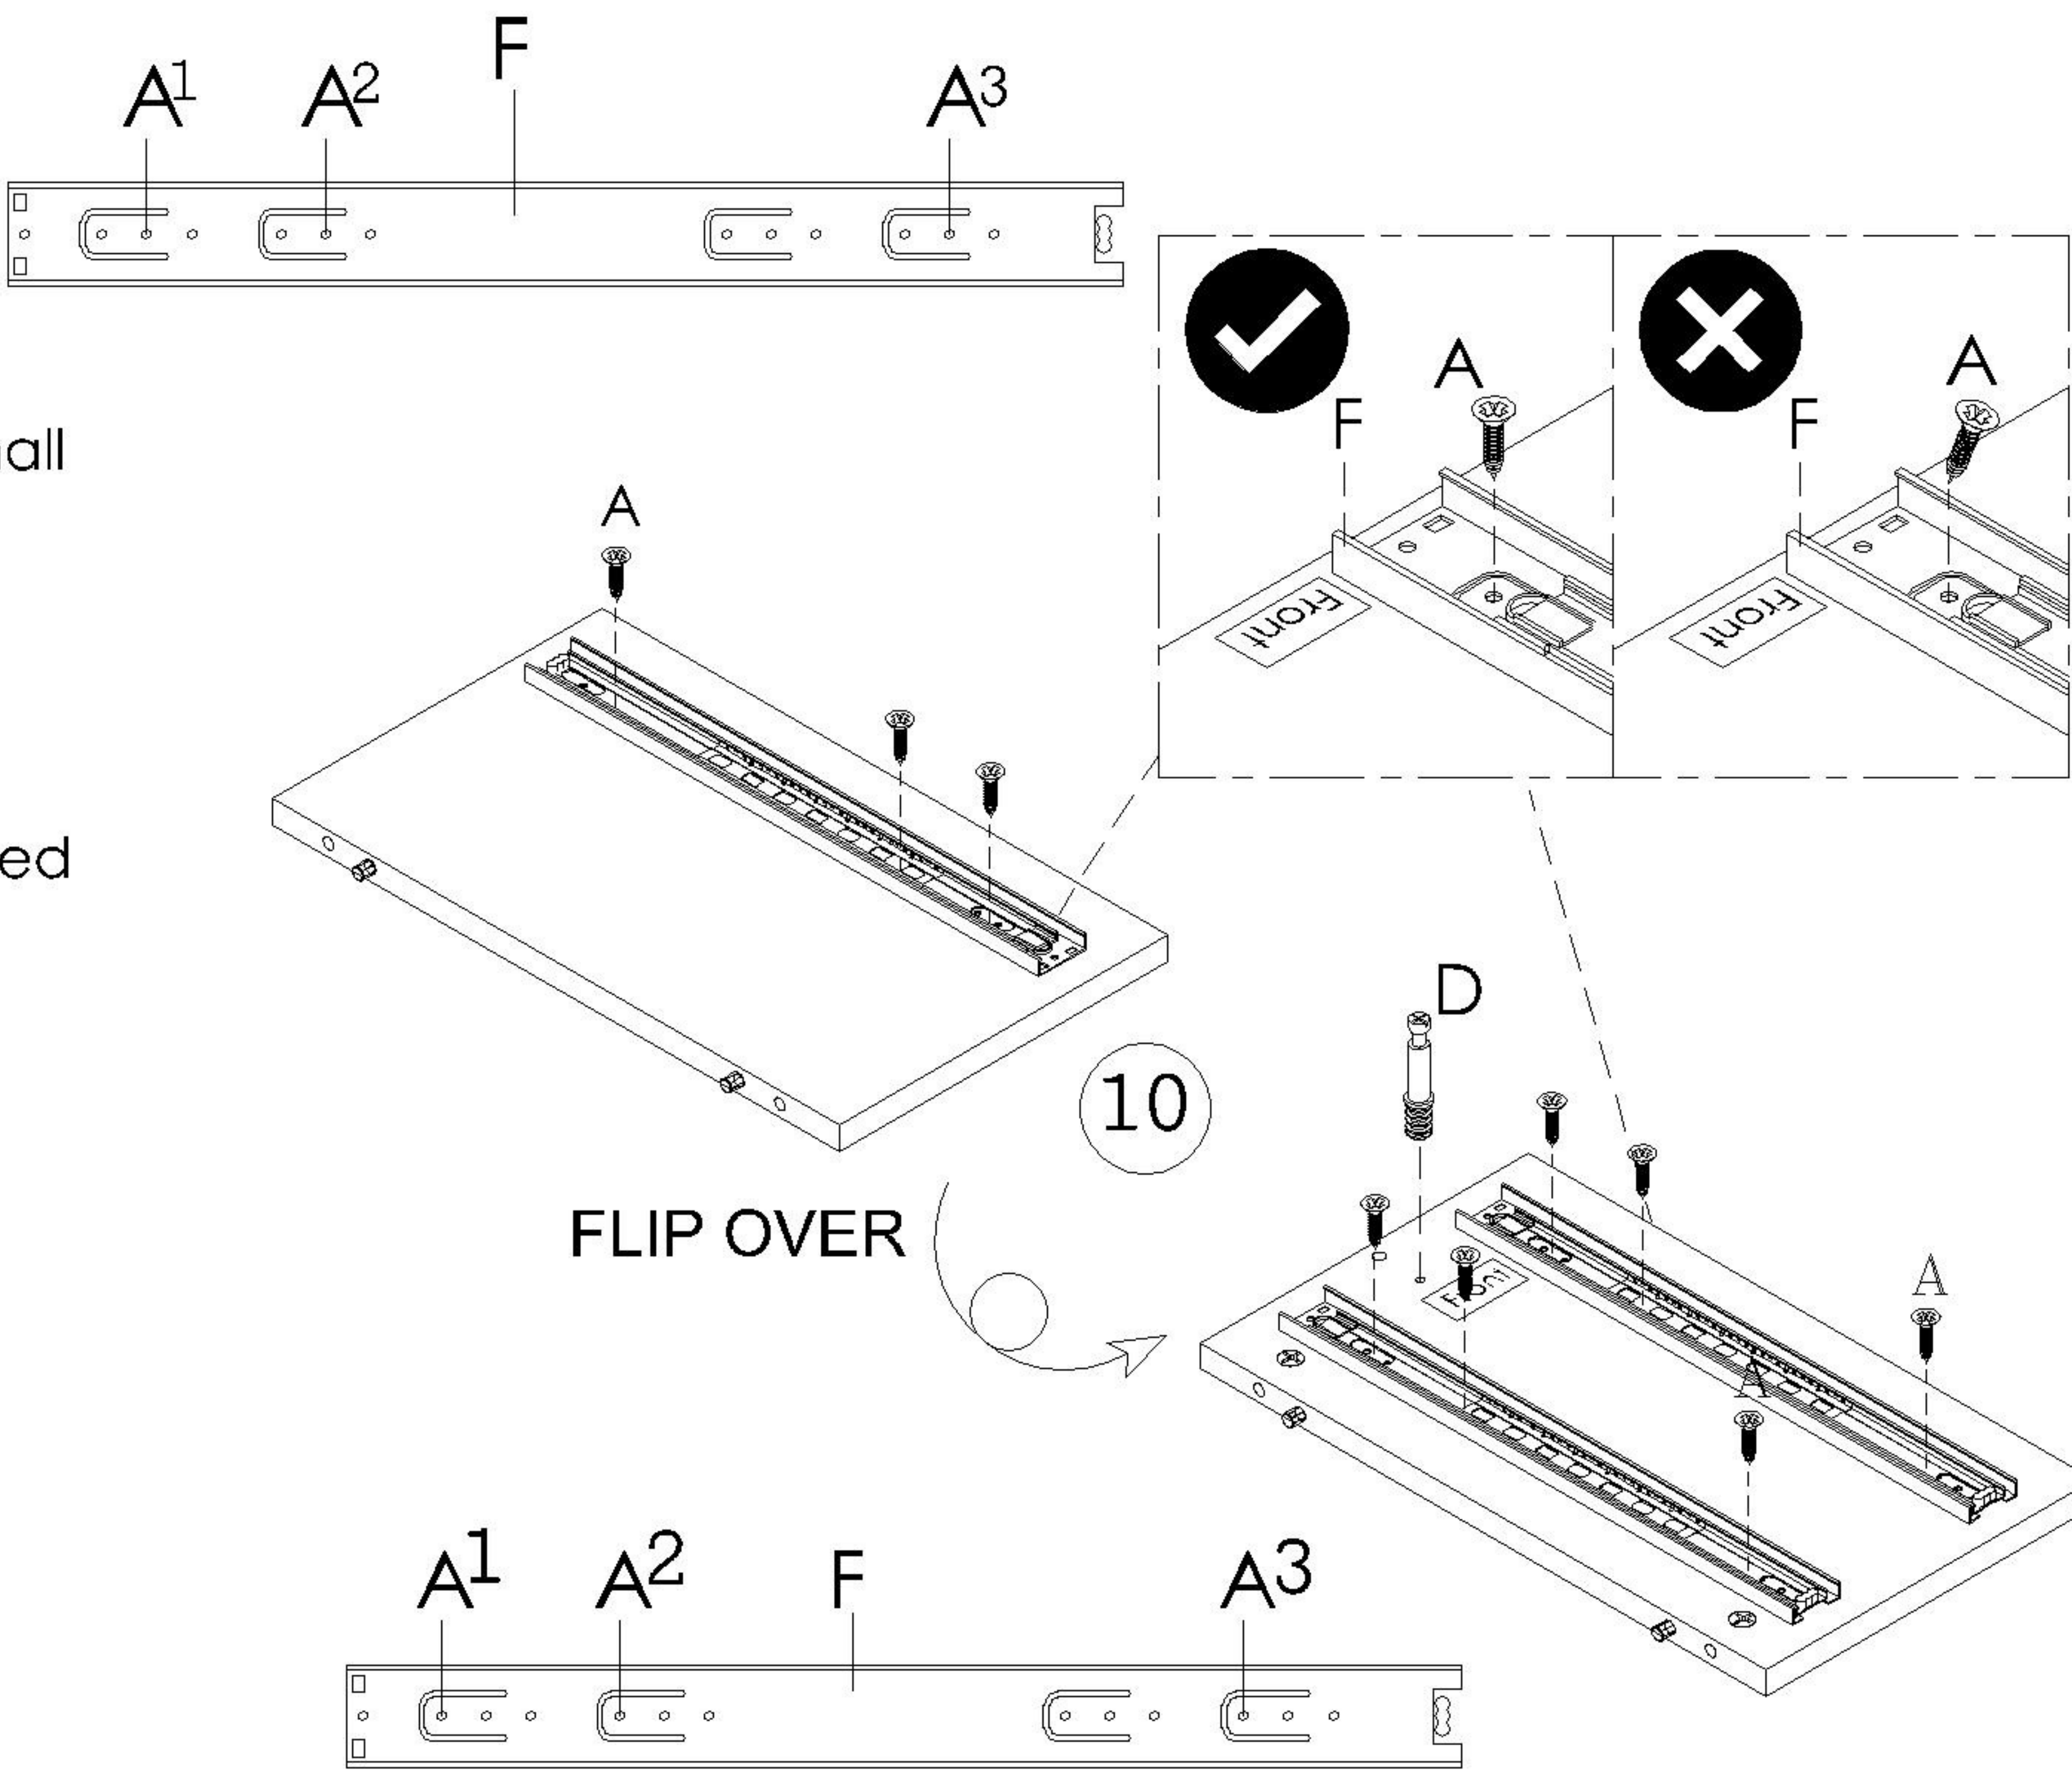


EXTENSION RUNNER DISASSEMBLE STEPS:

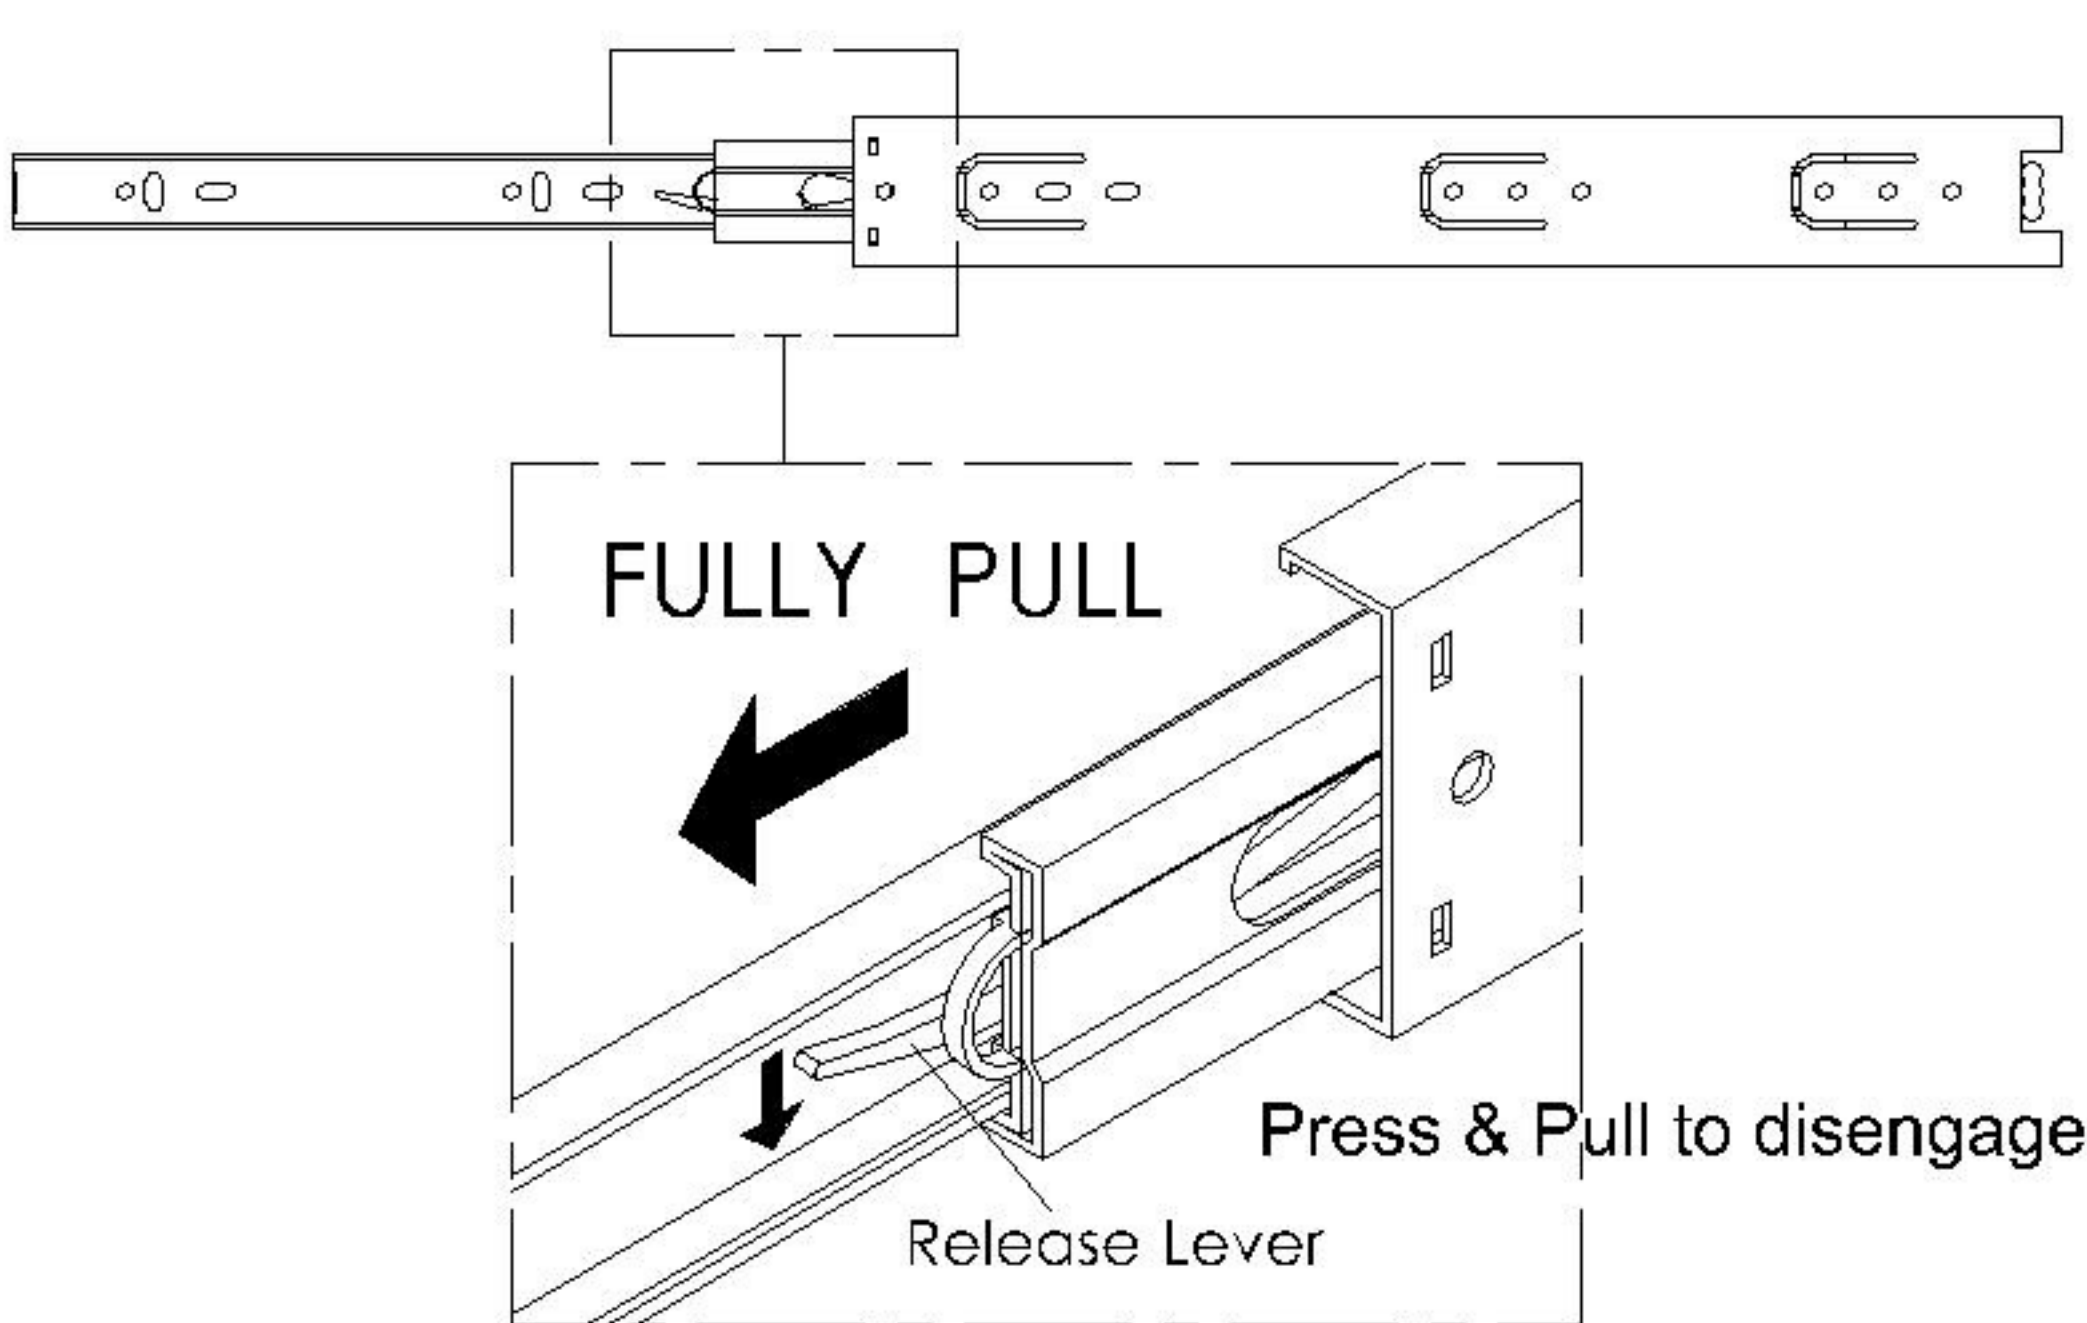

STEP 7

- A) Insert Wood Dowel(C) to Big Partition(11)




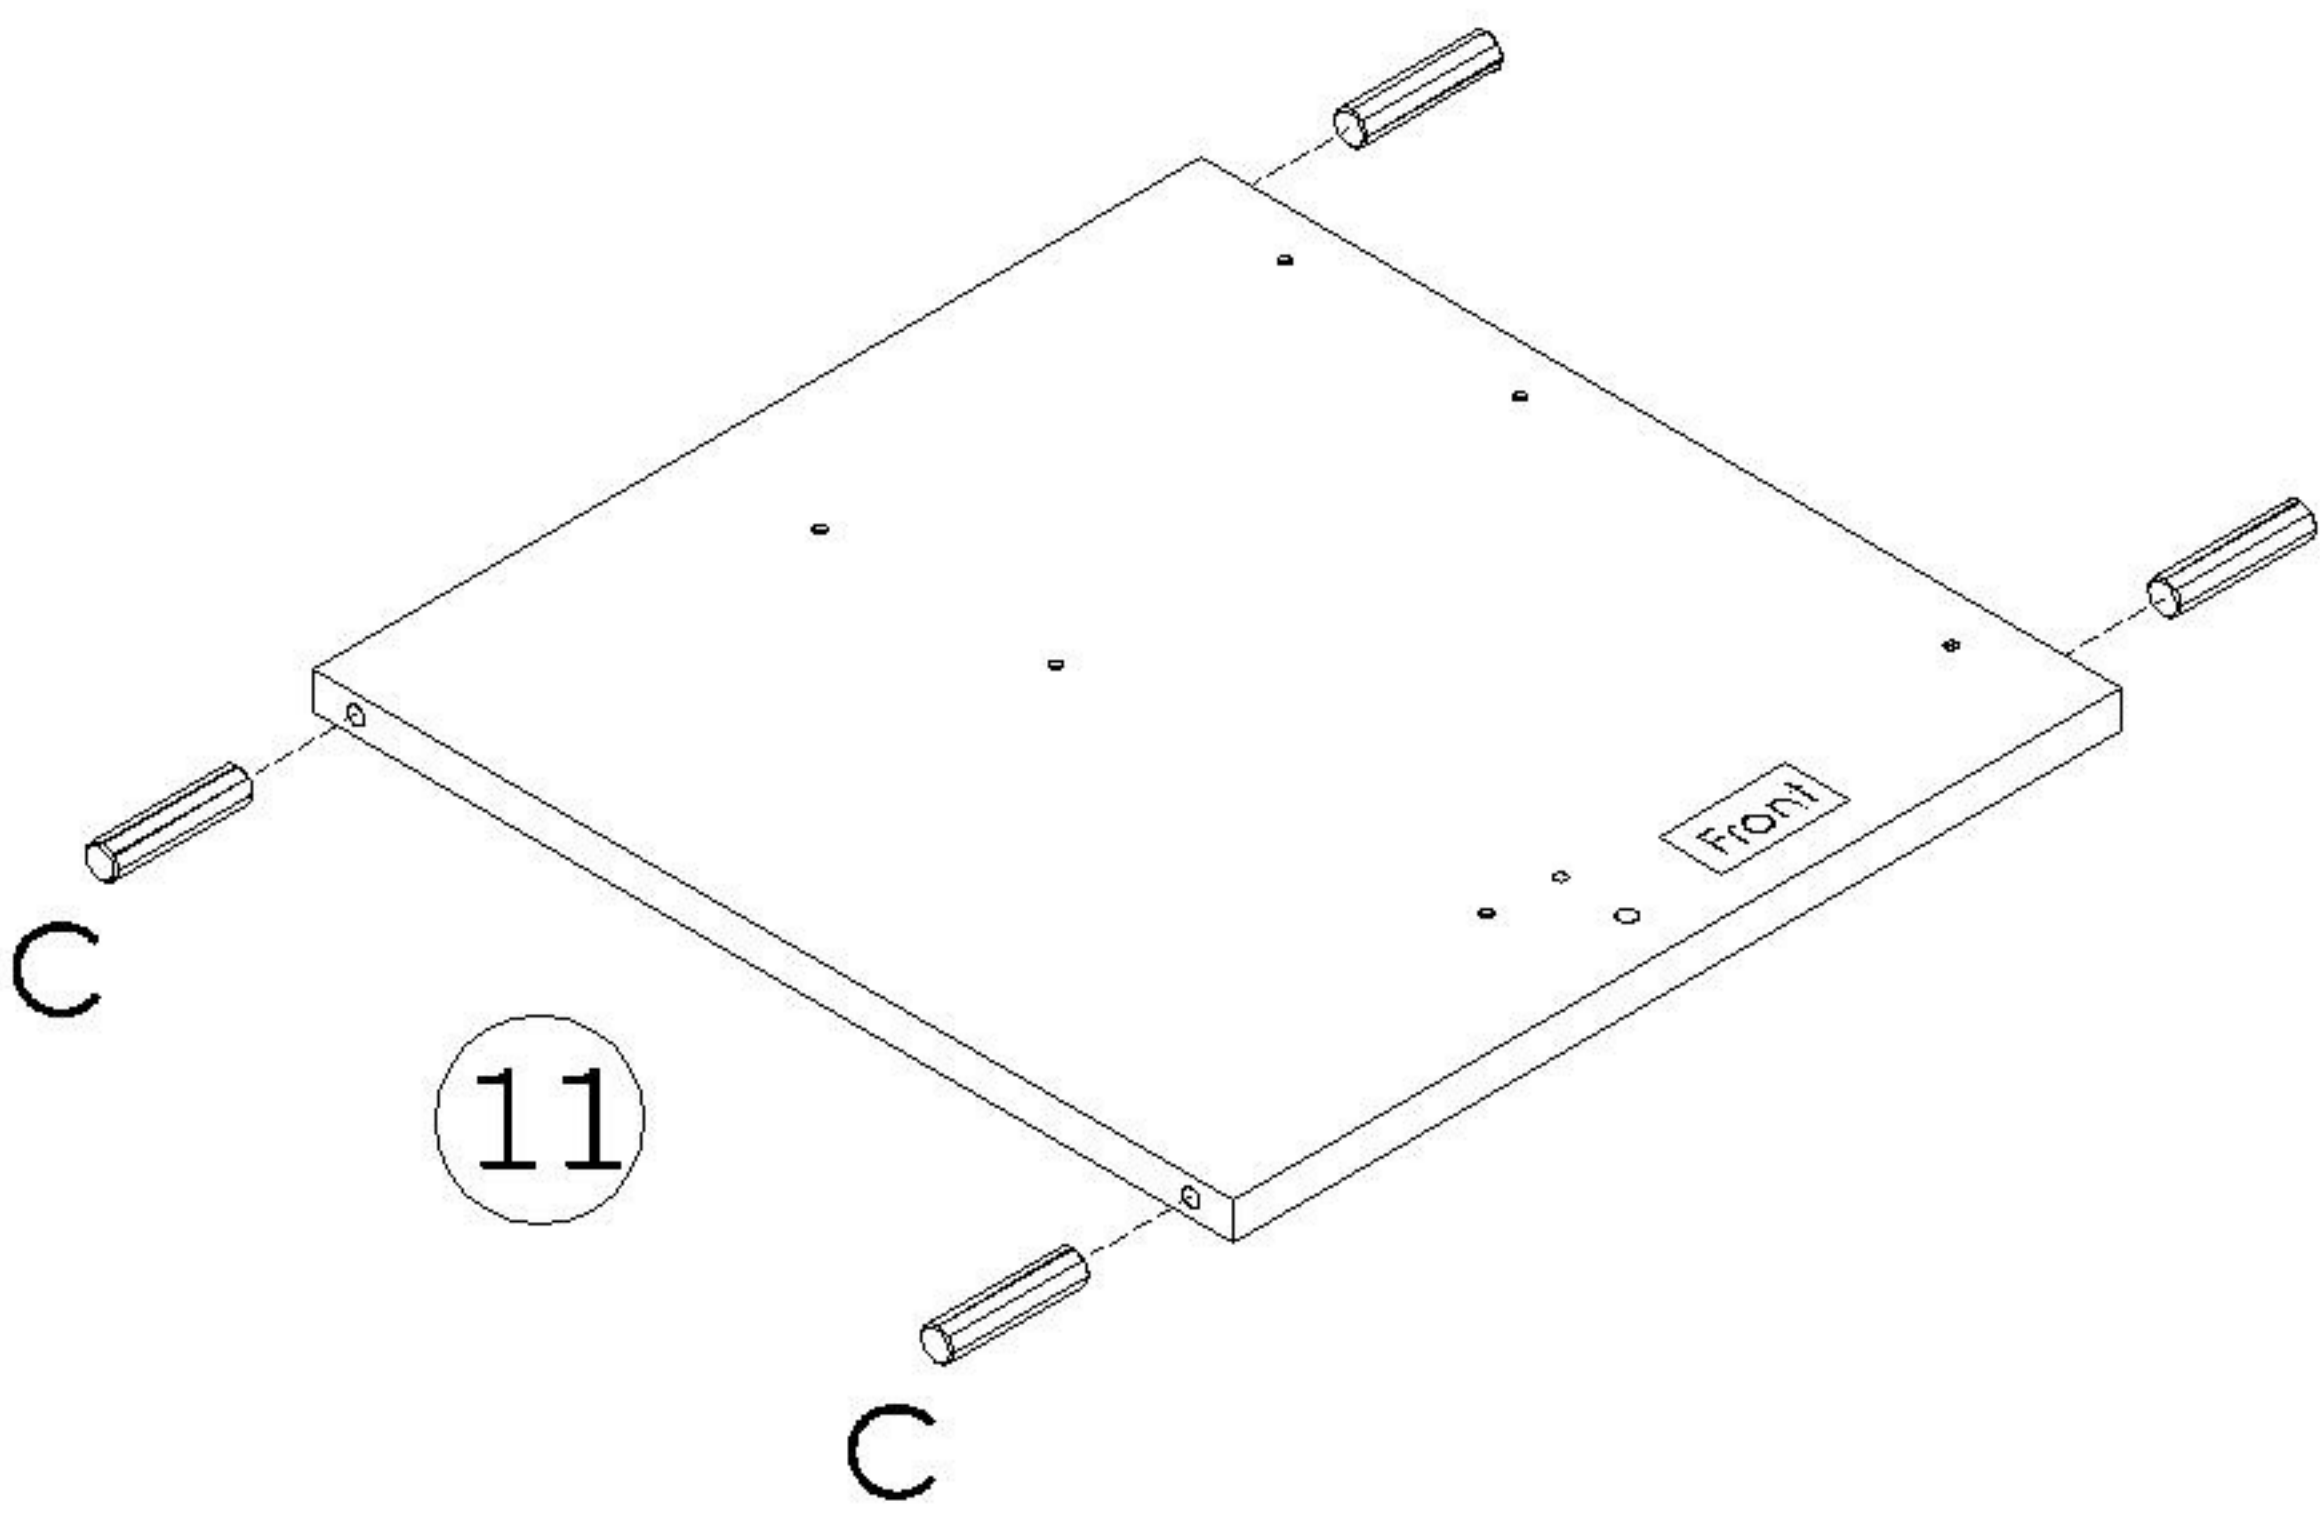


STEP 8


- A) Attach Extension Runner(F) to both sides of Big Partition(11) using Chipboard Screw(A) to secure
- B) Insert & secure Cam Bolt(D) to both sides of Big Partition(11)

NOTE : Chipboard Screw(A) should be assembled from the front of the runner. Start from A¹, A² then A³

NOTE : Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole

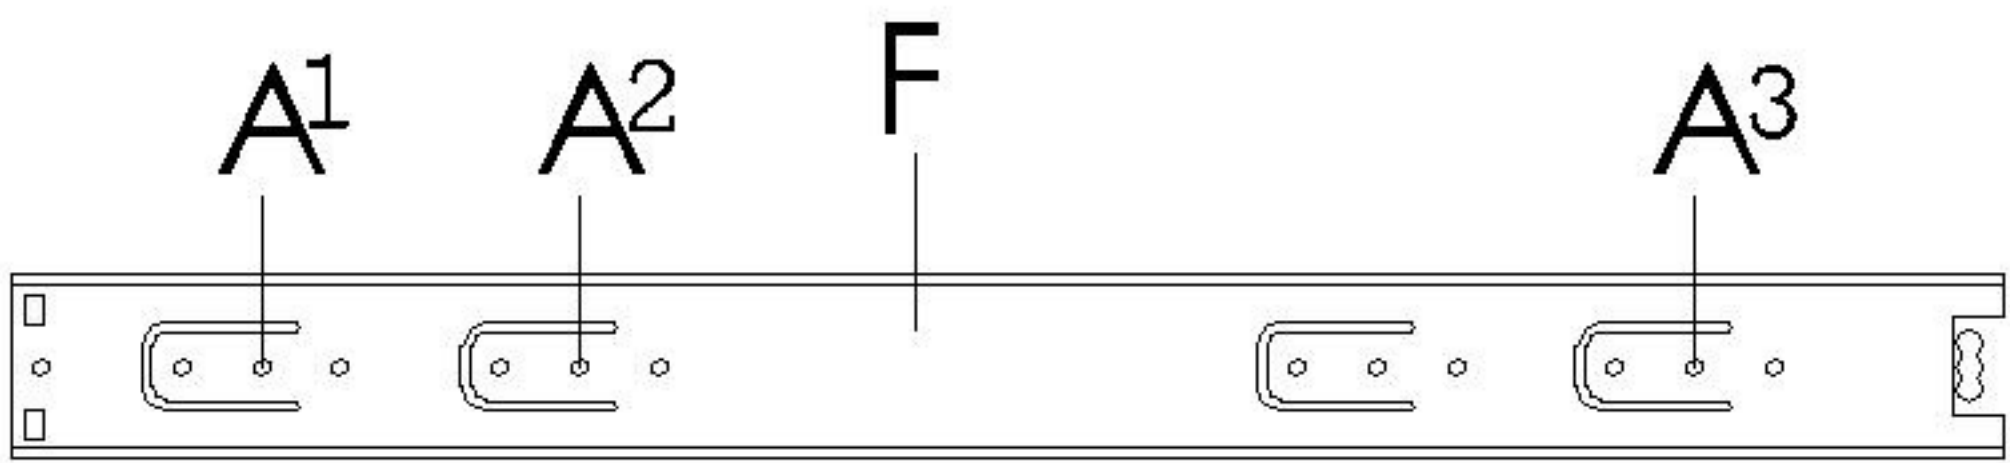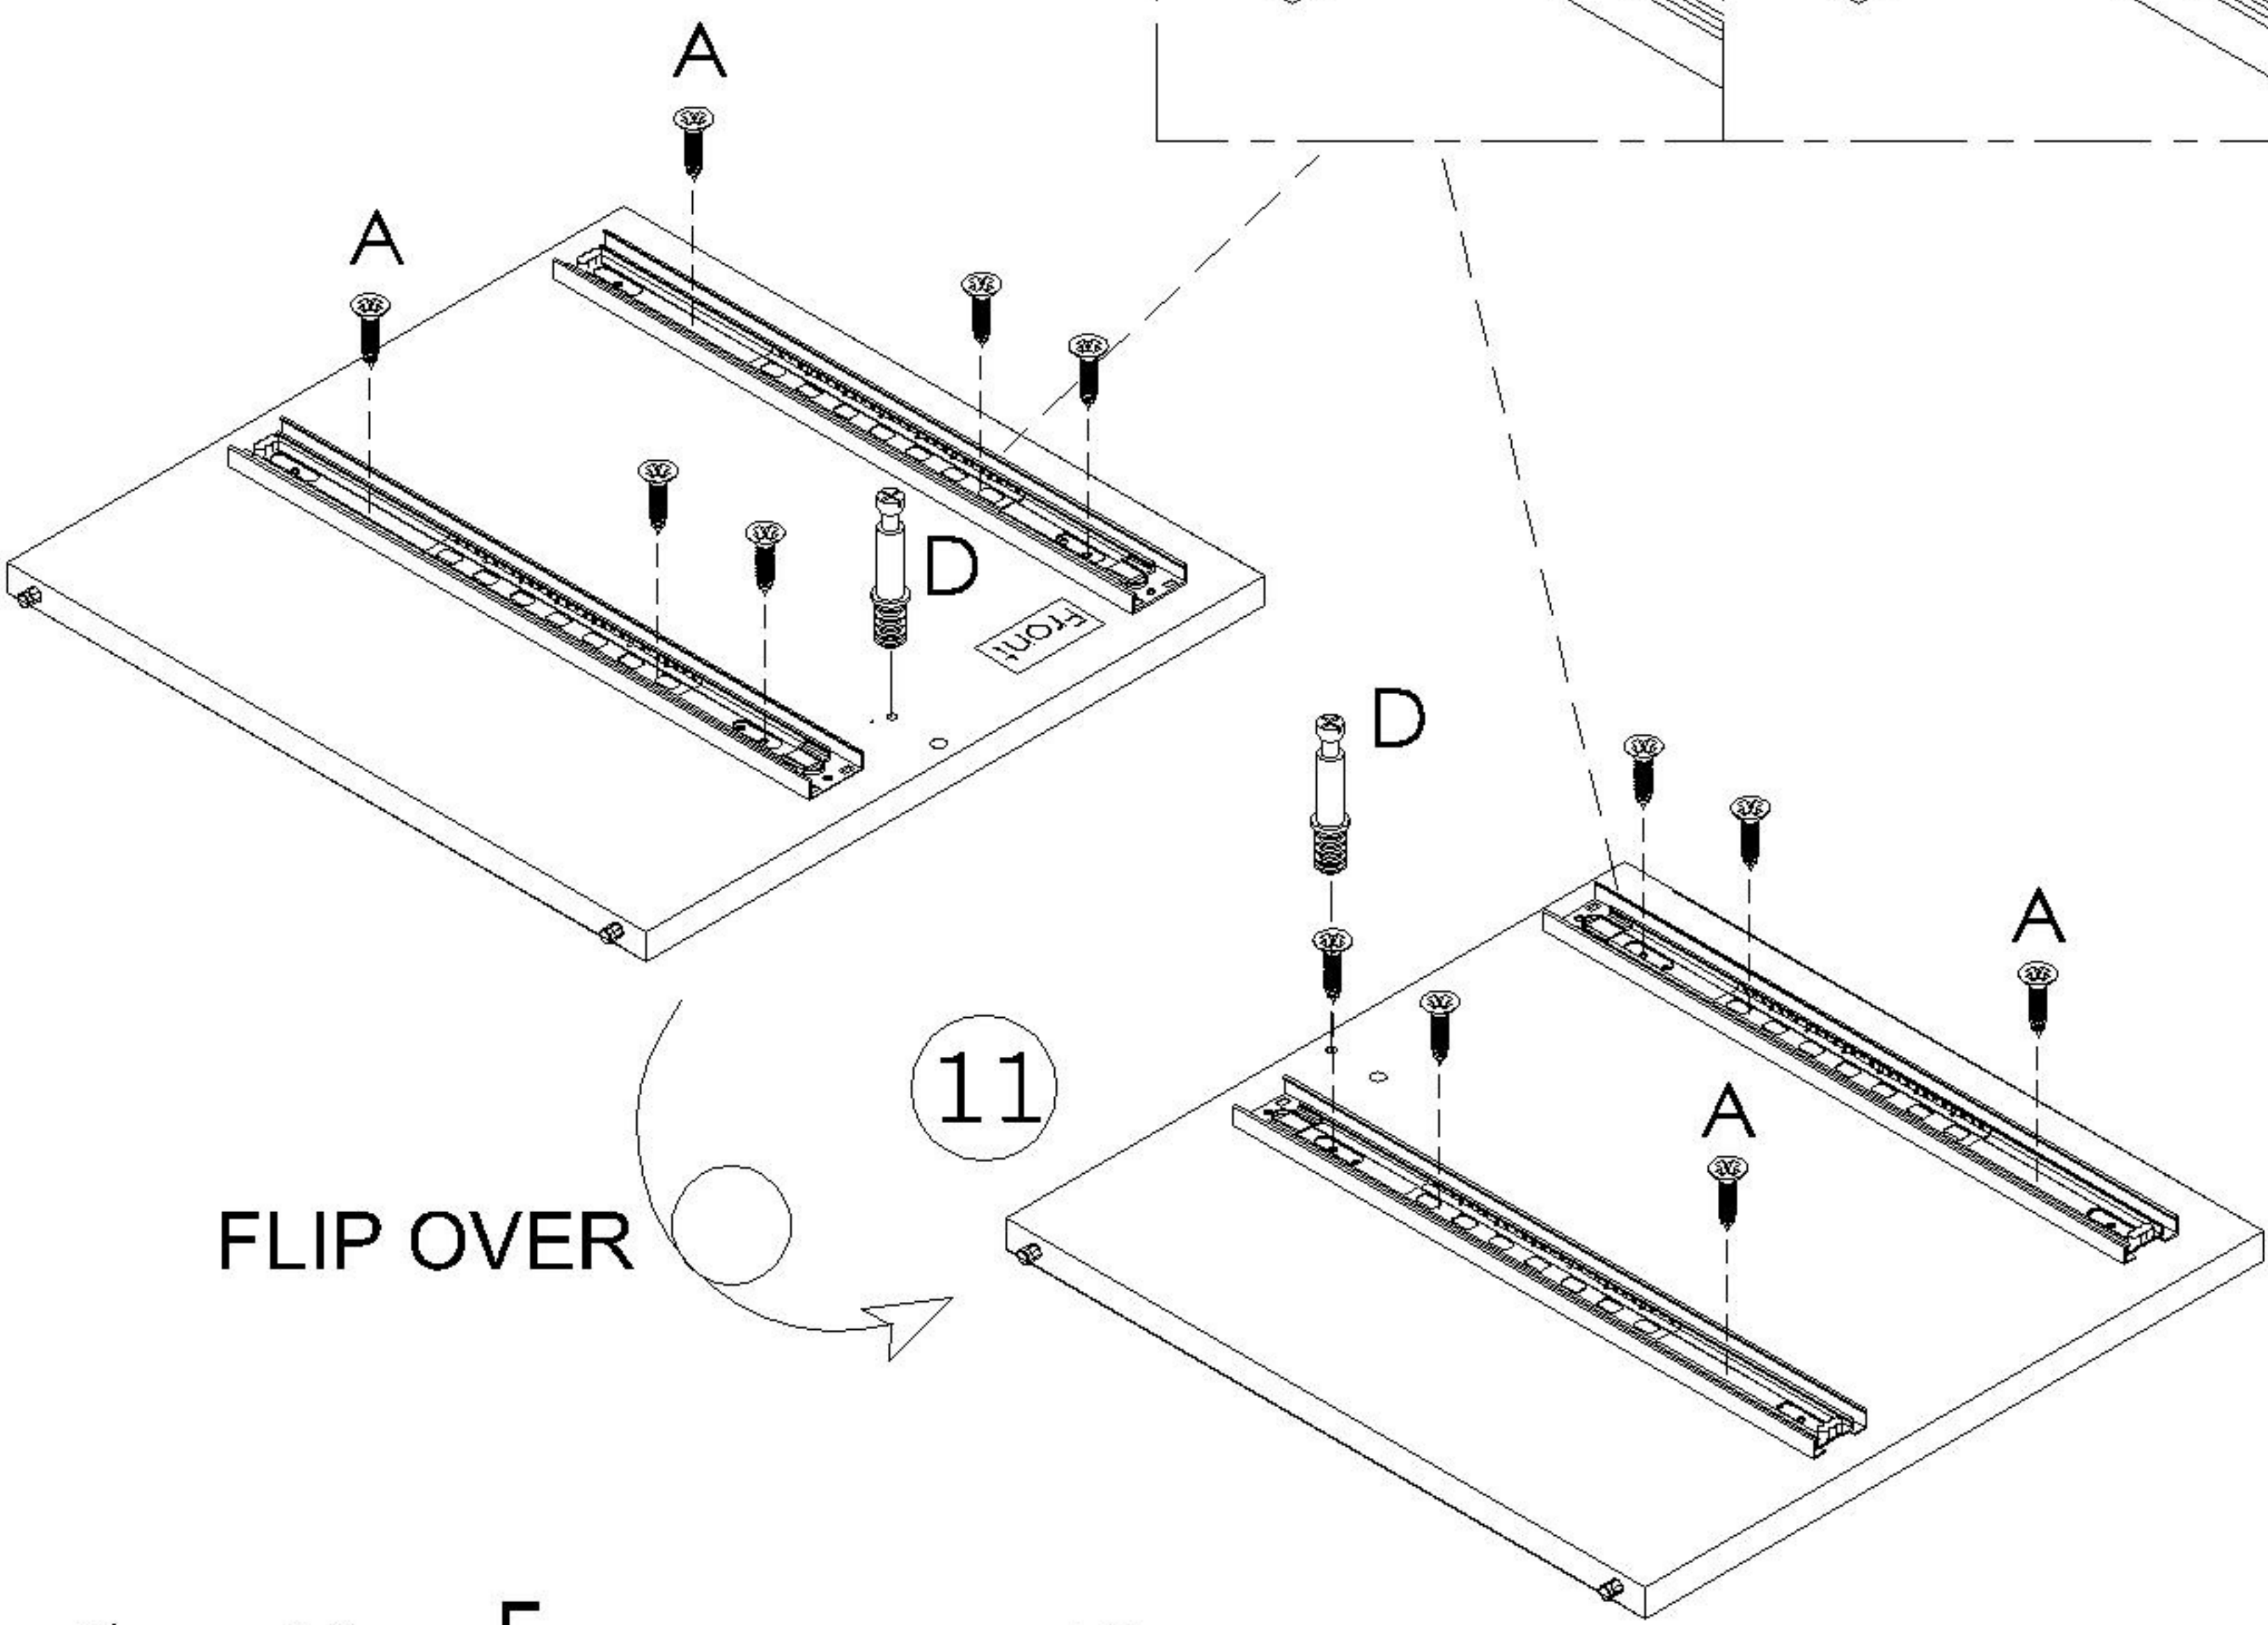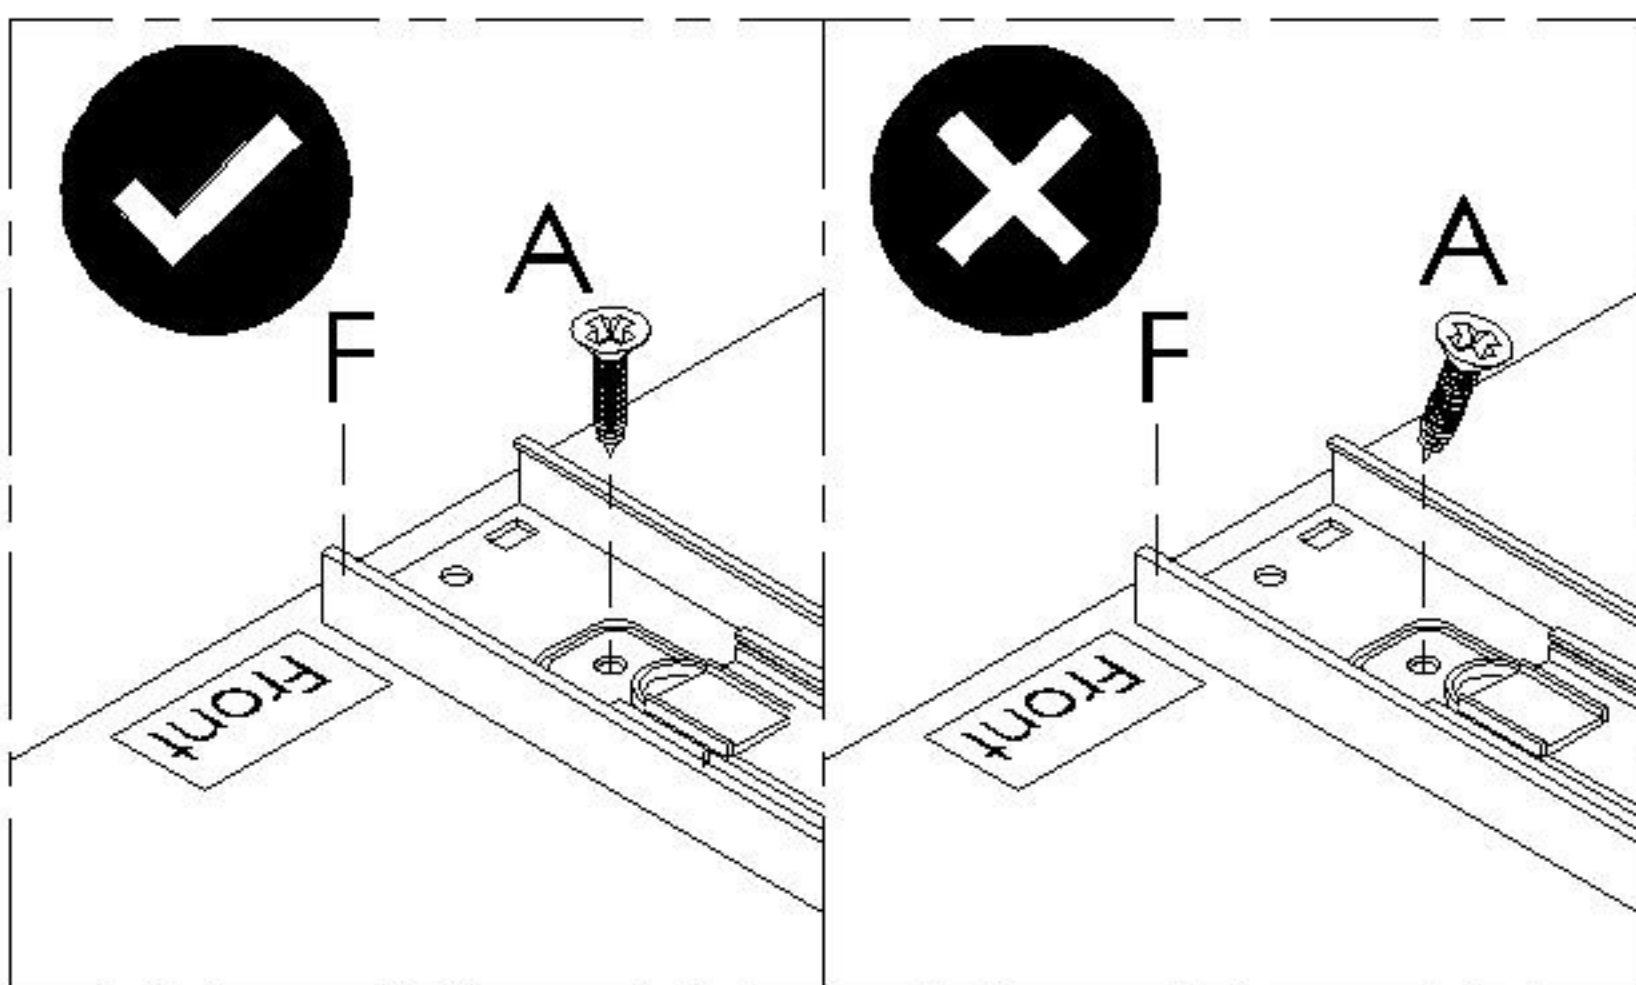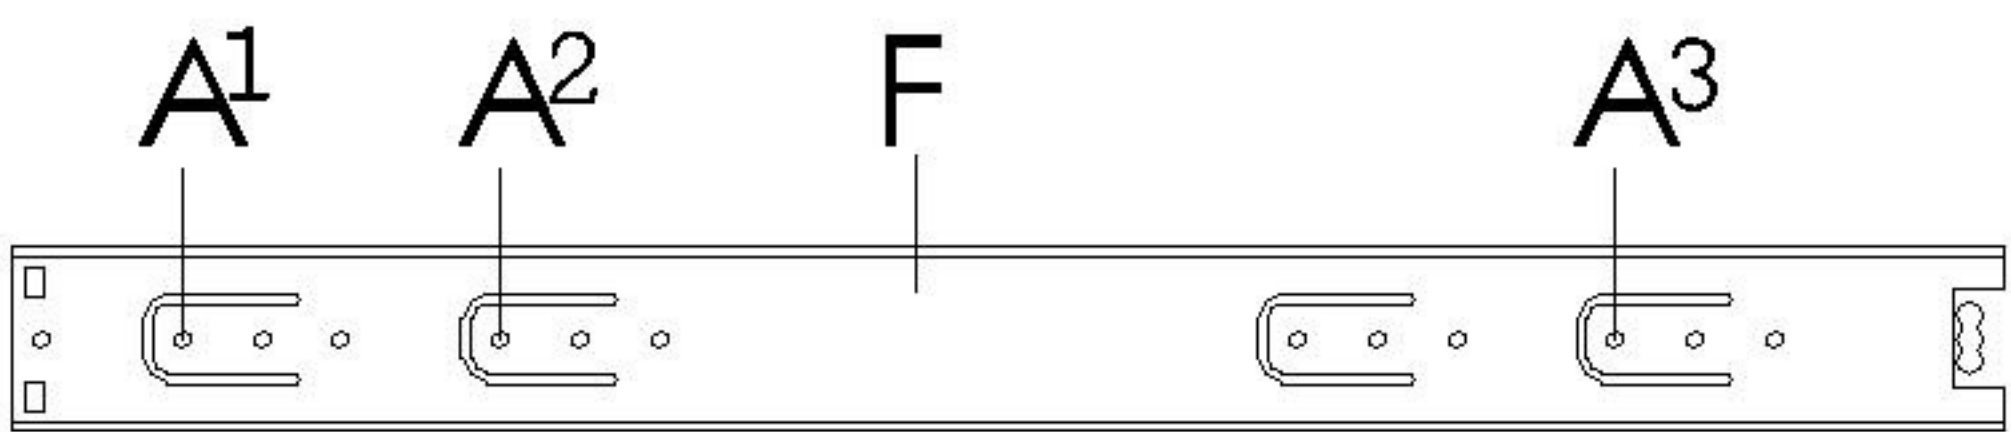


EXTENSION RUNNER DISASSEMBLE STEPS:

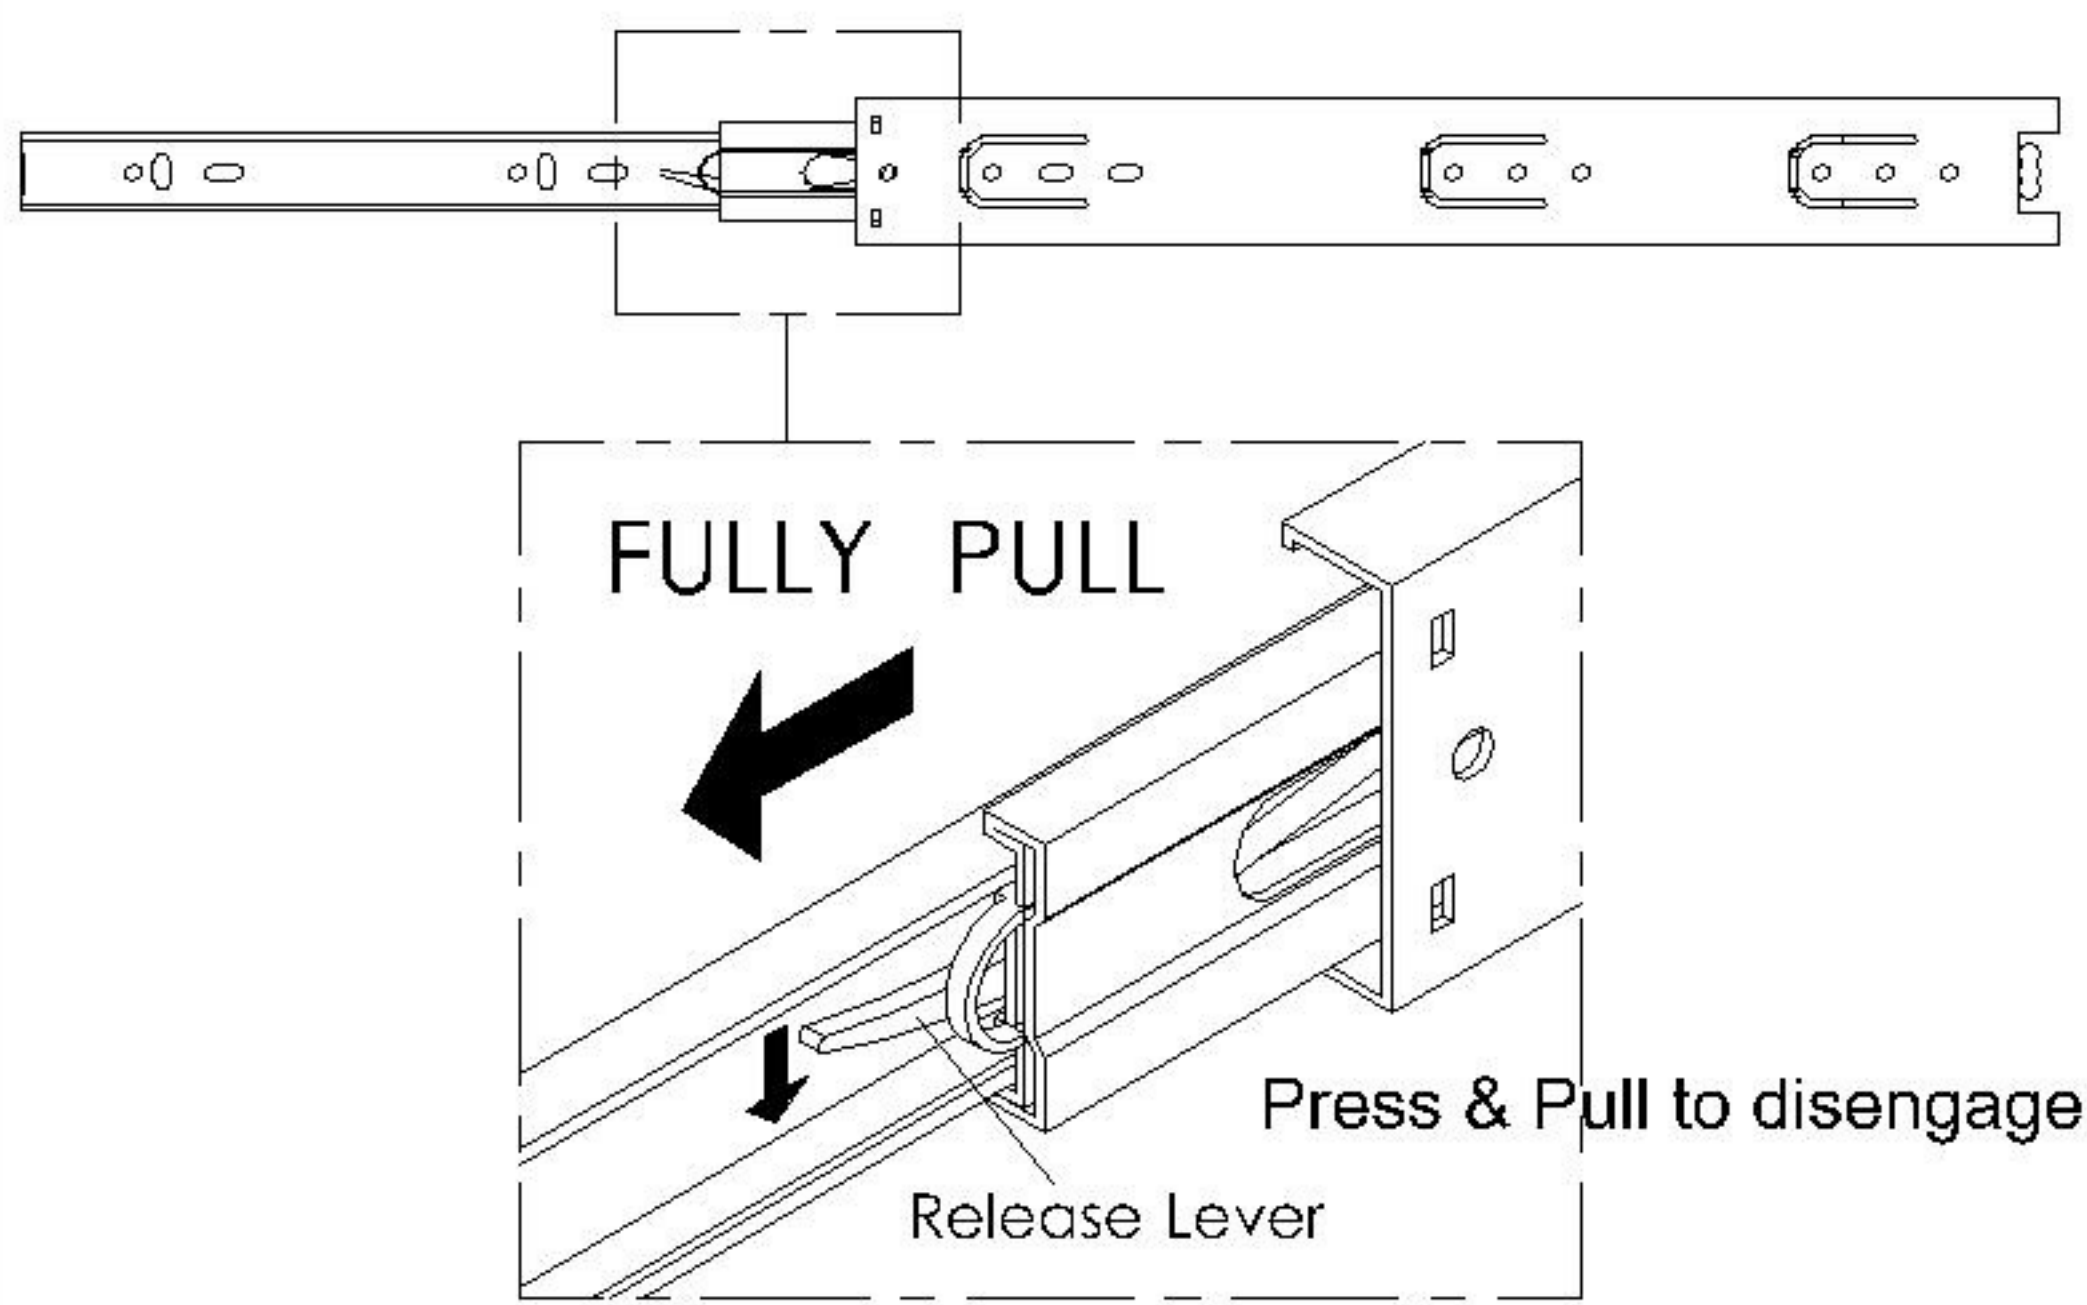


STEP 9

- A) Insert Wood Dowel(C) to Top Bar, Center Bar, Bottom Bar(5,7,8)
- B) Attach Cam Lock(D) to Top Bar, Center Bar, Bottom Bar(5,7,8)


Note: Make sure arrows on each Cam Lock point towards nearest edge with holes

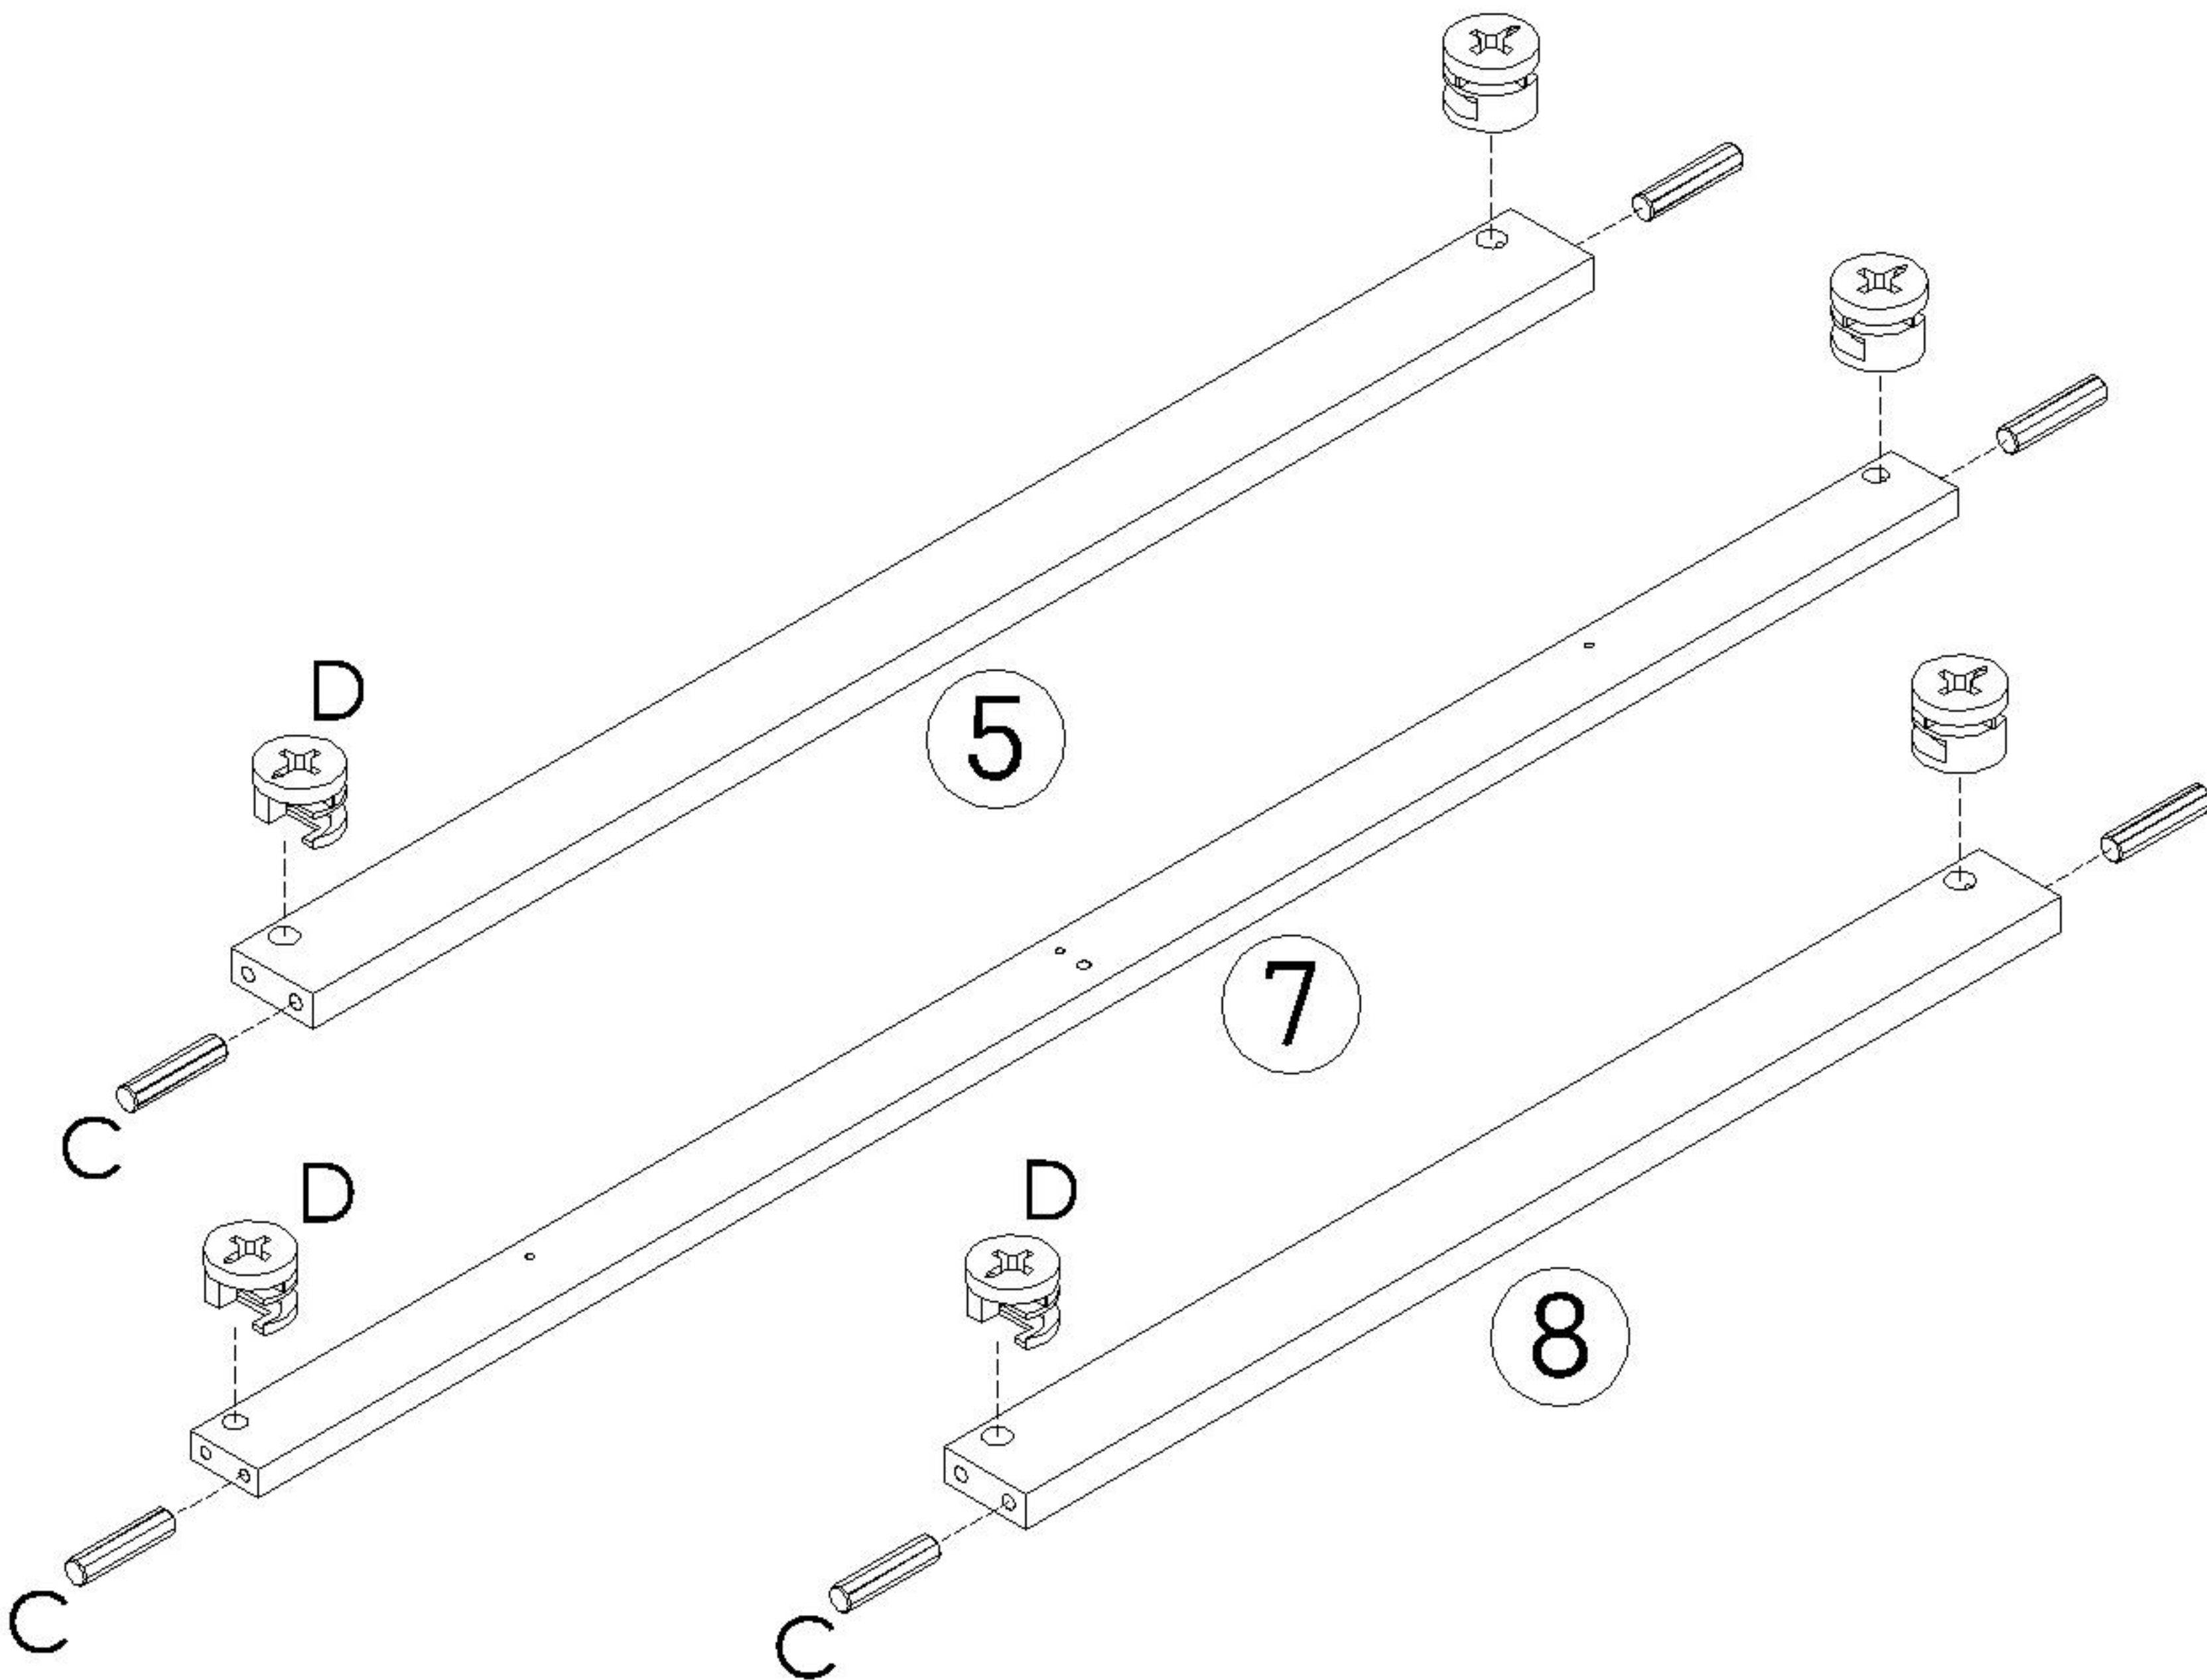


STEP 10A

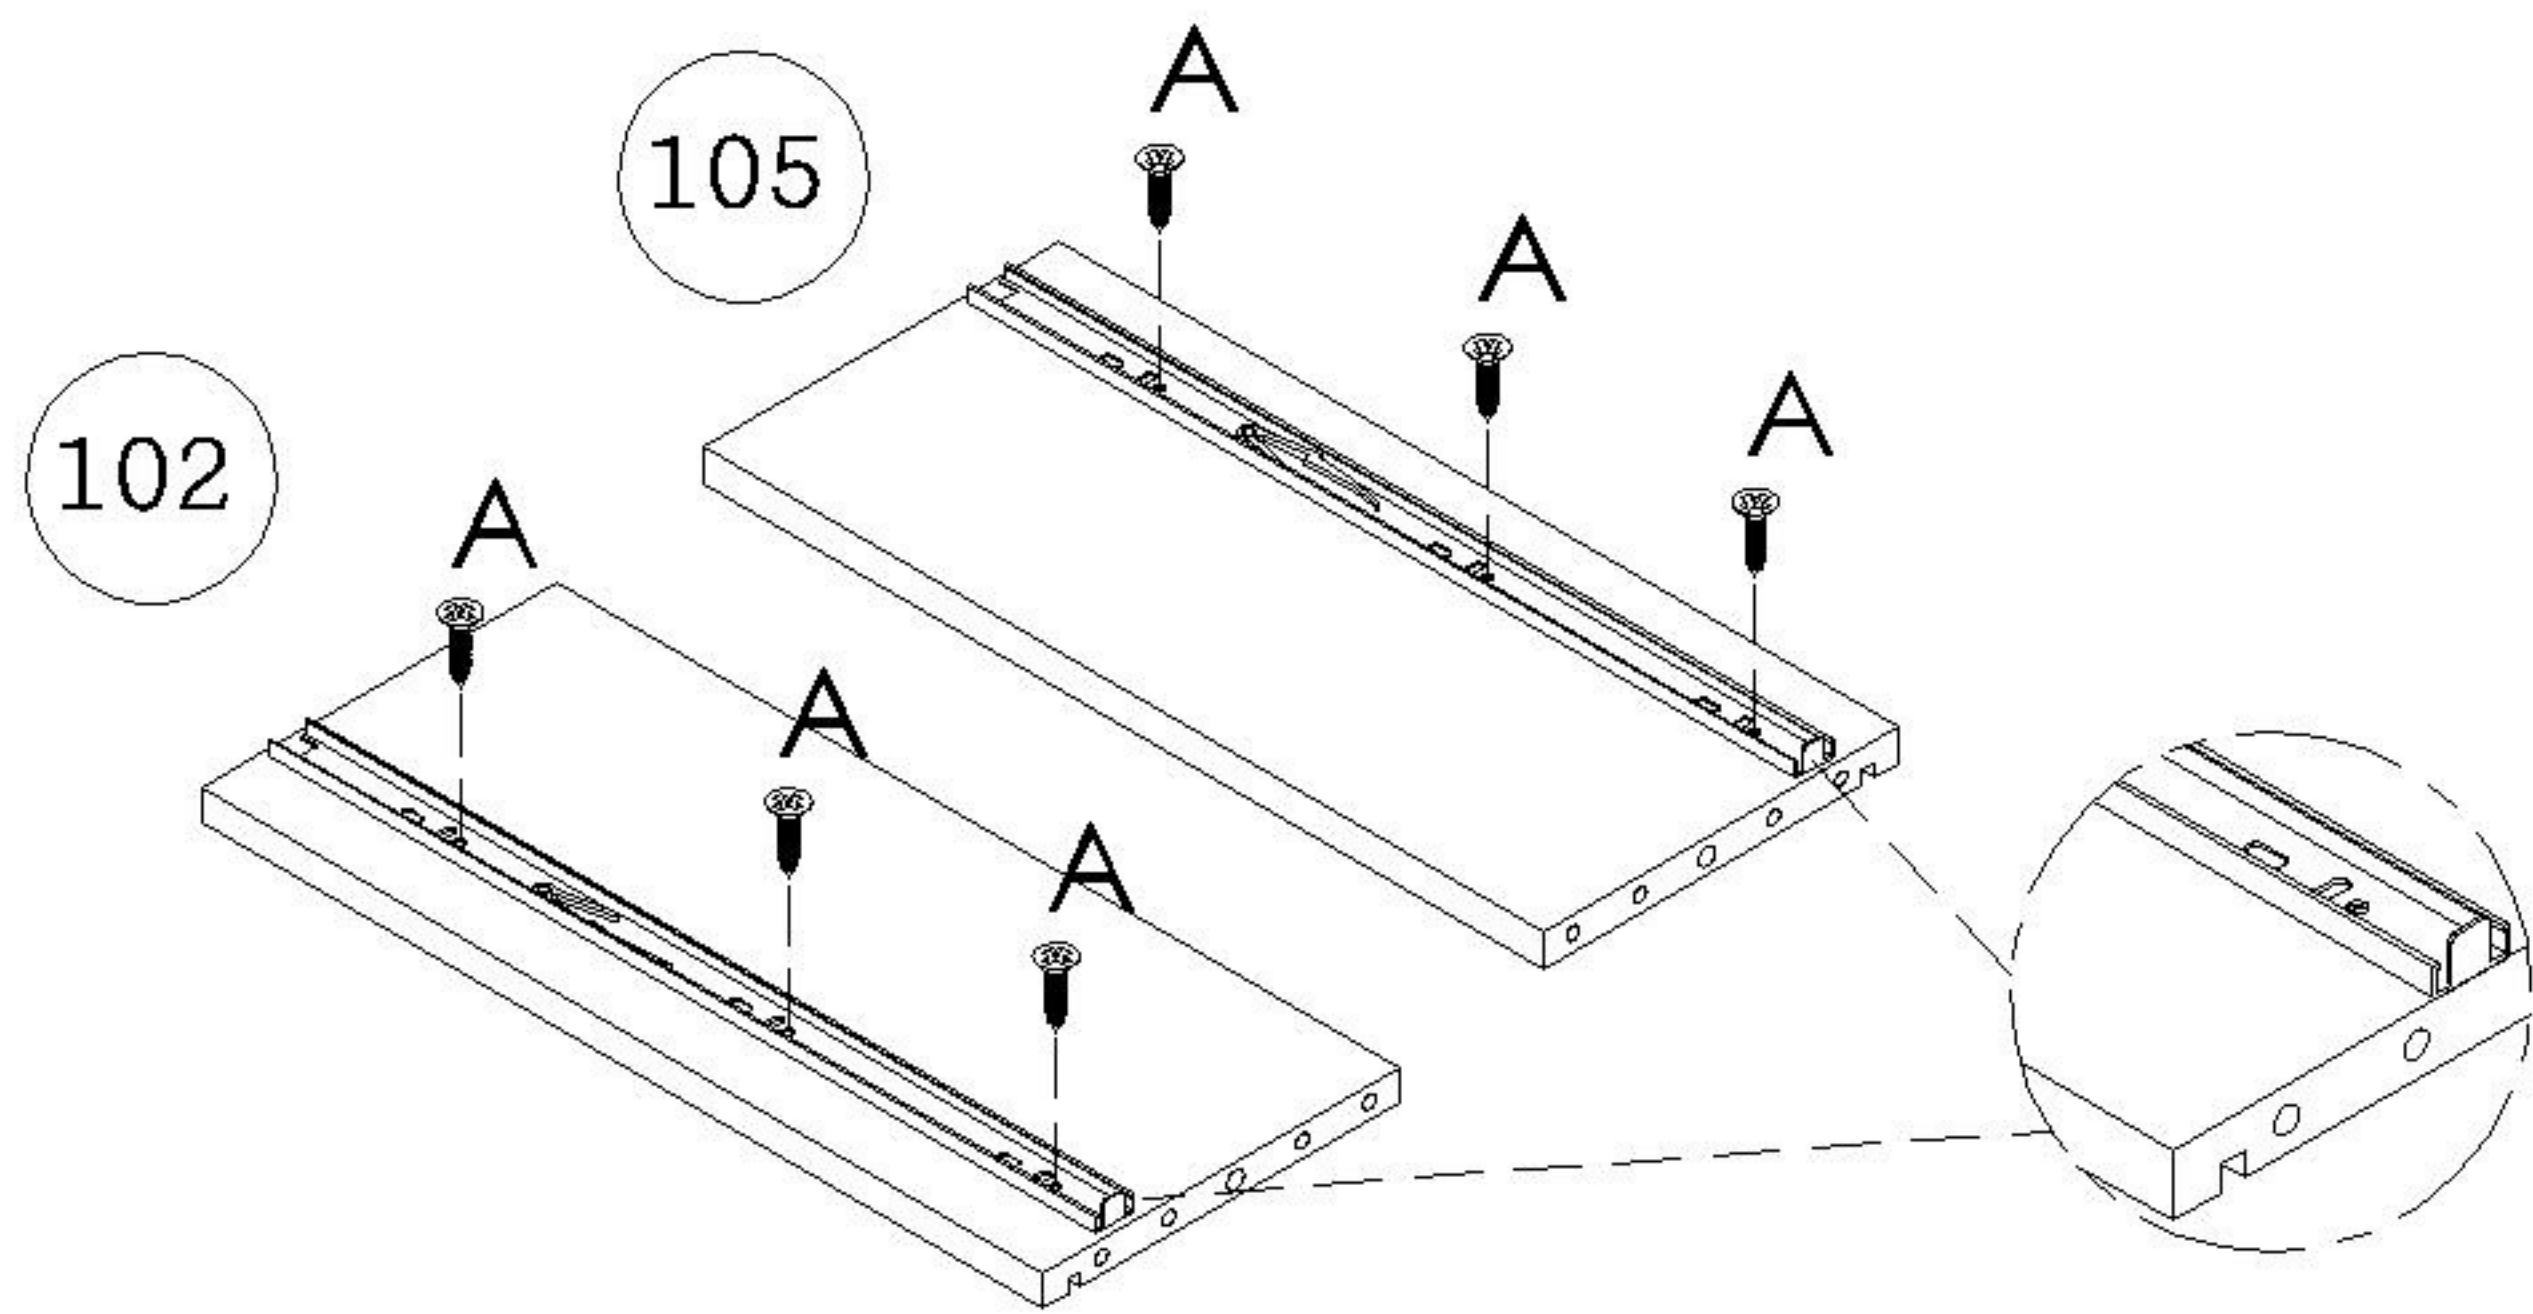

- A) Attach Extension Runner(F) to Left,Right Small Drawer Side (102,105) using Chipboard Screw(A) to secure

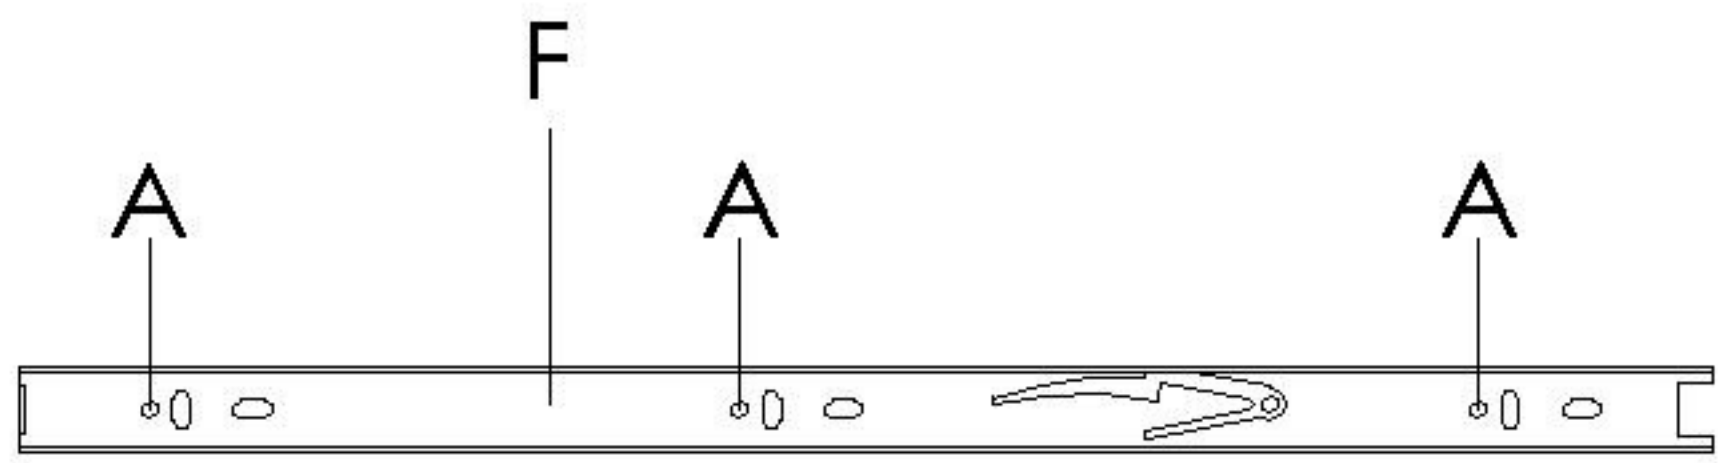


STEP 10B

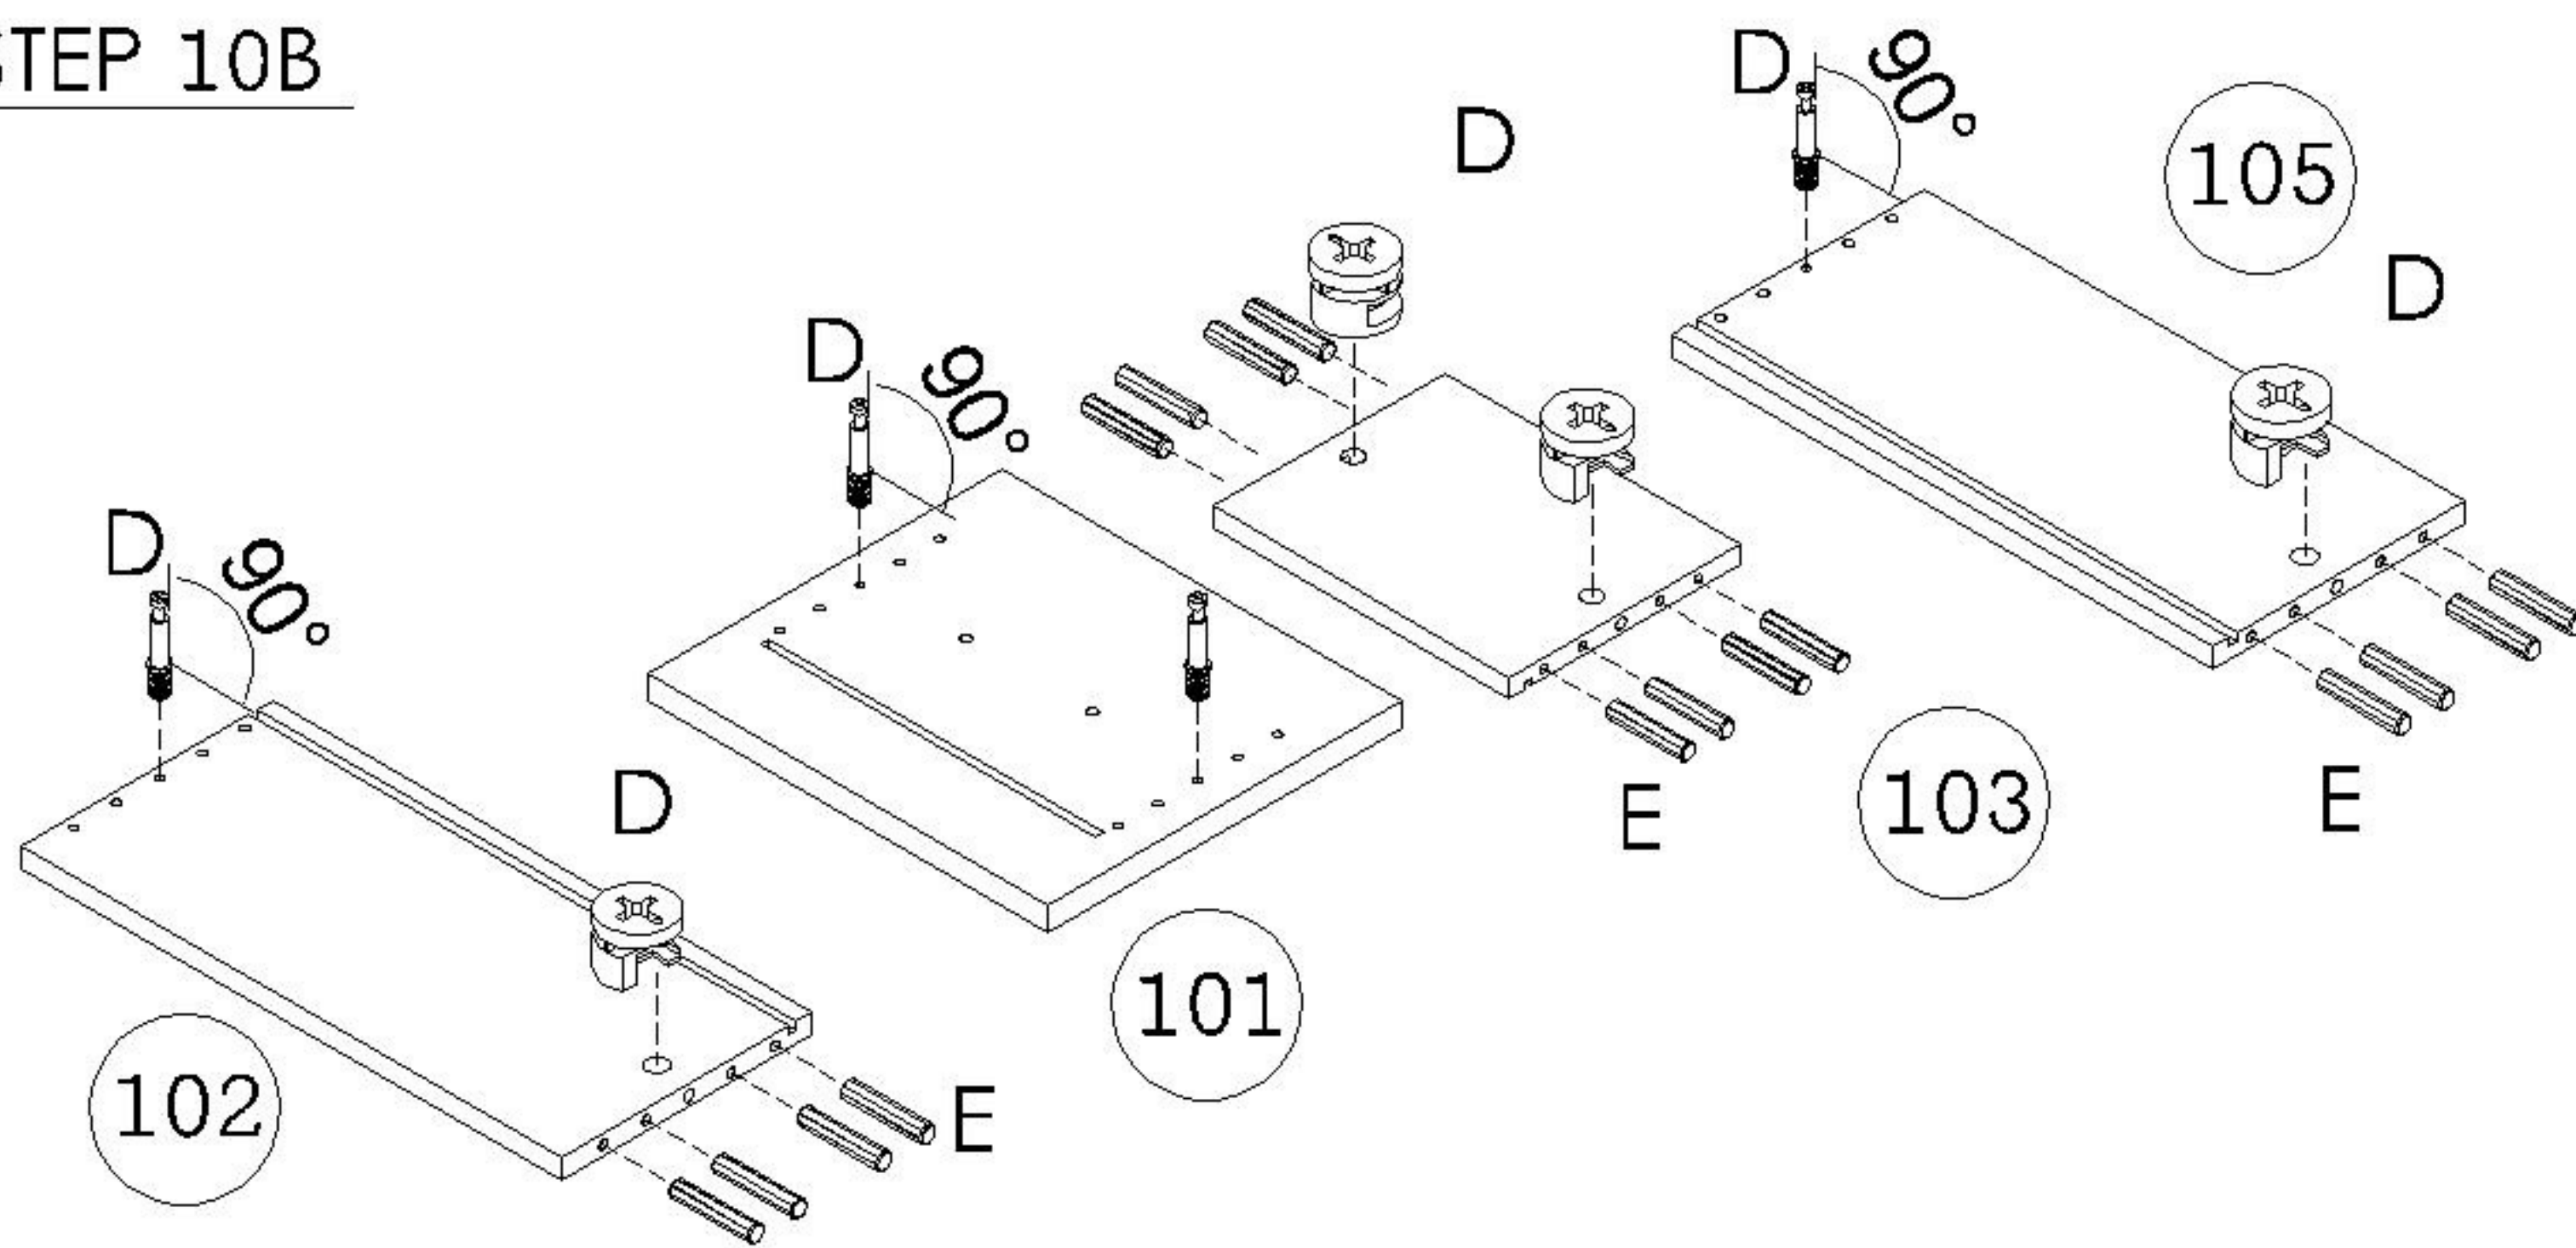

- A) Flip Over Left,Right Small Drawer Side(102,105)
B) Insert Wood Dowel(E) to Left,Right Small Drawer Side(102,105) & Small Drawer Back(103)
C) Attach Cam Lock(D) to Left,Right Small Drawer Side(102,105) & Small Drawer Back(103)
D) Attach Cam Bolt(D) to Left,Right Small Drawer Side(102,105) & Small Drawer Front(101)

NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes


STEP 10C

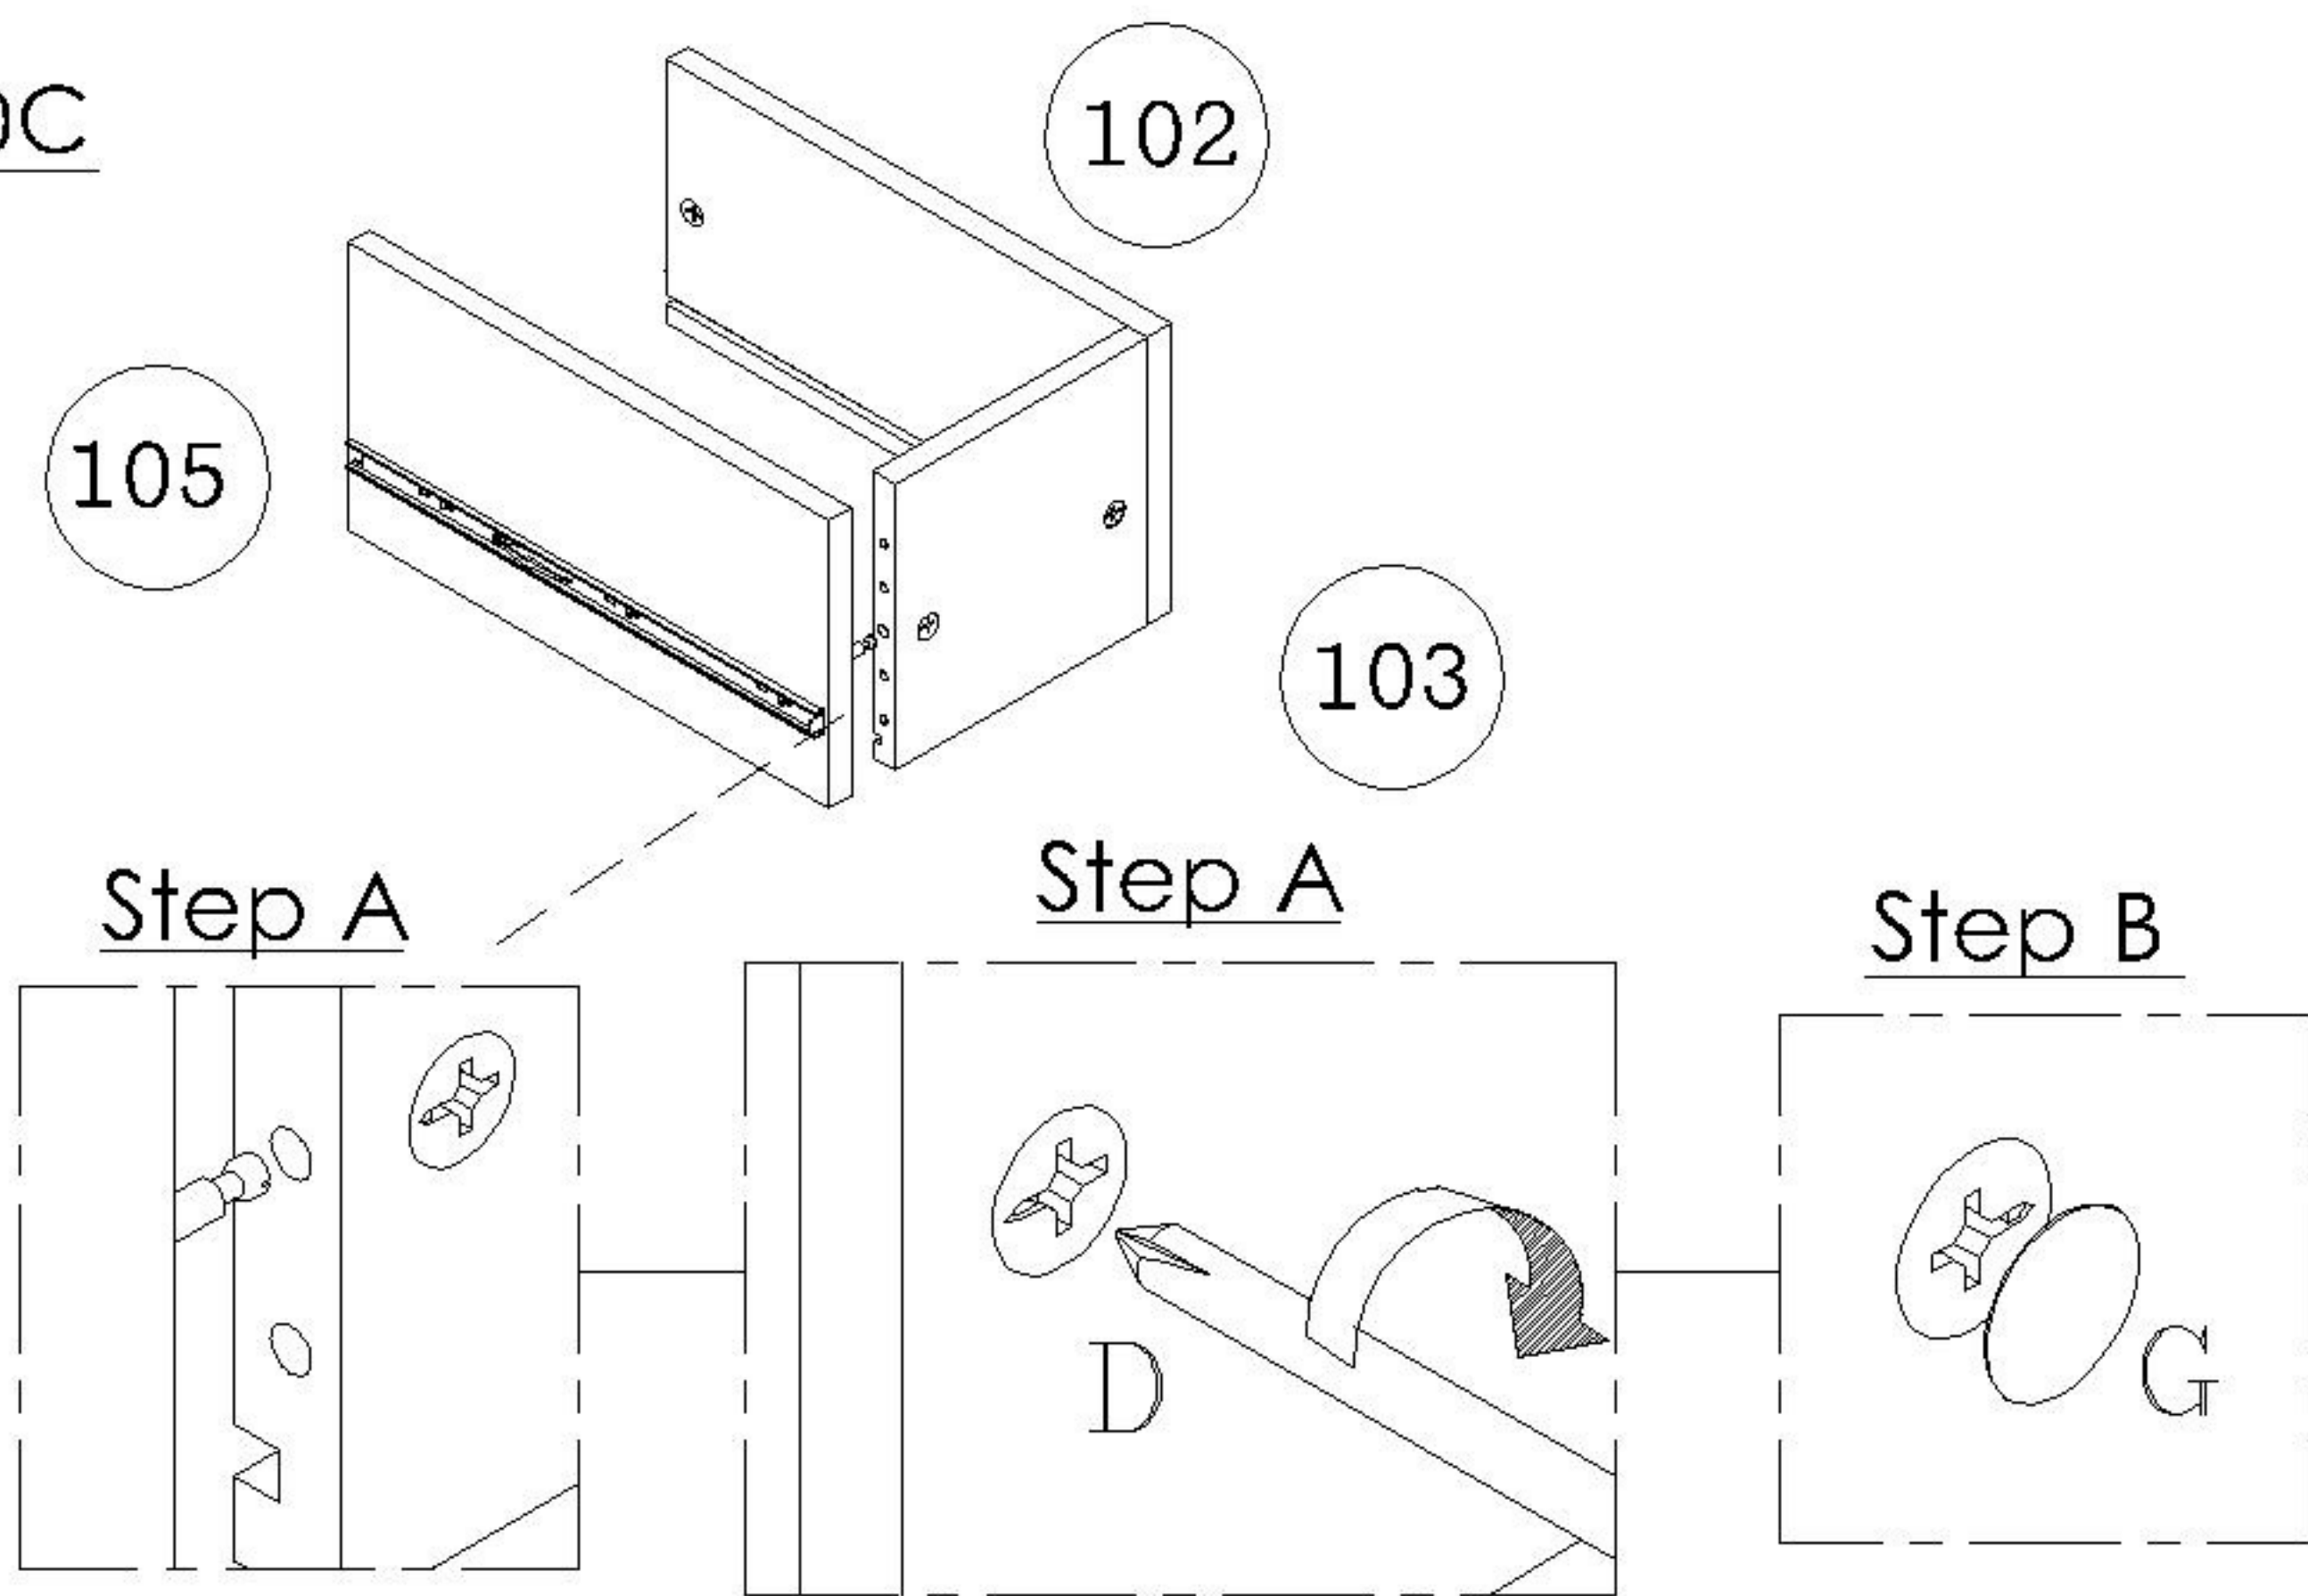

- A) Attach Left,Right Small Drawer Side(102,105) to Small Drawer Back(103) secure with Cam Lock(D)
B) Using Cam Lock Cover(G) to cover Cam Lock(D)


NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes

STEP 10D

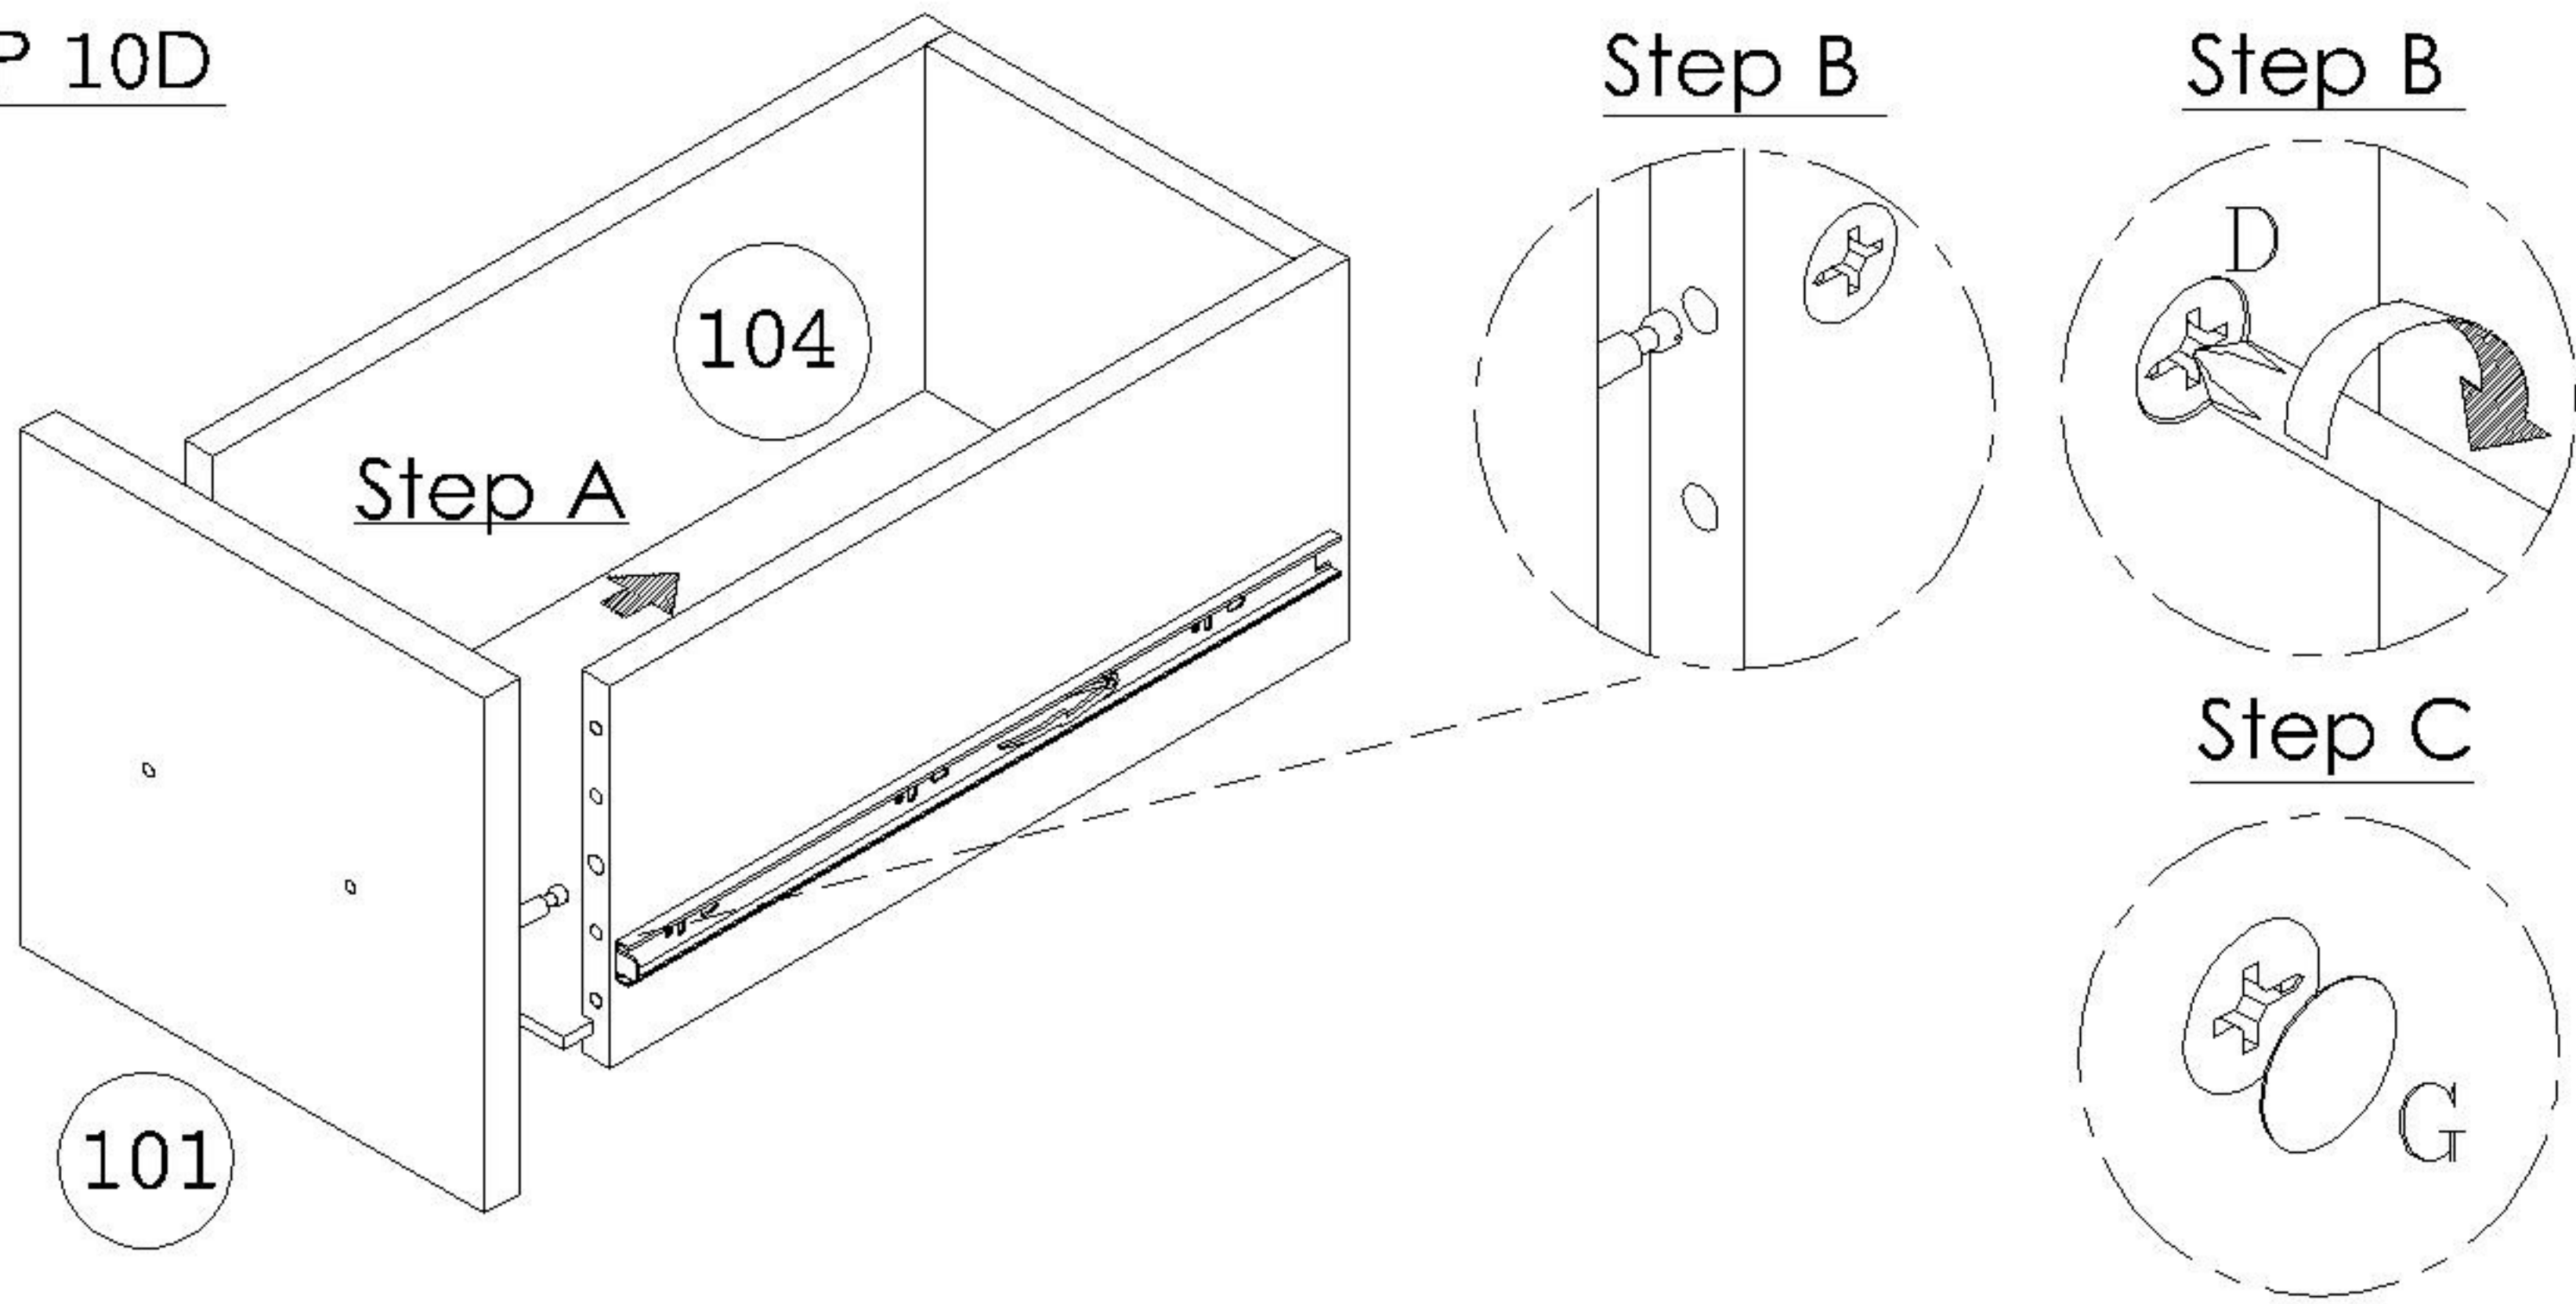


- A) Slot in Small Drawer Base(104) in corresponding grooves
B) Attach Small Drawer Front(101) to Drawer Box secure with Cam Lock(D)
C) Using Cam Lock Cover(G) to Cover Cam Lock(D)

STEP 10E

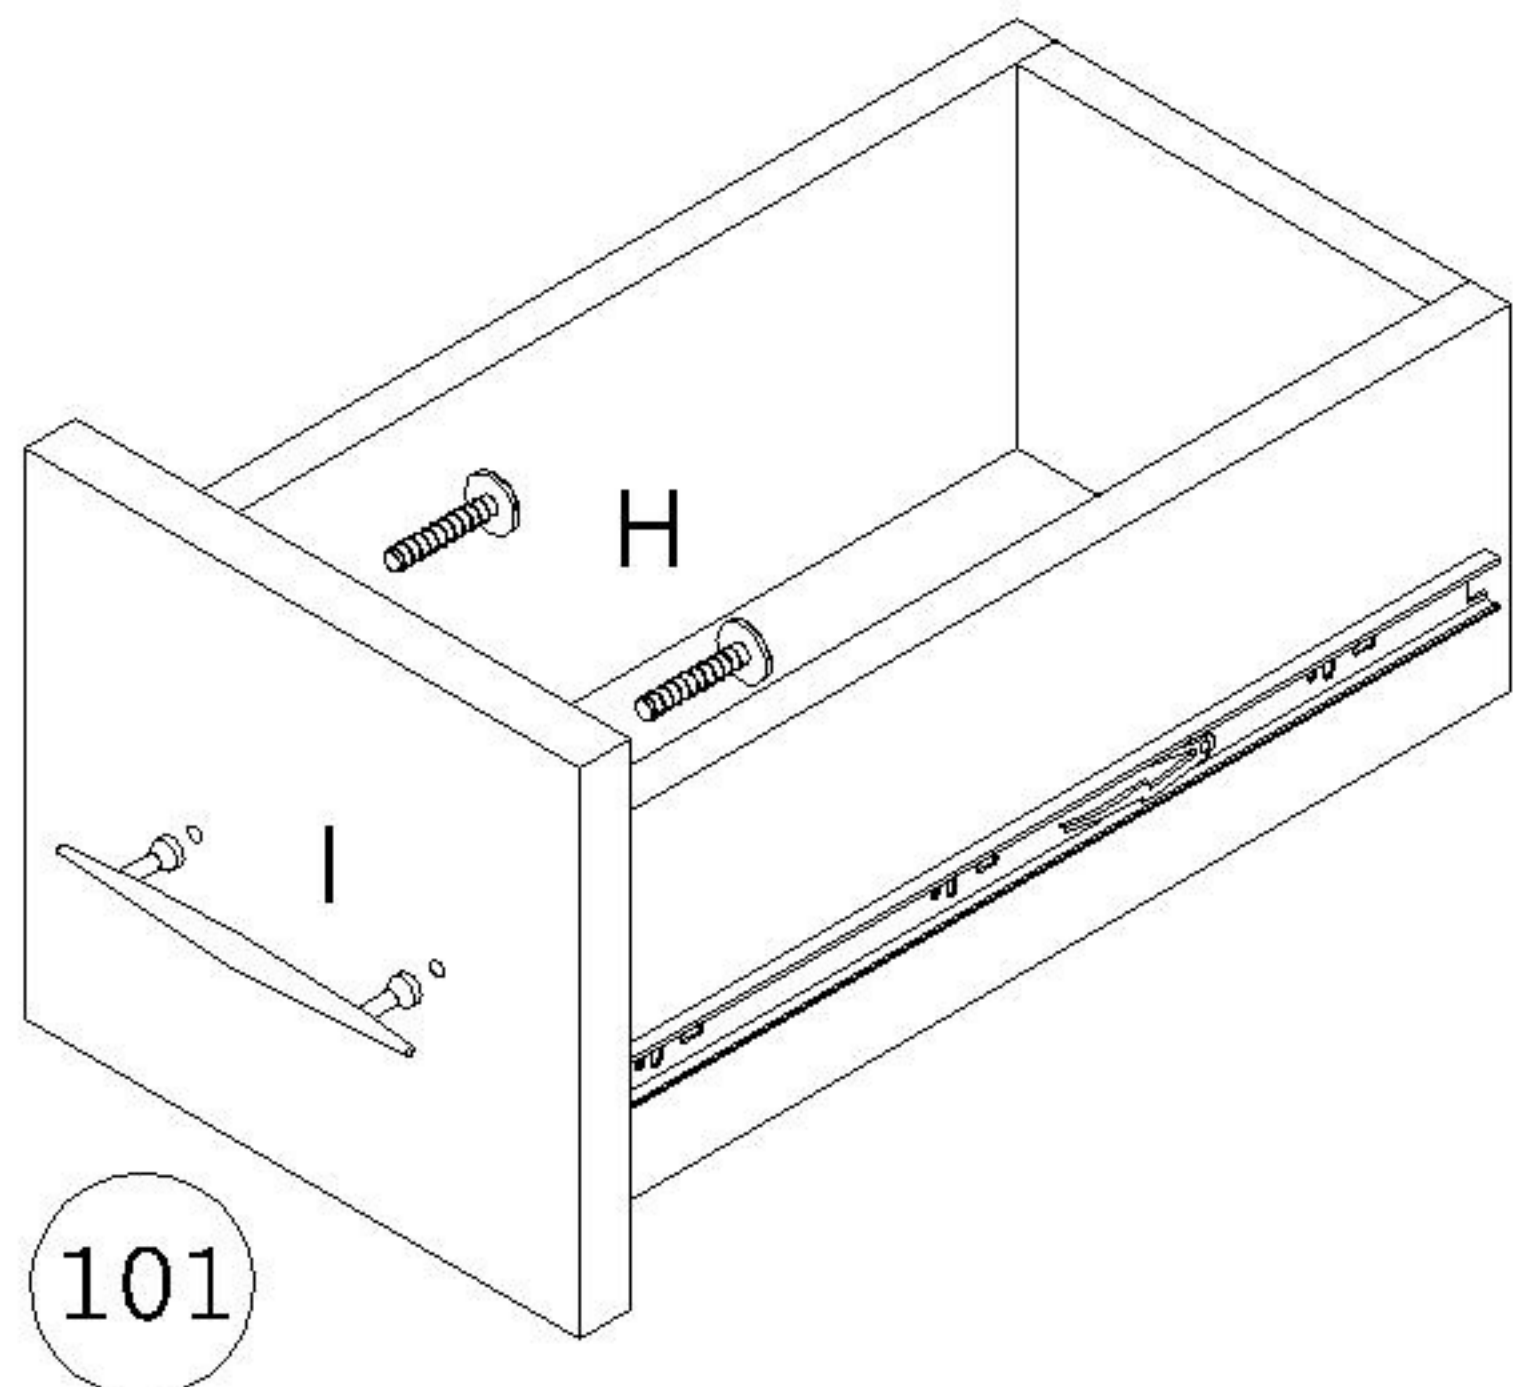


- A) Attach Handle(I) to Small Drawer Front(101) secure using Panhead Screw(H)


STEP 11A

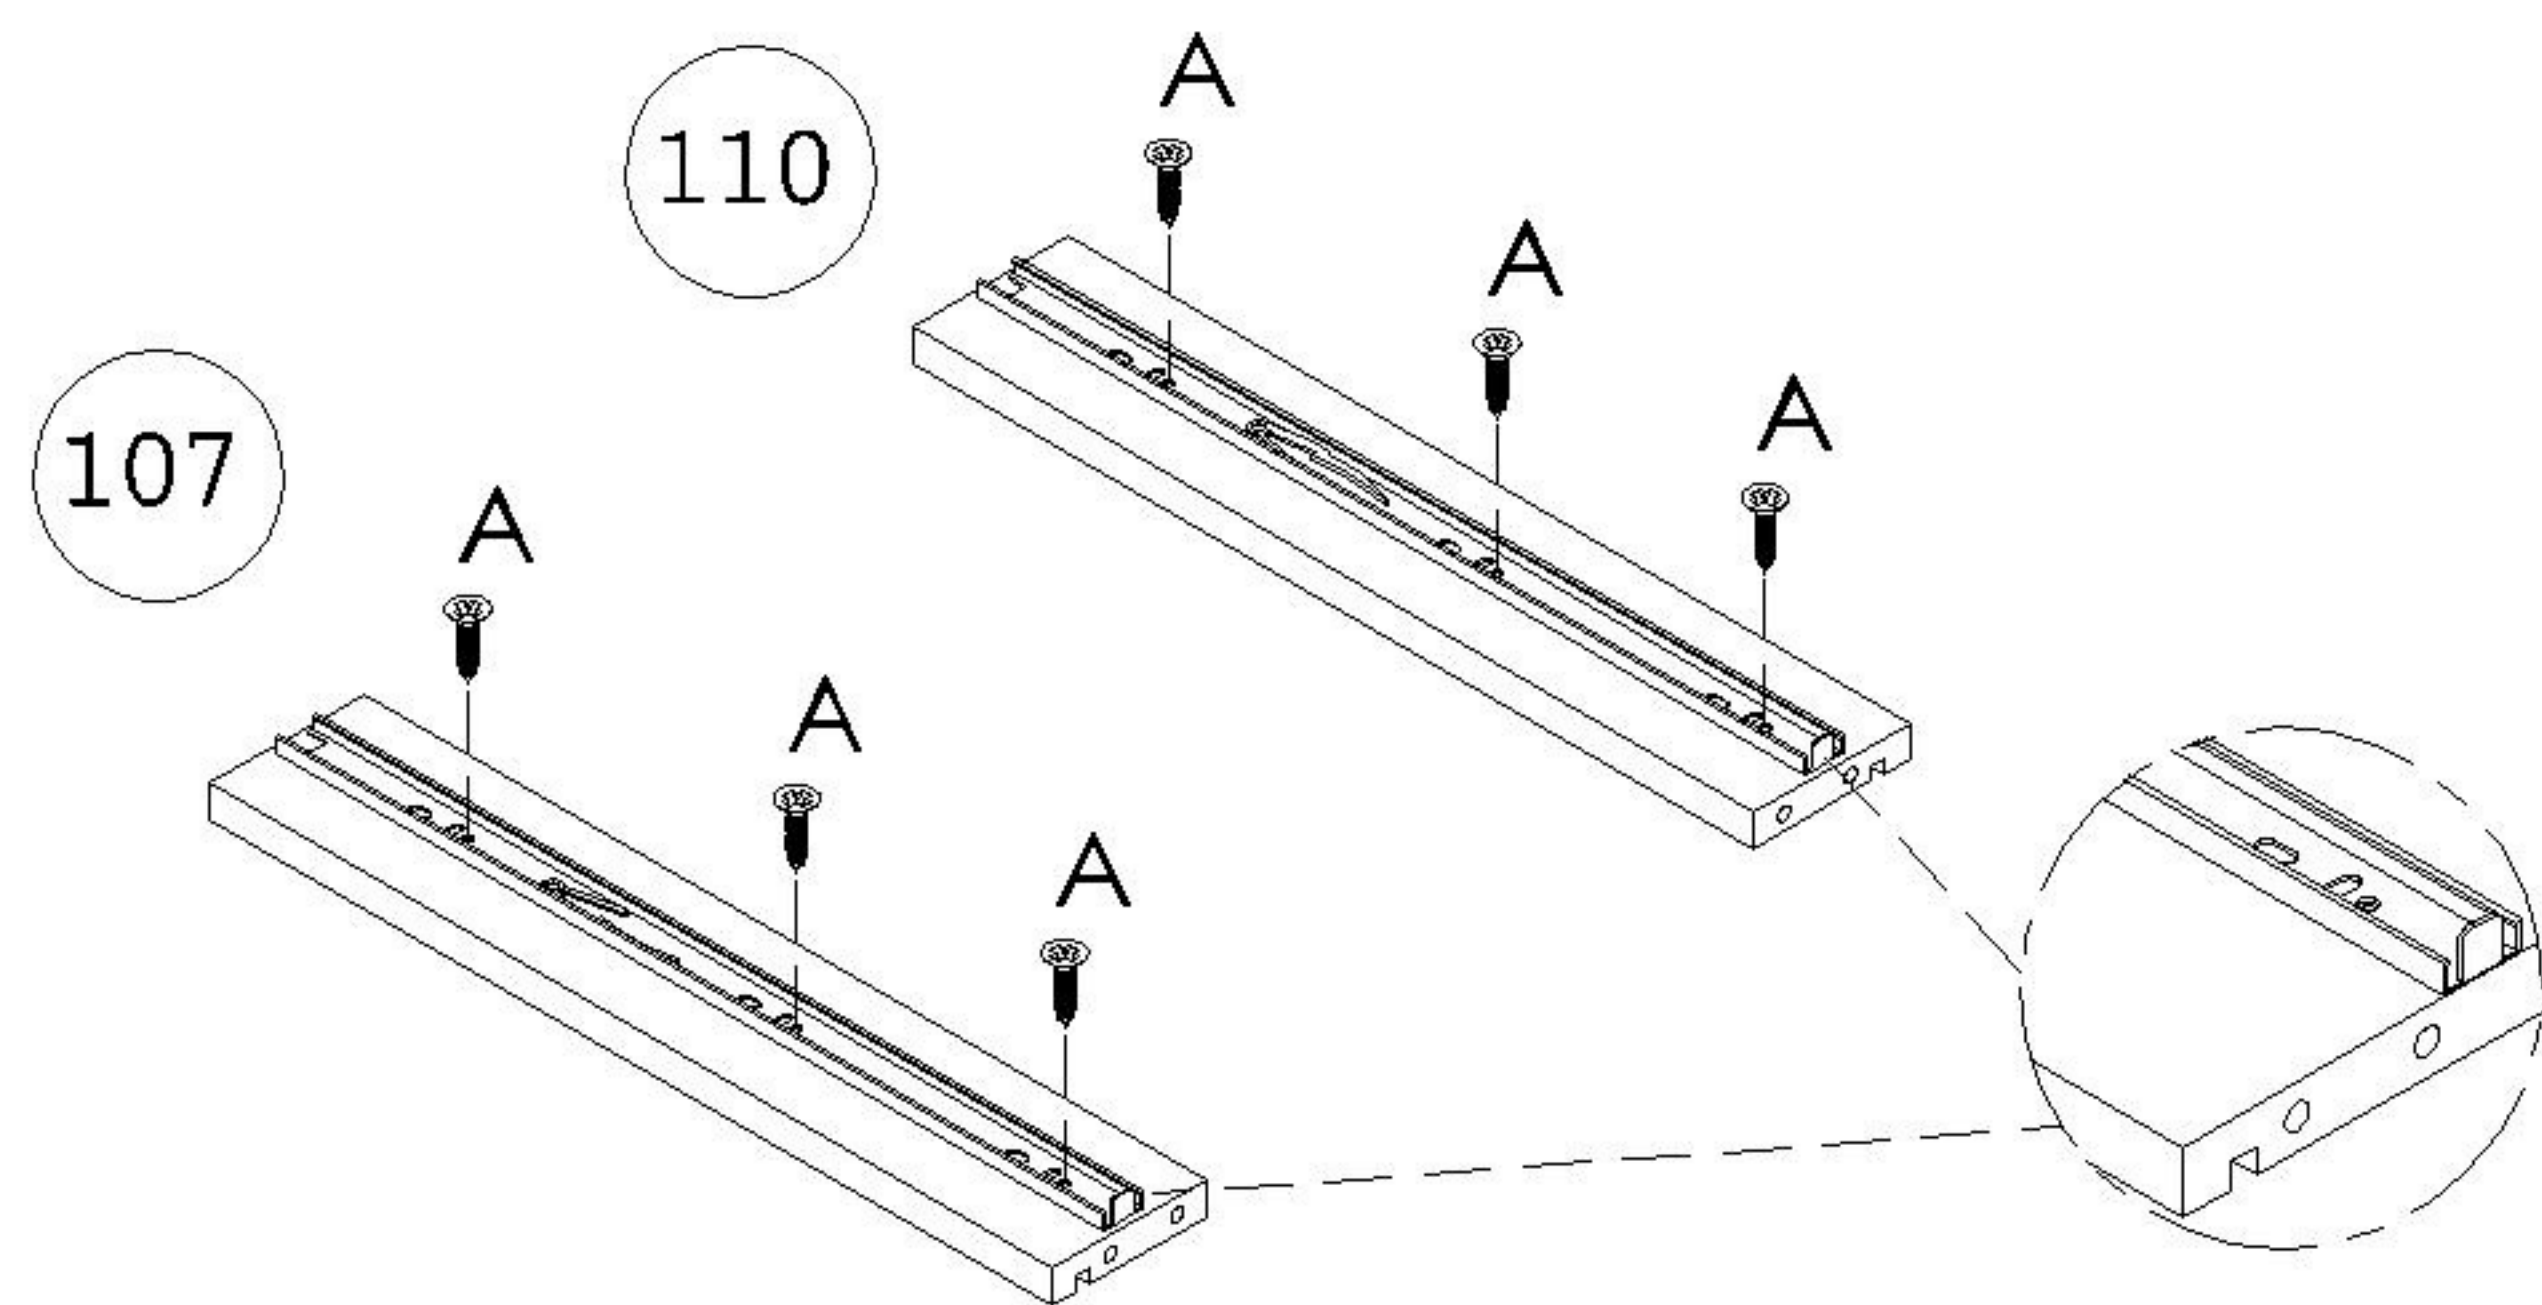

- A) Attach Extension Runner(F) to Medium Left,Right Drawer Side (107,110) using Chipboard Screw(A) to secure

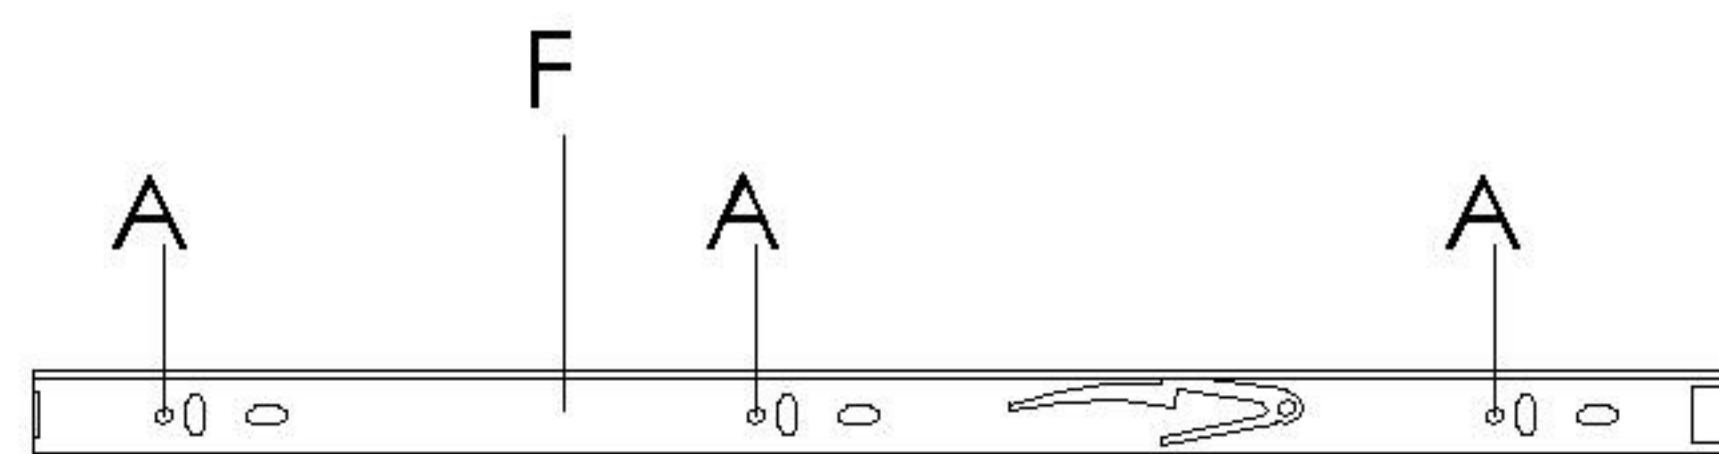


STEP 11B

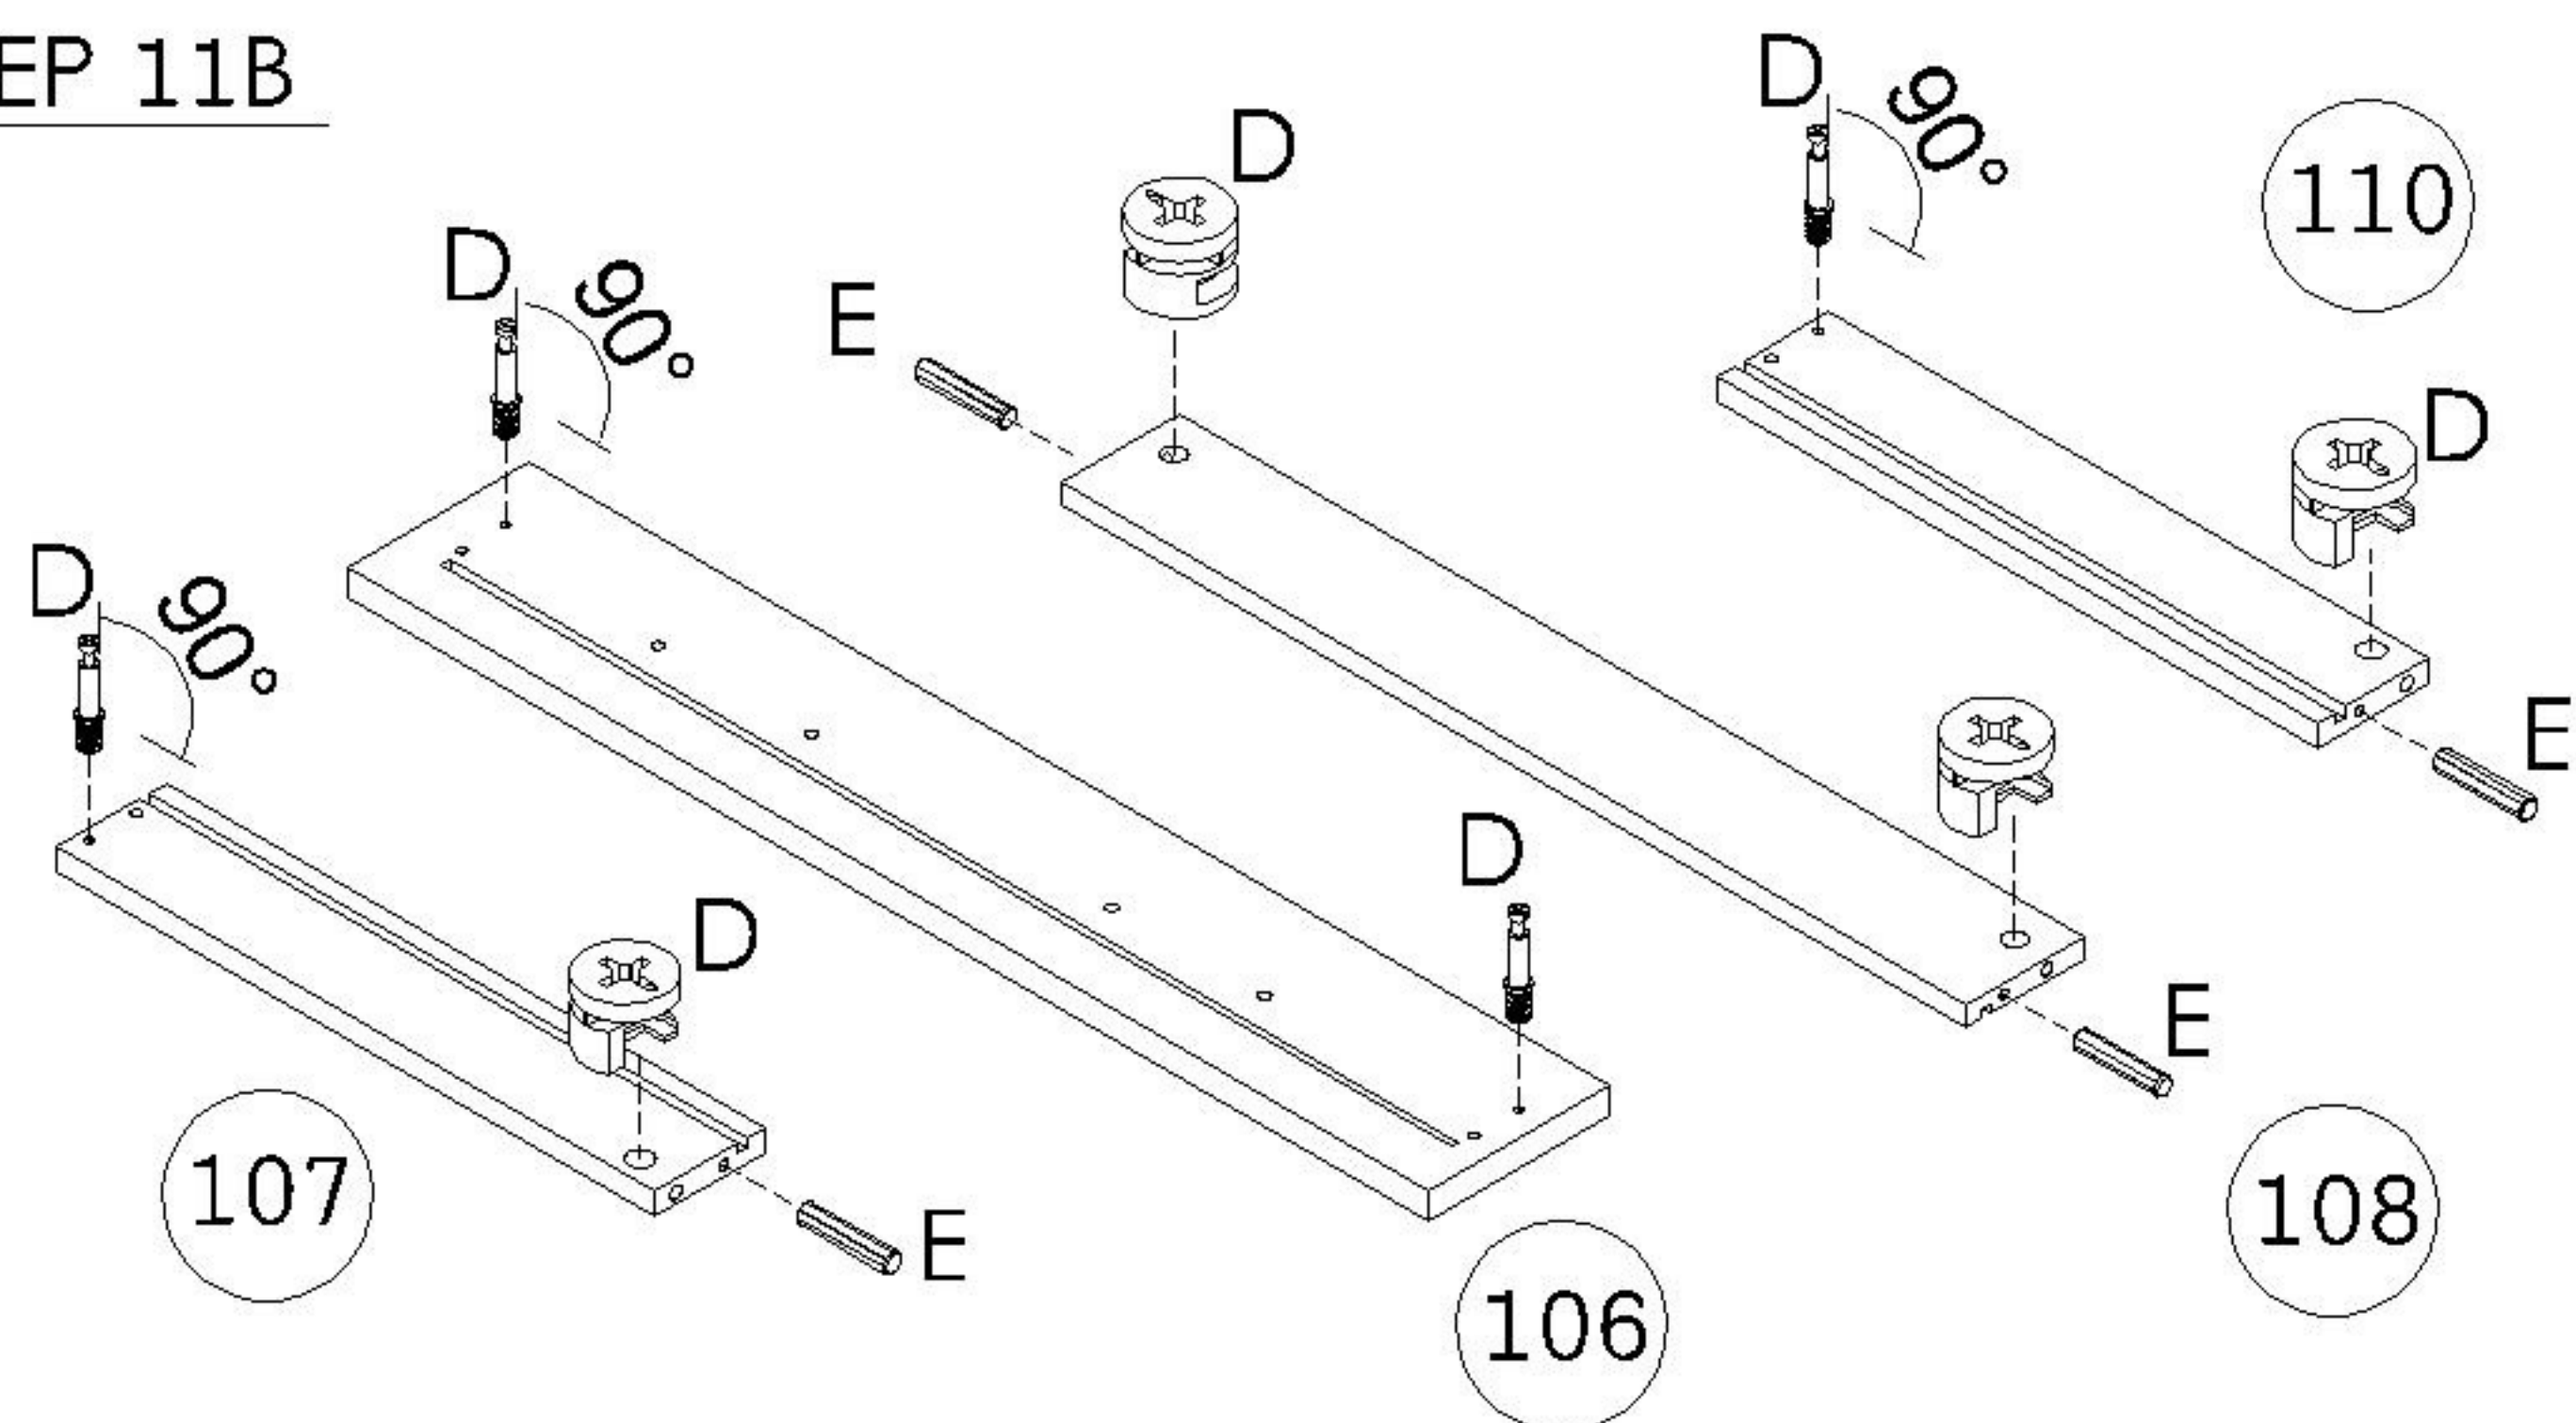

- A) Insert Wood Dowel(E) to Left,Right Medium Drawer Side(107,110) & Medium Drawer Back(108)
- B) Attach Cam Lock(D) to Medium Left,Right Drawer Side(107,110) & Medium Drawer Back(108)
- C) Attach Cam Bolt(D) to Medium Drawer Front(106) & Left,Right Medium Drawer Side(107,110)


STEP 11C

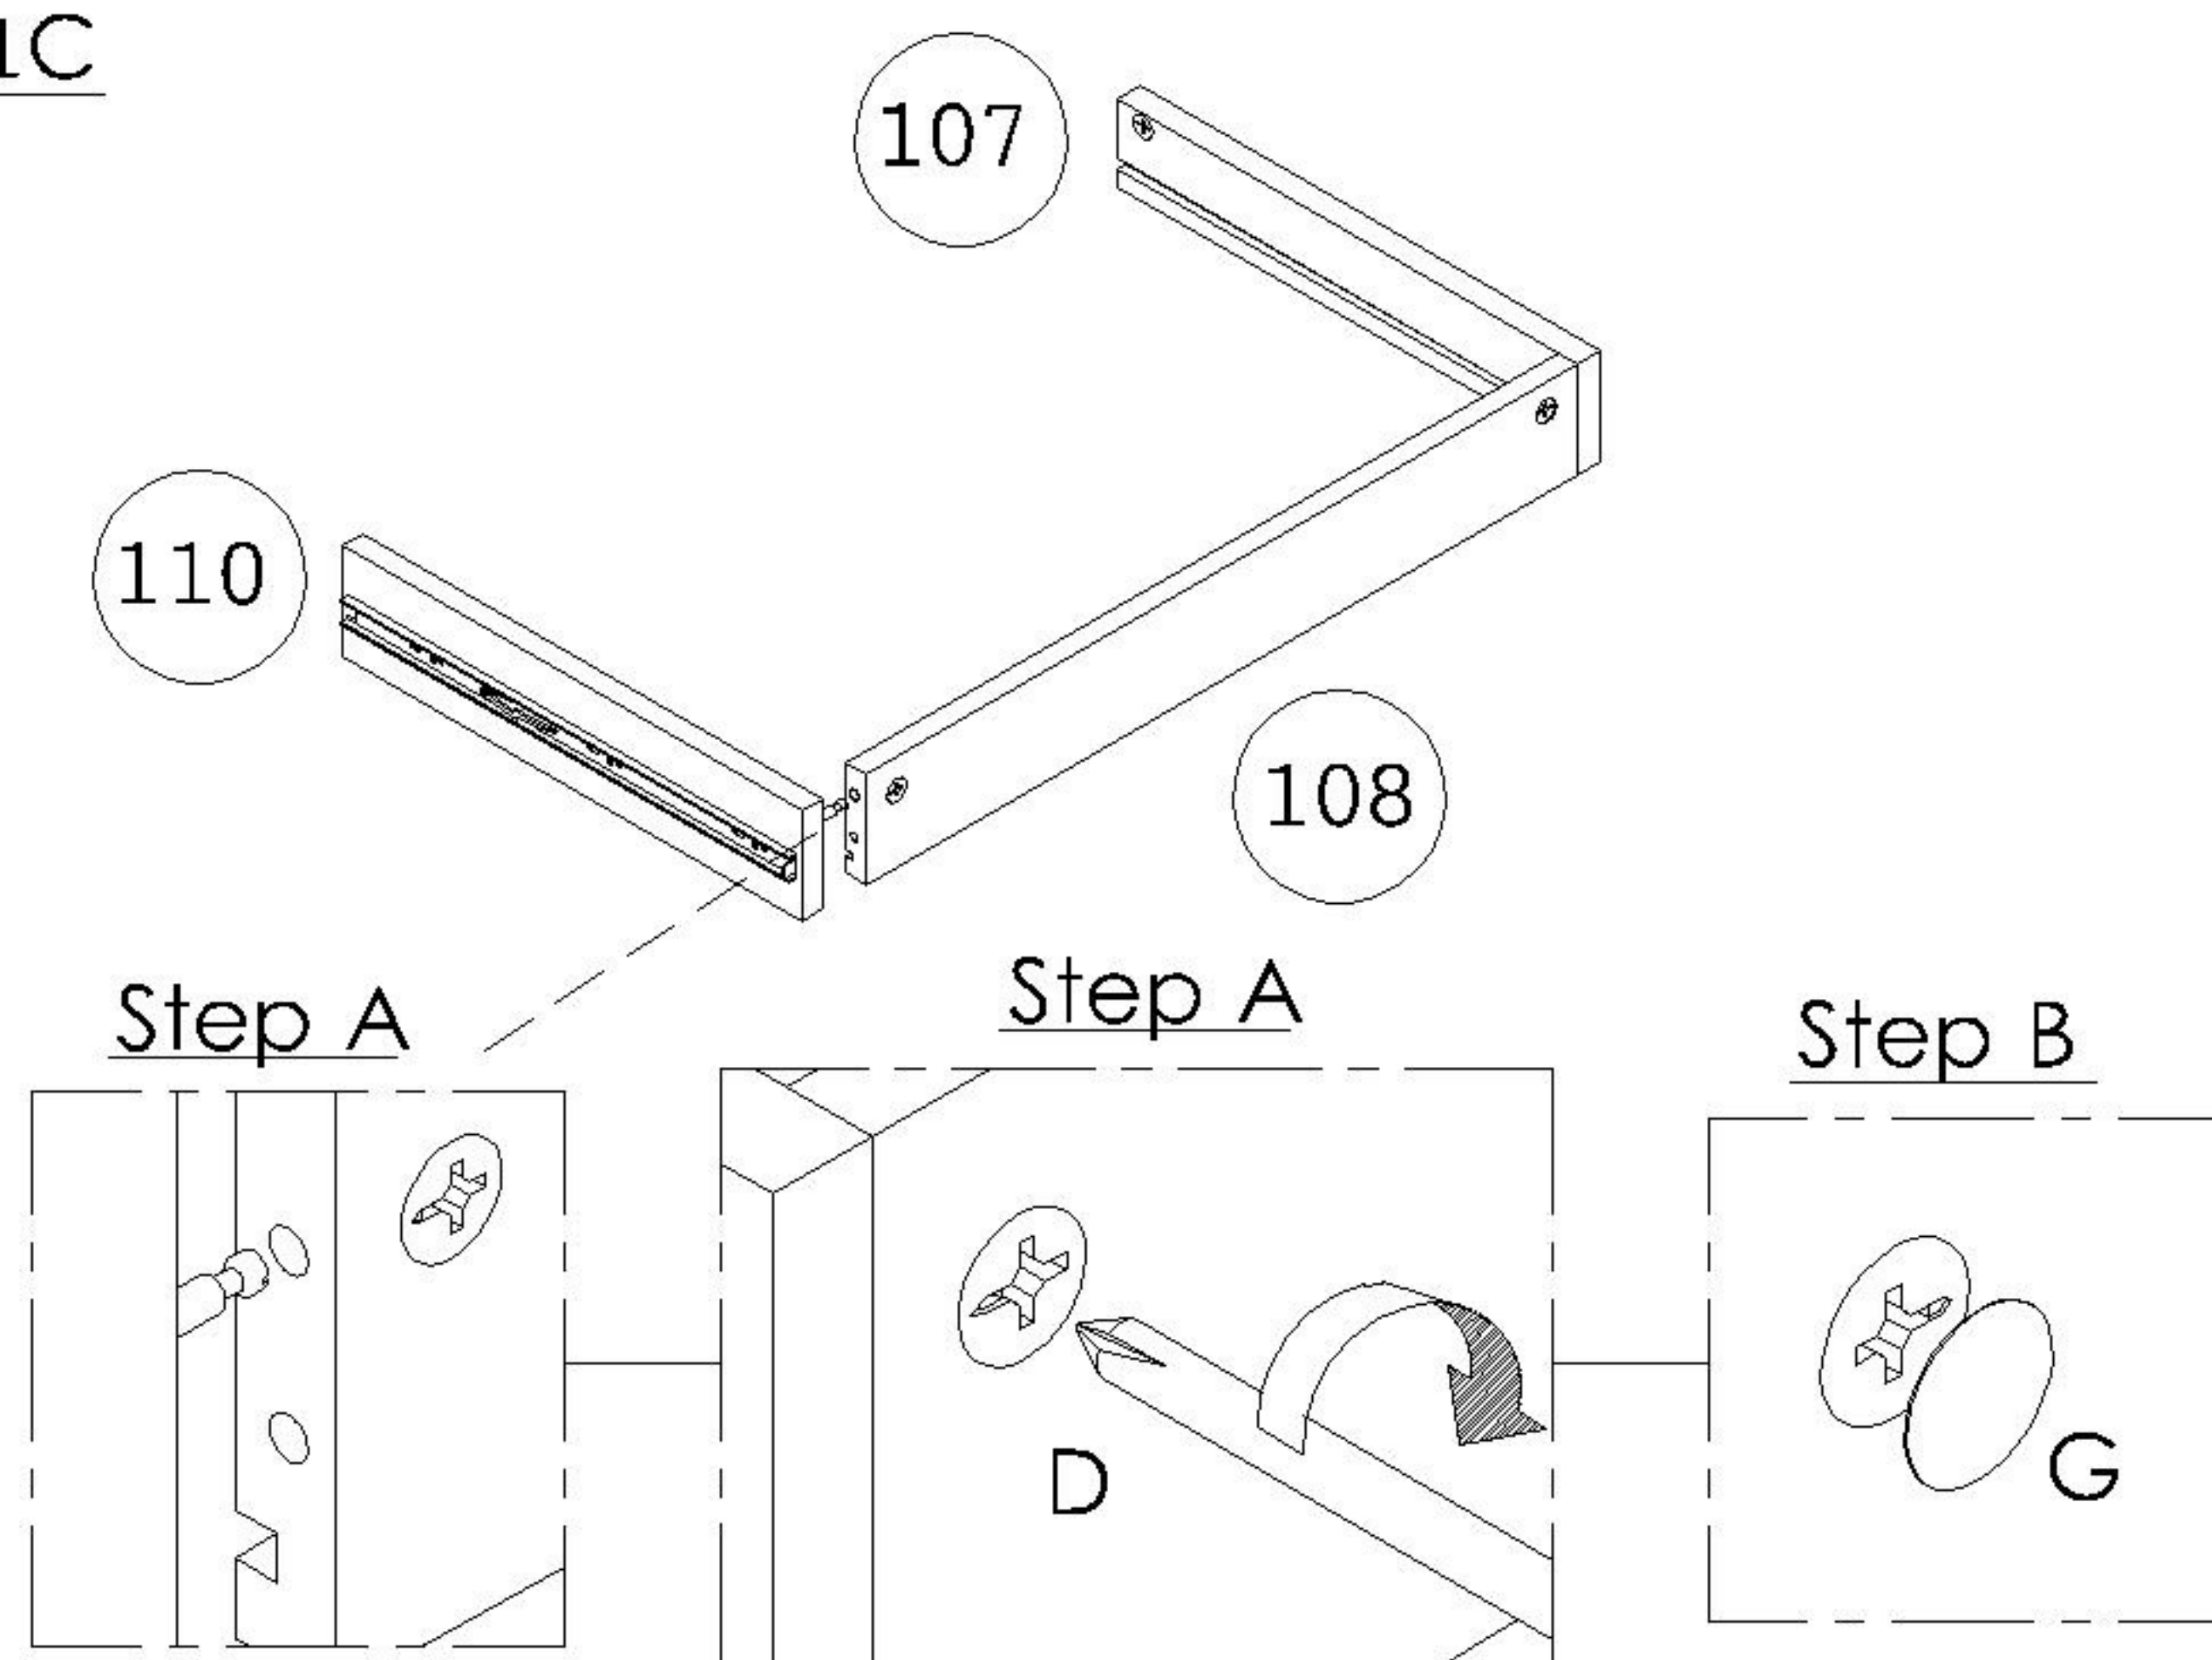

- A) Attach Left,Right Medium Drawer Side(107,110) to Medium Drawer Back(108) secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)


NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes

STEP 11D

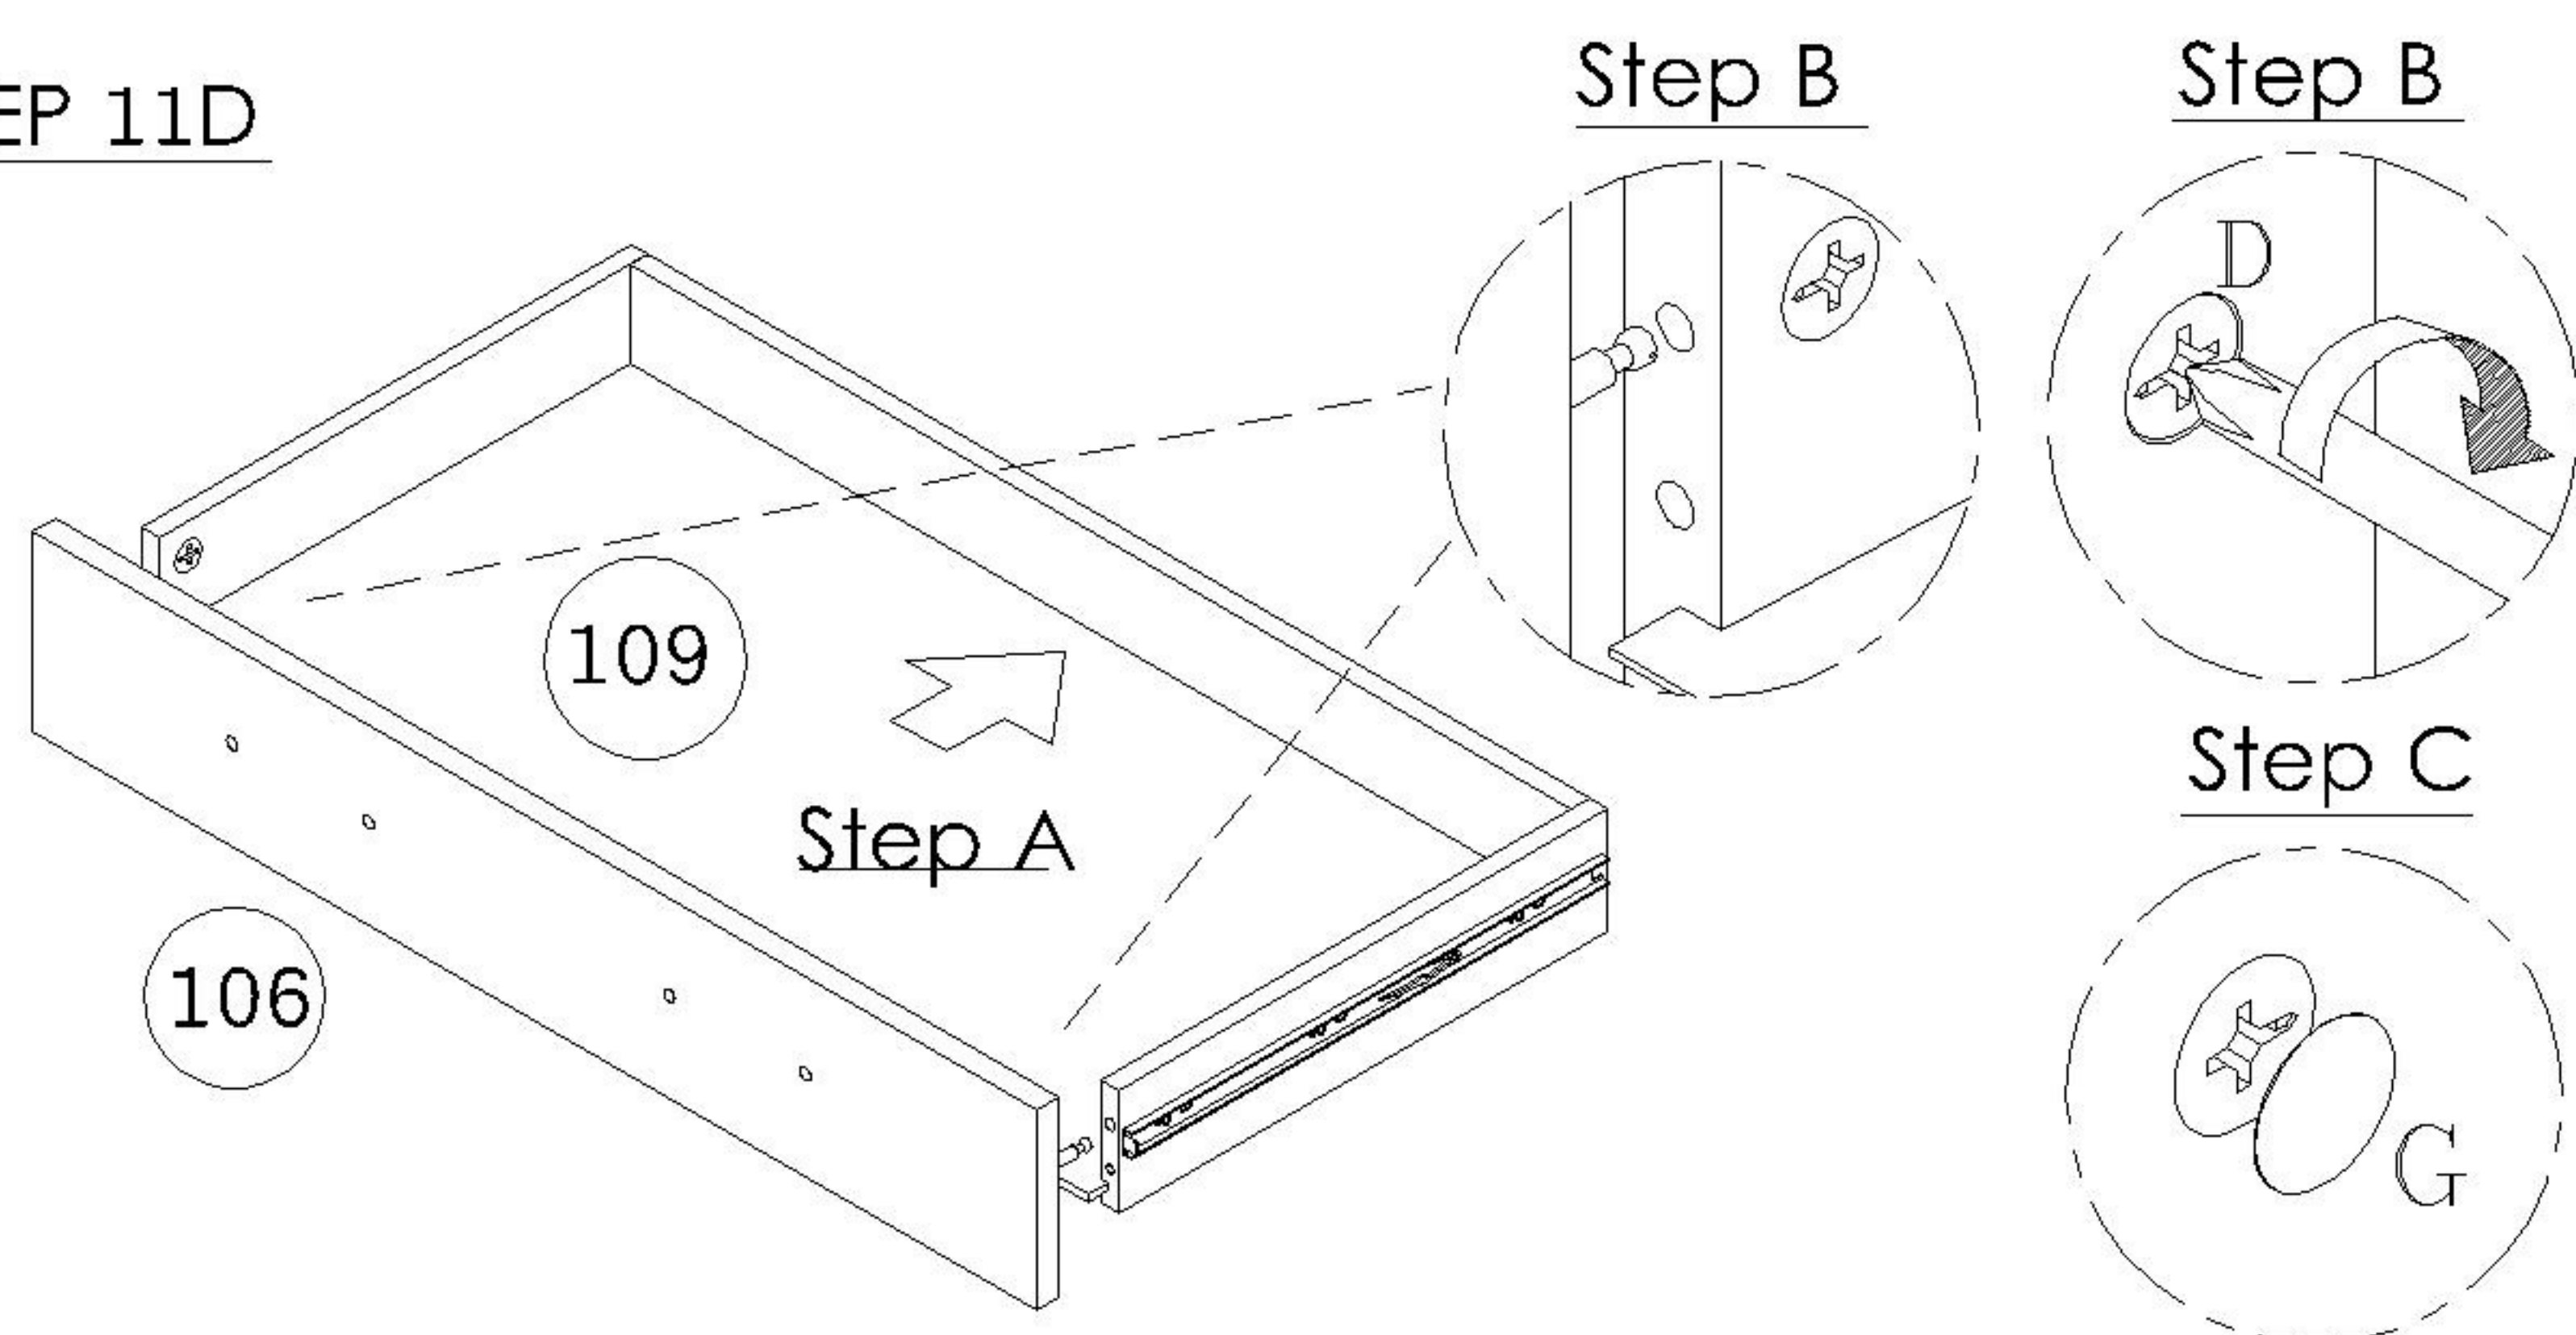


- A) Slot in Medium Drawer Base(109) in corresponding grooves
- B) Attach Medium Drawer Front(106) to Drawer Box secure with Cam Lock(D)
- C) Using Cam Lock Cover(G) to Cover Cam Lock(D)

STEP 11E

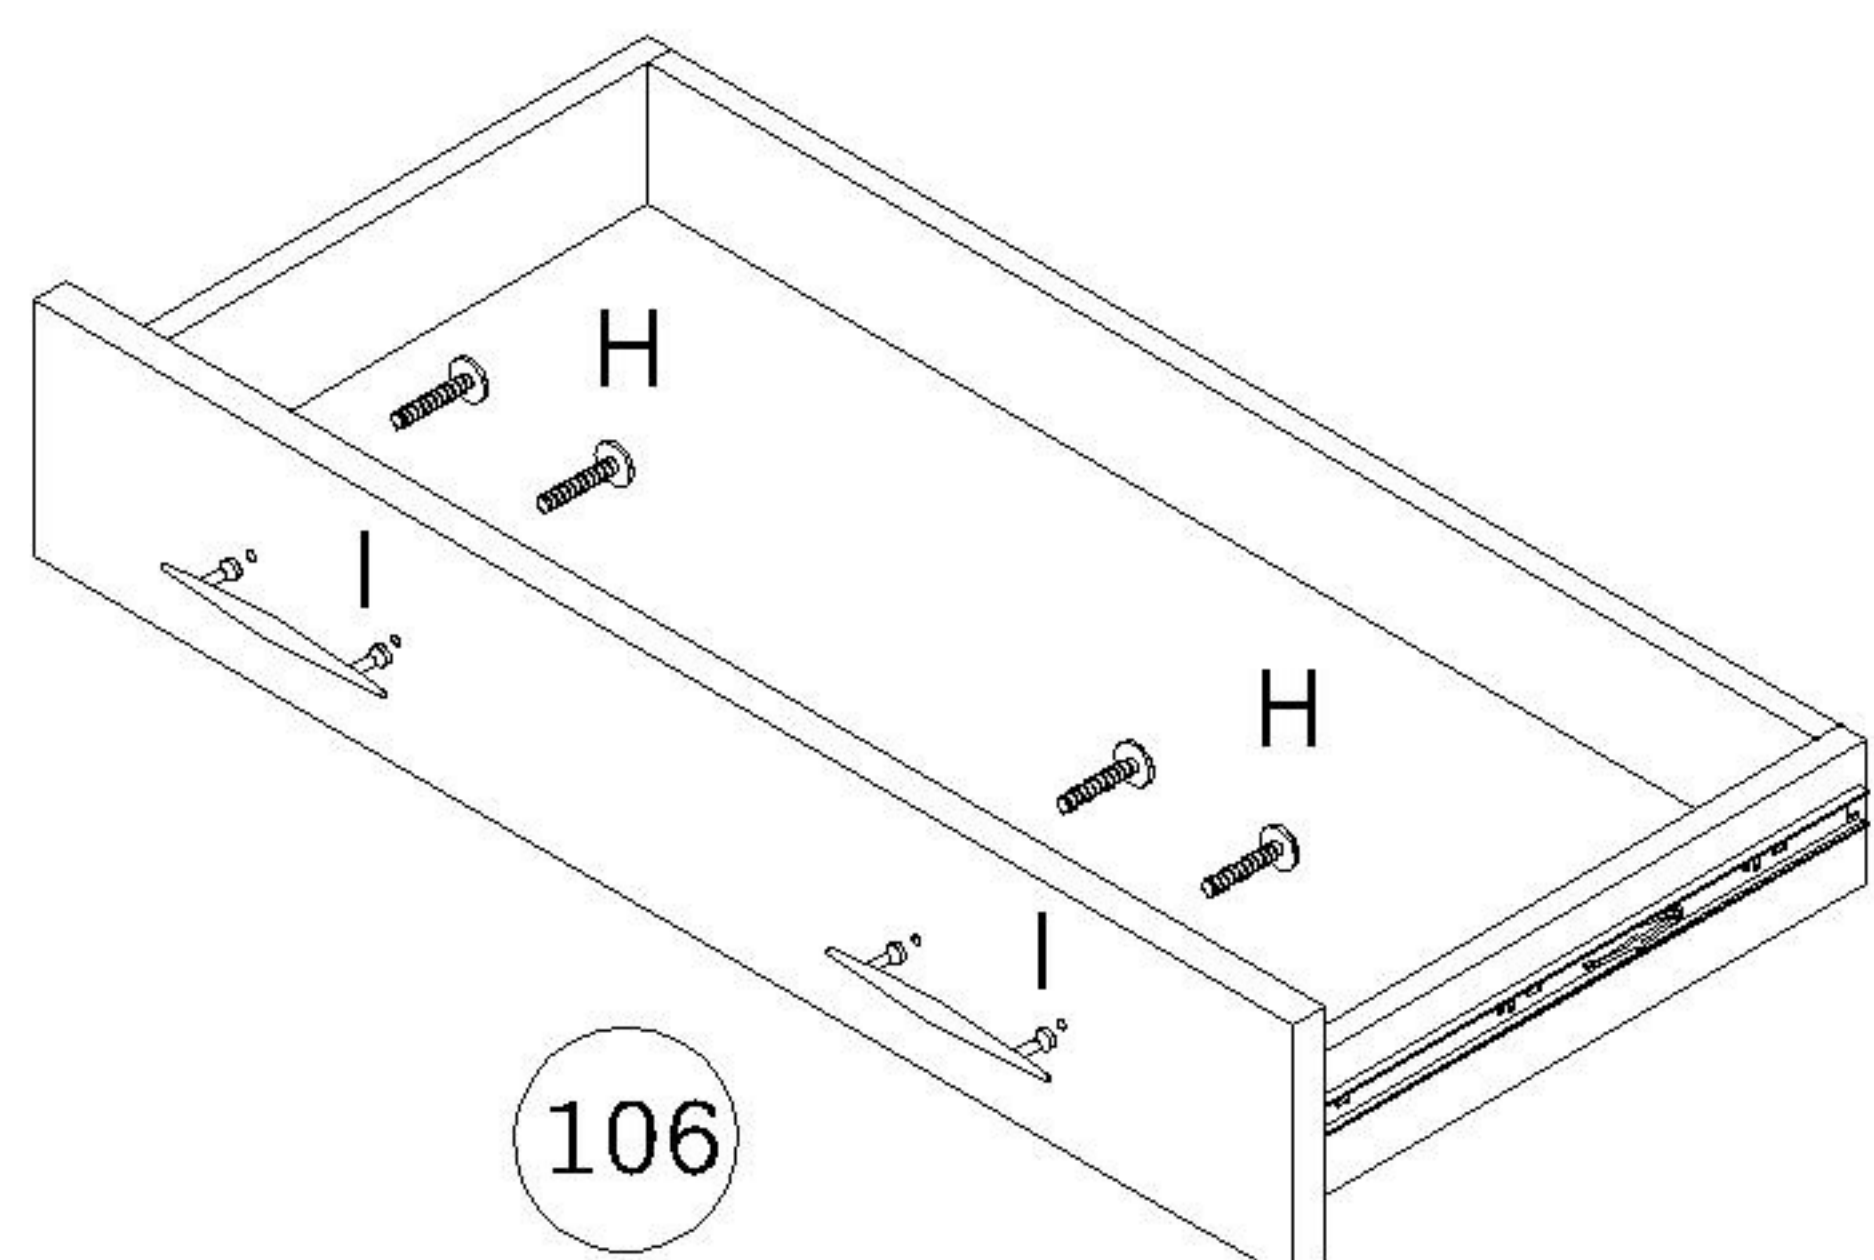


- A) Attach Handle(I) to Medium Drawer Front(106) secure using Panhead Screw(H)


STEP 12A

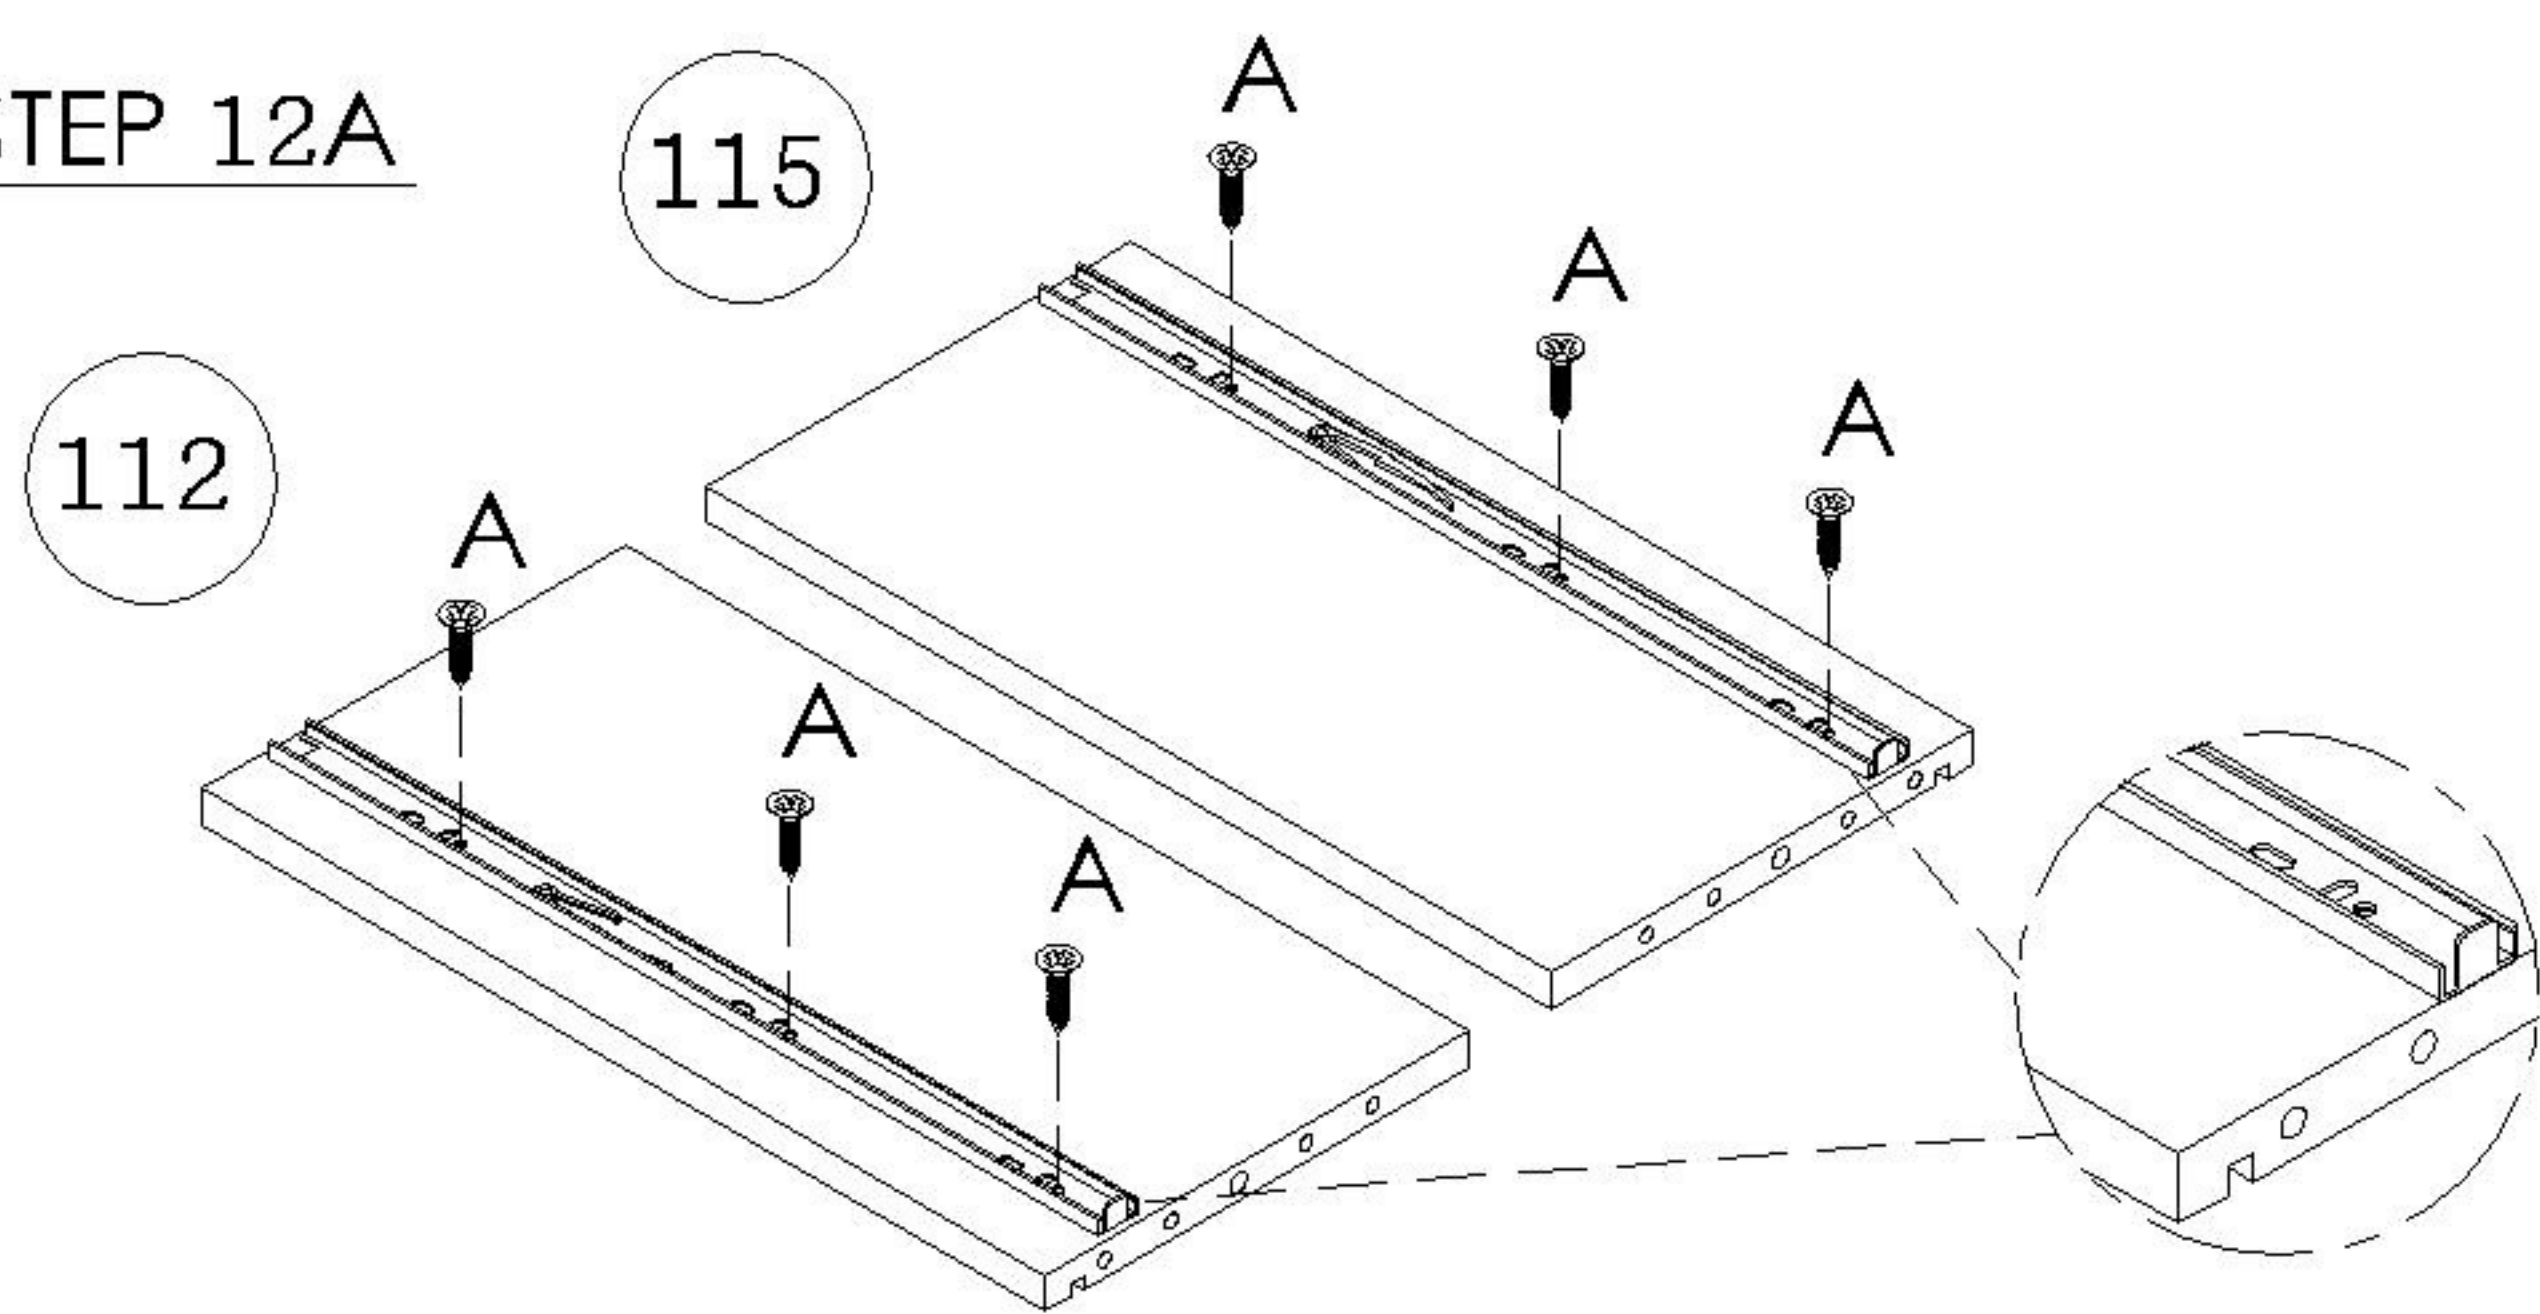

- A) Attach Extension Runner(F) to Left,Right Big Drawer Side (112,115) using Chipboard Screw(A) to secure

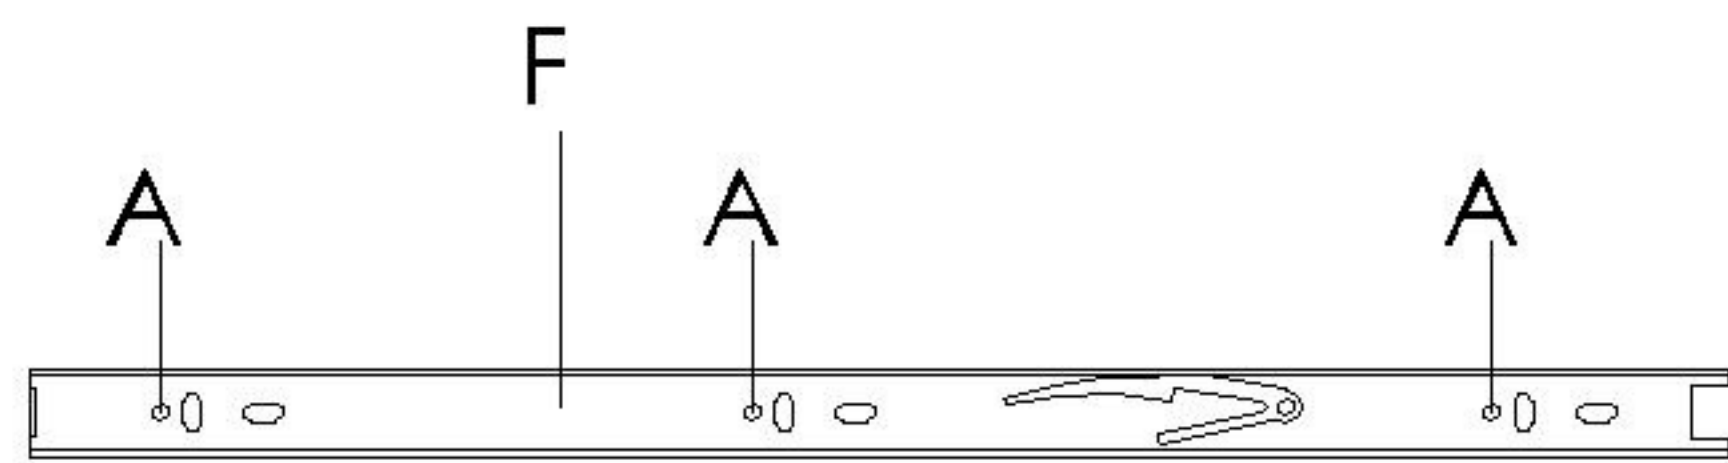


STEP 12B

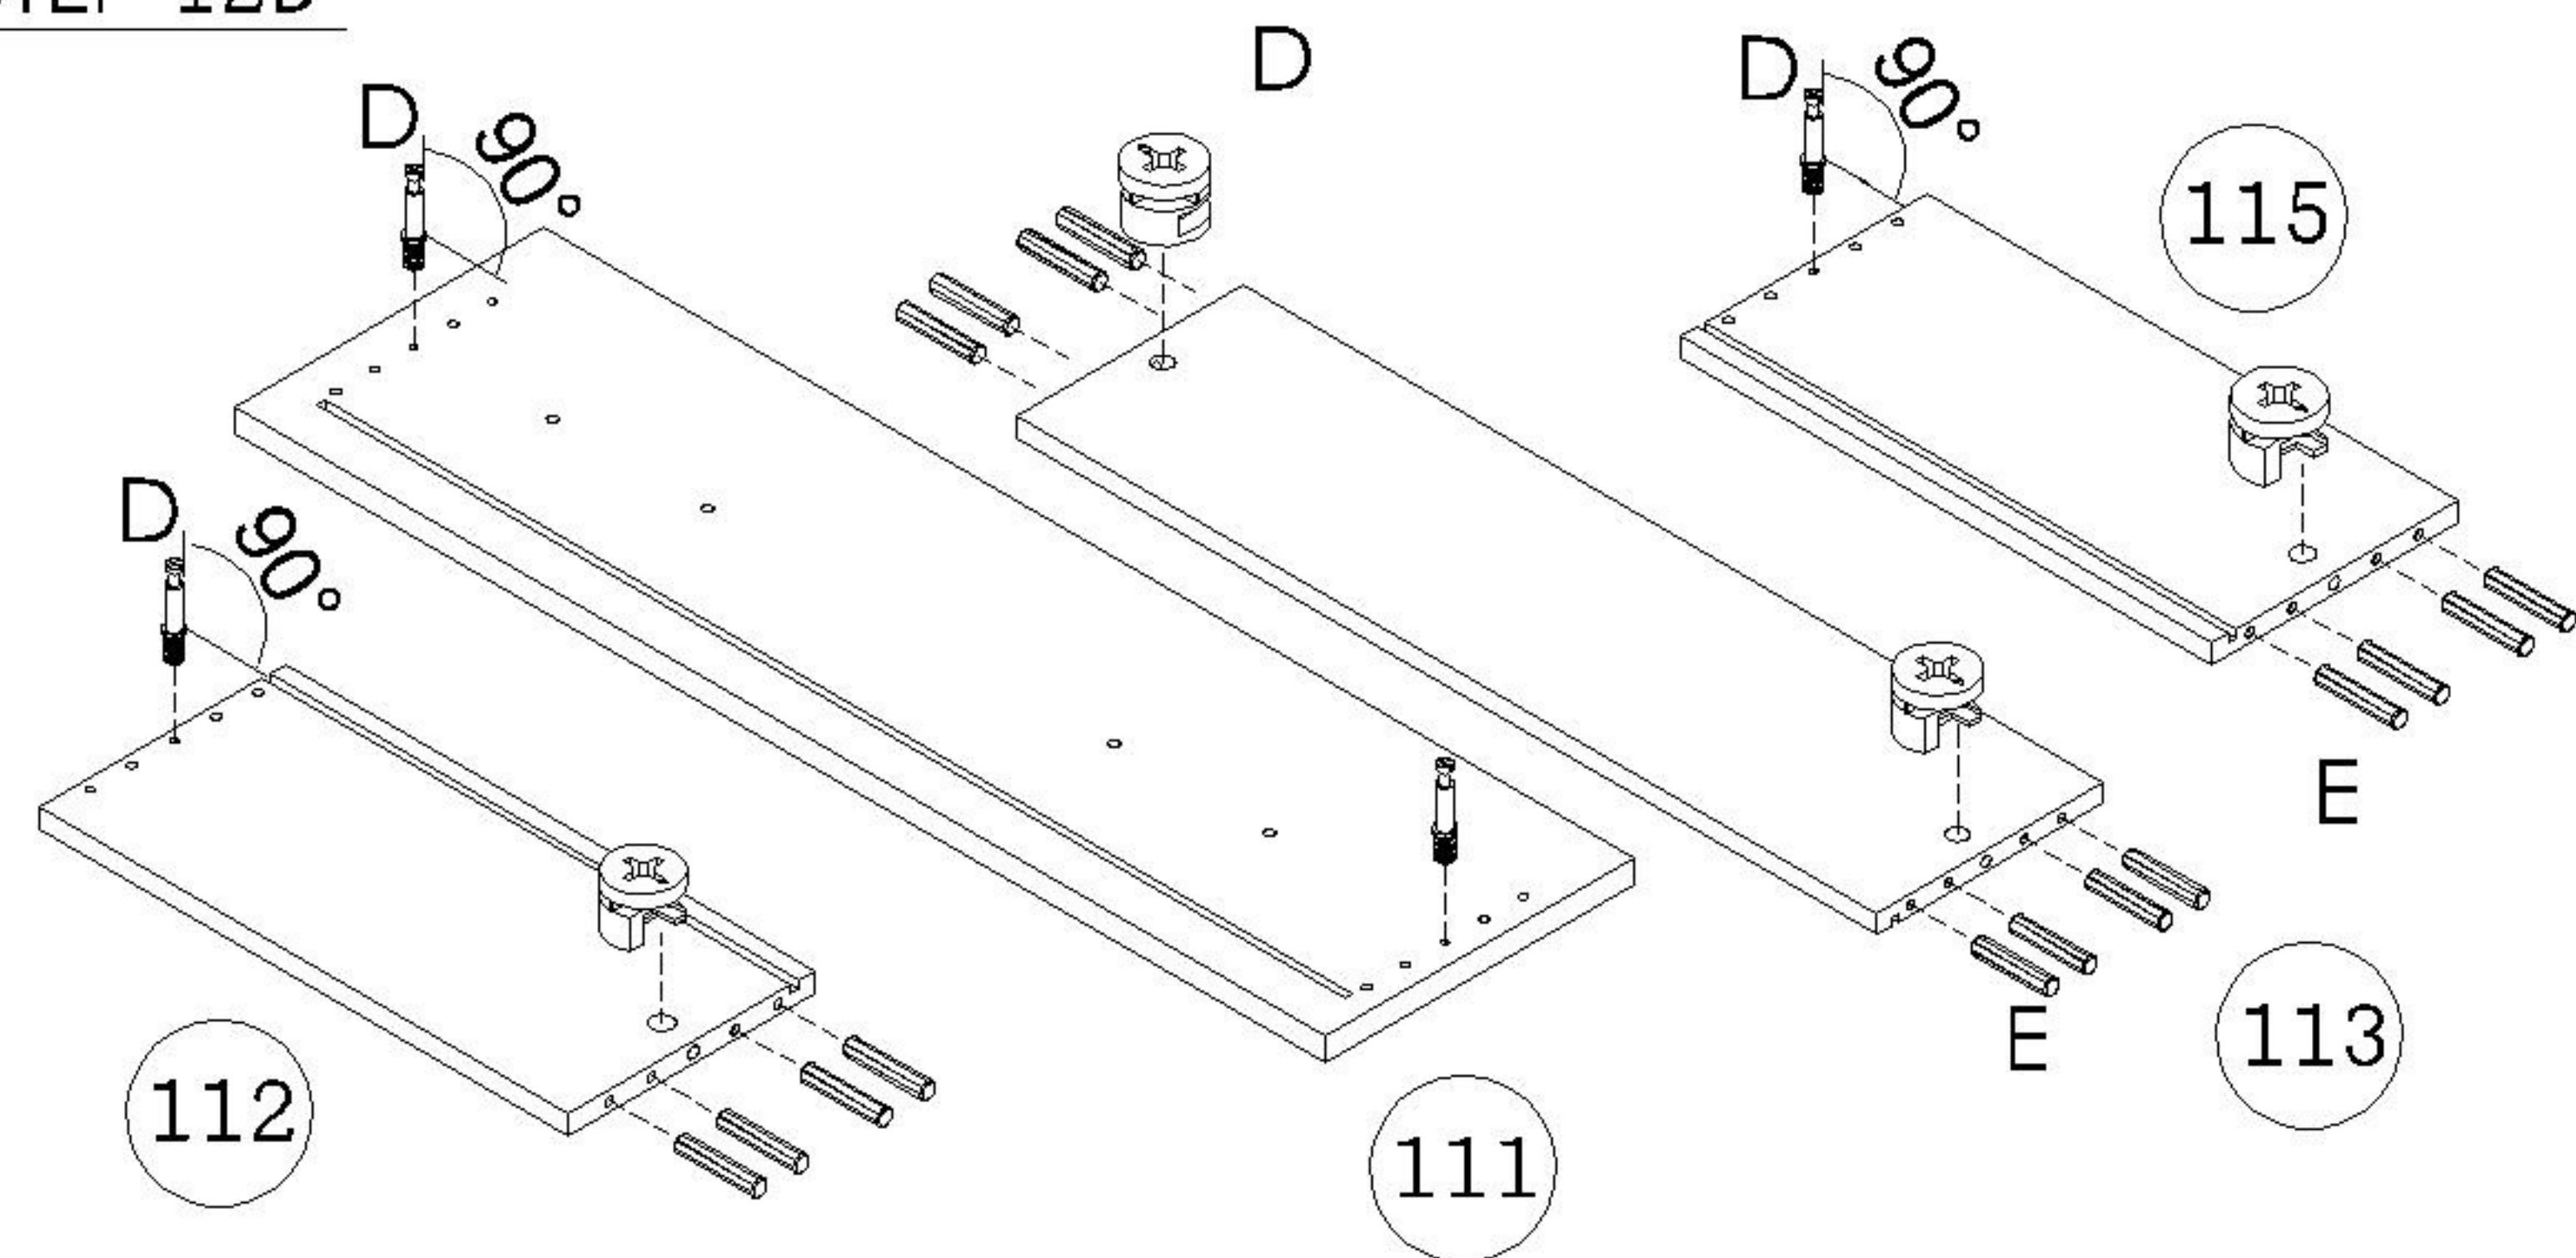

- A) Insert Wood Dowel(E) to Left,Right Big Drawer Side(112,115) & Big Drawer Back(113)
- B) Attach Cam Lock(D) to Left,Right Big Drawer Side(112,115) & Big Drawer Back(113)
- C) Attach Cam Bolt(D) to Big Drawer Front(111) & Left,Right Big Drawer Side(112,115)


STEP 12C

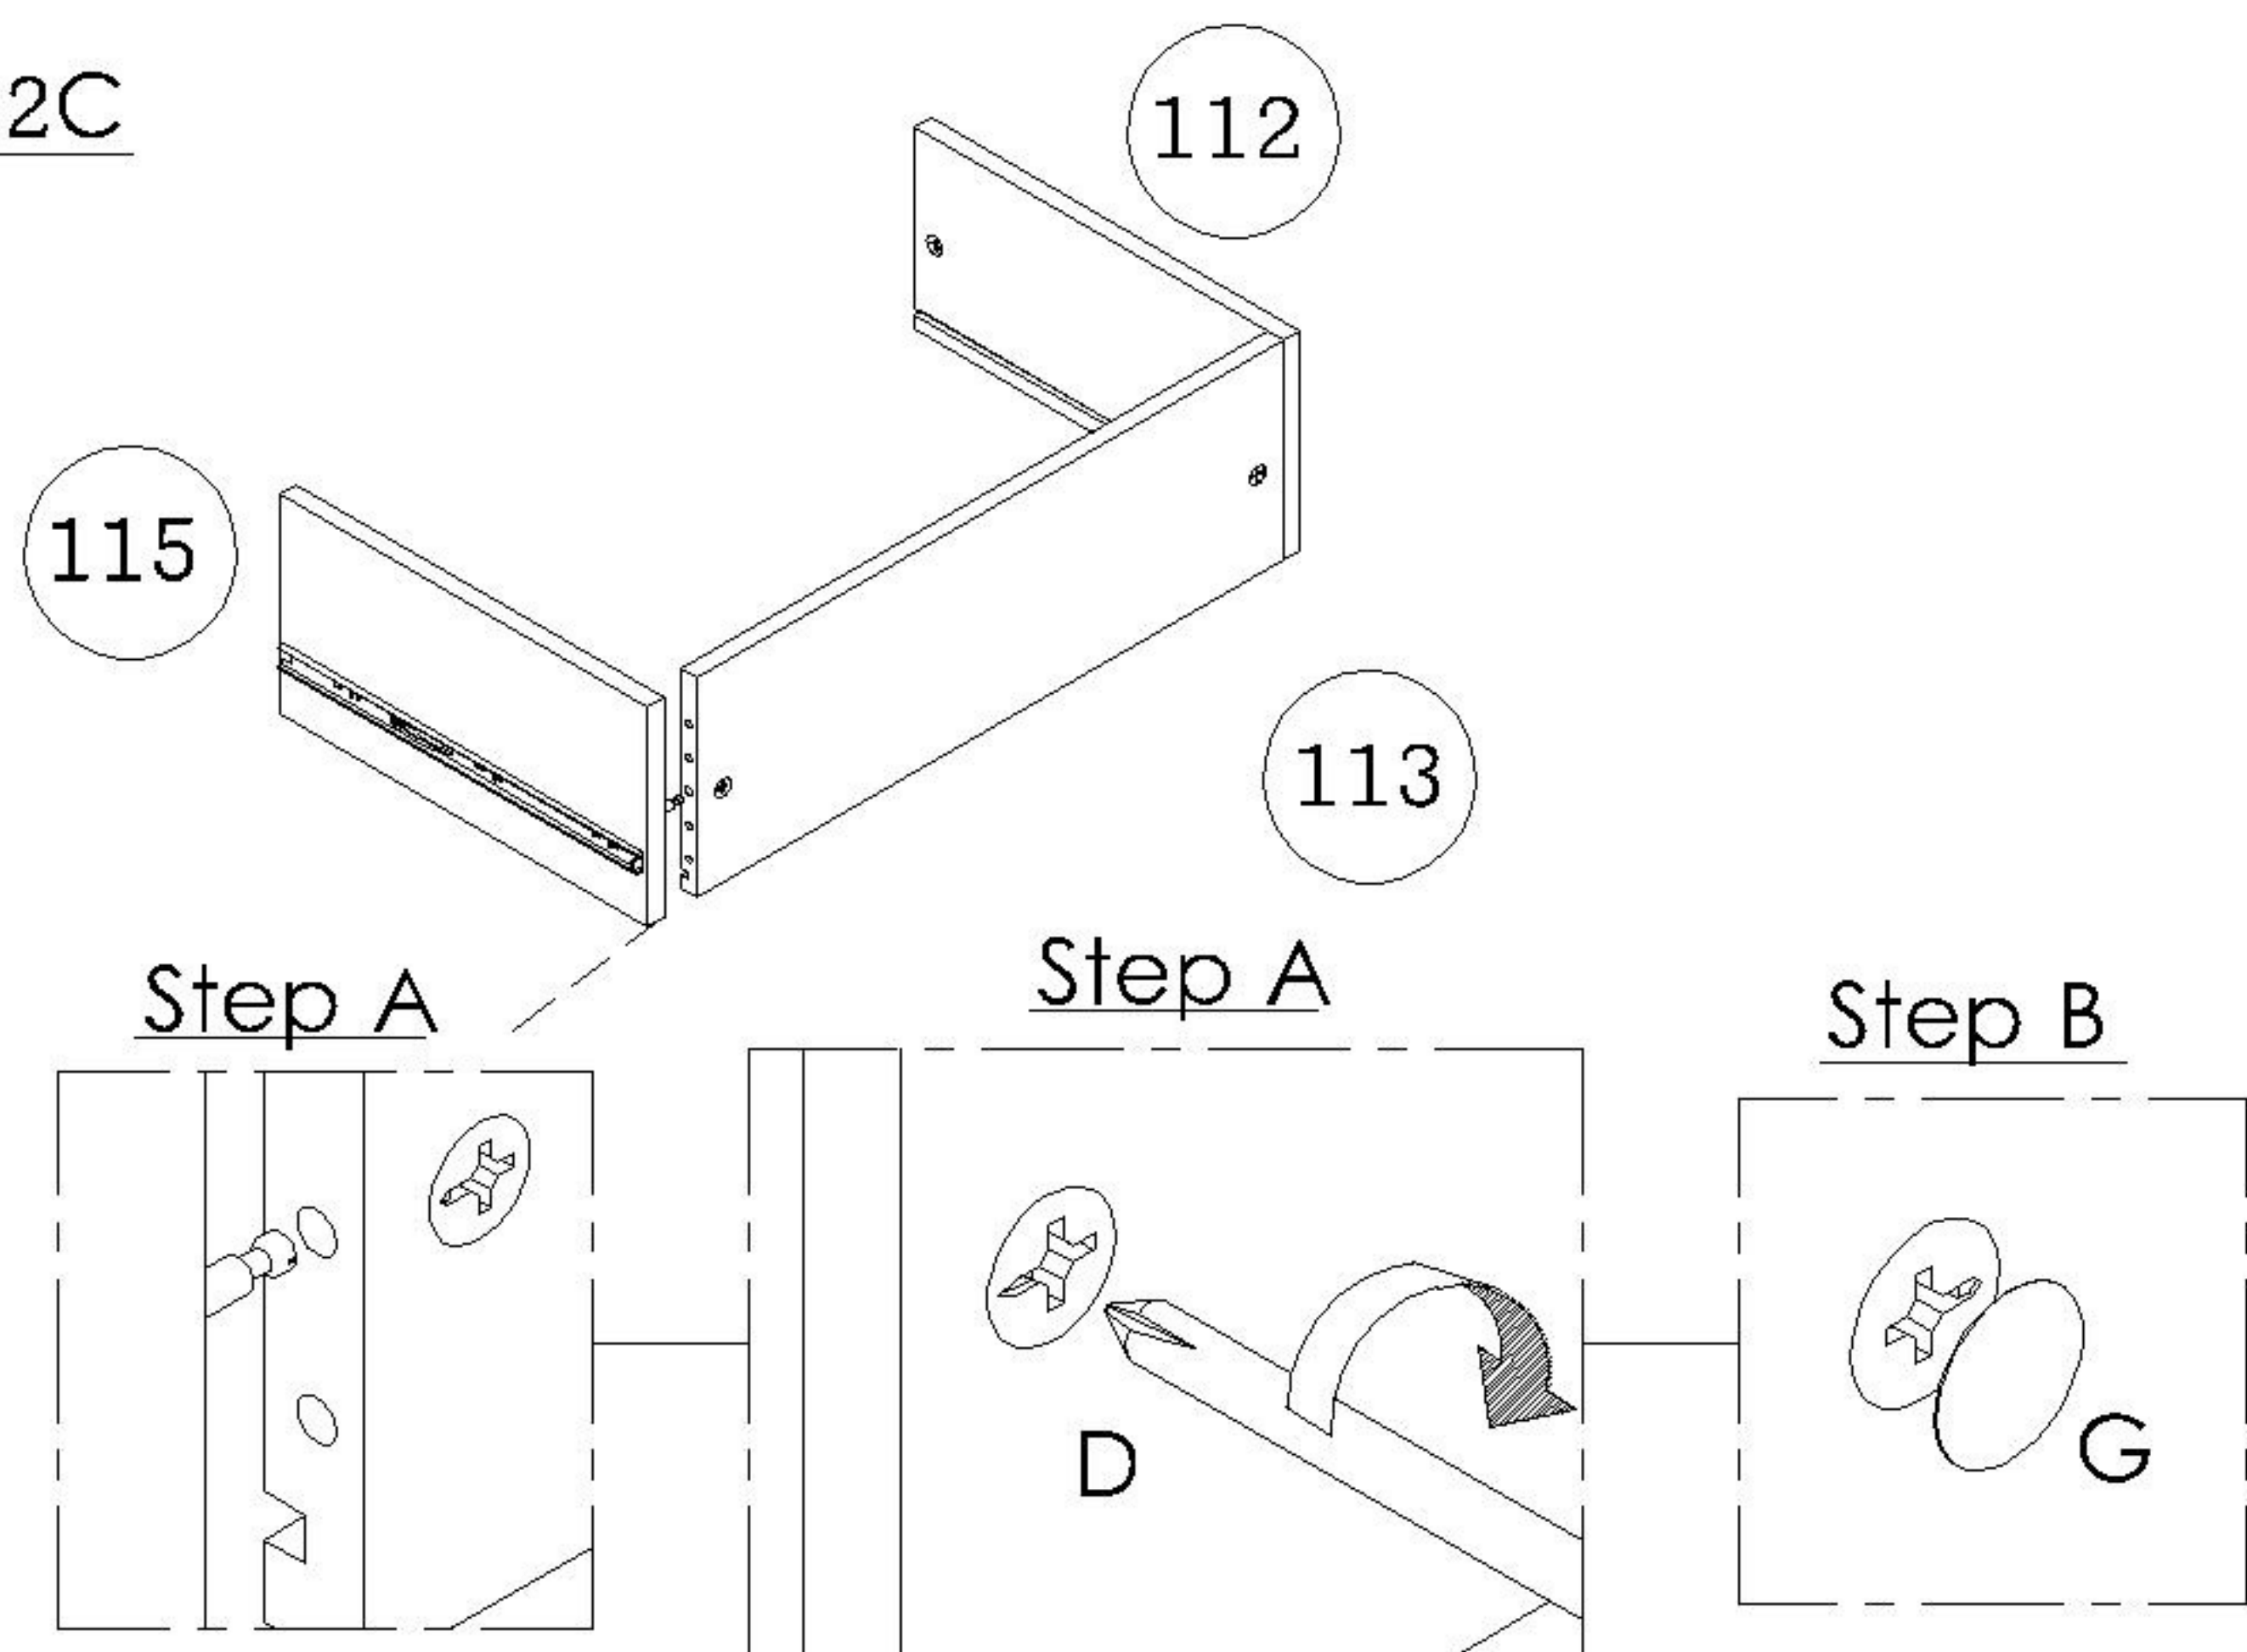

- A) Attach Left,Right Big Drawer Side(112,115) to Big Drawer Back(113) secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)


NOTE : Make sure arrows on each Cam Lock point towards nearest edge with holes

STEP 12D

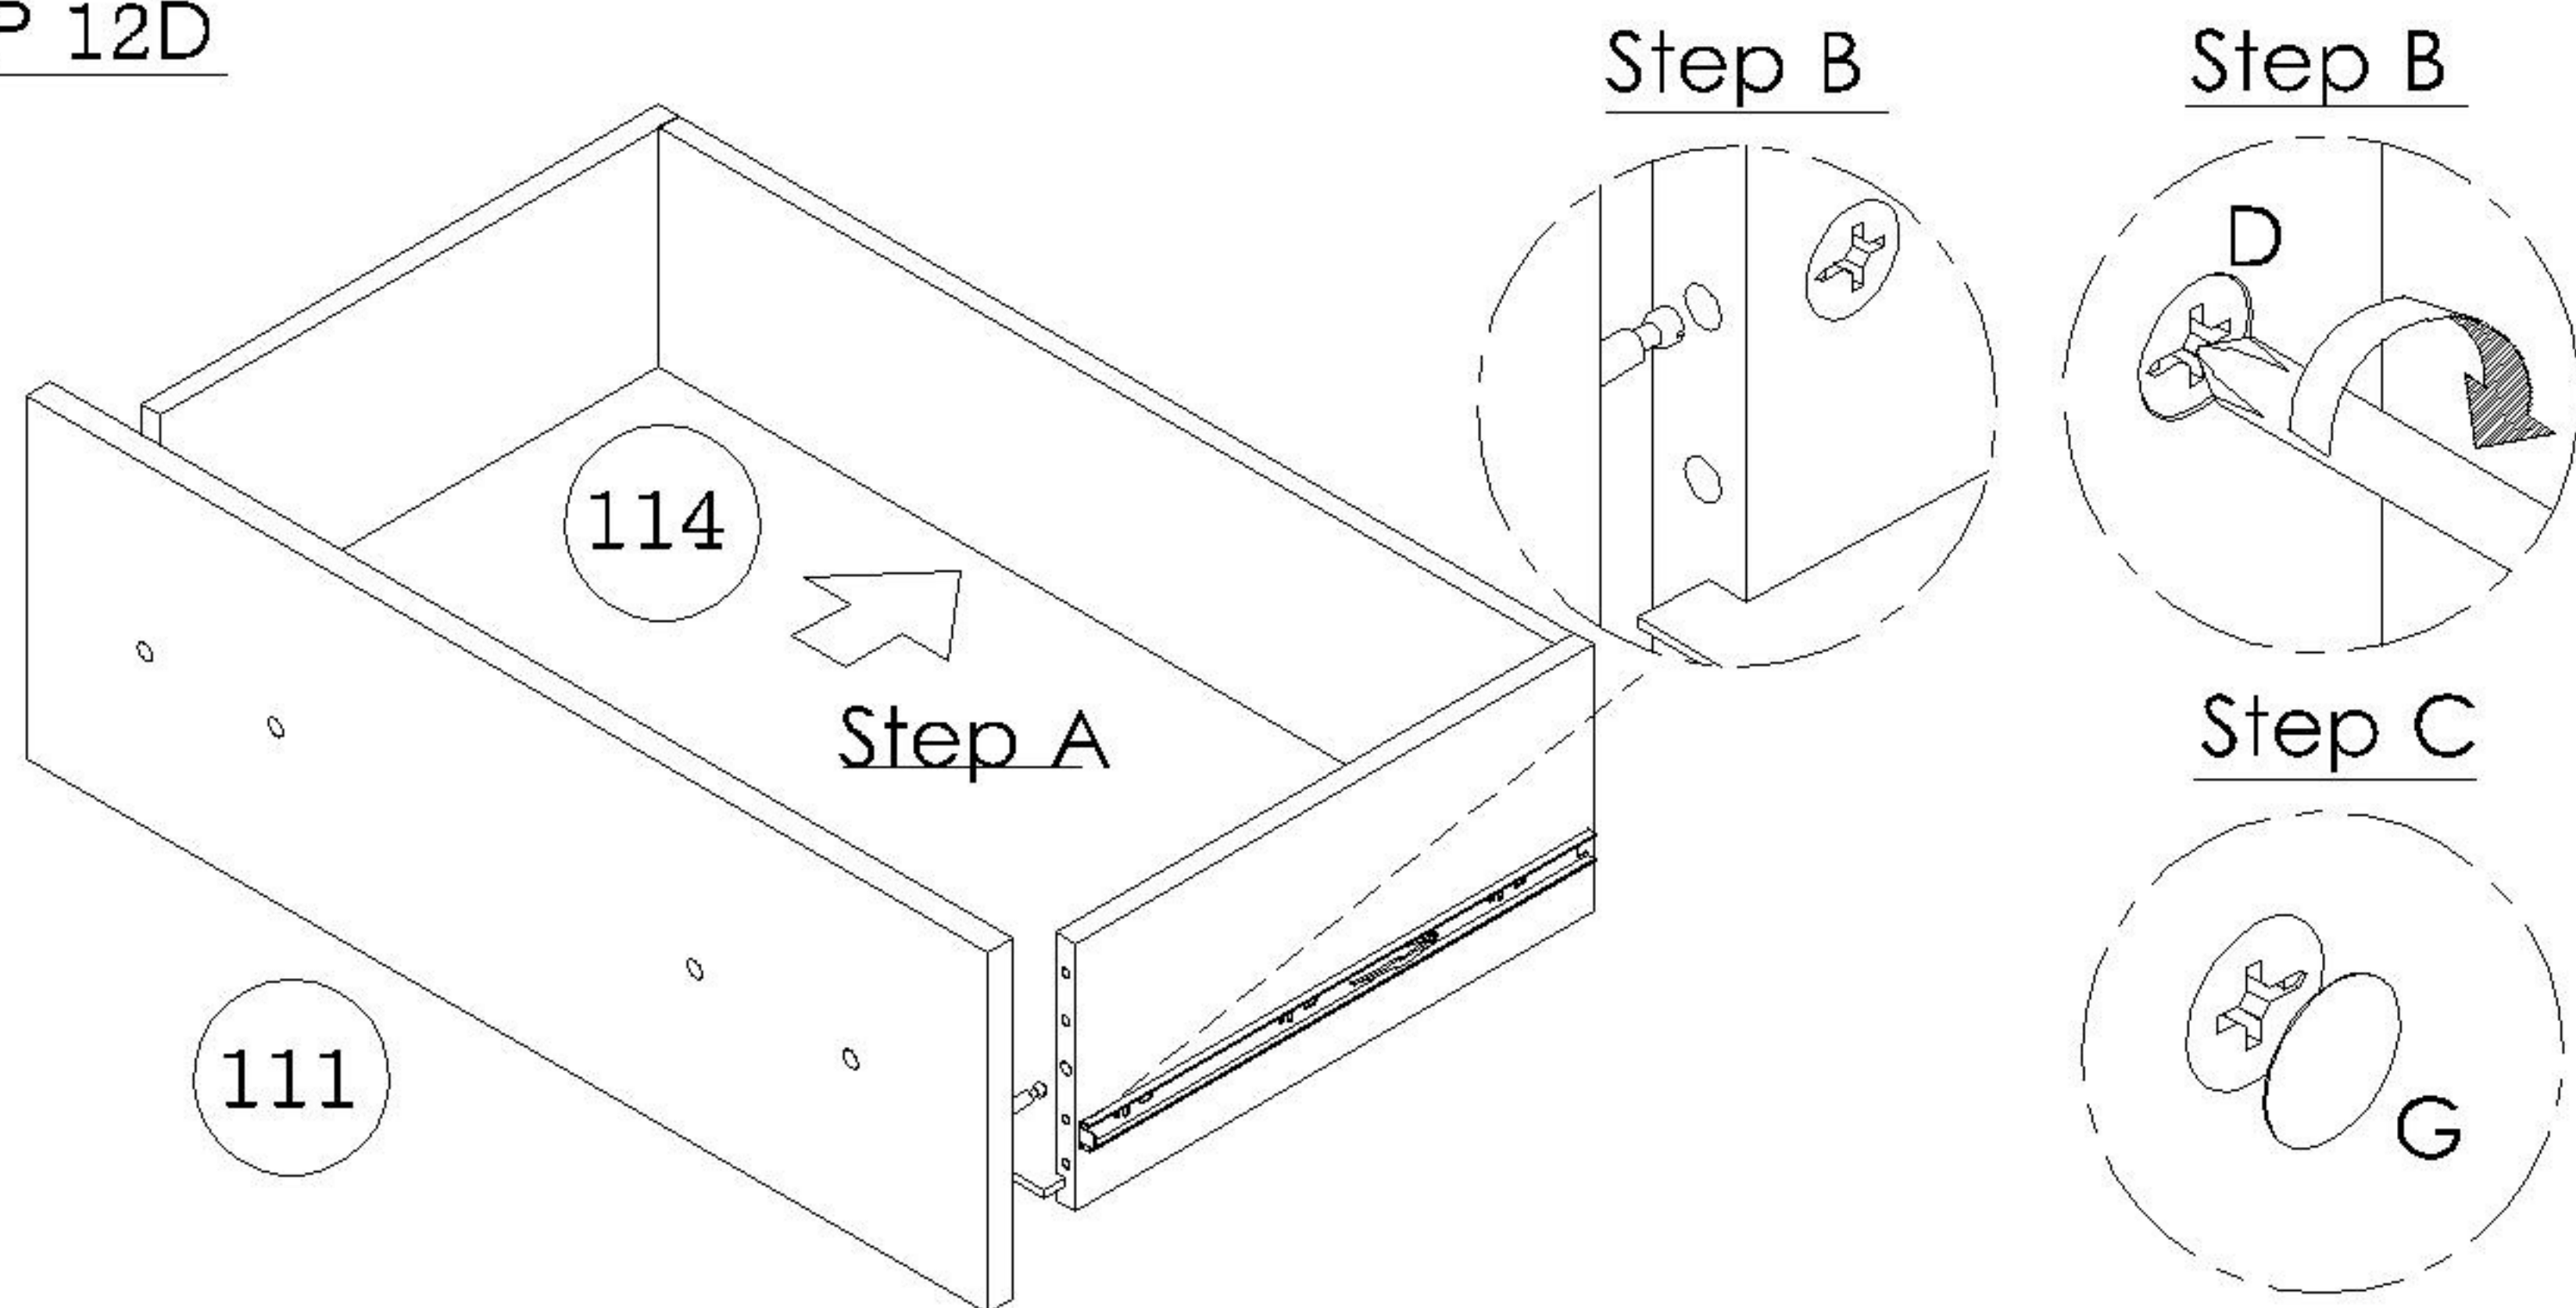

- A) Slot in Big Drawer Base(114) in corresponding grooves
- B) Attach Big Drawer Front(111) to Drawer Box secure with Cam Lock(D)
- C) Using Cam Lock Cover(G) to Cover Cam Lock(D)


STEP 12E

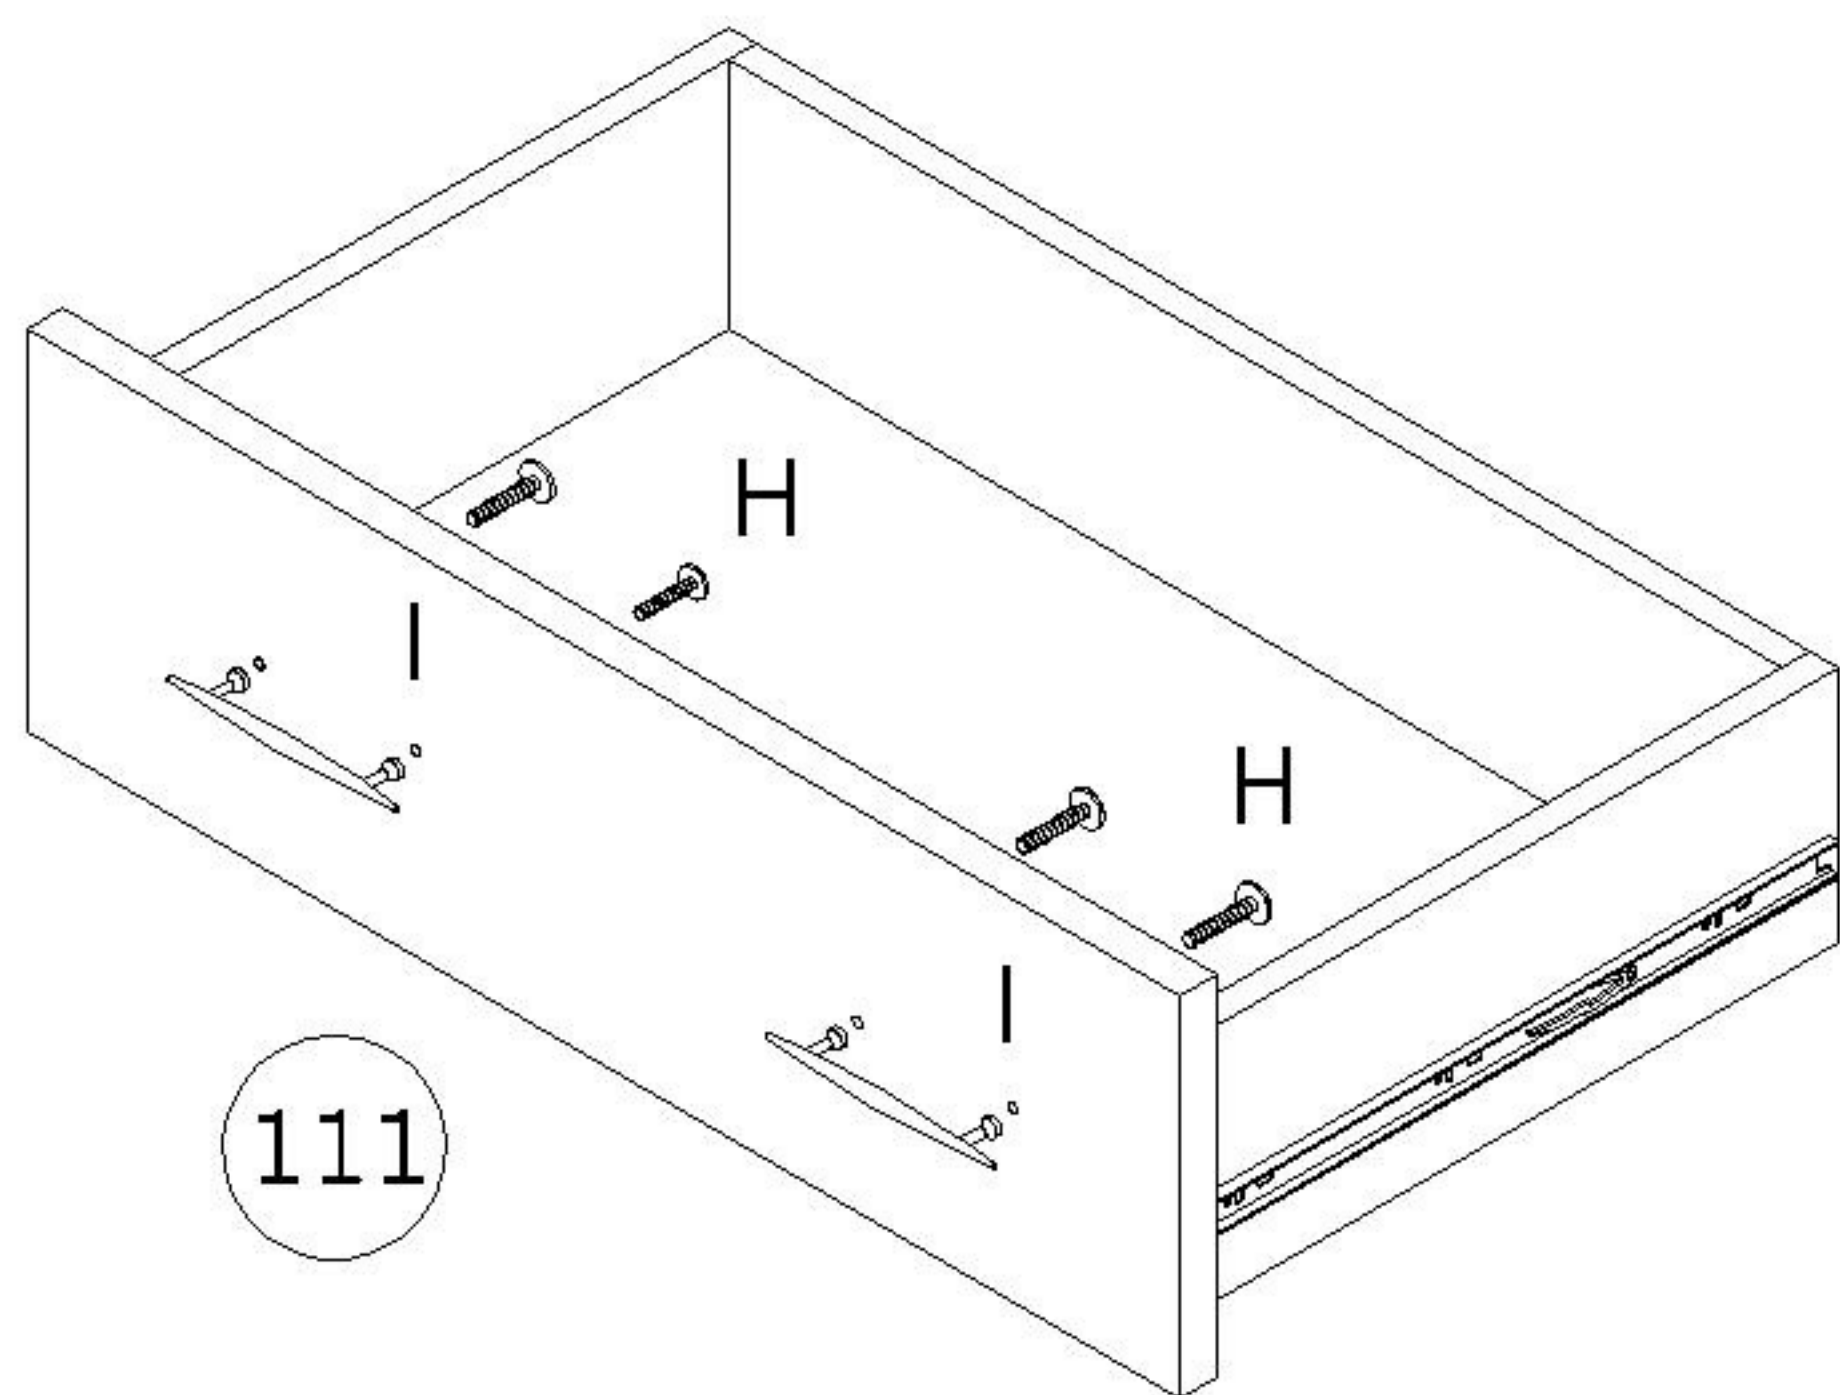

- A) Attach Handle(I) to Big Drawer Front(111) secure using Panhead Screw(H)


STEP 13

- A) Attach Top Bar(5) to Left,Right Small Partition(9,10) & secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)

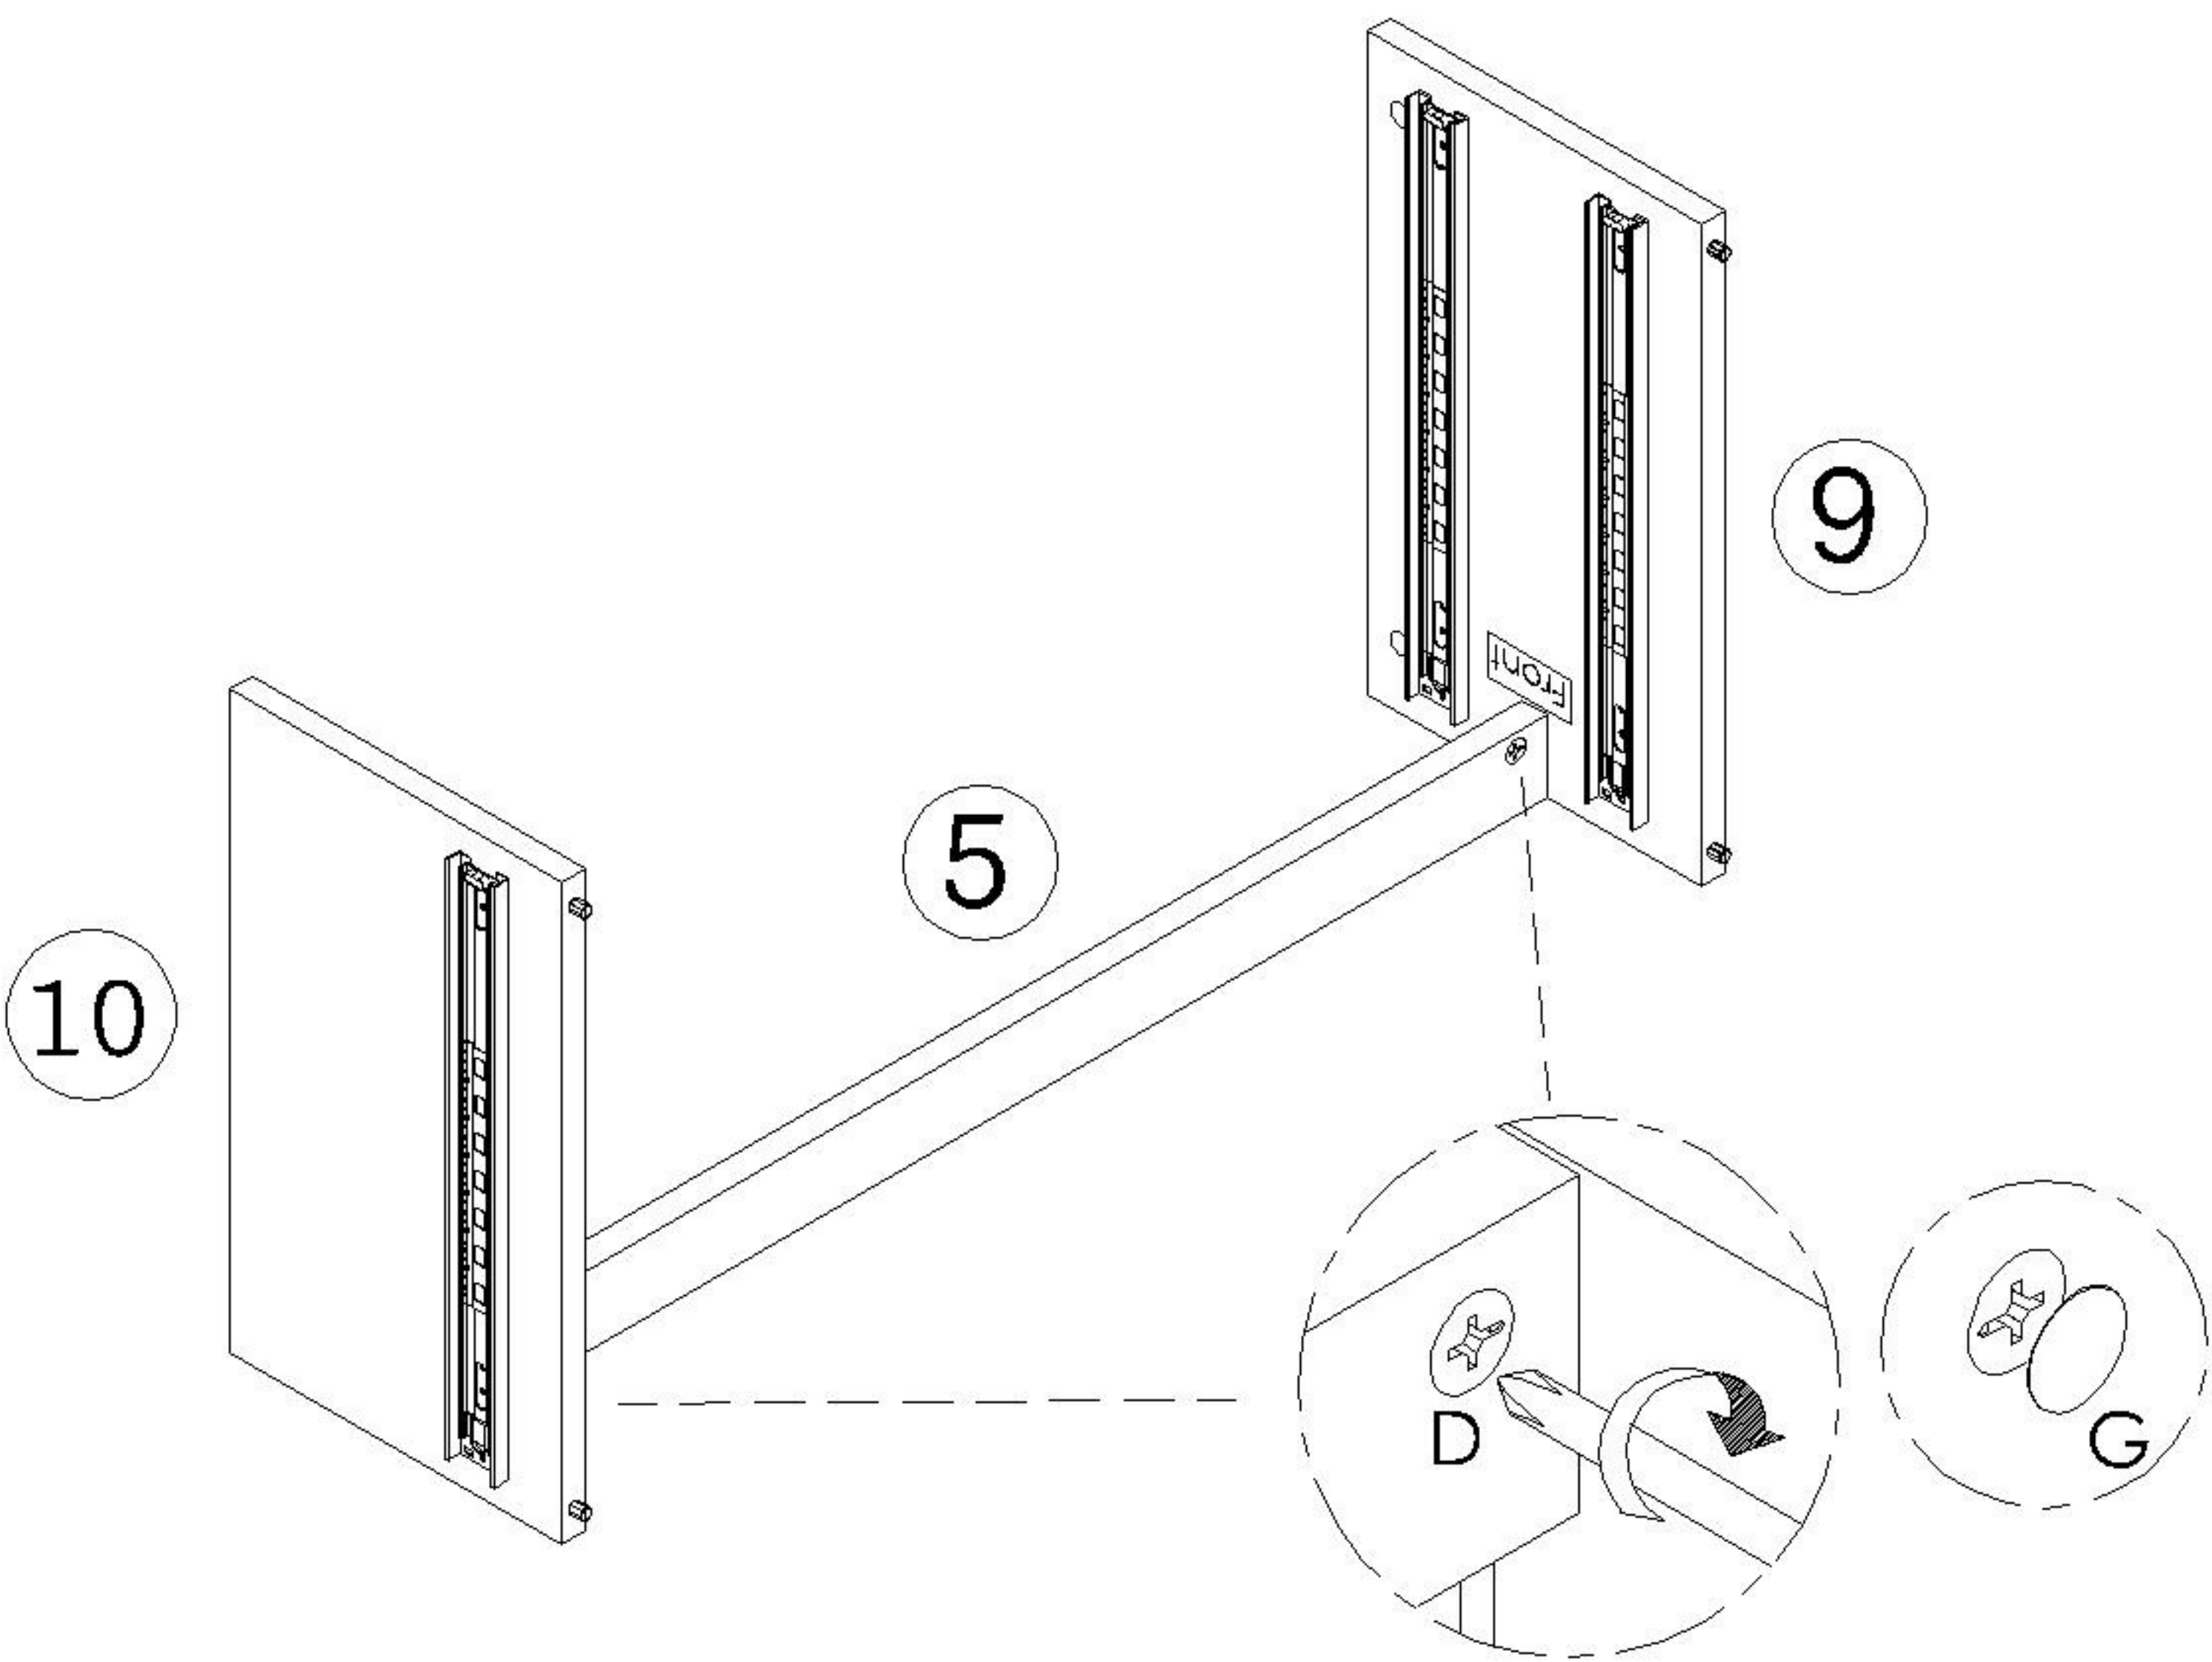


STEP 14

- A) Attach both Center Bar(7) to underneath of Left,Right Small Partition(9,10) & using Chipboard Screw(B) to secure

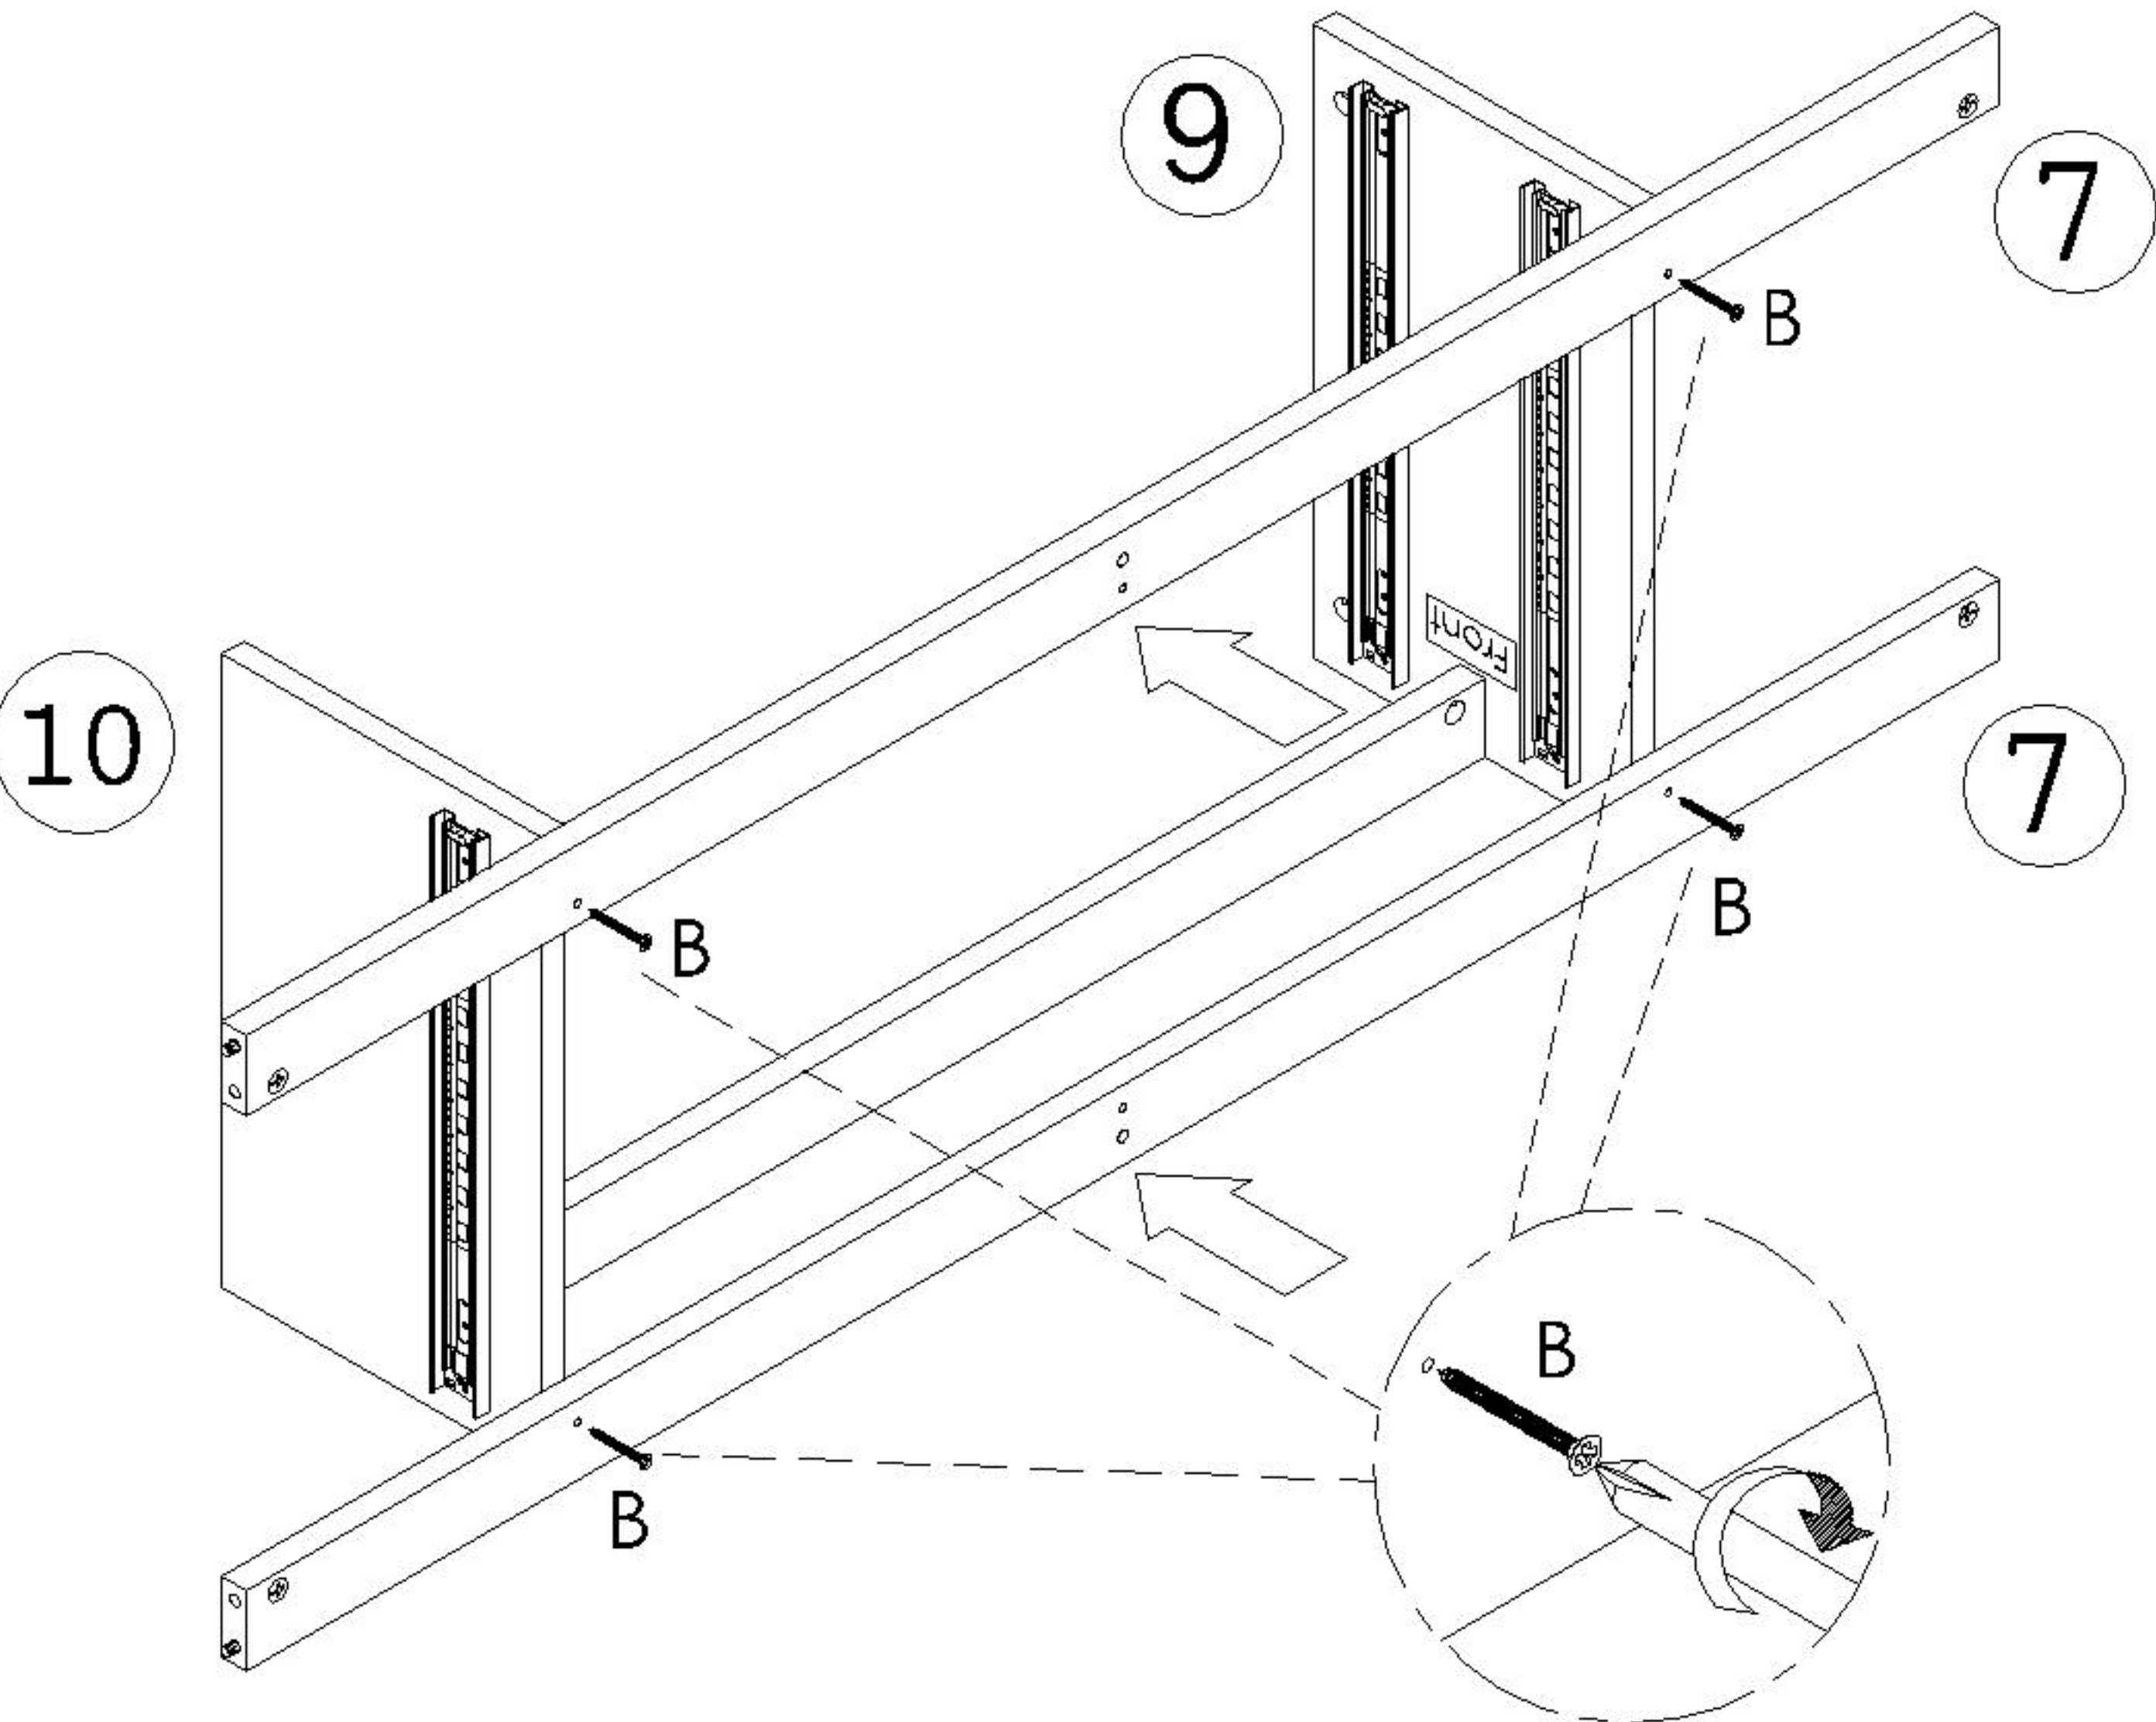


STEP 15

- A) Attach Big Partition(11) to underneath of both Center Bar(7) & using Chipboard Screw(B) to secure

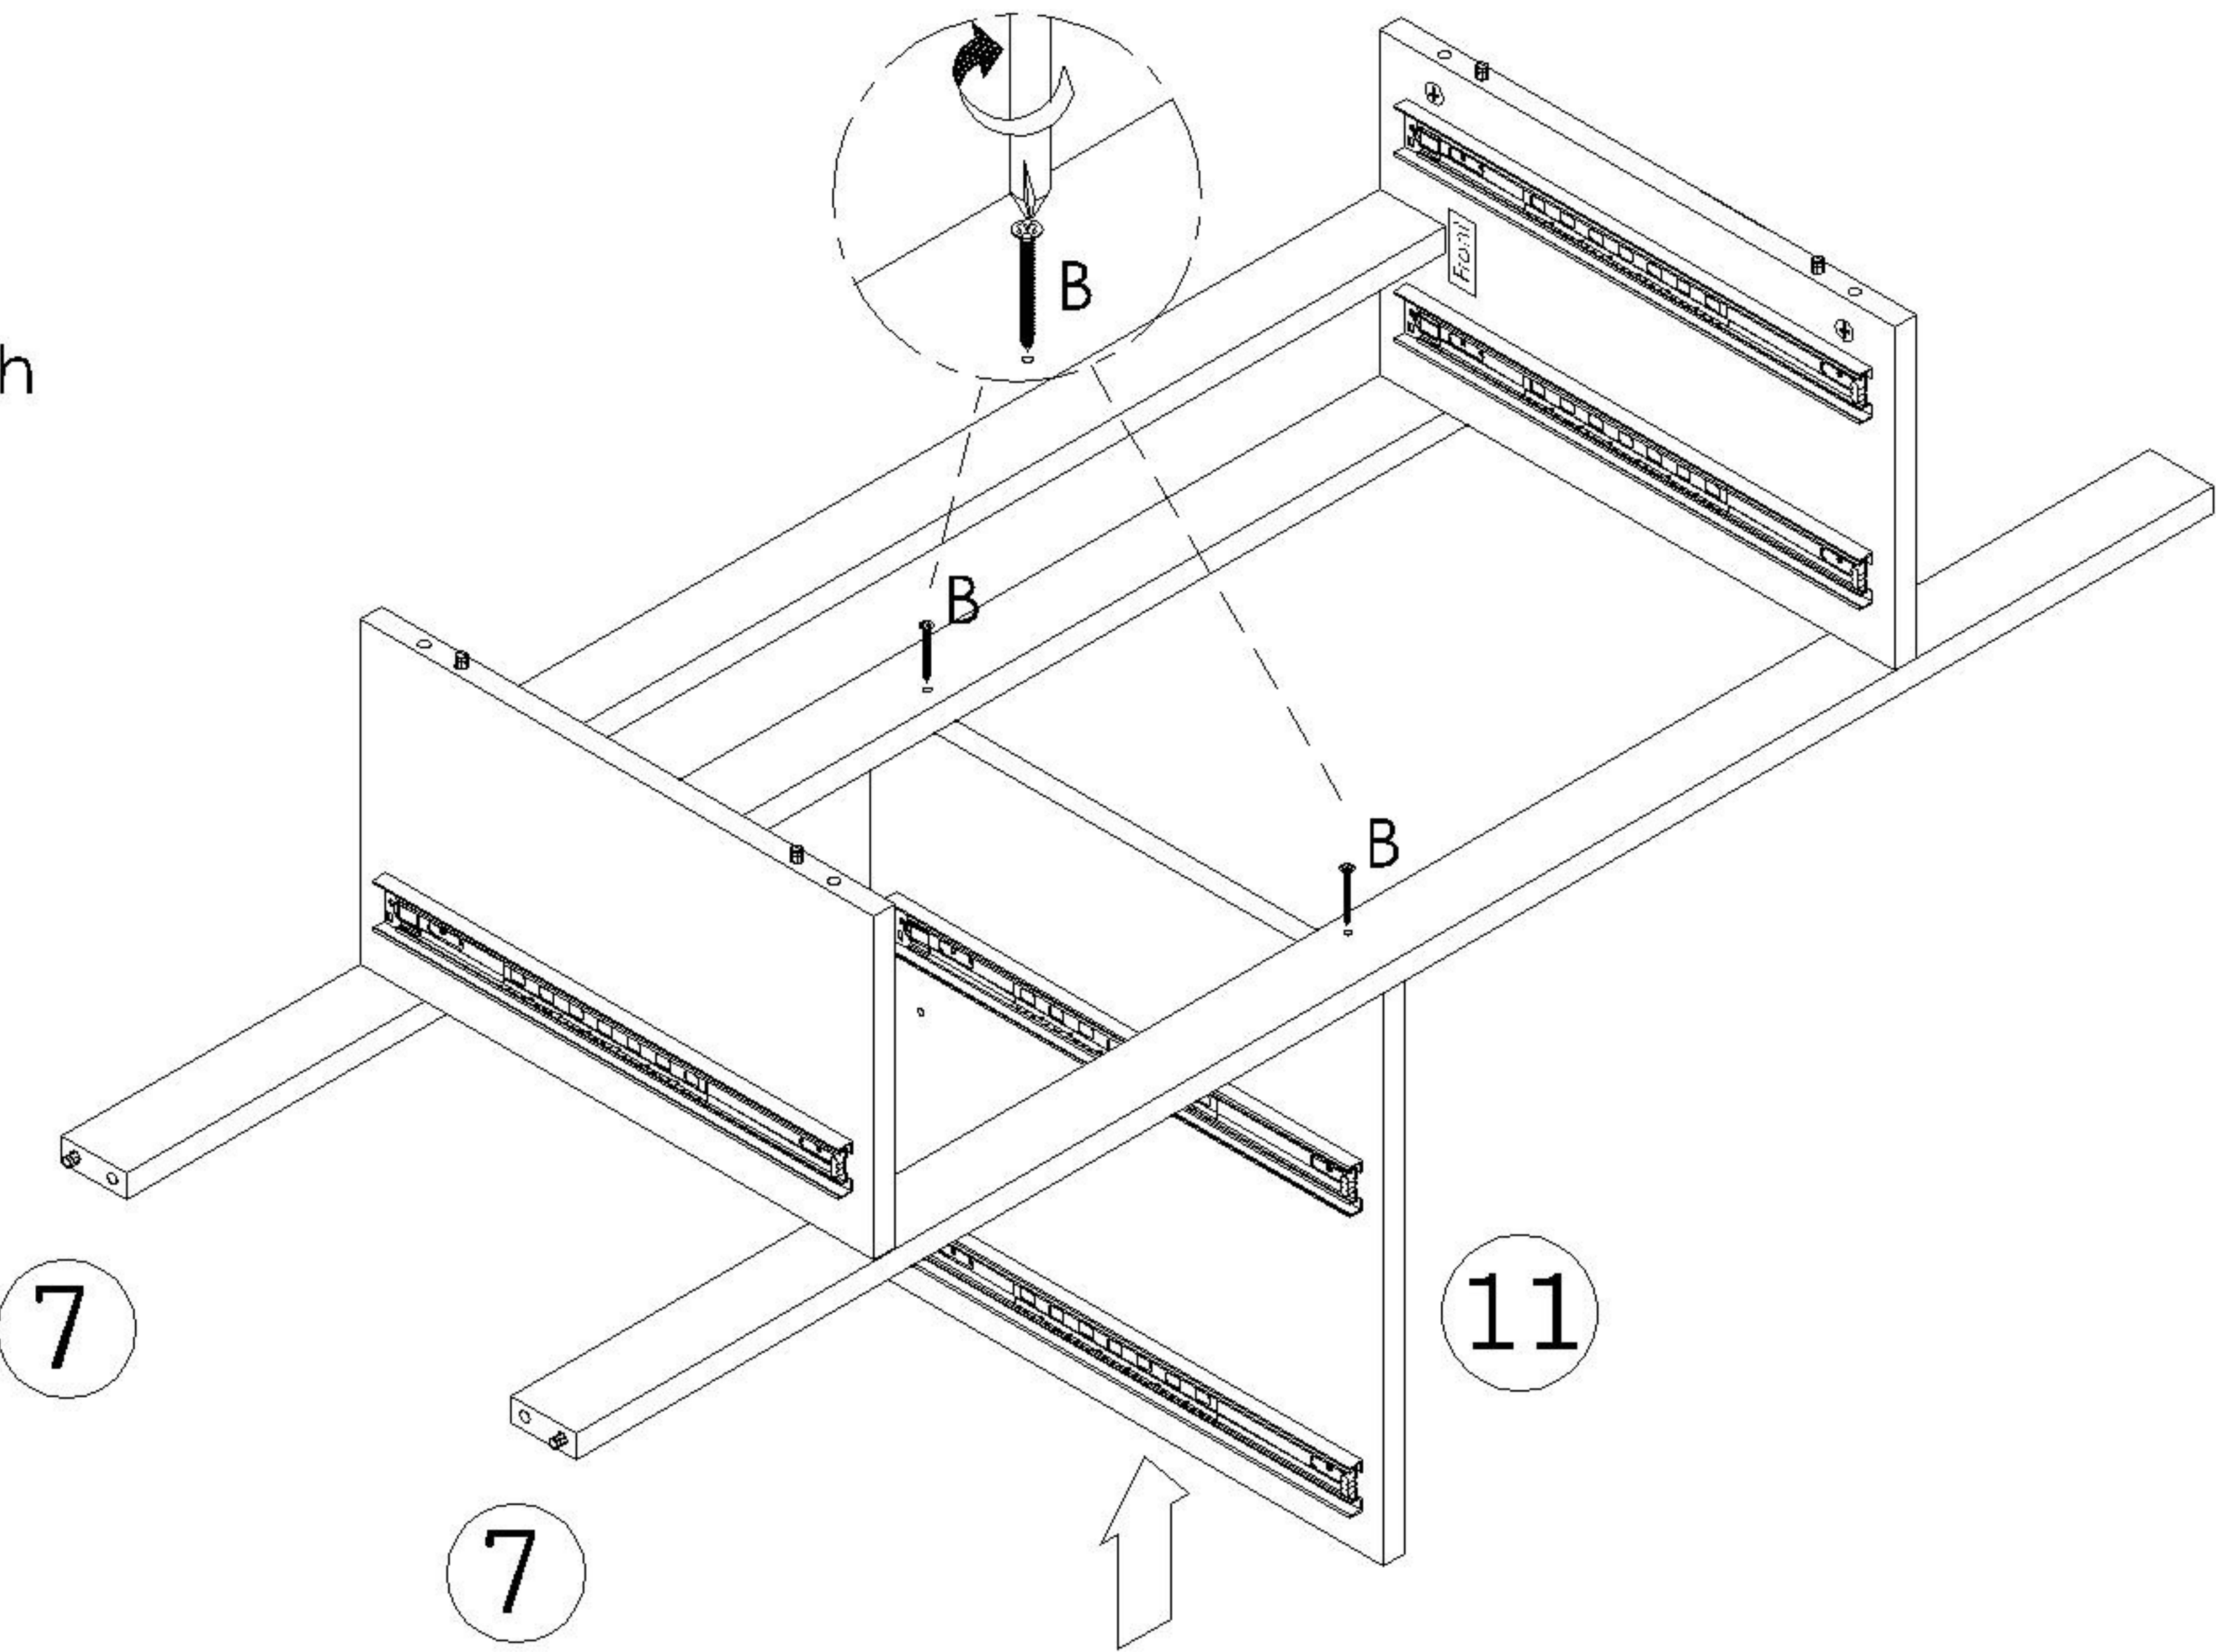


STEP 16

- A) Attach both Bottom Bar(8) to Big Partition(11) and secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)

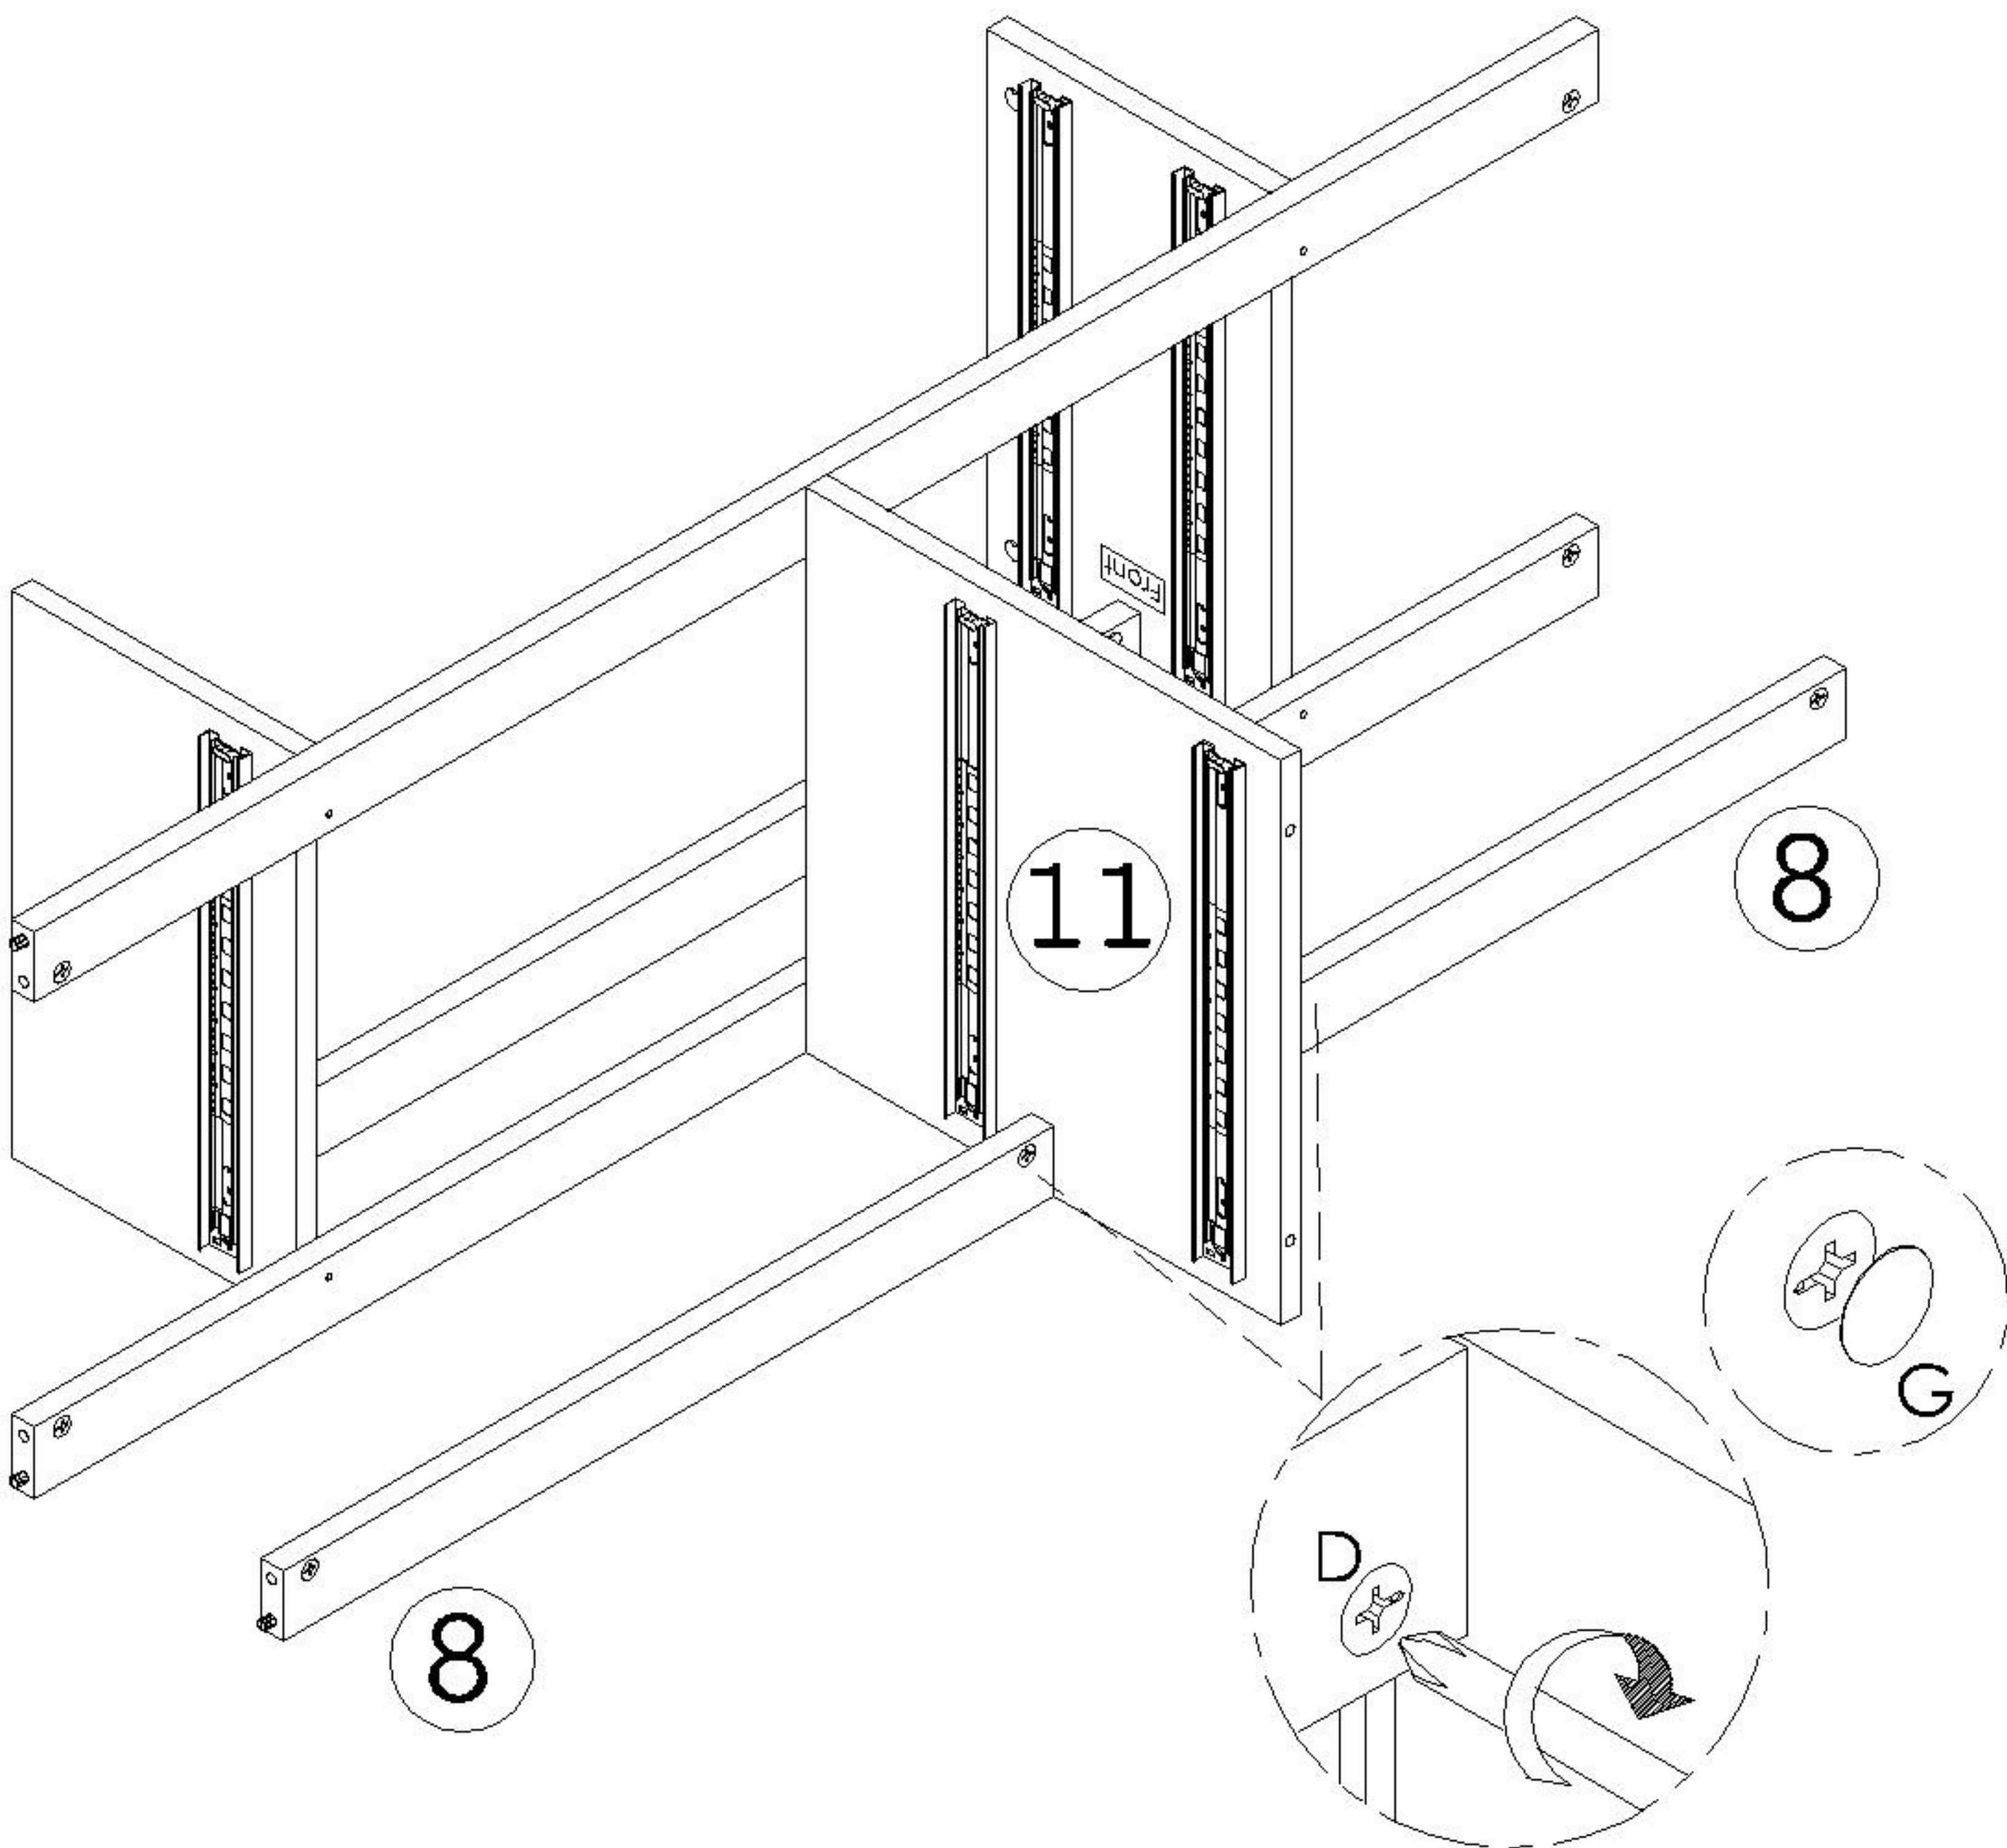


STEP 17

- A) Attach Center Bar,Bottom Bar(7,8) to Left,Right Side Panel(2,3) & secure with Cam Lock(D)
- B) Using Cam Lock Cover(G) to cover Cam Lock(D)

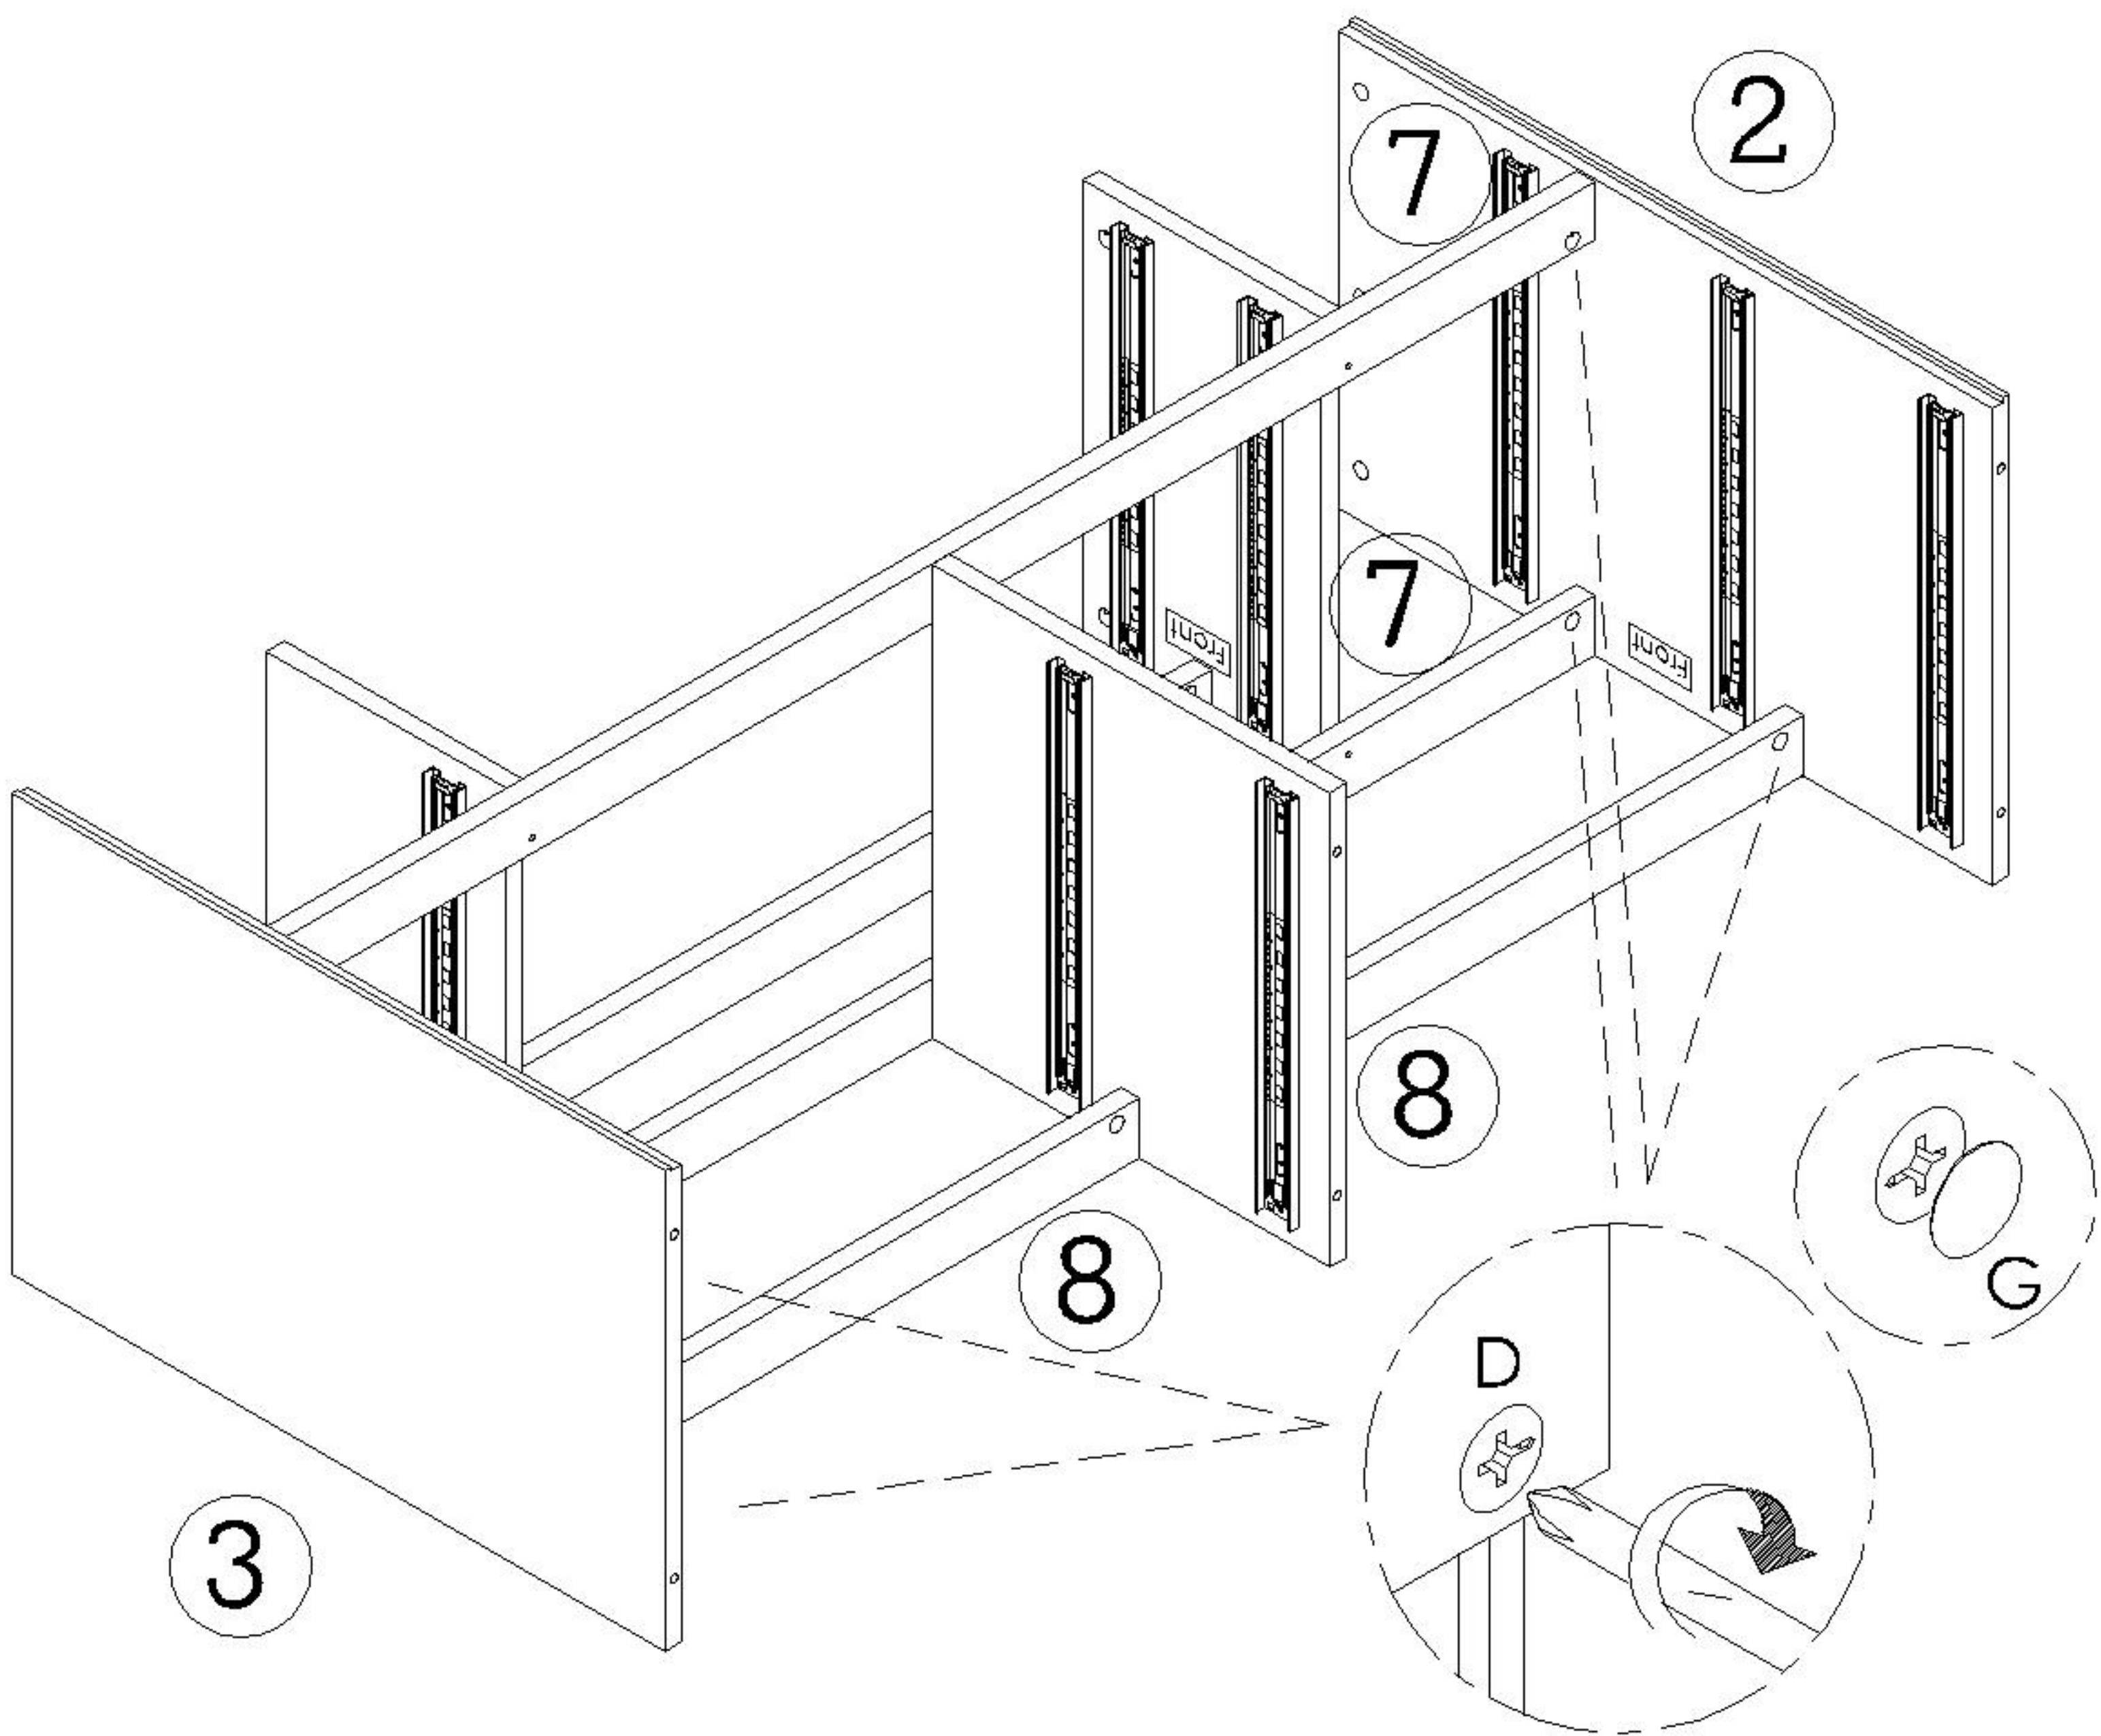


STEP 18

- A) Attach Bottom Frame(4) to underneath of Left,Right Side Panel(2,3) & Big Partition(11) using Chipboard Screw(B) to secure

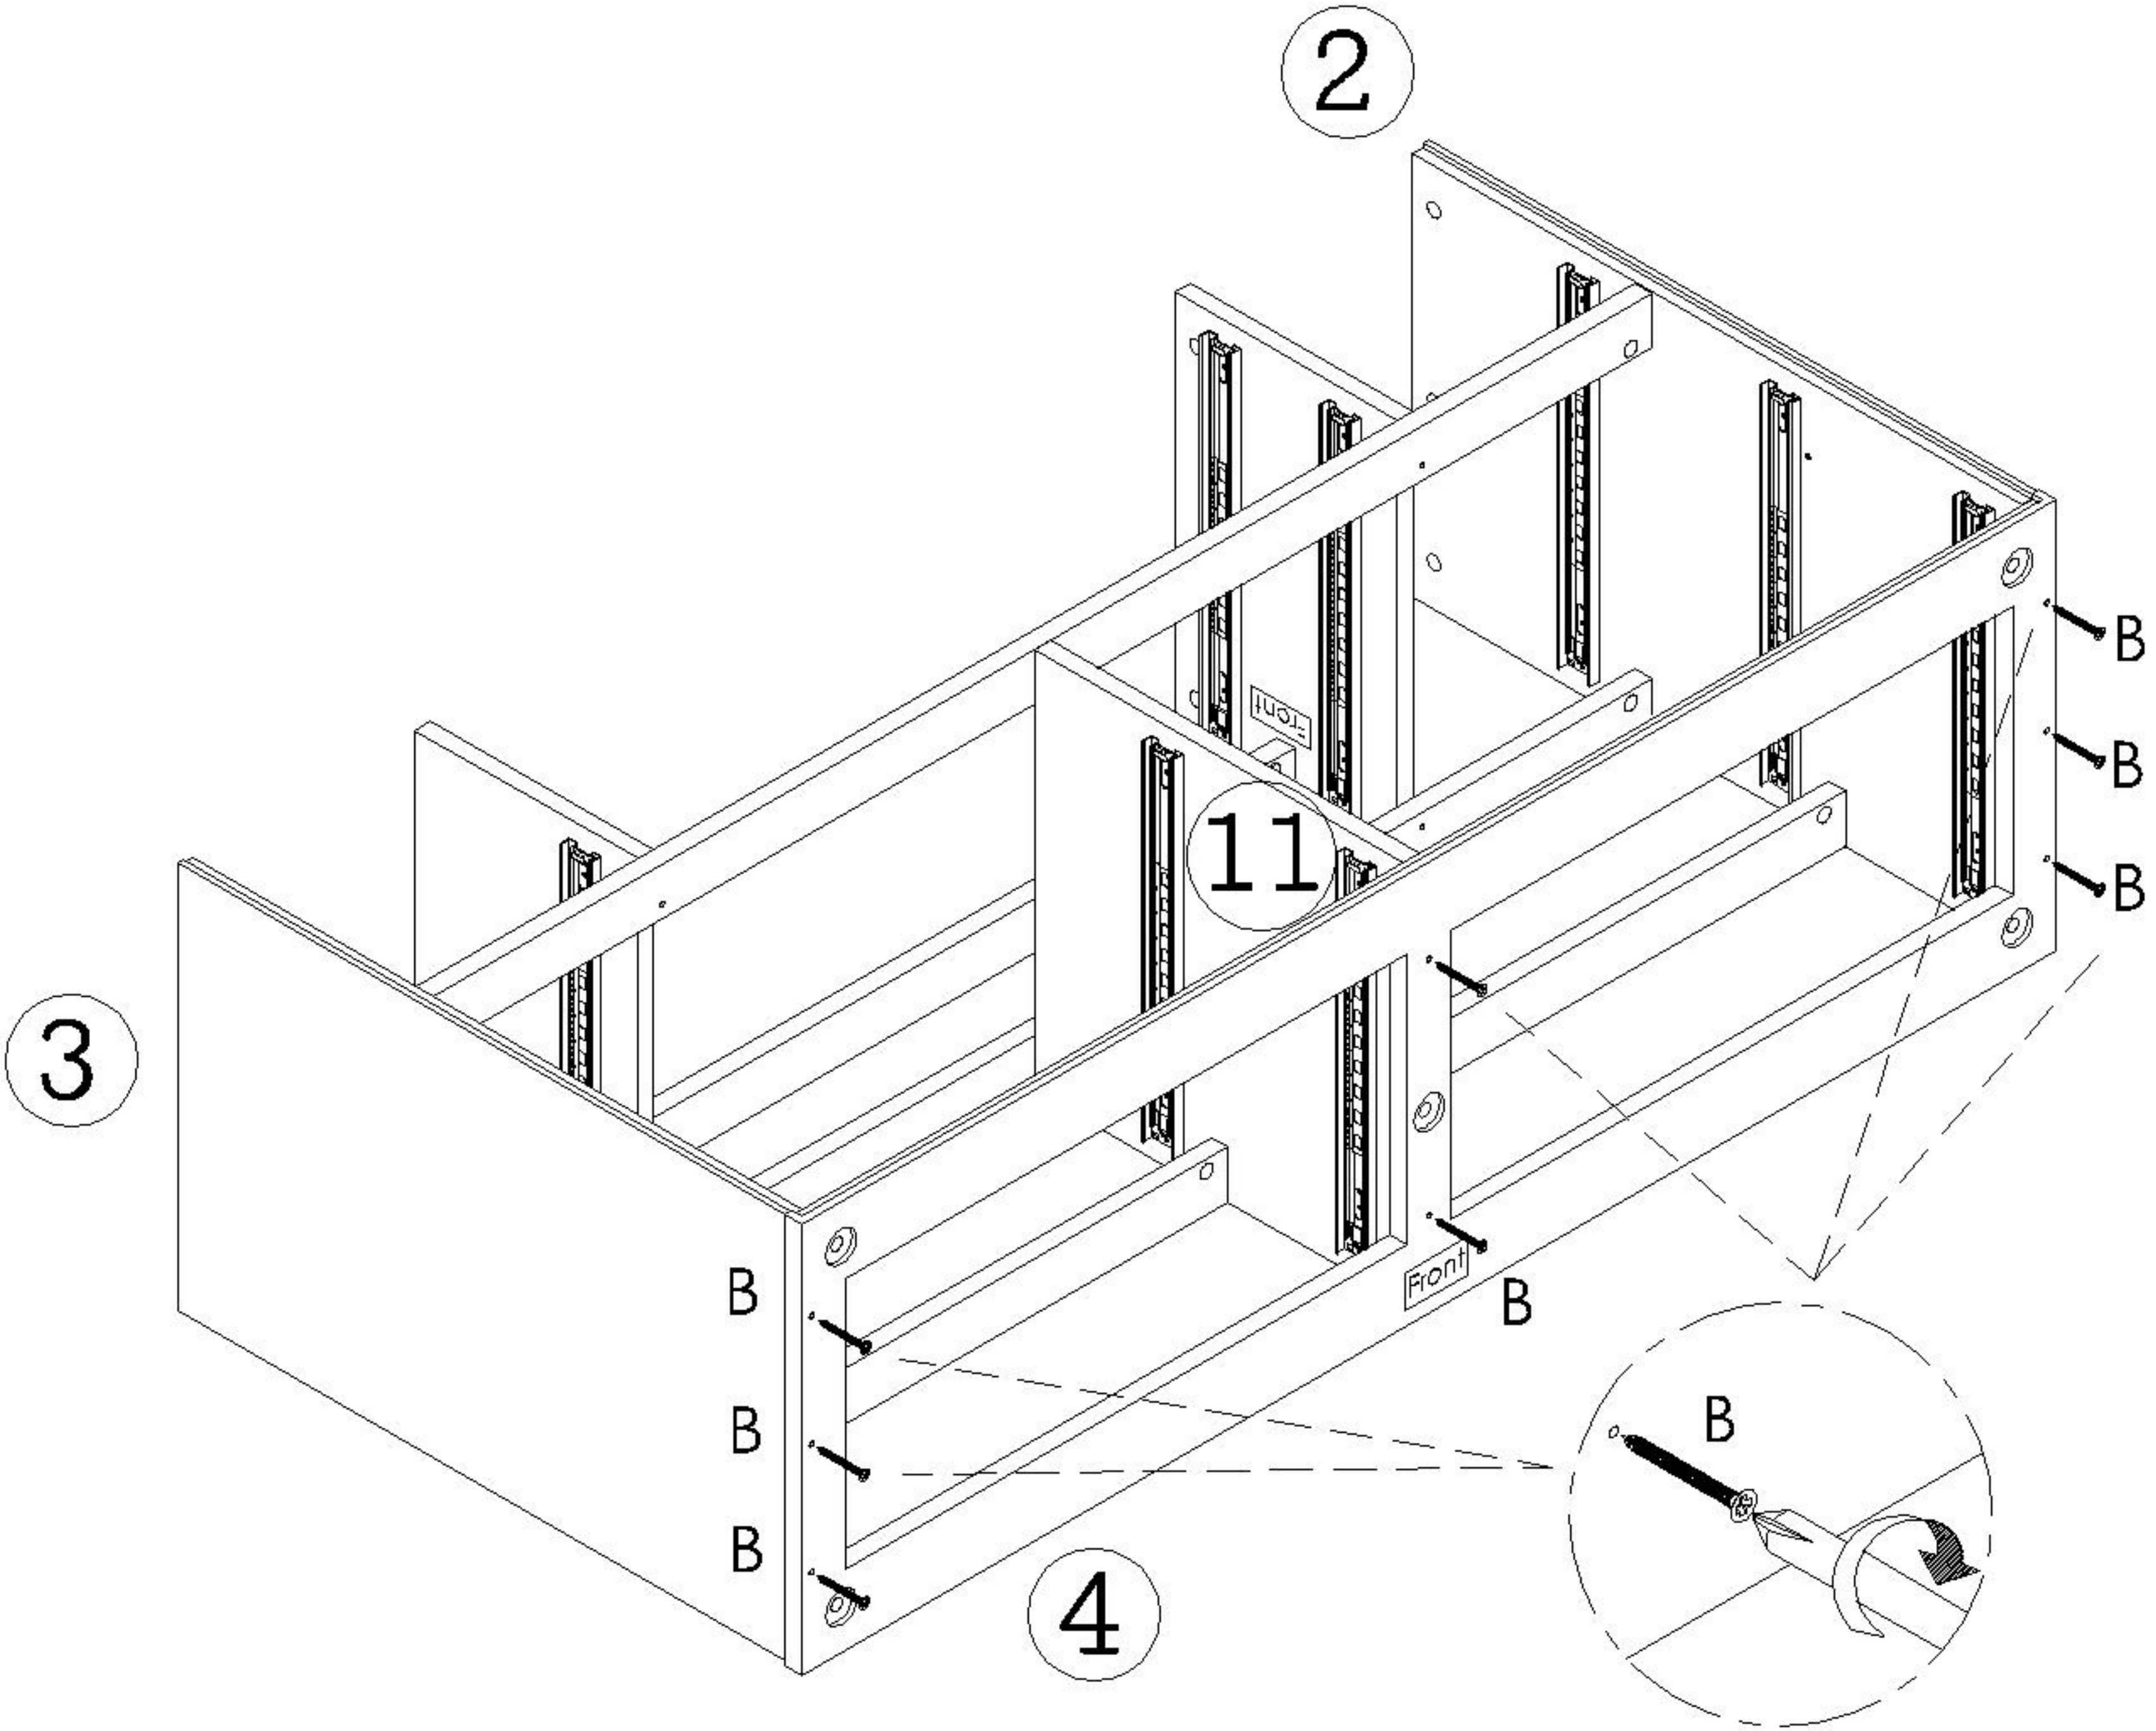


STEP 19

- A) Attach and secure Leg(6) to Bottom Frame(4) clockwise

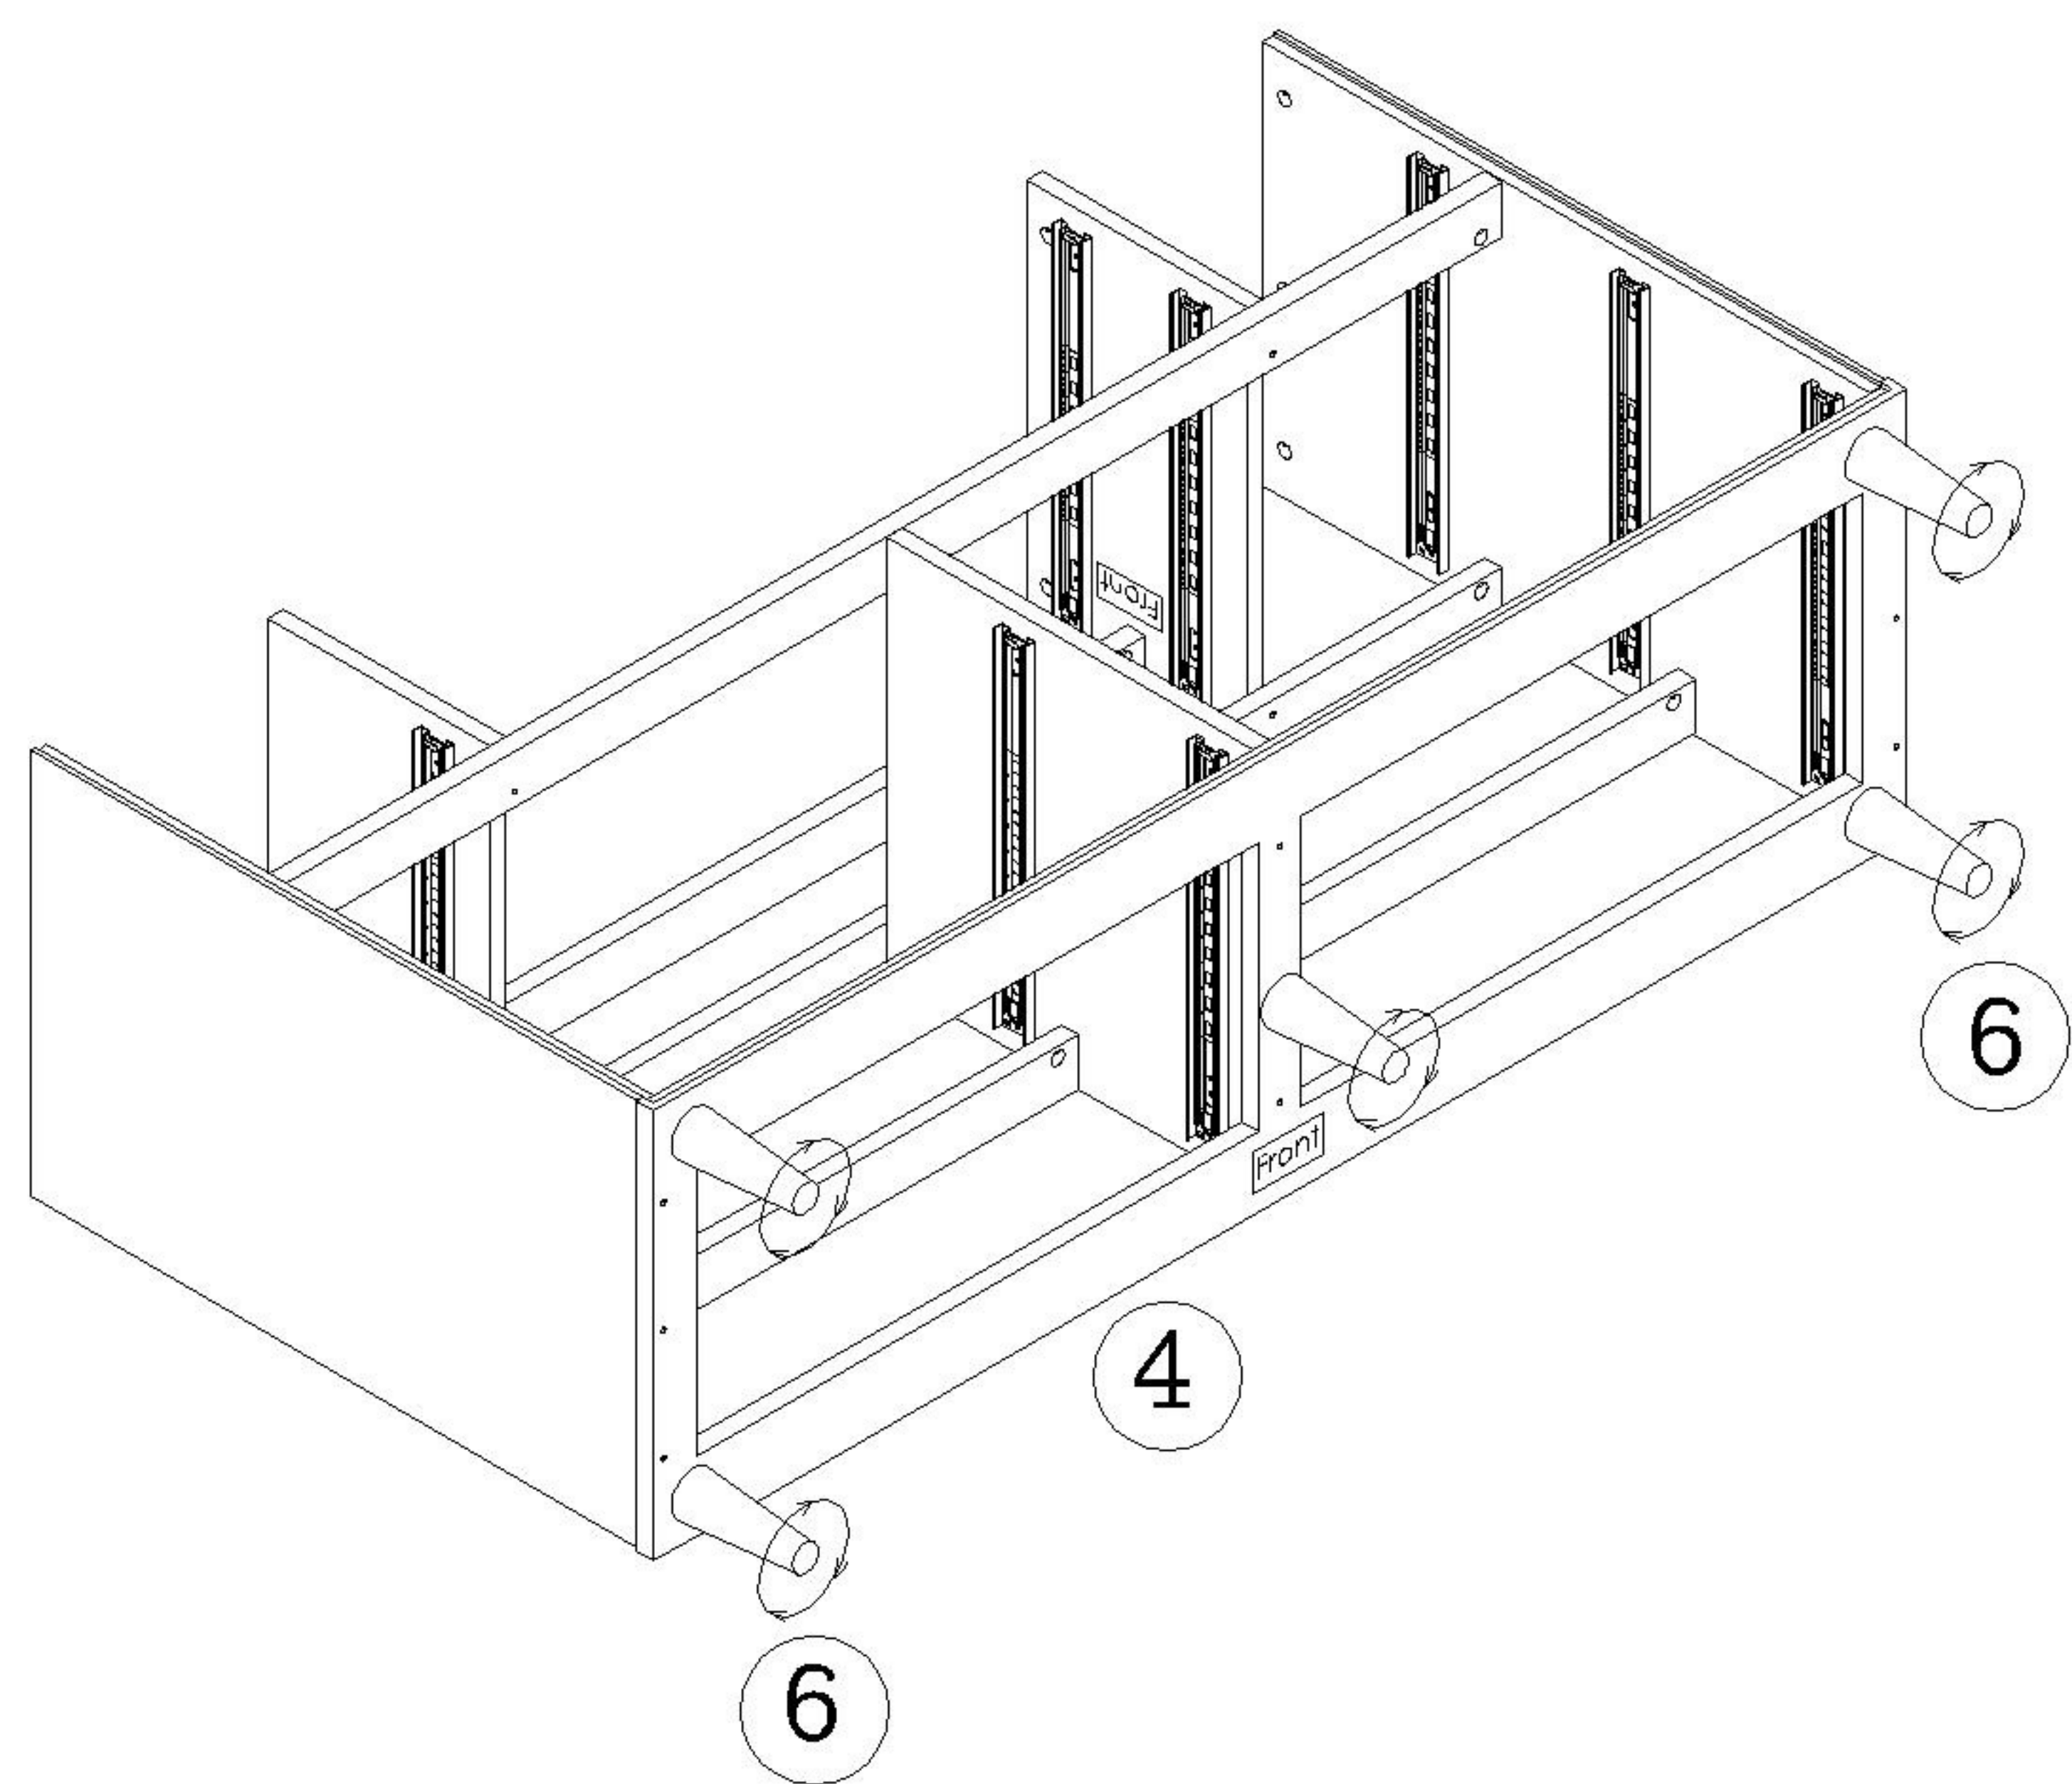


STEP 20

- A) Attach Top Panel(1) to Left,Right Side Panel(2,3) and Left,Right Partition(9,10) secure with Cam Lock(D)
- B) Cover Cam Lock(D) with Cam Lock Cover(G)

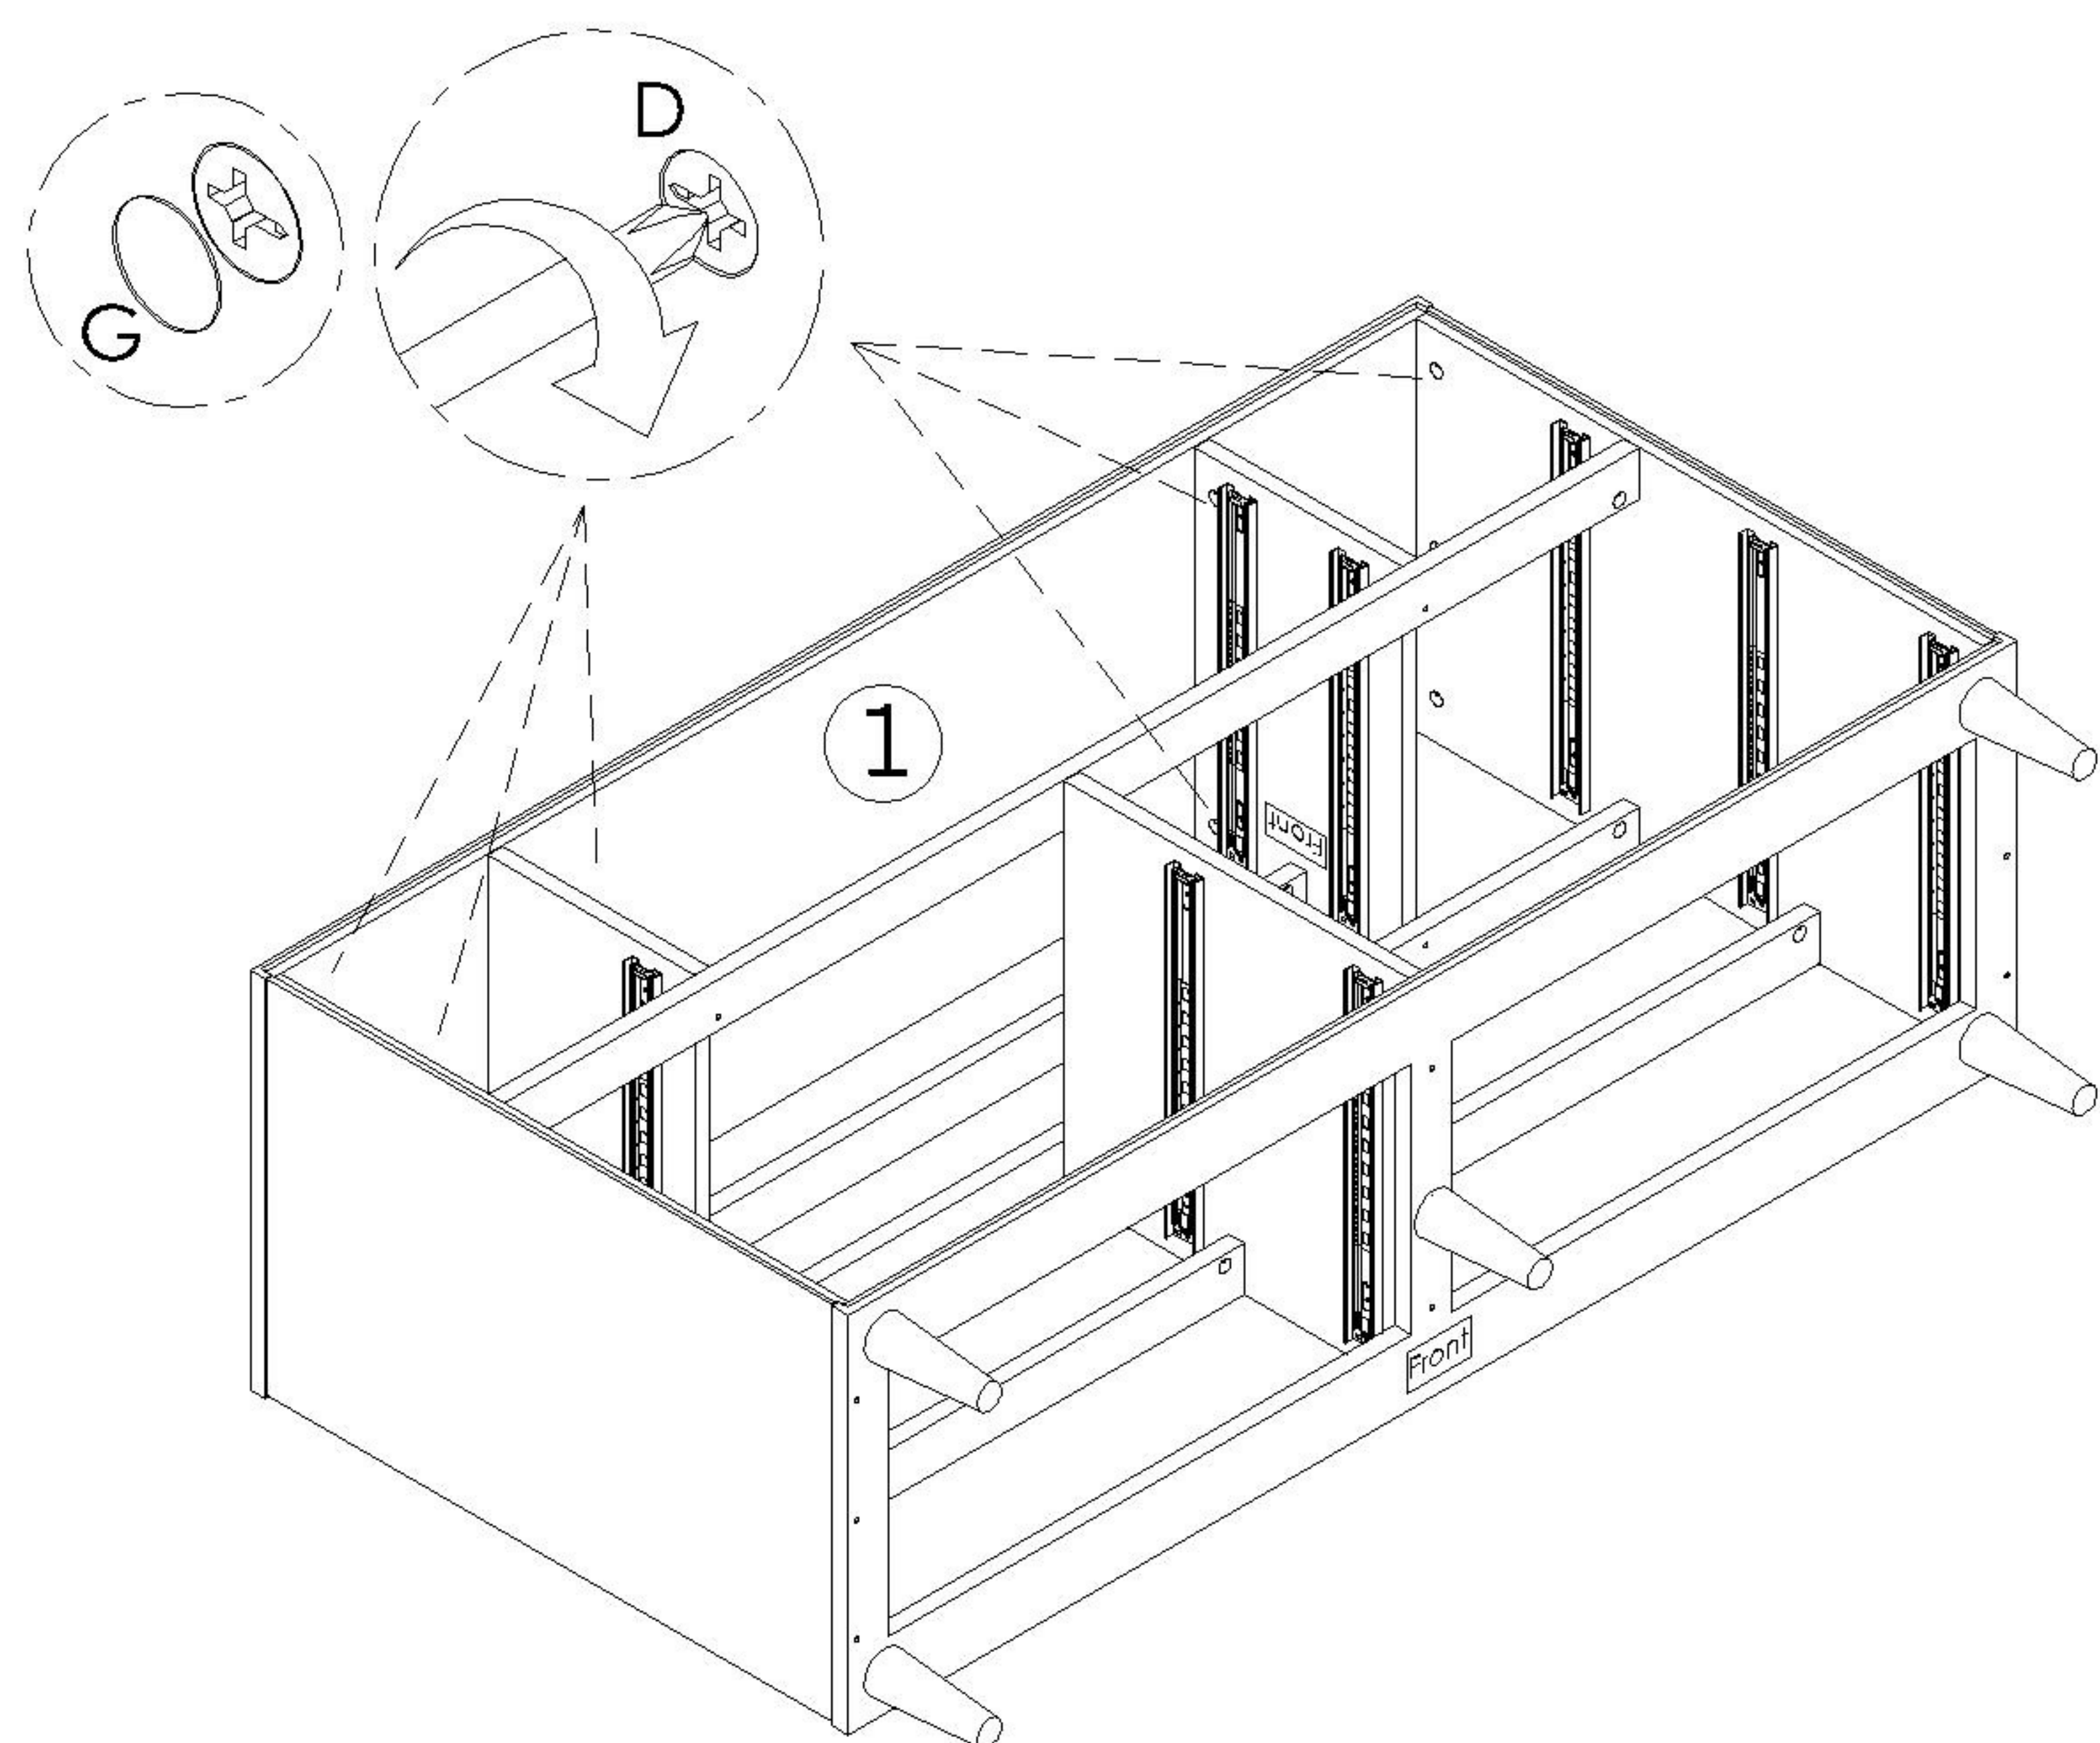

STEP 21


- A) Attach Back Plywood(12) to assembled unit using Panhead Chipboard Screw(Black)(J) to secure

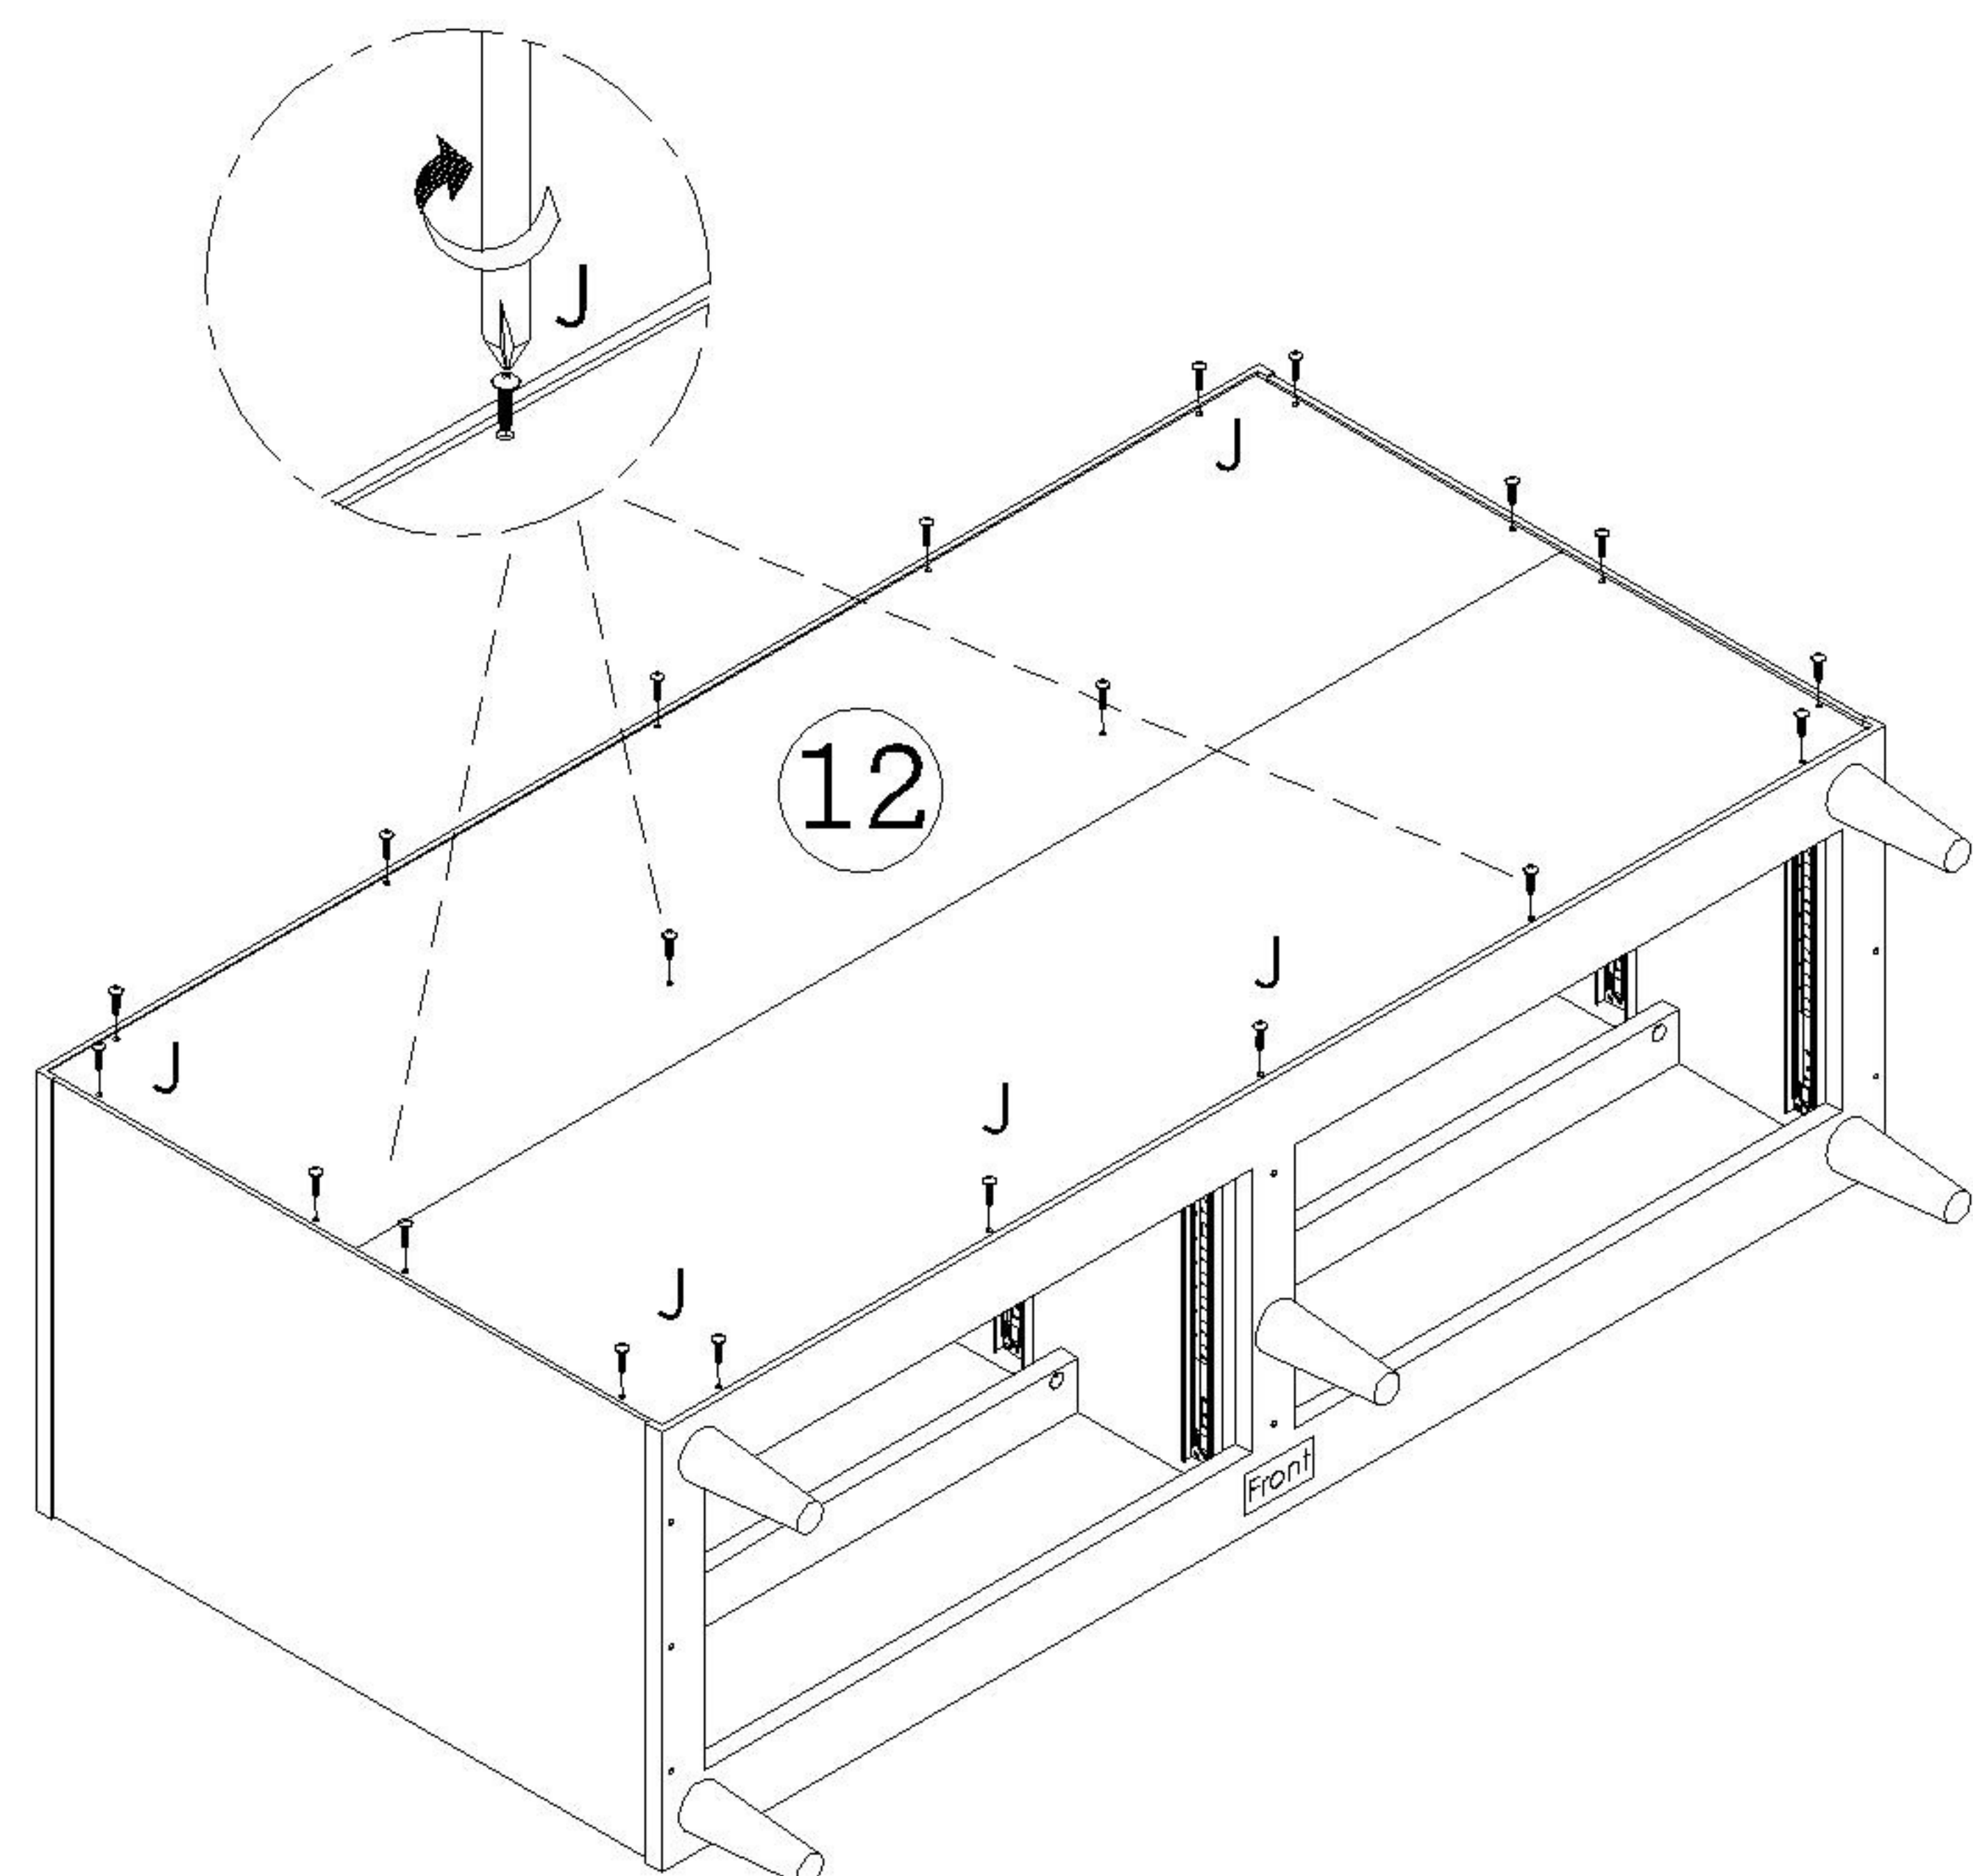

EXTENSION RUNNER ASSEMBLE STEPS:

STEP 22A


- i) Pull Out Metal Chrome Plate on both sides of runner

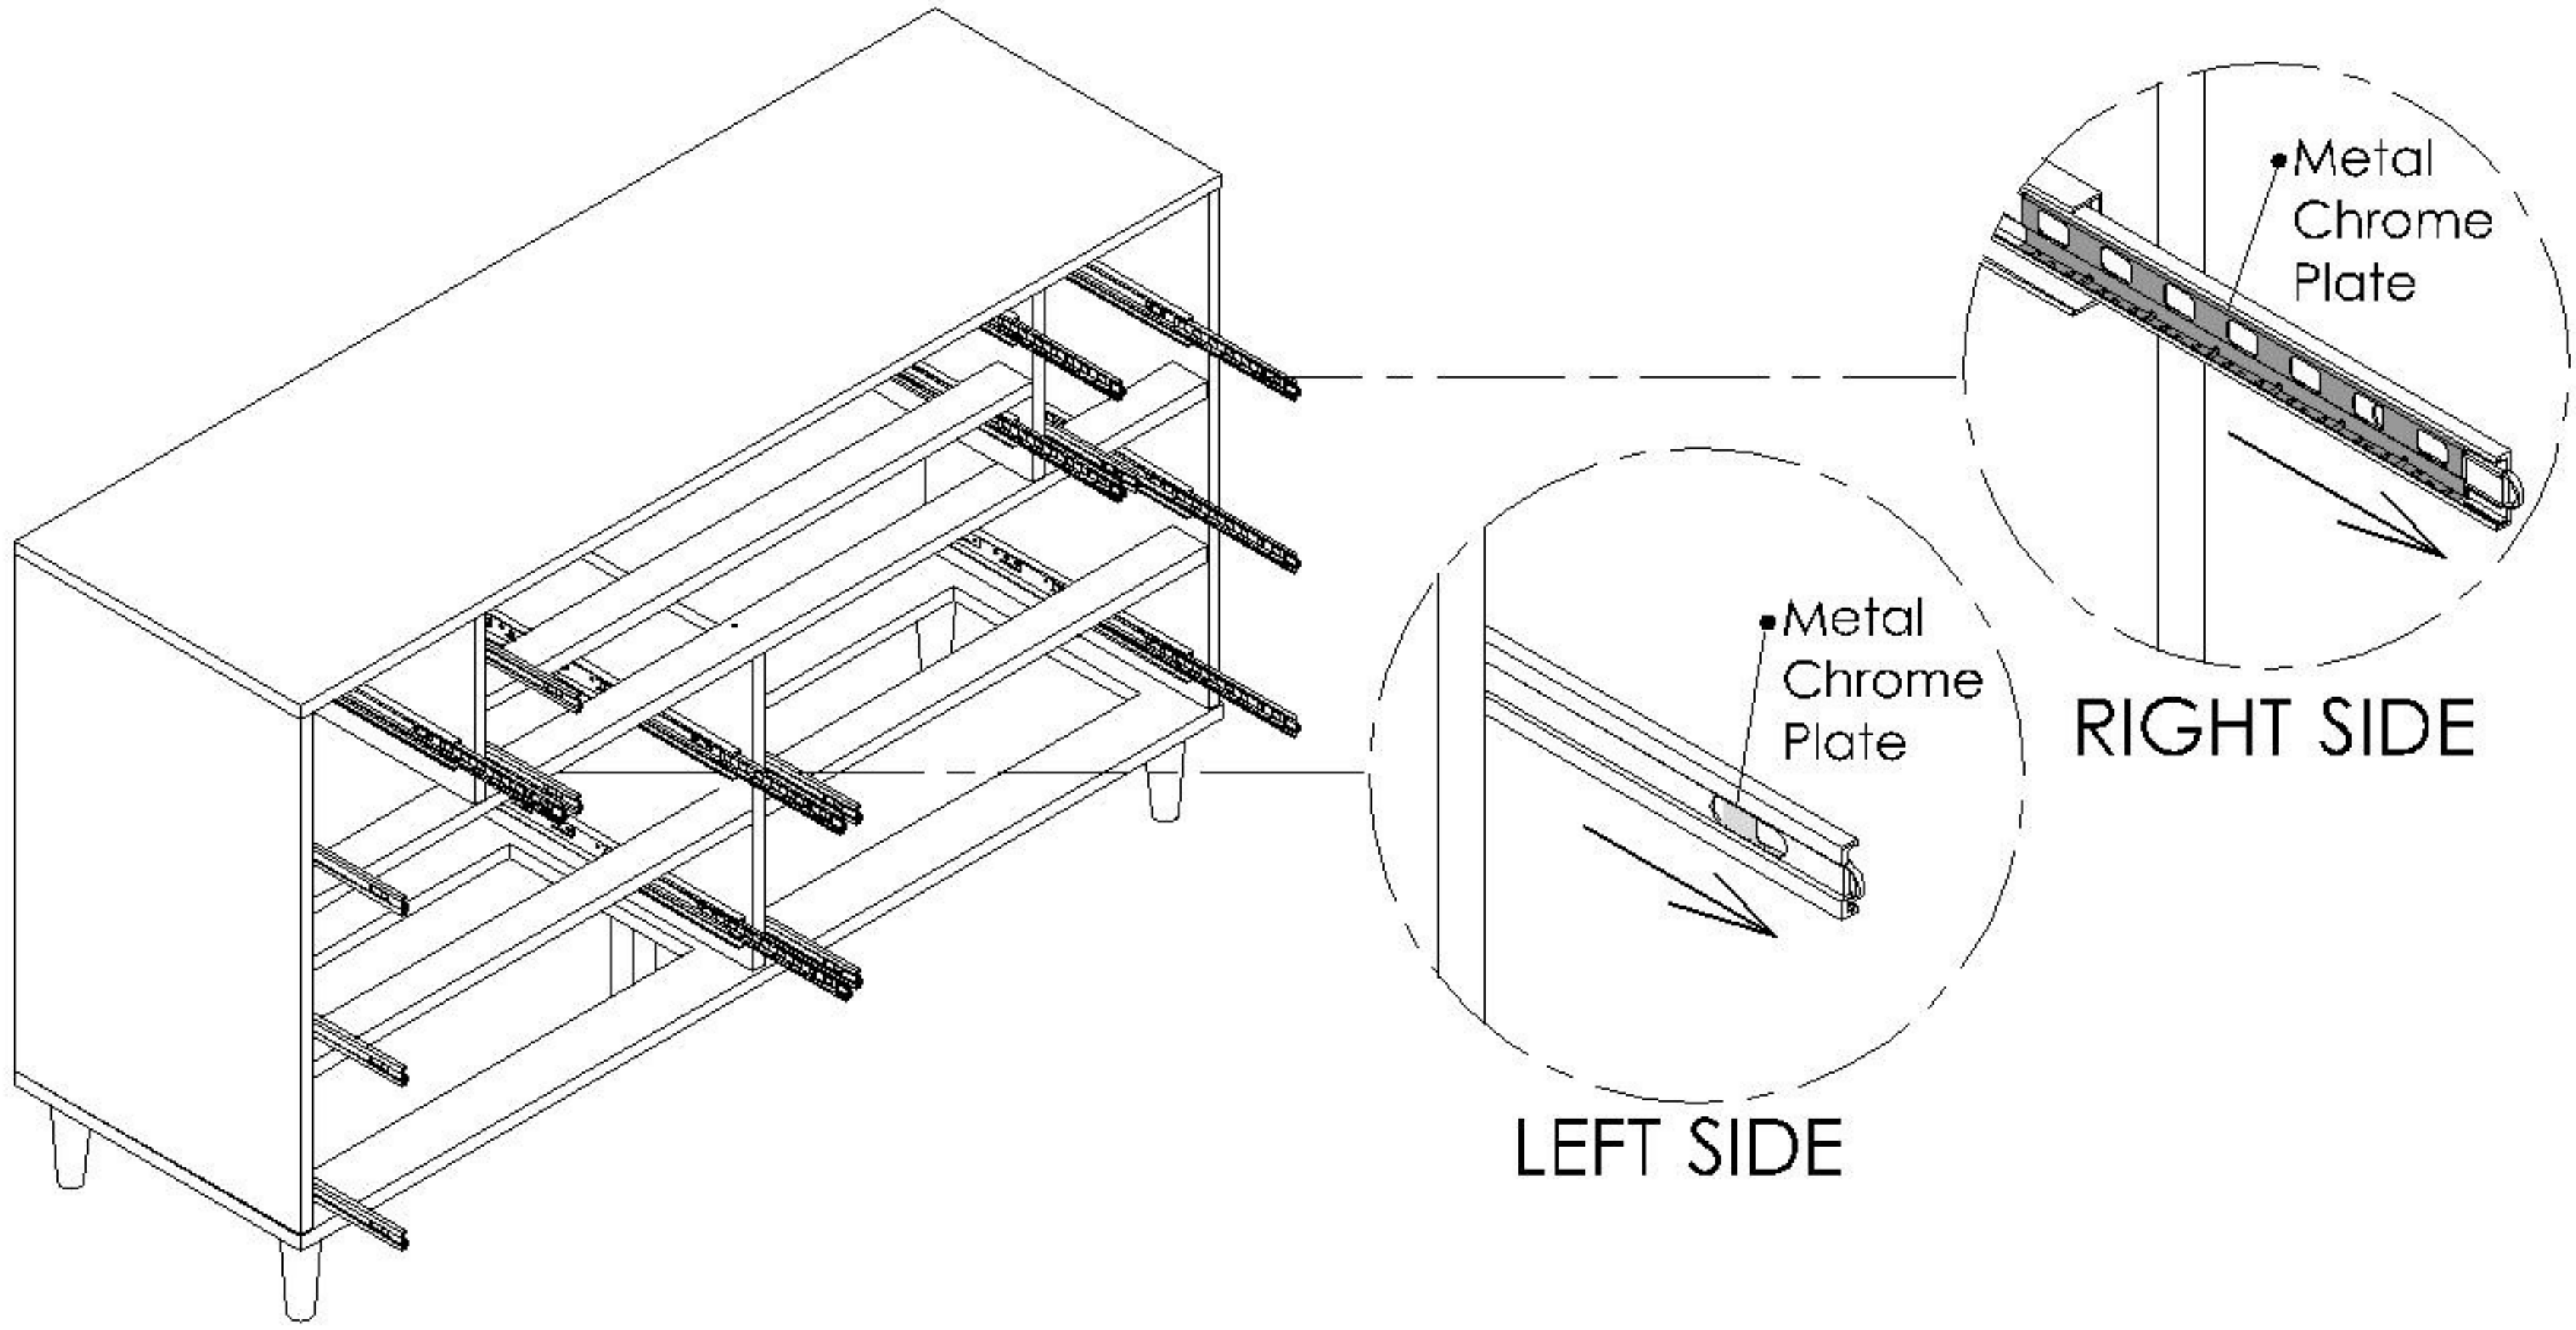

STEP 22B


- i) Align Metal Chrome Plate and Inner Slide on one side first and thereafter on the other side. Remove & repeat if it is not aligned properly
- ii) Slowly push the drawer box into the metal track on interior side of Side Panel

Notes : If runner is stuck on track, slightly pull/push drawer box

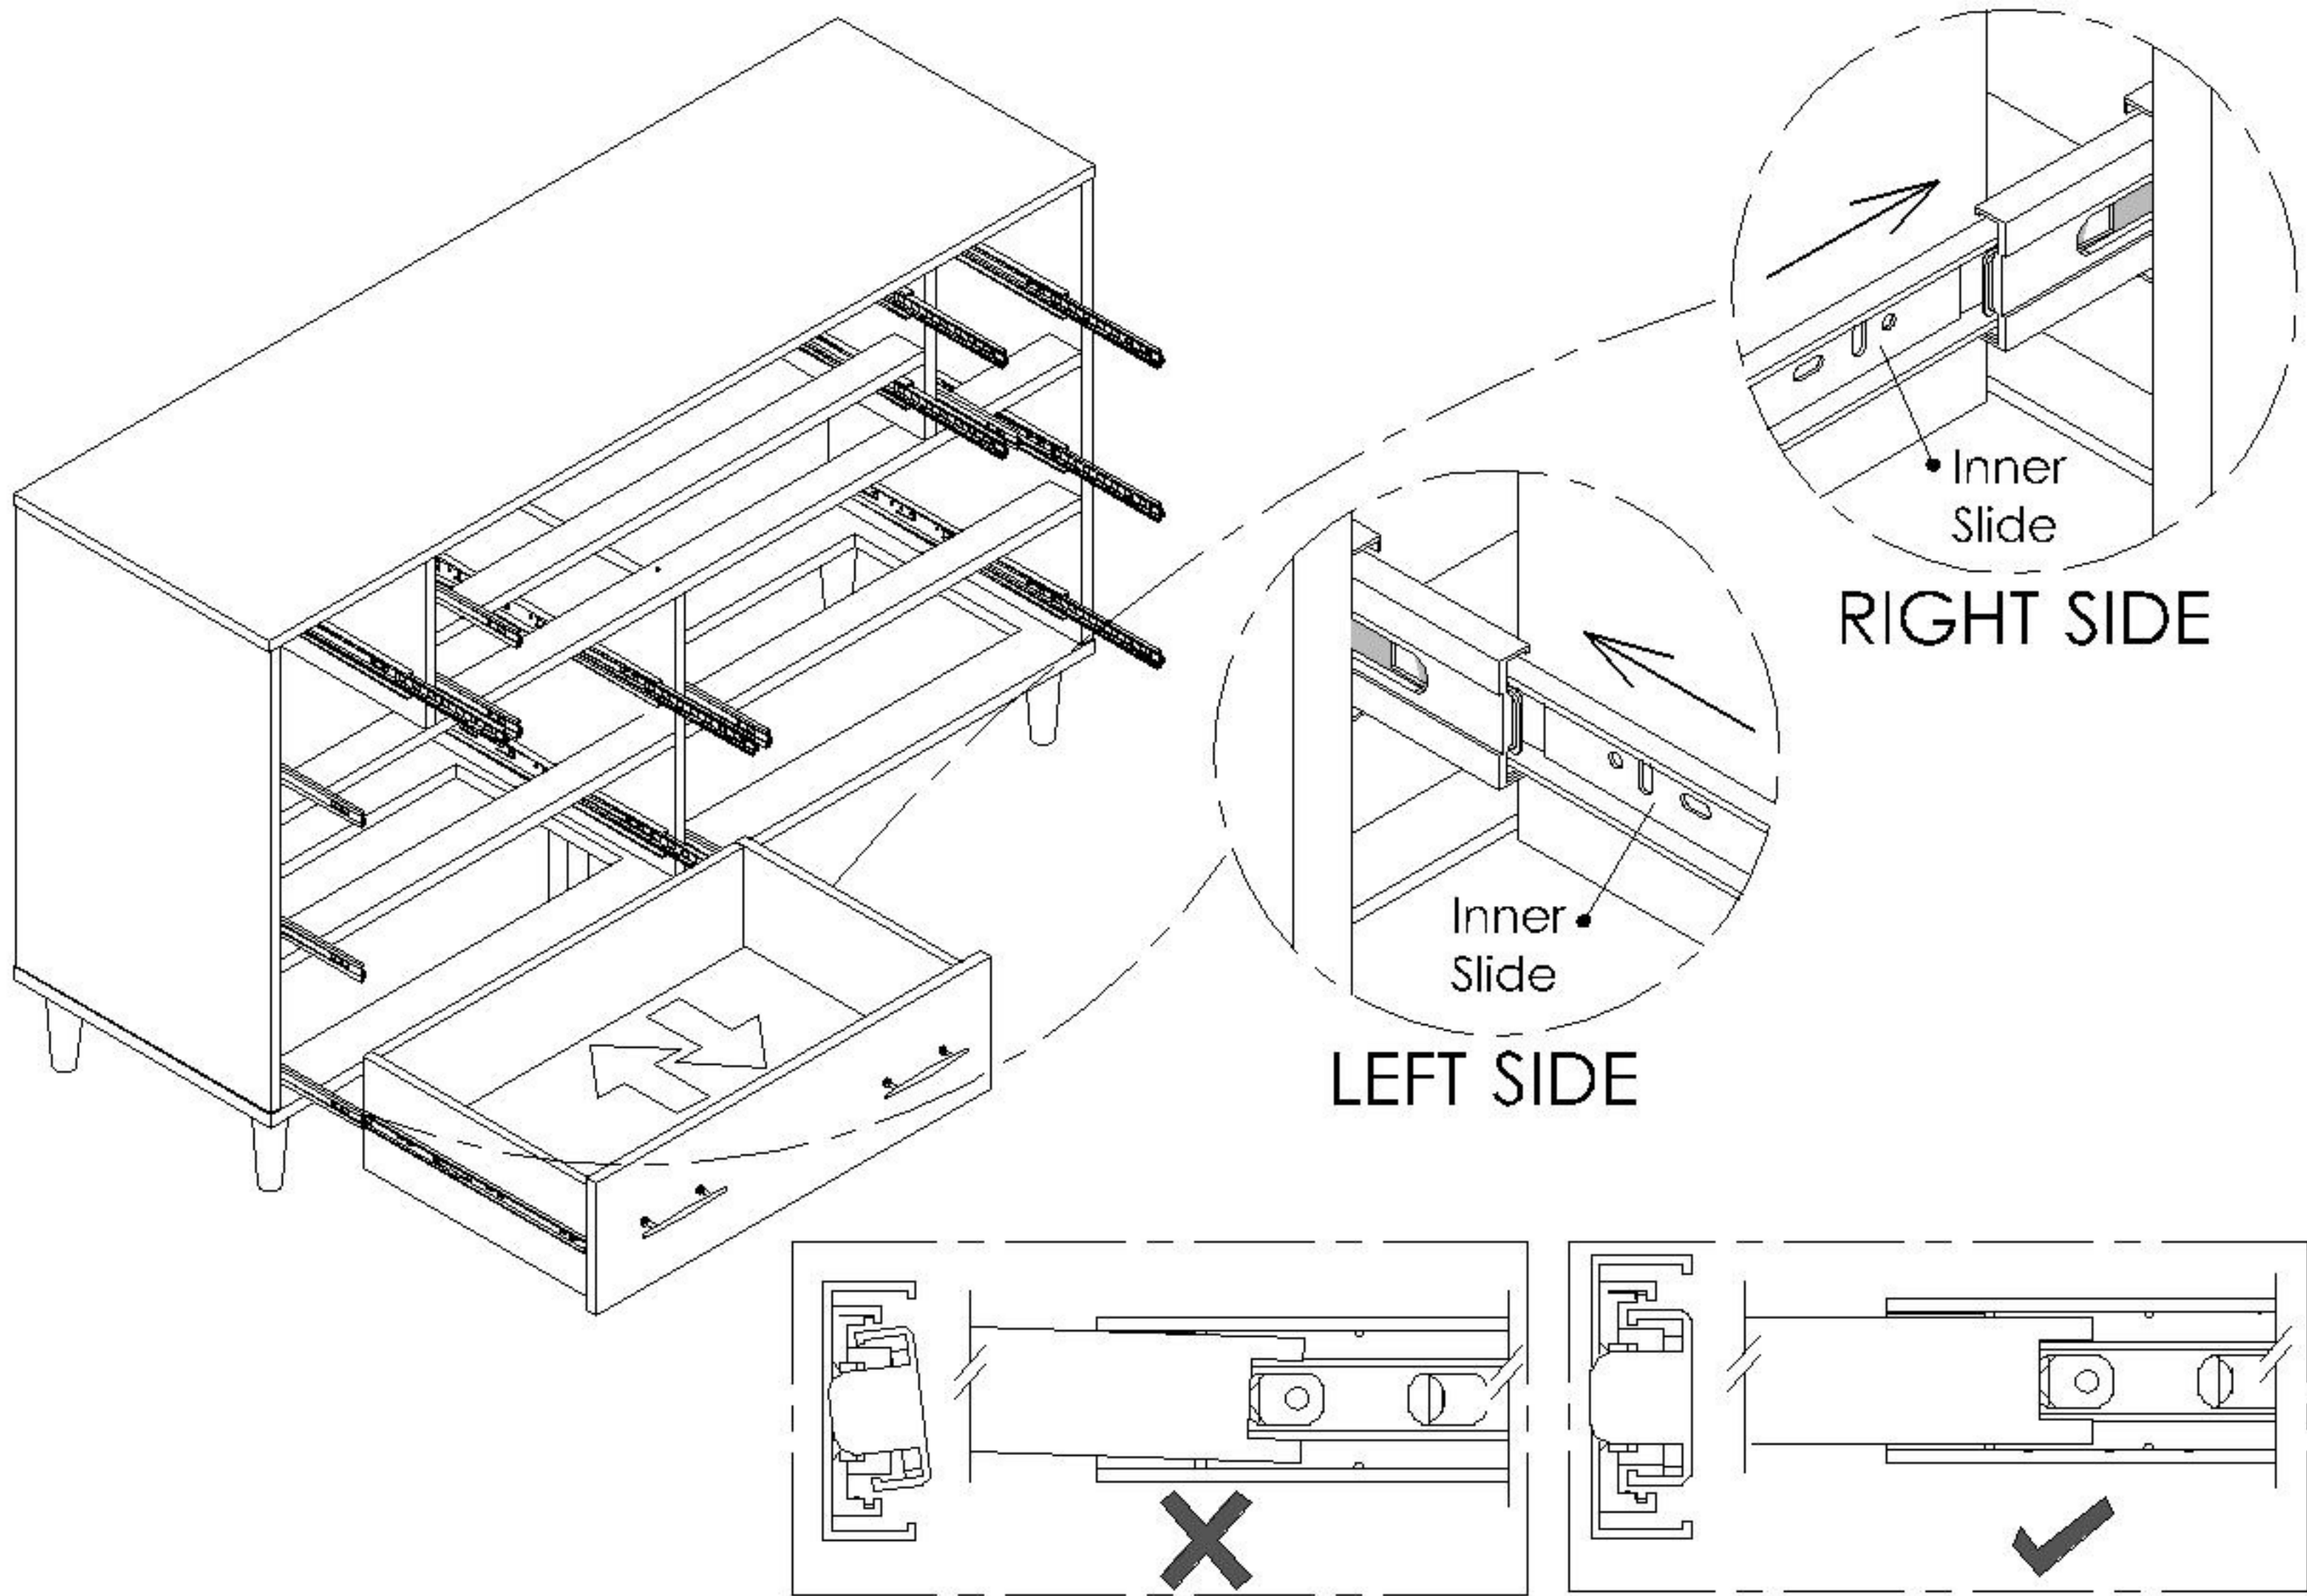


STEP 22C

- i) When both tracks are aligned properly , push the drawer box all the way in.

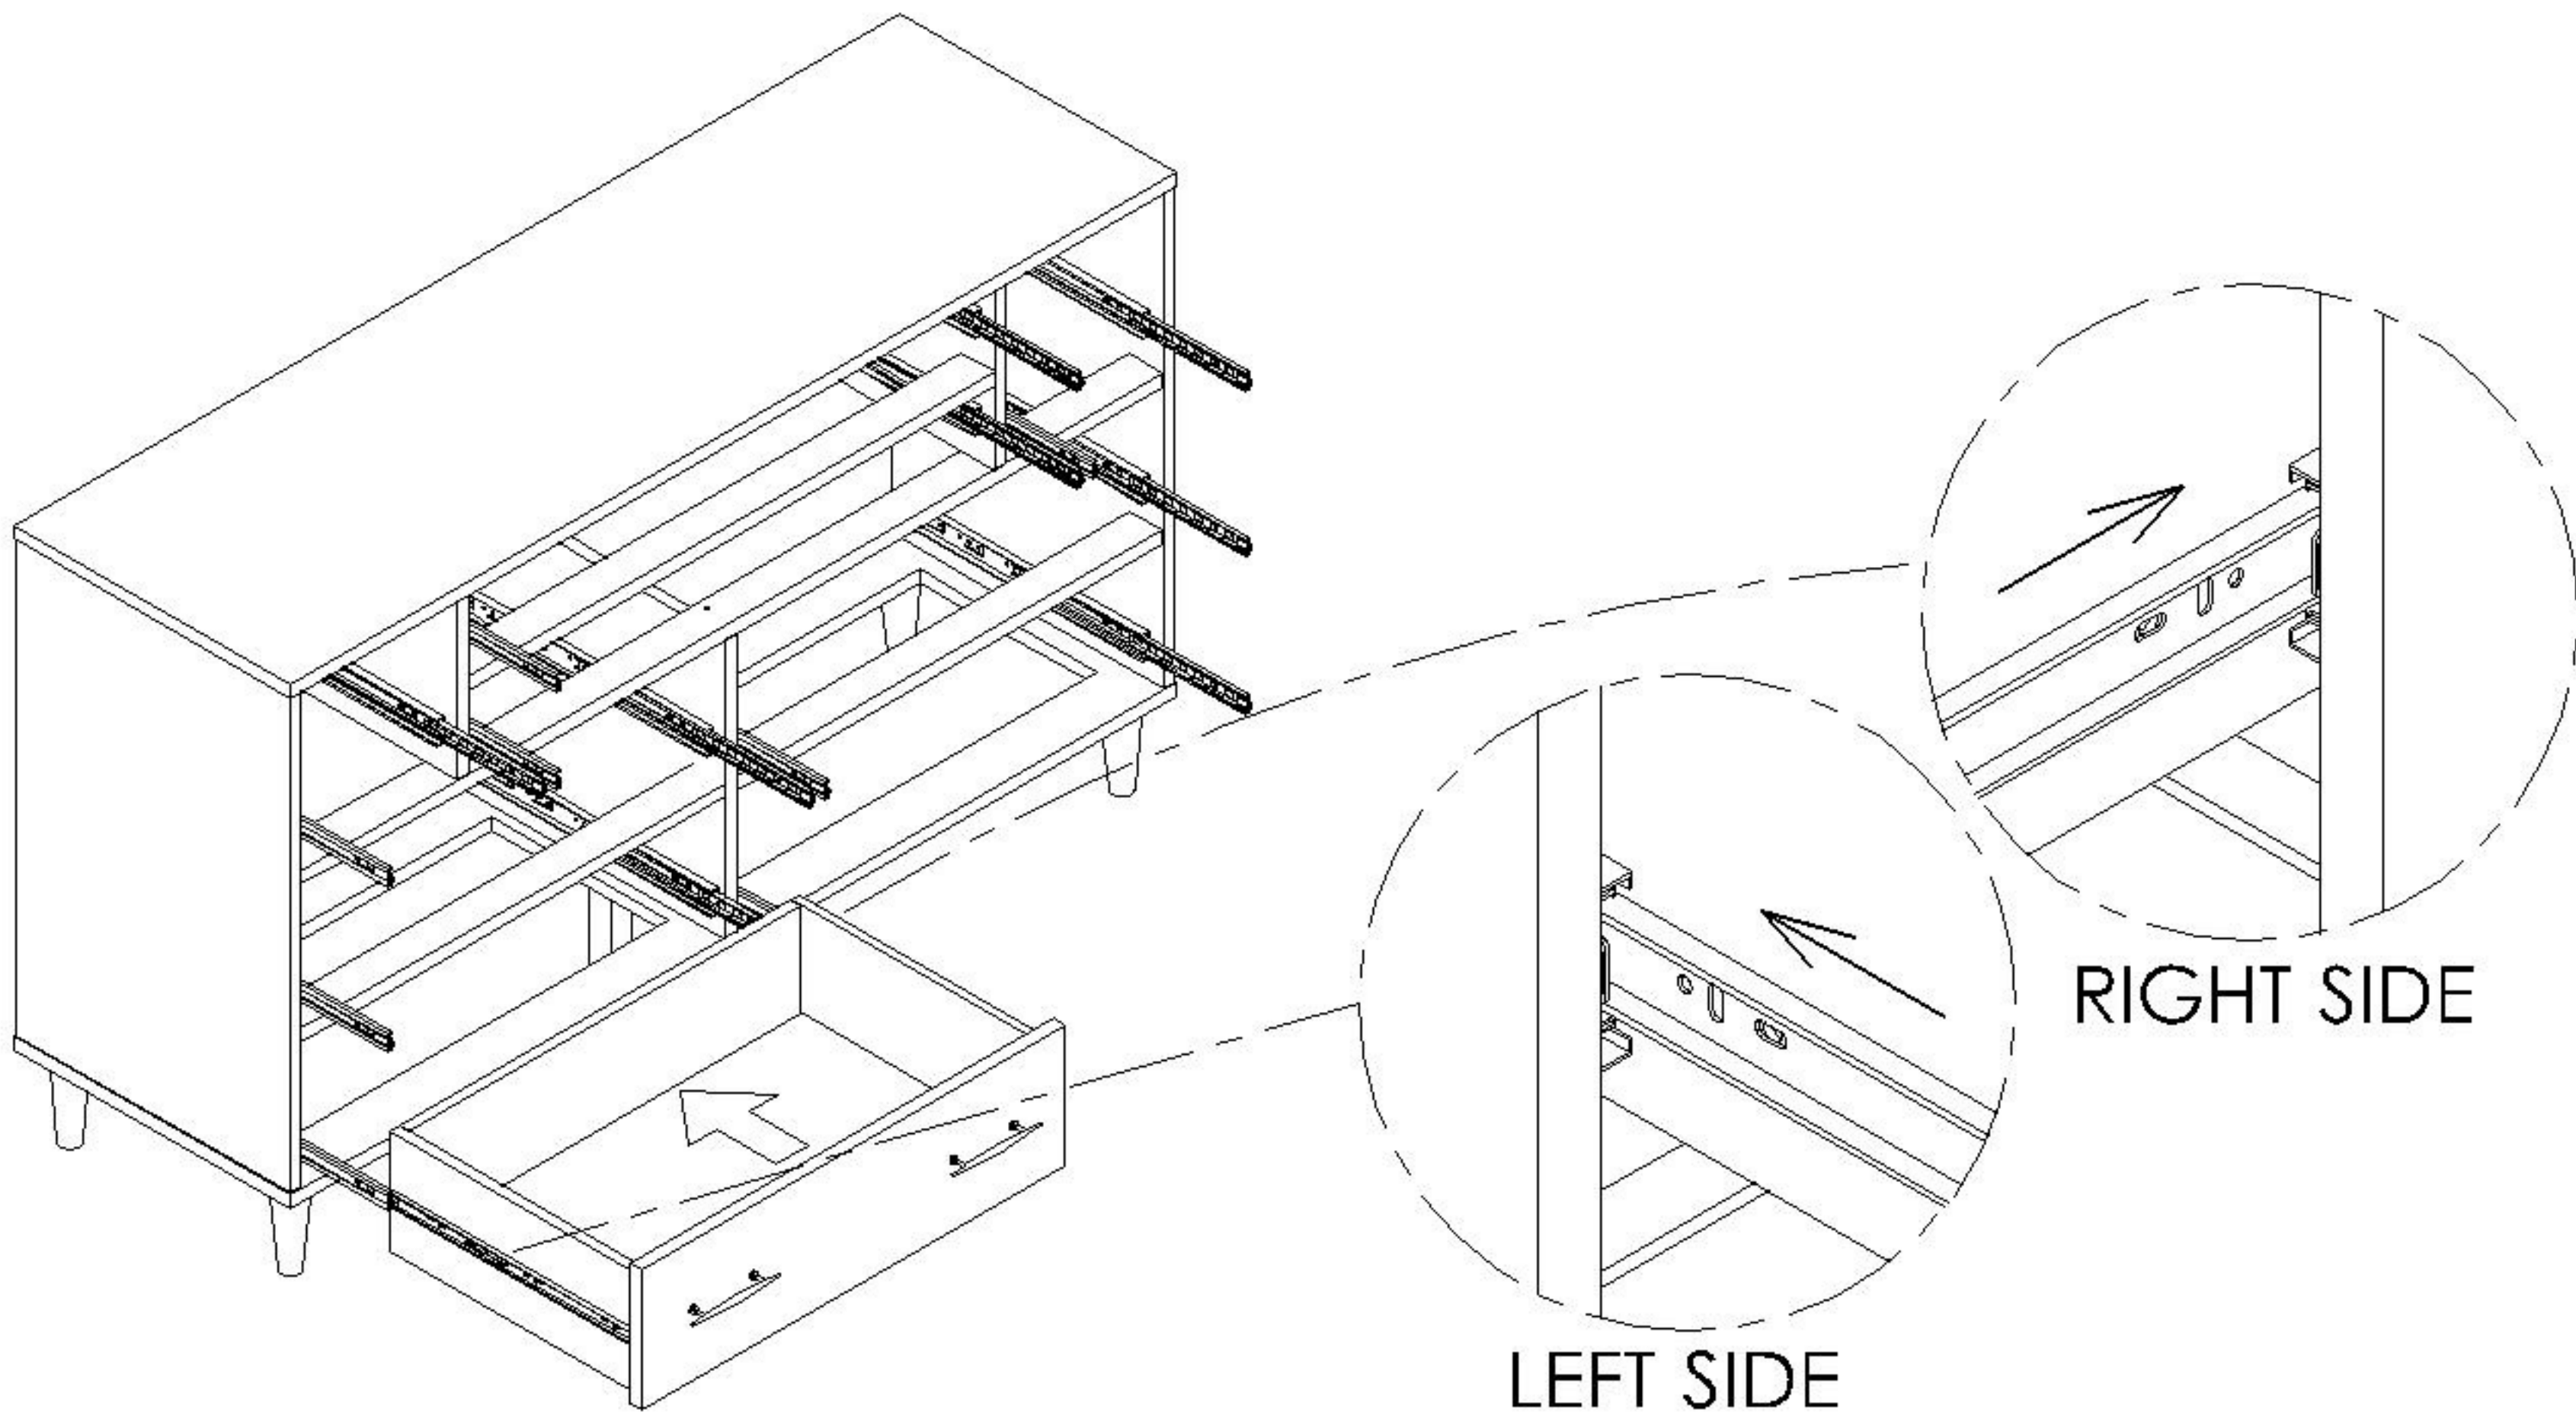

STEP 22D


- i) Drawers should assembled as follows

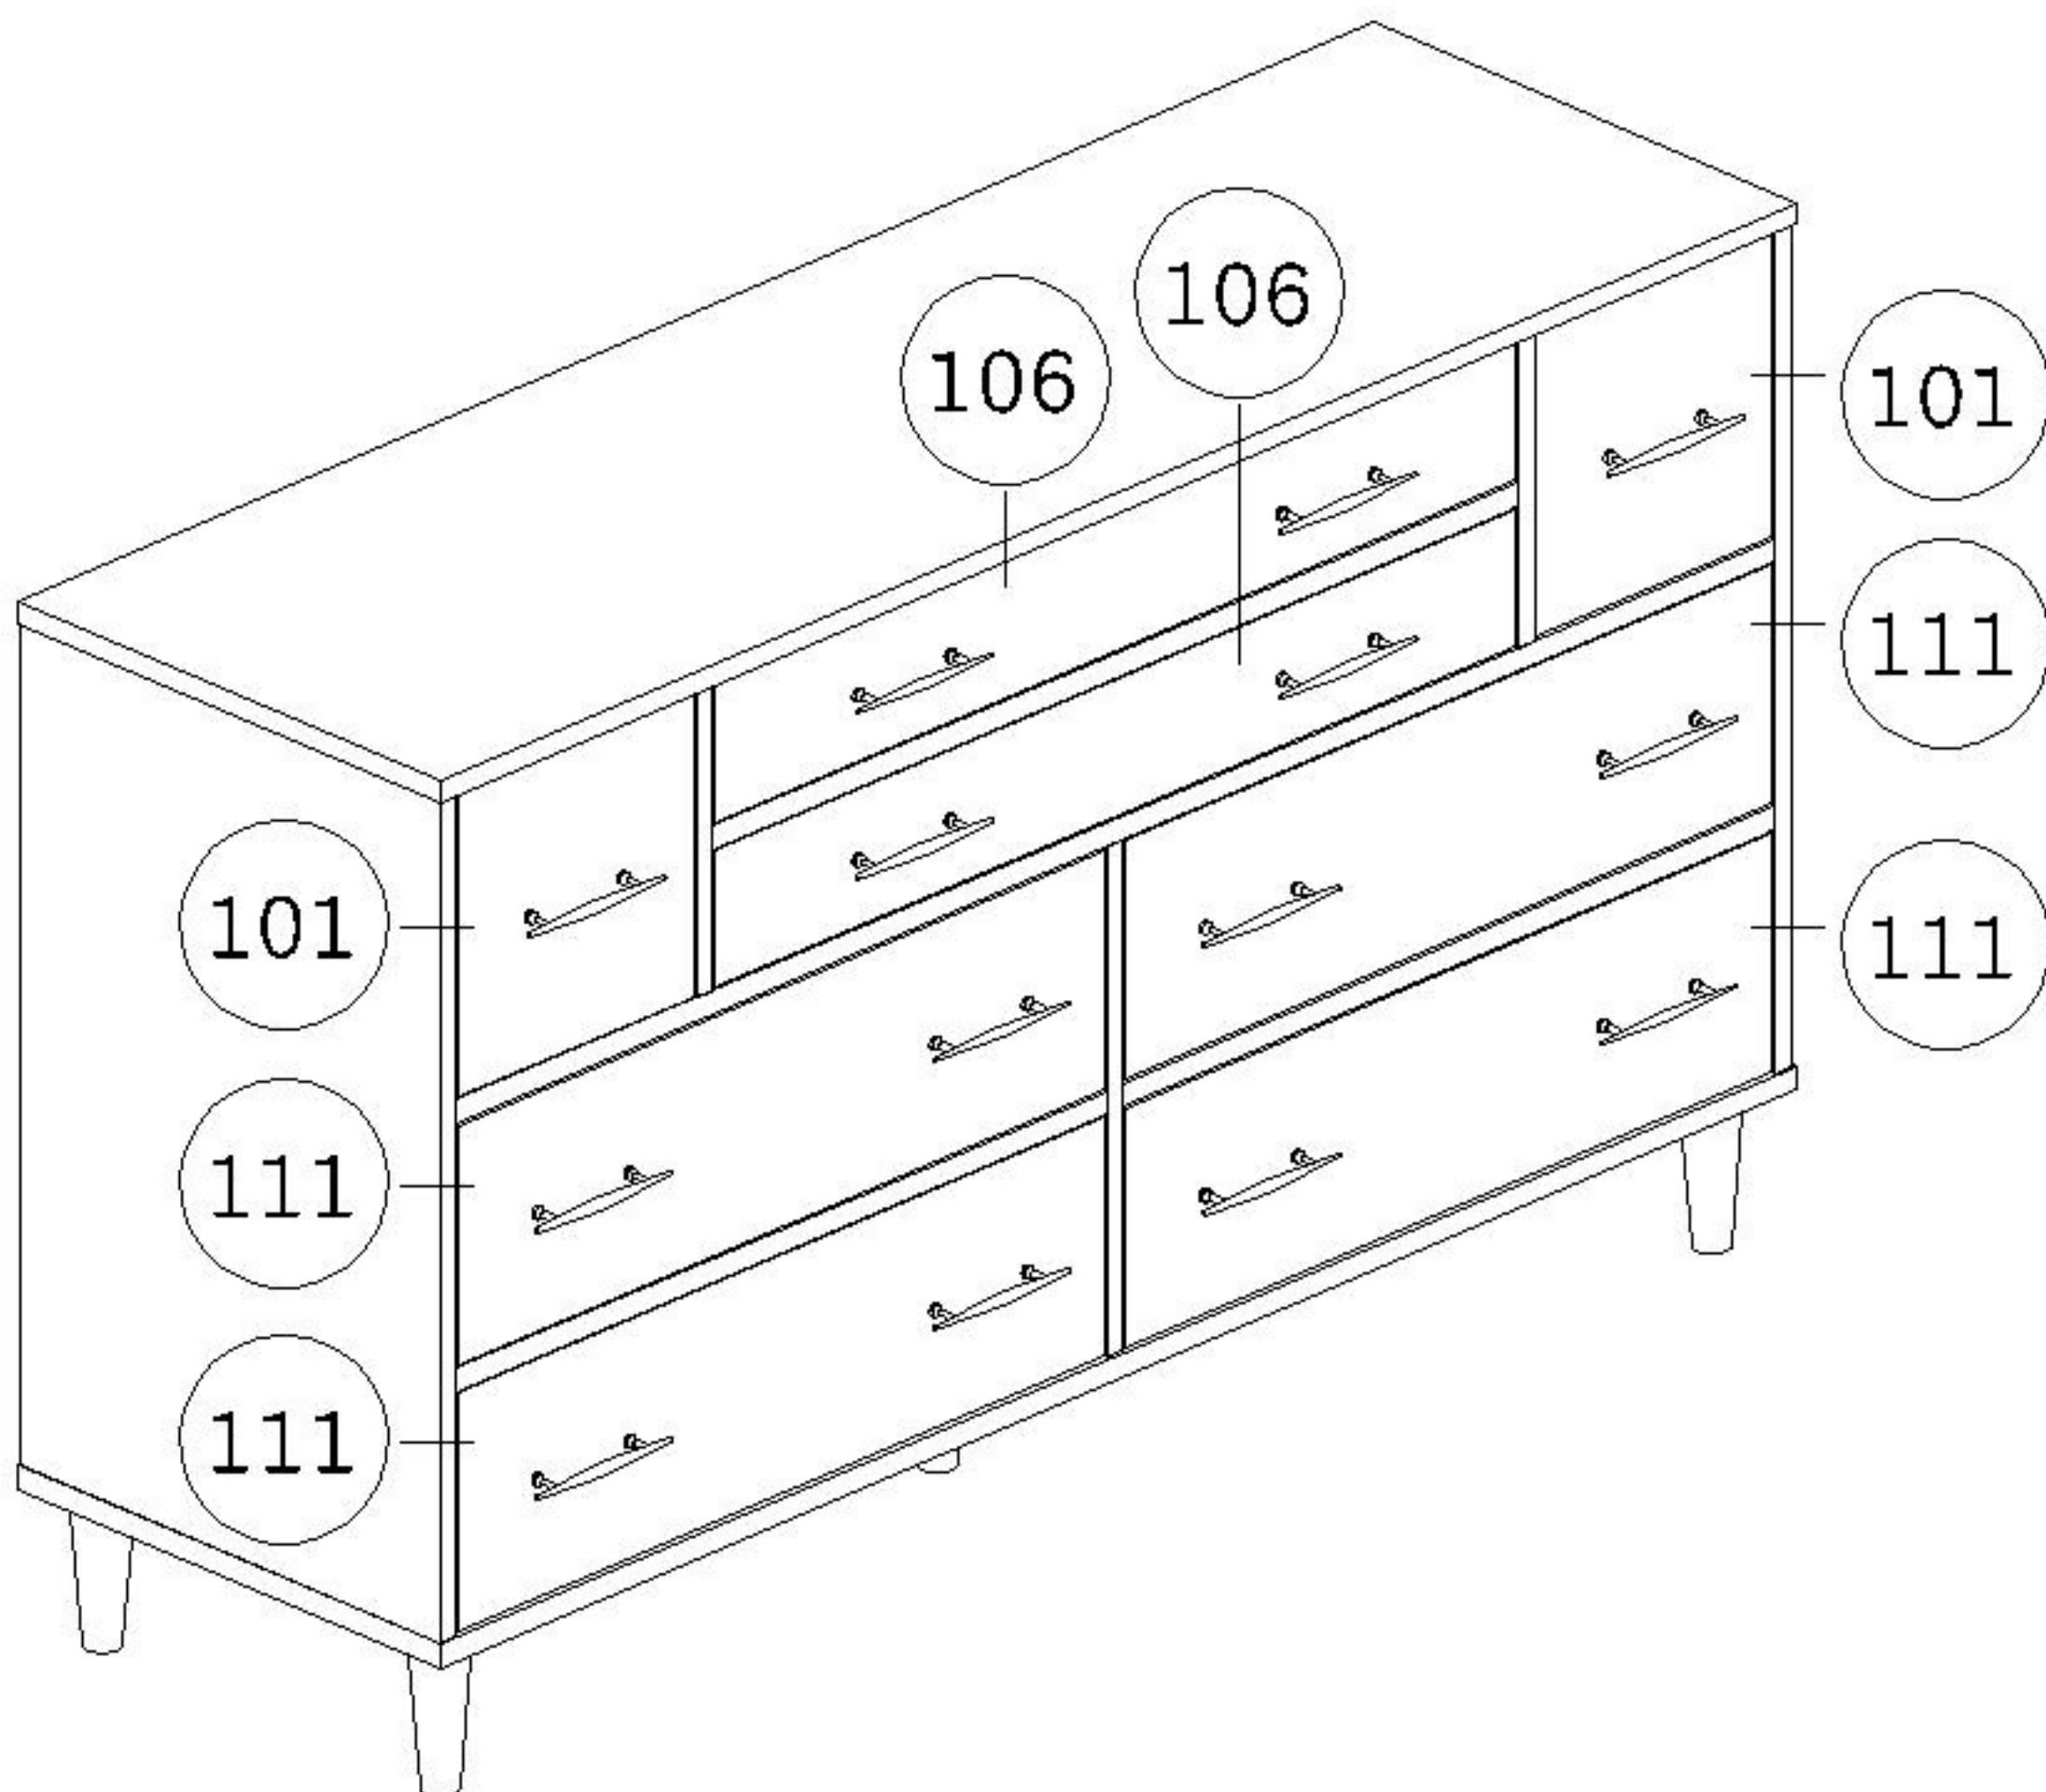

STEP 23

*Following step is OPTIONAL. Follow these steps if you wish to secure unit to a wall for added safety

- i) Attach Safety Belt(Z) to Back Plywood and secure using Flat Washer(X) Chipboard Screw(W) to secure

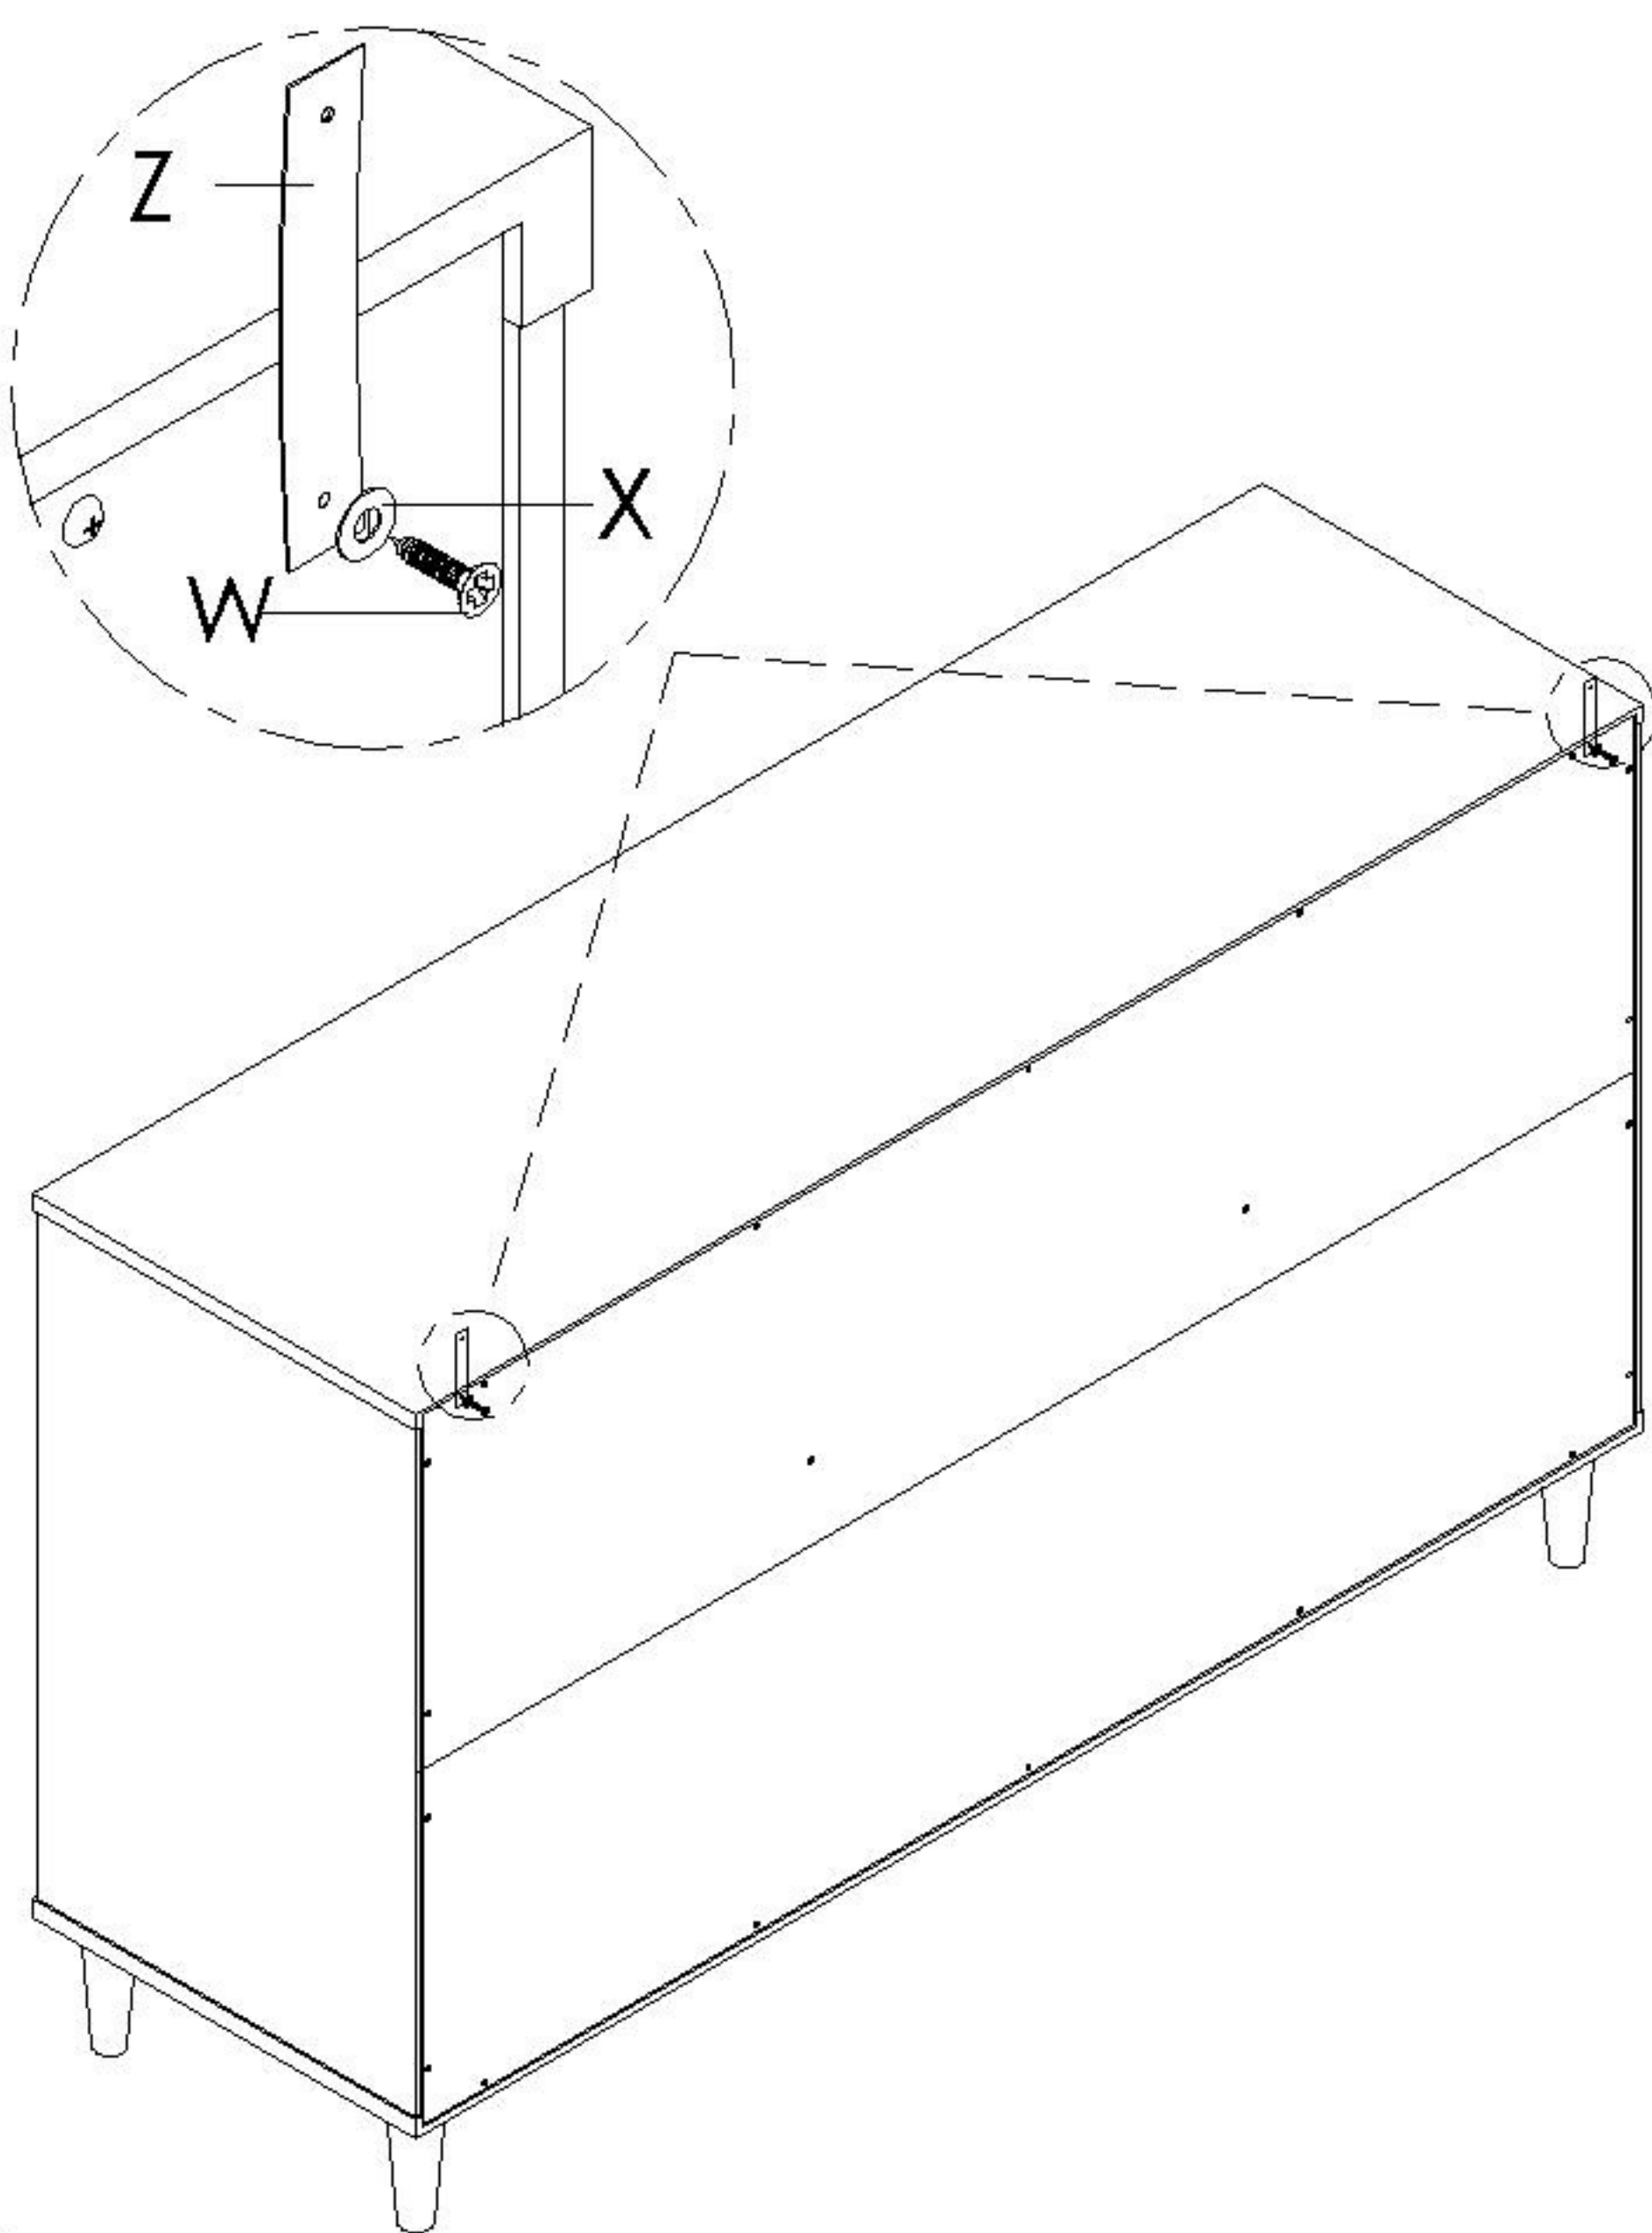

- ii) Drill a hole at the wall, insert Screw Plug(Y) into hole
- iii) Move assembled unit to wall and Screw in Safety Belt(Z) using Chipboard Screw(W)

