

## NOTICE

\*Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.

\*This item should be assembled on a soft surface to prevent scratching the finish during assembly.

\*This item may require periodic tightening.

\*If you are having difficulty, our friendly Customer Care team is always here to help. Please email [customersupport@safavieh.com](mailto:customersupport@safavieh.com)

## PREPARATION

\*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

\*If any part is missing or damaged, do not attempt to assemble the product.


\*Estimated Assembly Time: 60 minutes.

\*Tools Required for Assembly (included): Allen Key

## CARE AND MAINTENANCE

Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.


## Part List

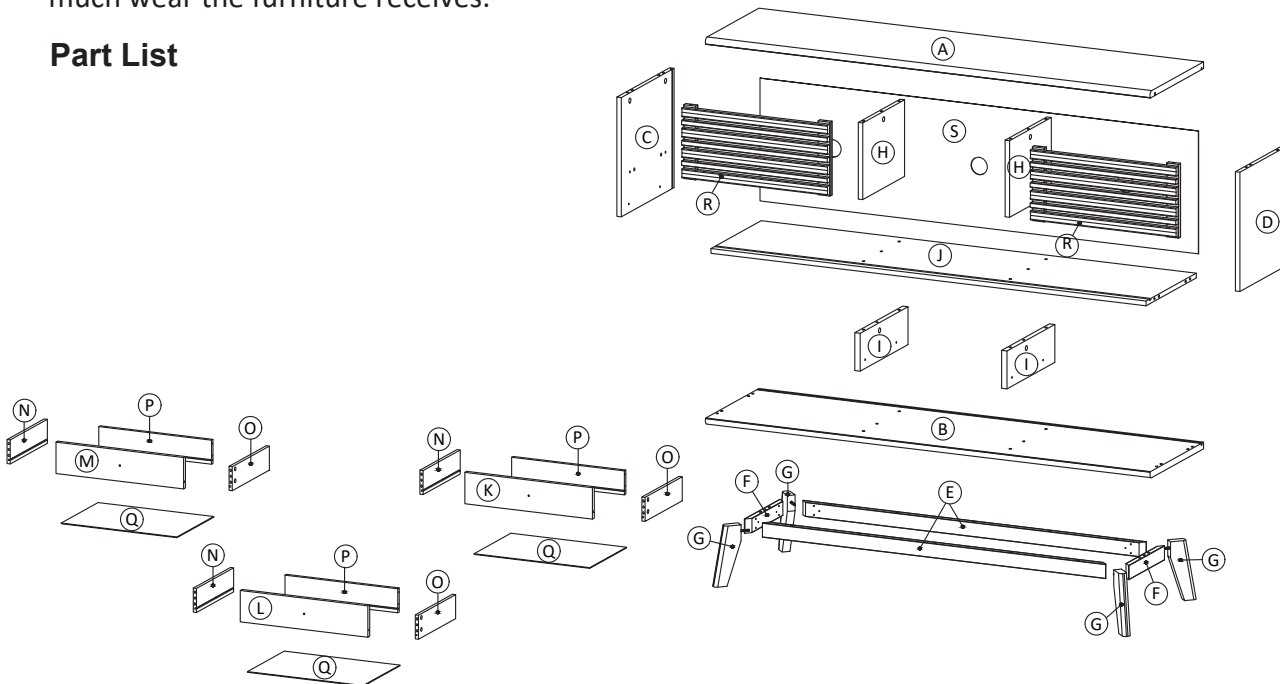

 **SAFAVIEH**  
FURNITURE

**Model# MED9613**

**Product Dimensions: 59"Wx15"Dx24"H**

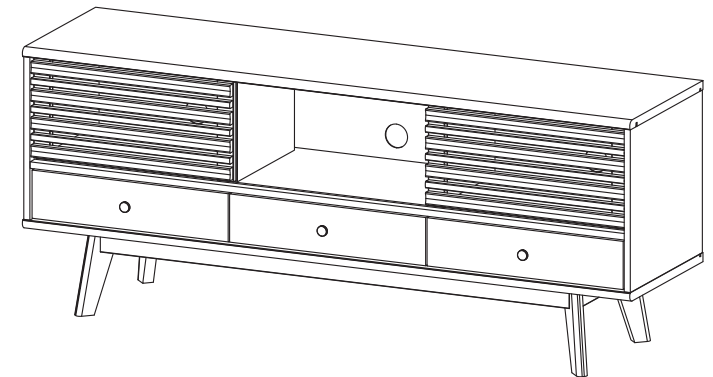




























### **WARNING**

This product is intended for use with a  
FLAT SCREEN TV ONLY  
Maximum Screen Size: 65 inches  
Weight Limit: 81.5 lbs  
Shelf Load Limit: 22 lbs  
Drawer Load Limit: 17.6 lbs  
Use with heavier televisions may result  
in instability causing tip over resulting in  
death or Serious injury.

### **WARNING**

Death or serious injury may occur  
when children climb on audio  
and/or video equipment furniture.  
A remote control or toys placed on  
the furnishing may encourage a  
child to climb on the furnishing and  
as a result the furnishing may tip  
over on the child.

## Hardware List

<b>HW1x24</b>  $\varnothing 6 \times 35 \text{ mm}$	<b>HW2x12</b>  $\varnothing 15 \text{ mm}$	<b>HW3x26</b>  $\varnothing 8 \times 30 \text{ mm}$	<b>HW4x10</b>  $M 6.4 \times 53 \text{ mm}$	<b>HW5x26</b> 	<b>HW6x8</b>  $M 7 \times 50 \text{ mm}$
<b>HW7x2</b>  $L 4$	<b>HW8x26</b>  $M 6 \times 10.5 \text{ mm}$	<b>HW9x12</b>  $\varnothing 12 \text{ mm}$	<b>HW10x18</b>  $M 3.5 \times 13 \text{ mm}$	<b>HW11x6</b>  $\varnothing 15 \text{ mm}$	<b>HW12x1</b> 
<b>HW13x12</b>  $M 8 \times 39 \text{ mm}$	<b>HW14x26</b>  $M 3.5 \times 15.5 \text{ mm}$	<b>HW15x4</b> 	<b>HW16x3</b>  $M 4 \times 22 \text{ mm}$	<b>HW17x4</b> 	<b>HW18x4</b>  $\varnothing 8 \times 50 \text{ mm}$
<b>HW19x6</b>  $\varnothing 6 \times 30 \text{ mm}$	<b>HW20x24</b>  $M 4 \times 16 \text{ mm}$	<b>HW21x4</b> 	<b>HW22x4</b> 	<b>HW23x3</b> 	<b>HW24x3</b> 
<b>HW BC410x4</b> 	<b>HW US11x1</b> 	<b>HW RM30Ax3</b> 			

## Part List & HW For Multi-Box Items

Piece	Description	Qty	Carton Call
A	Top Board	1	1 of 1
B	Bottom Board	1	1 of 1
C	Side Board Left	1	1 of 1
D	Side Board Right	1	1 of 1
E	Support Leg 1	2	1 of 1
F	Support Leg 2	2	1 of 1
G	Leg	4	1 of 1
H	Center Board Big	2	1 of 1
I	Center Board Small	2	1 of 1
J	Fixed Shelf	1	1 of 1
K	Front Drawer Right	1	1 of 1
L	Front Drawer Middle	1	1 of 1
M	Front Drawer Left	1	1 of 1
N	Side Drawer Left	3	1 of 1
O	Side Drawer Right	3	1 of 1
P	Back Drawer	3	1 of 1
Q	Bottom Drawer	3	1 of 1
R	Door	2	1 of 1
S	Back Board	1	1 of 1


Piece	Description	Qty	Carton Call
HW1	Cambolt	24	1 of 1
HW2	CamLock Big	12	1 of 1
HW3	Dowel Medium	26	1 of 1
HW4	Screw M 6.4 x 53 mm	10	1 of 1
HW5	Wedge	26	1 of 1
HW6	Screw M 7 x 50 mm	8	1 of 1
HW7	Allen Key	2	1 of 1
HW8	Screw M 6 x 10.5 mm	26	1 of 1
HW9	CamLock Small	12	1 of 1
HW10	Screw M 3.5 x 13 mm	18	1 of 1
HW11	Screw Cap	6	1 of 1
HW12	Wrench	1	1 of 1
HW13	Screw M 8 x 39 mm	12	1 of 1
HW14	Screw M 3.5 x 15.5 mm	26	1 of 1
HW15	Flange Nut	4	1 of 1
HW16	Screw M 4 x 22 mm	3	1 of 1
HW17	Floor Protector	4	1 of 1
HW18	Dowel Big	4	1 of 1
HW19	Dowel Small	6	1 of 1
HW20	Screw M 4 x 16 mm	24	1 of 1
HW21	Pin Sliding Top	4	1 of 1
HW22	Pin Sliding Bottom	4	1 of 1
HW23	Bumper	3	1 of 1
HW24	Handle	3	1 of 1
HW BC410	Corner Brace	4	1 of 1
HW US11	Anti-Deflection Bar	1	1 of 1
HW RM30A	Rail	3	1 of 1

# PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

If any part is part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 60 minutes.

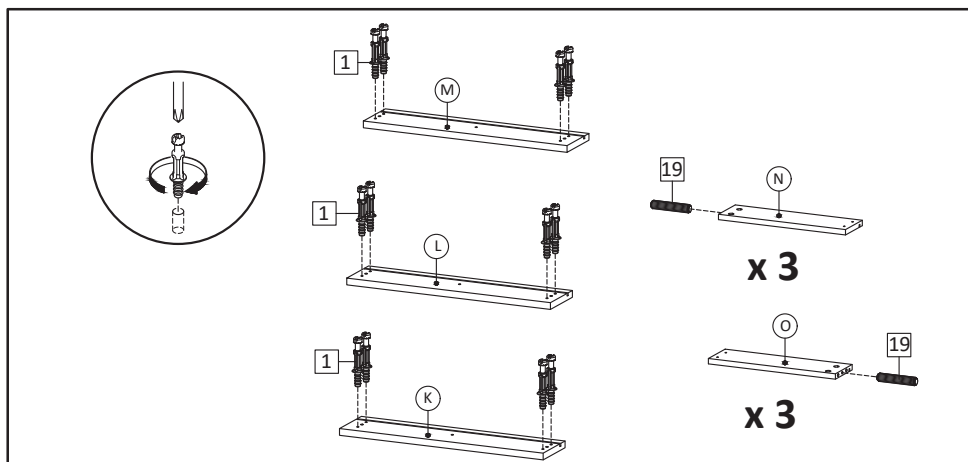


**STEP1:** Insert Cambolt (HW1) into Front Drawer Right (K), Front Drawer Middle (L) and Front Drawer Left (M). Insert Dowel Small (HW19) into Side Drawers (N & O).

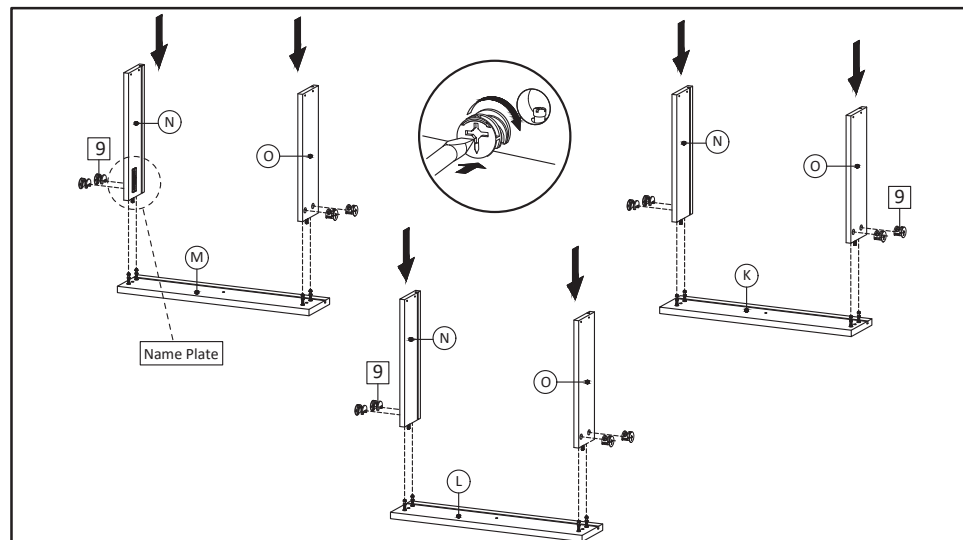


**STEP2:** Combine Side Drawers (N & O) into Front Drawer Right (K), Front Drawer Middle (L) and Front Drawer Left (M) then tighten camlock (HW9) using screwdriver.

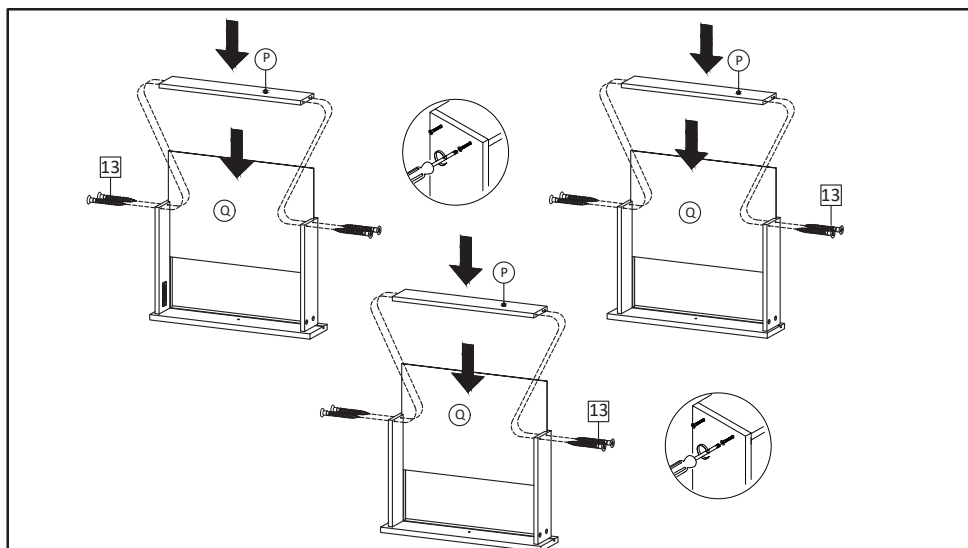


**STEP3:** Insert Bottom Drawer (Q) with laminated face facing upward then put Back Drawer (P) and secure with Screw M8x39mm (HW13).

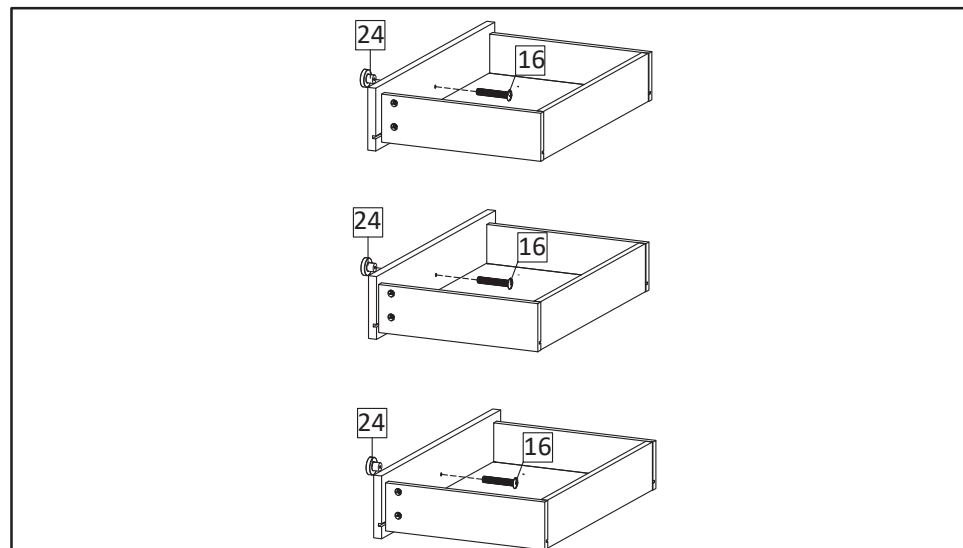


**STEP4:** Use Screw M4x22mm (HW16) to attach Handle (HW24) to the Front Drawer.

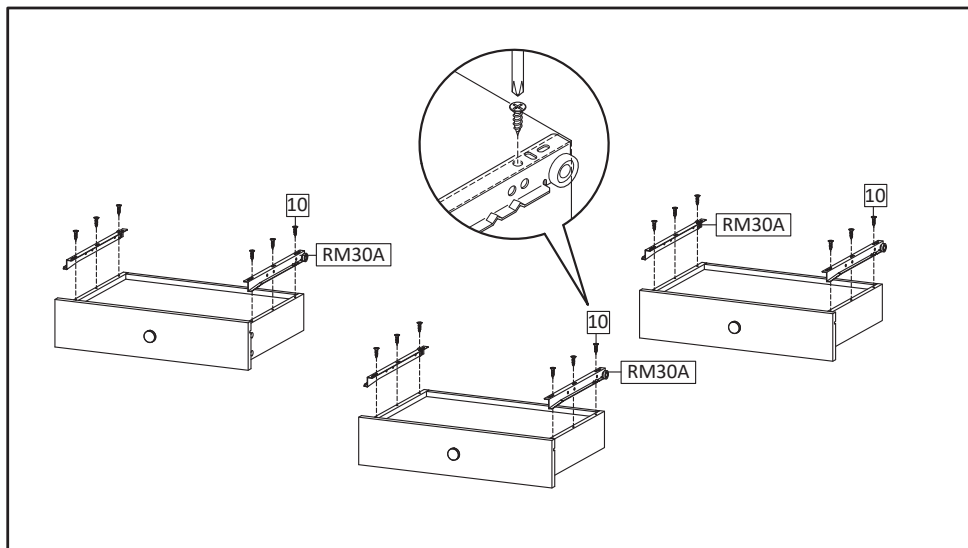


**STEP5:** Install the metal runner (HW RM30A) into position as shown in picture.  
Secure with screws M3.5x13mm (HW10).

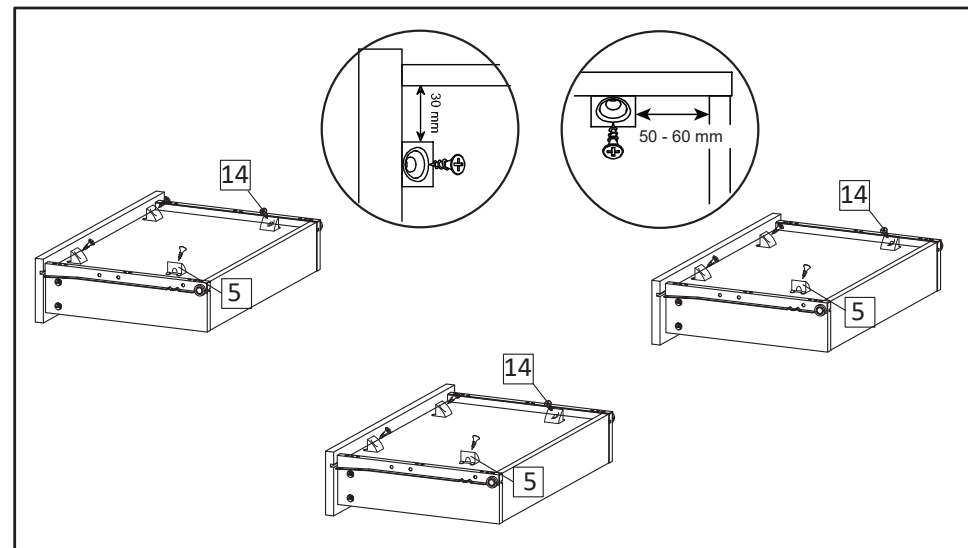


**STEP6:** Insert the Screw M3.5x15.5mm (HW14) and wedge (HW5) into the bottom of the drawer according to the picture.

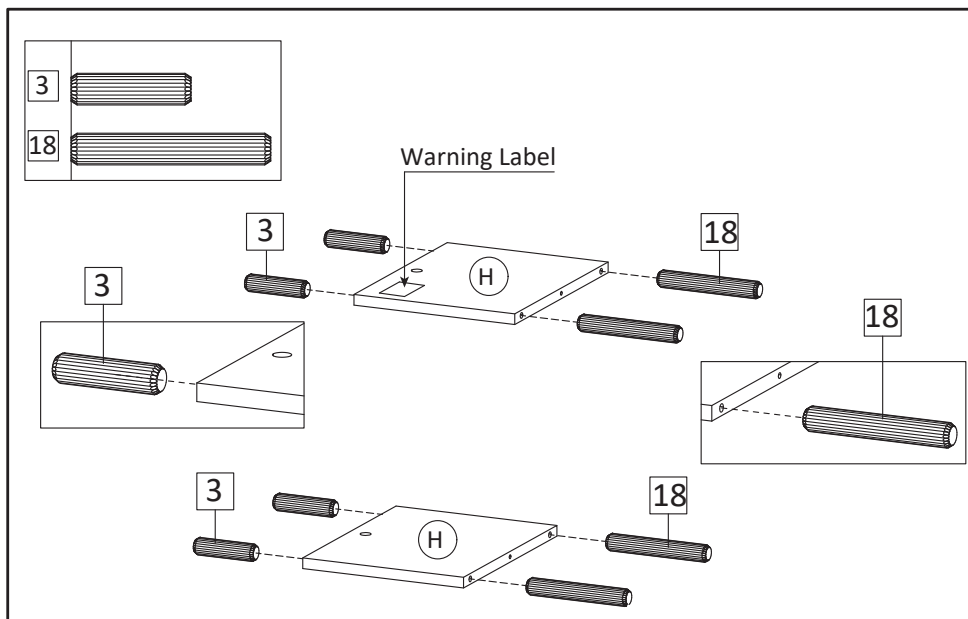


**STEP7:** Insert Dowel Medium (HW3) and Dowel Big (HW18) into Center Board Big (H)

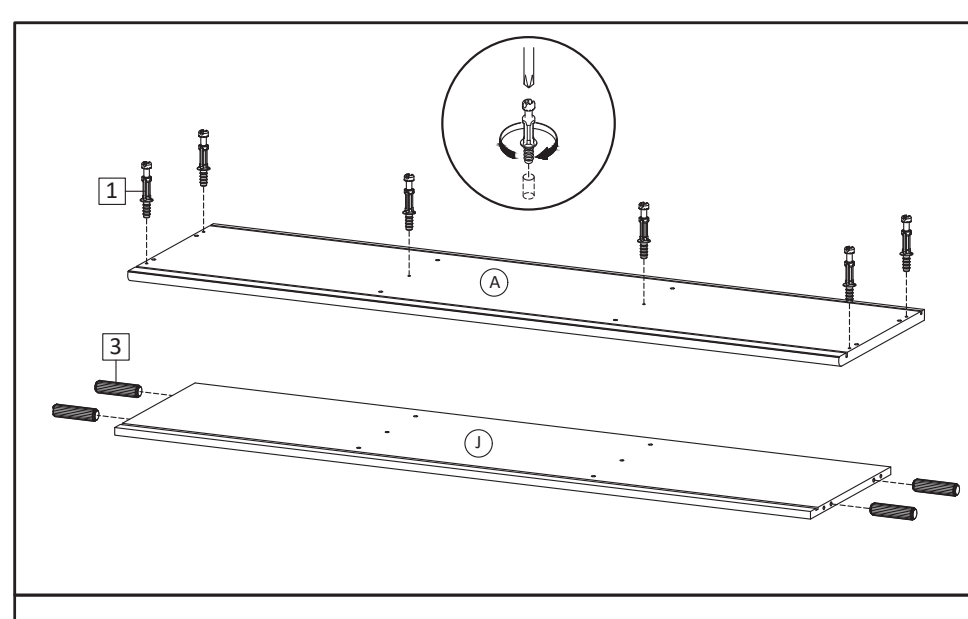


**STEP8:** Insert Cambolt (HW1) into Top Board (A).  
Insert Dowel Middle (HW3) into Fixed Shelf (J).

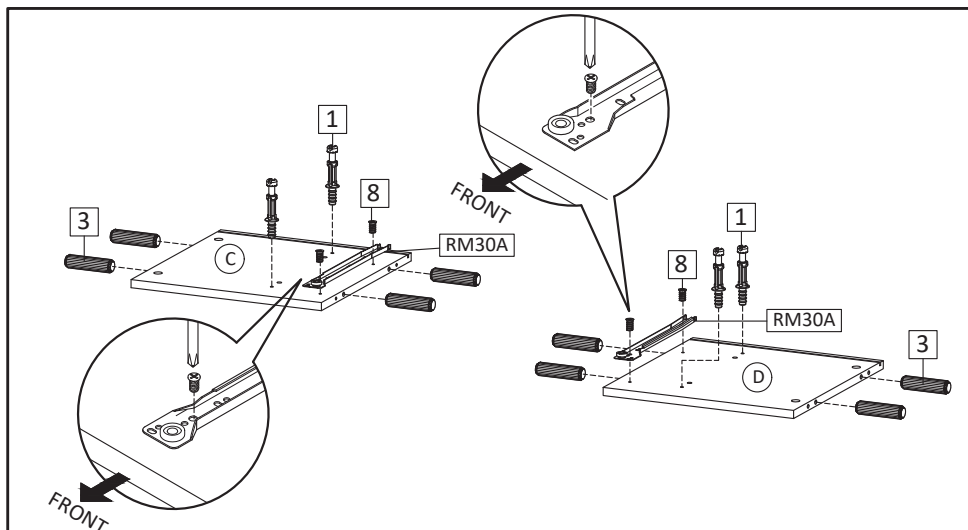


**STEP9:** Insert Dowel Medium (HW3) into Side Board Left (C) and Side Board Right (D). Insert Camlock (HW1) into Side Board Left (C) and Side Board Right (D). Continue with securing part of the metal runner (HW RM30A) into position as the above image, using screw M6x10.5mm (HW8).

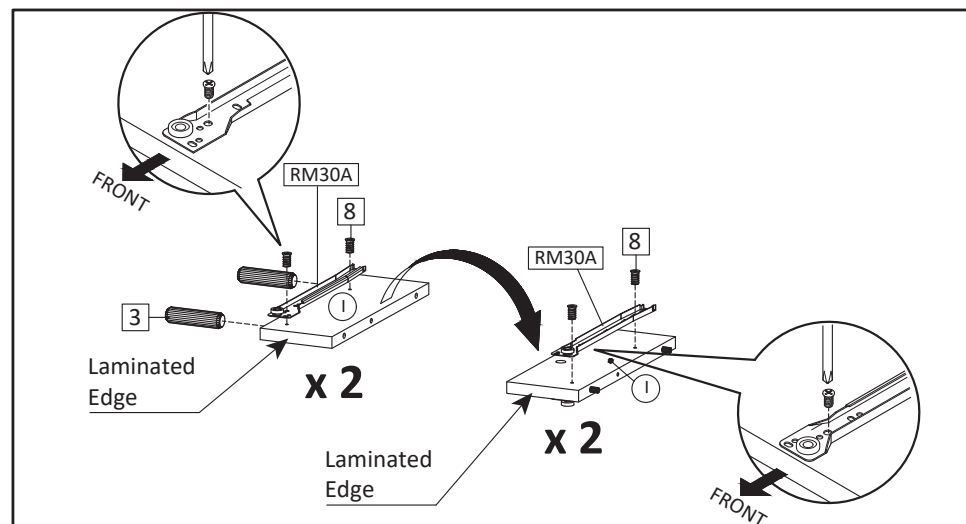


**STEP10:** Part of Metal Runner must be installed to Center Board small (I) on both sides. Secure part of the metal runner (HW RM30A) into position as the above image, using screw M6x10.5mm (HW8), then flip the board to access the opposite surface, continue to secure part of metal runner (HW RM30A) using screw M6x10,5mm (HW8).

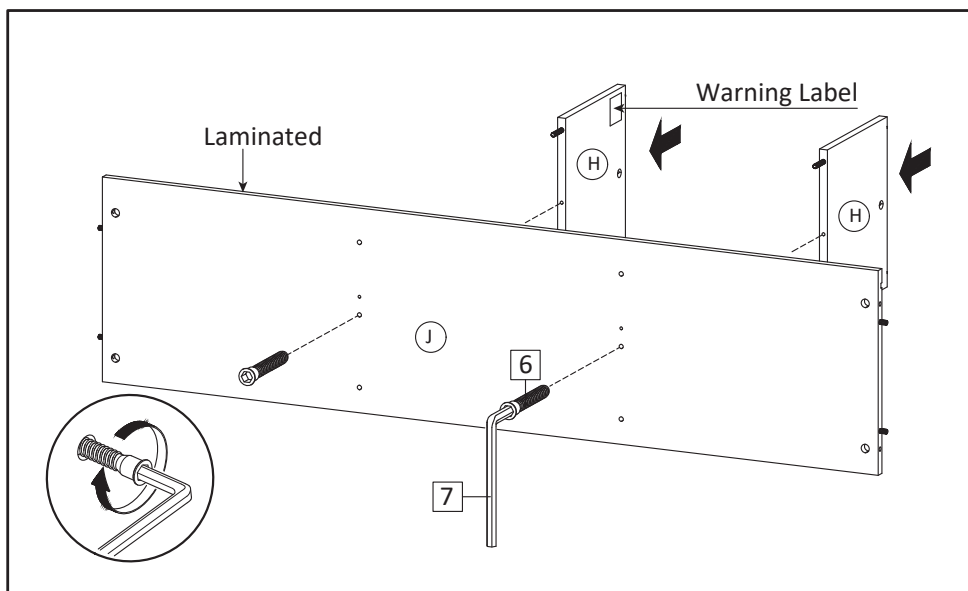


**STEP11:** Attach Center Board Big (H) into Fixed Shelf (J), secure with Screw M7x50mm (HW6) using Allen Key (HW7).

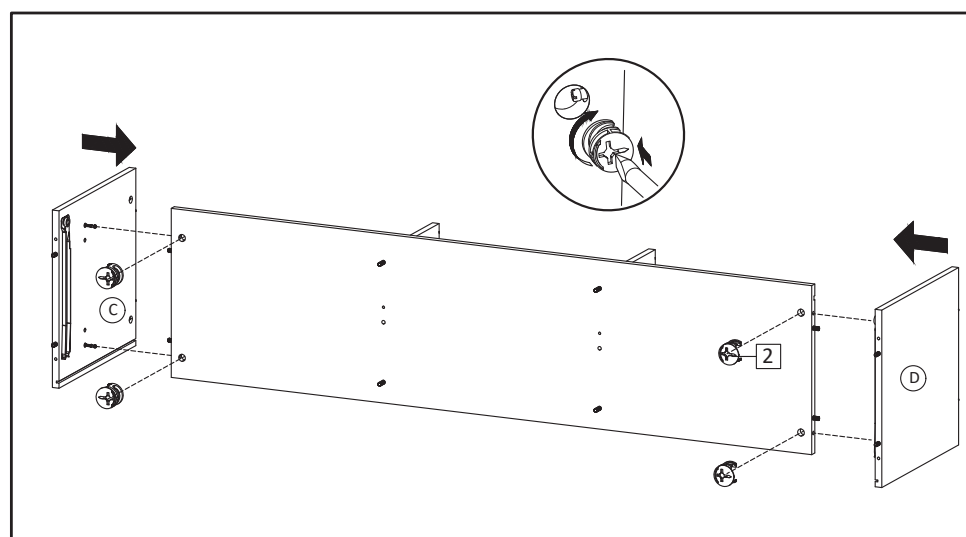


**STEP12:** Continue by attaching Side Board Left (C) and Side Board Right (D) into the assembled components from step 11. Insert Camlock Big (HW2) and tighten it using screwdriver.

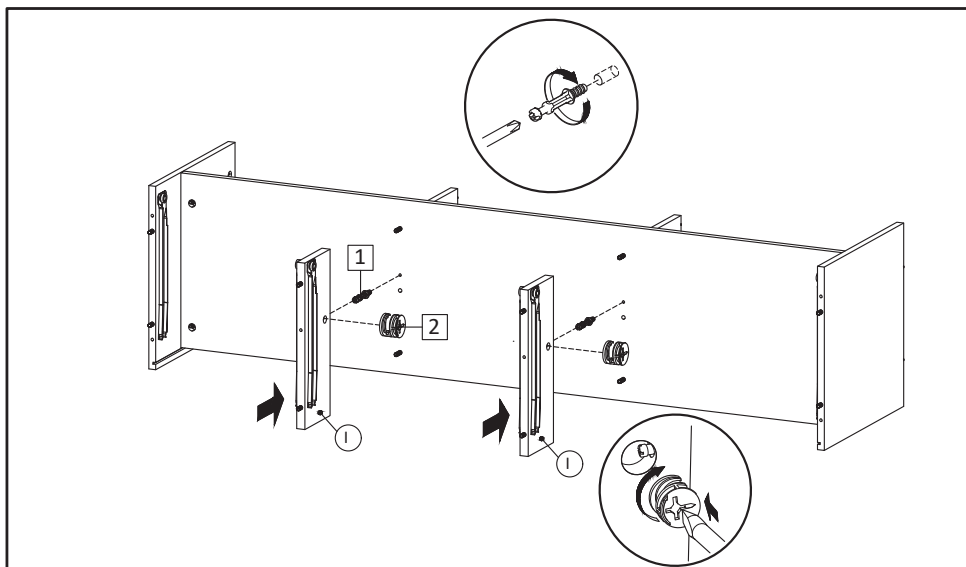


**STEP13:** Attach Center Board small (I) into the assembled component from step 12. Insert Cambolt (HW1), Camlock Big (HW2) and tighten it using screwdriver.

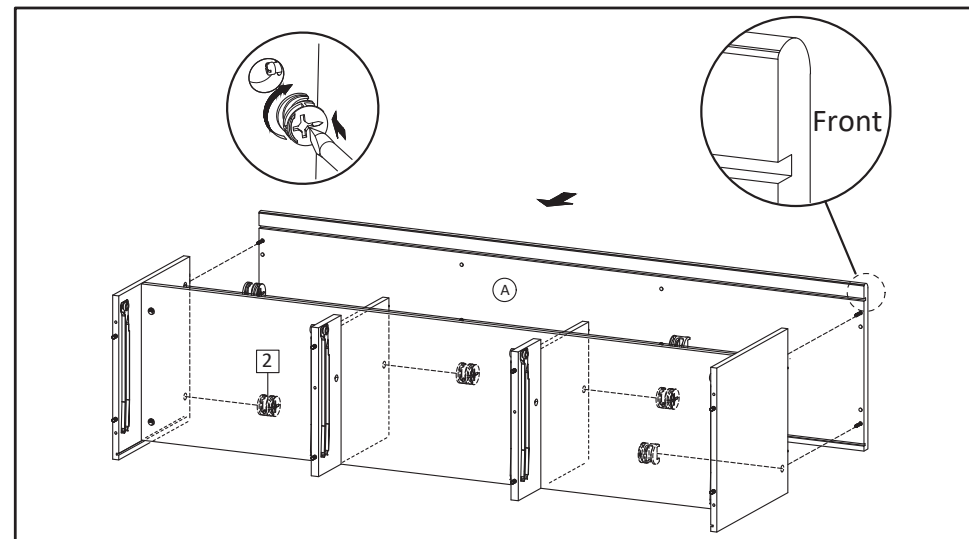


**STEP14:** Bring the Top Board (A) into assembled component. Secure with Camlock Big (HW2) and tighten it using screwdriver.

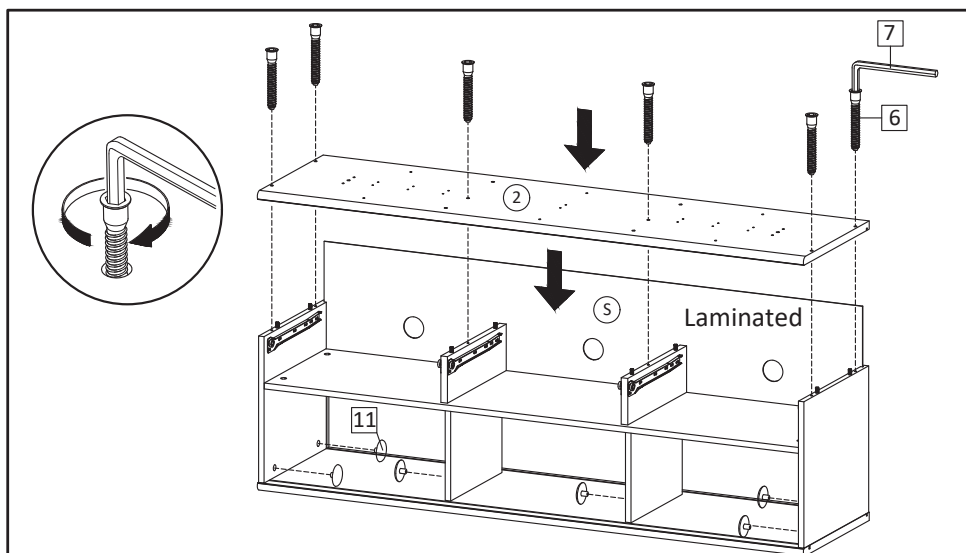


**STEP15:** Bring the assembled components from step 14 upside down with the Top Board on the floor. Insert Back Board (S) into position. Then put Bottom Board, secure with Screw M7x50mm (HW6), tighten screws using Allen Key (HW7). Put the Screw Cup (HW11) over the tightened camlock.

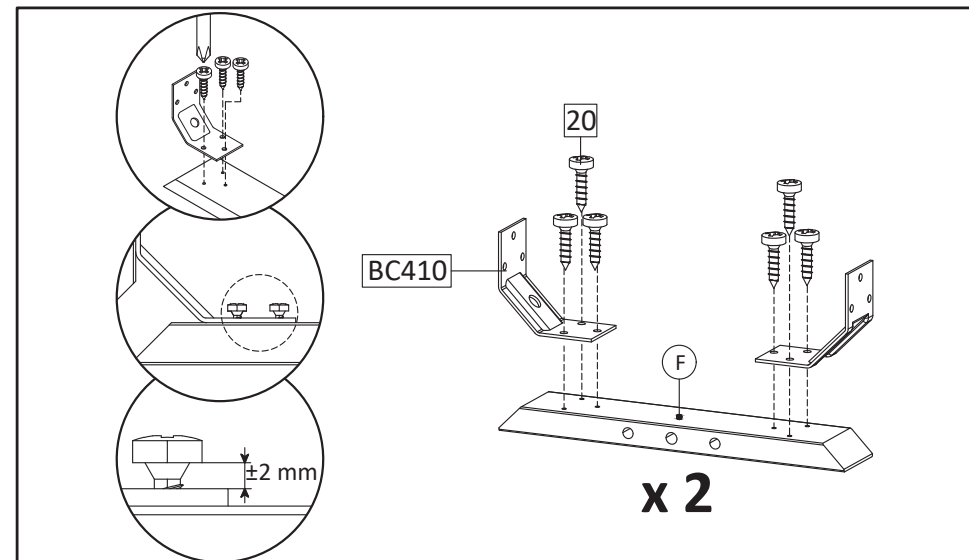


**STEP16:** Now let's combine the bottom skirt. Start with installing Corner Brace (HW BC410) into Support Leg 2 (F) using Screw M4x16mm (HW20). Do not overtight screw yet, leave around 2mm gap.

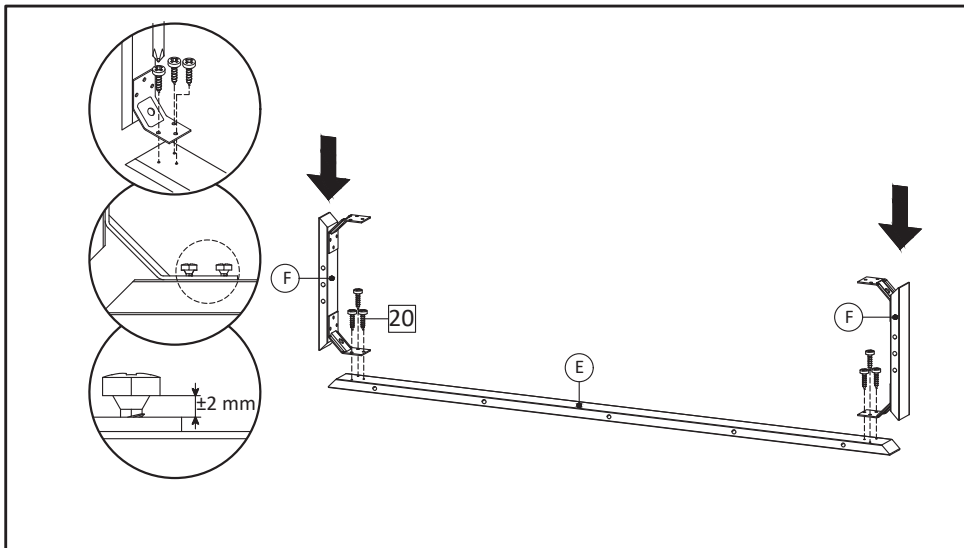


**STEP17:** Combine components from step 16 with remaining Support Leg 1 (E), using Screw M4x16mm (HW20). Do not overtight screw yet, leave around 2mm gap.

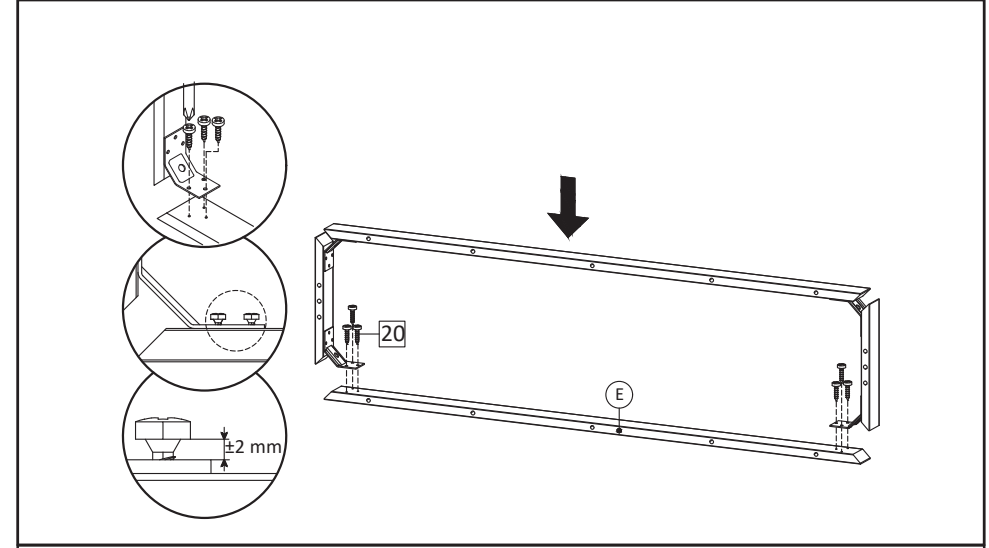

**STEP18:** Combine the Support Leg 2(F) from step 17 with remaining Support Leg 1 (E), using Screw M4x16mm (HW20). Do not overtight screw yet, leave around 2mm gap.




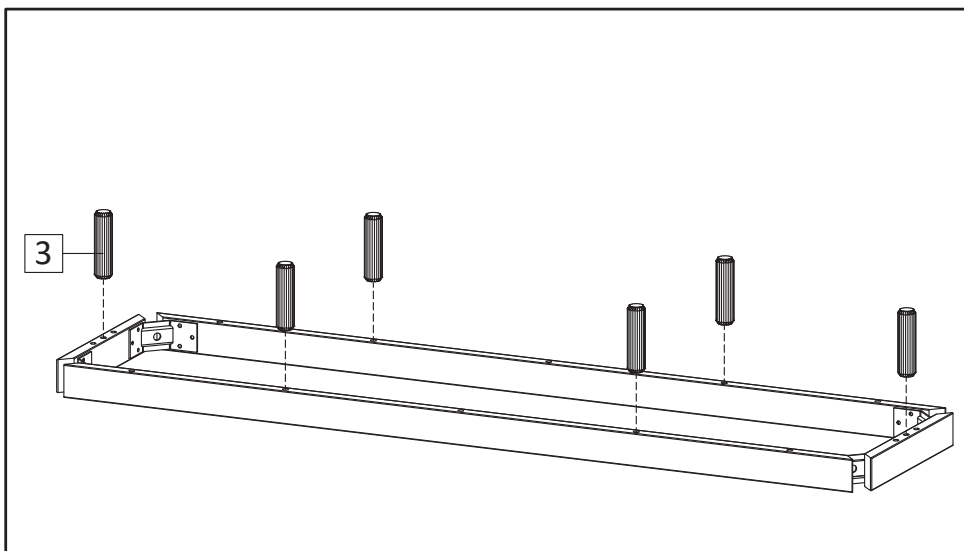






**STEP19:** Insert Dowel Medium (HW3) into assembled bottom skirt.

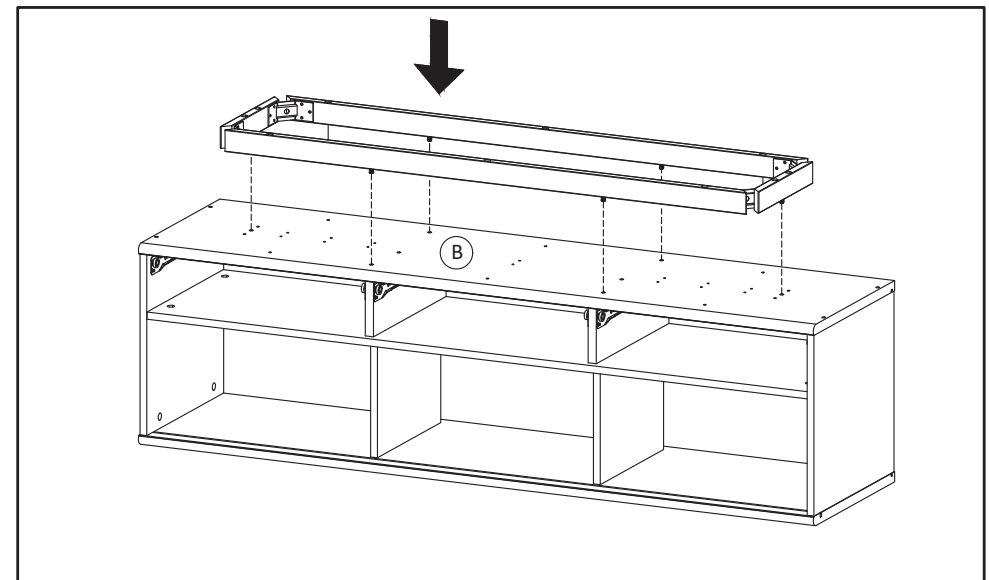

**STEP20:** Bring the assembled bottom skirt and insert into Bottom Board of the Media Stand.



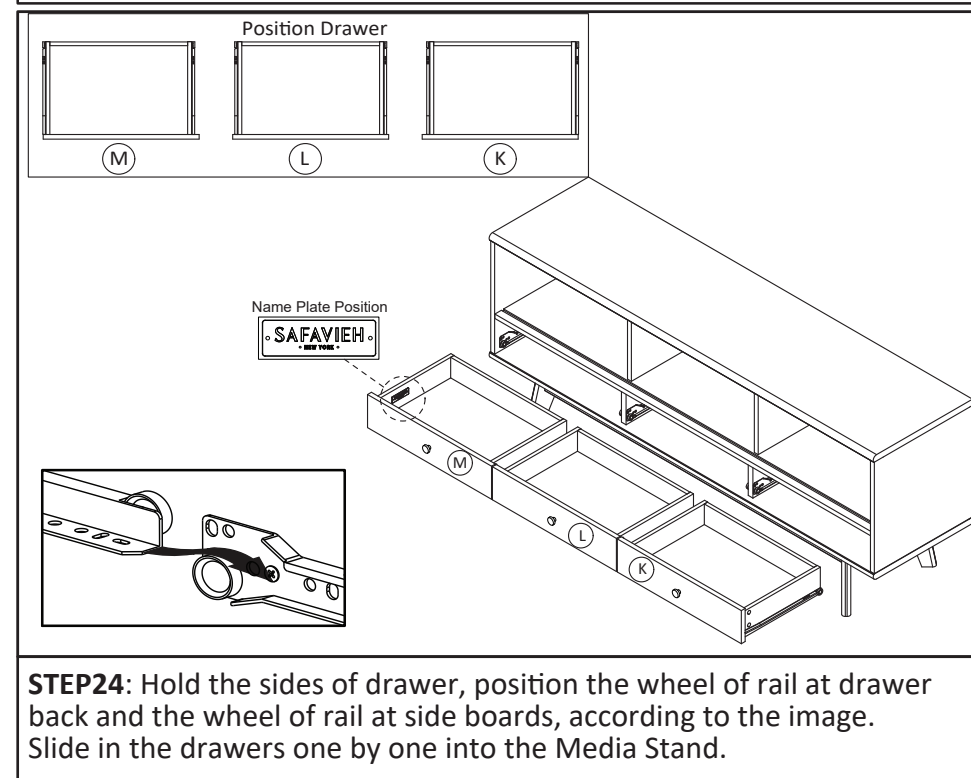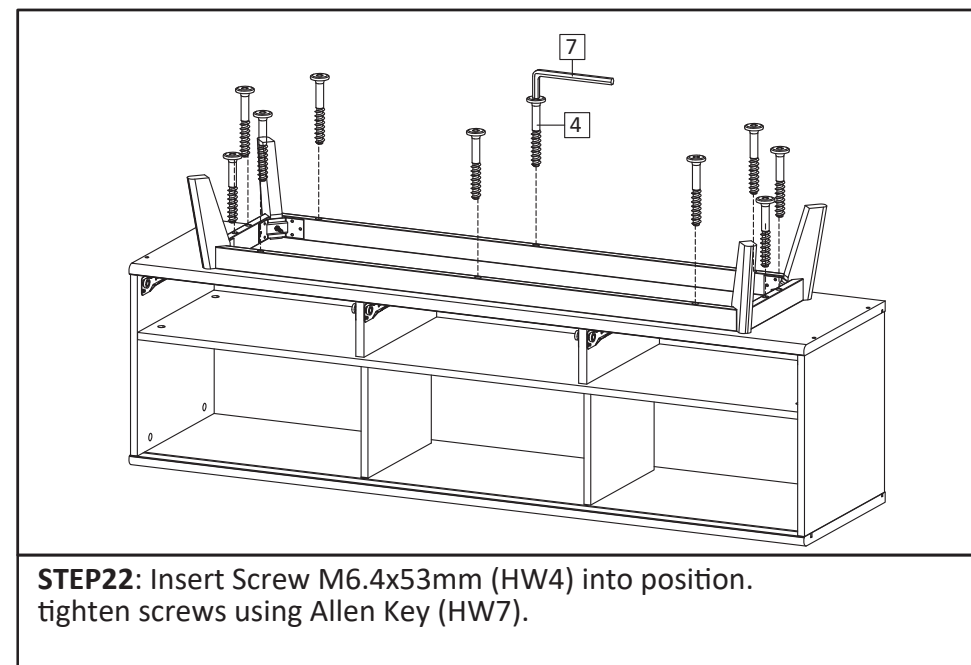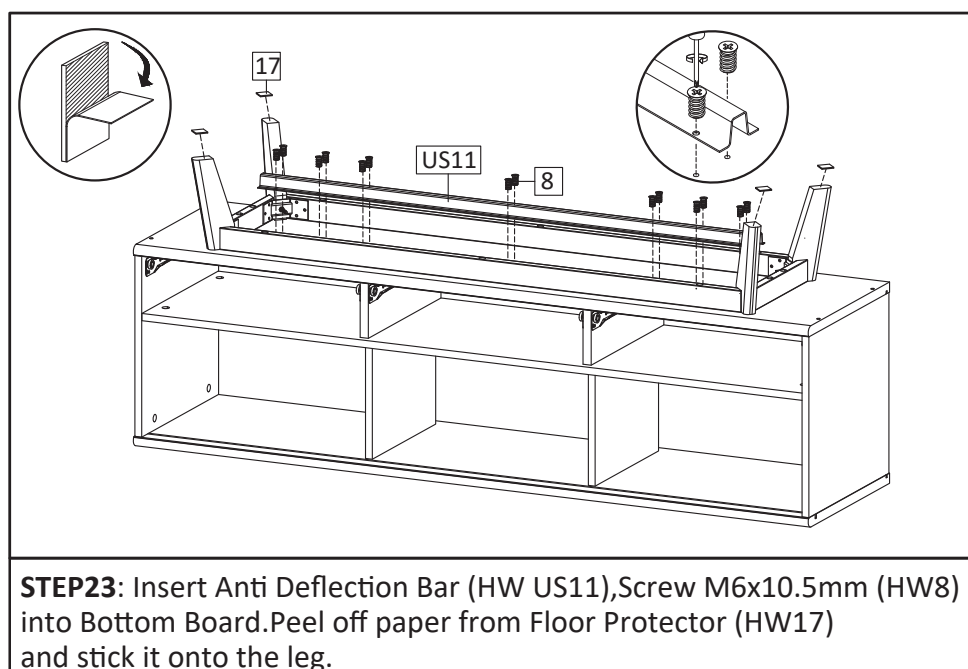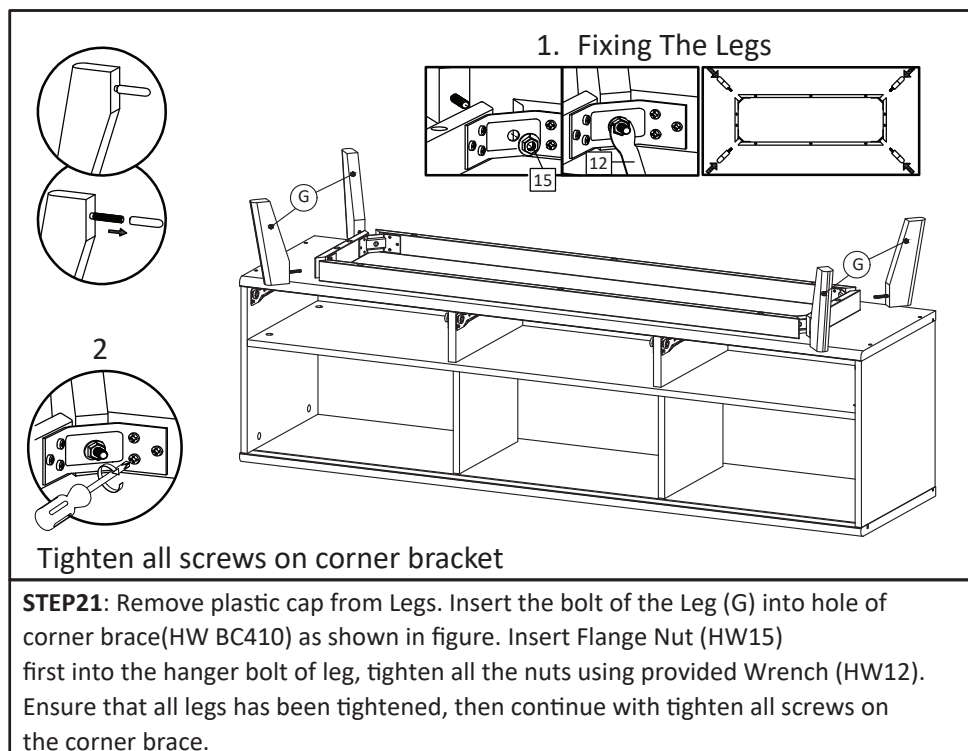

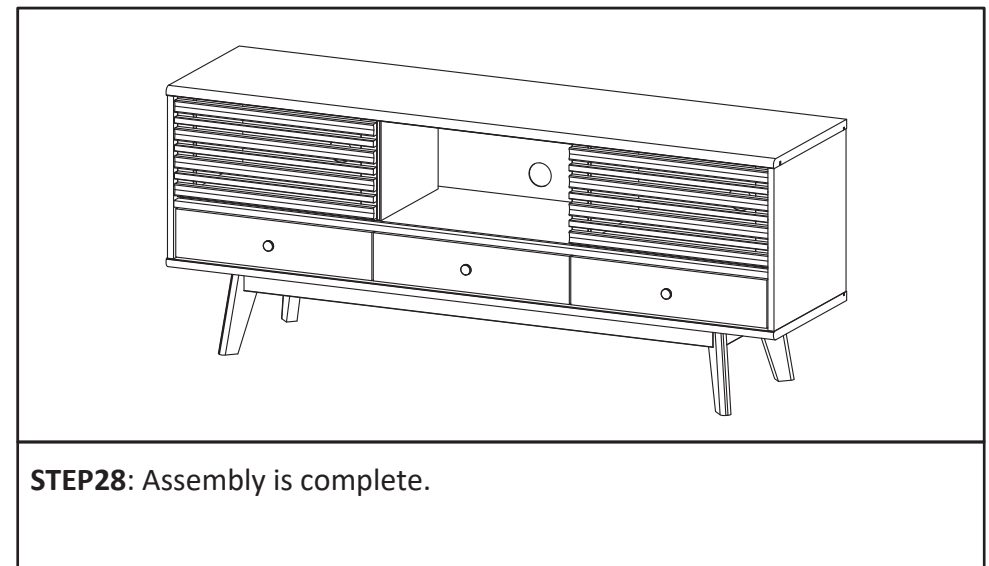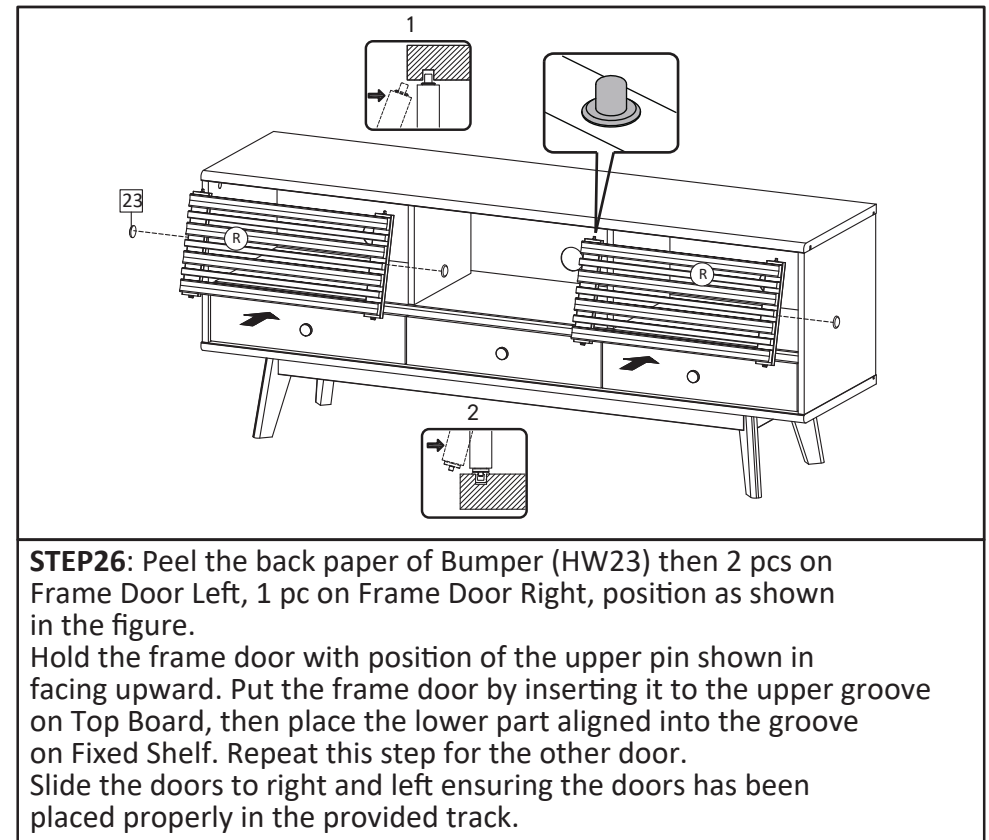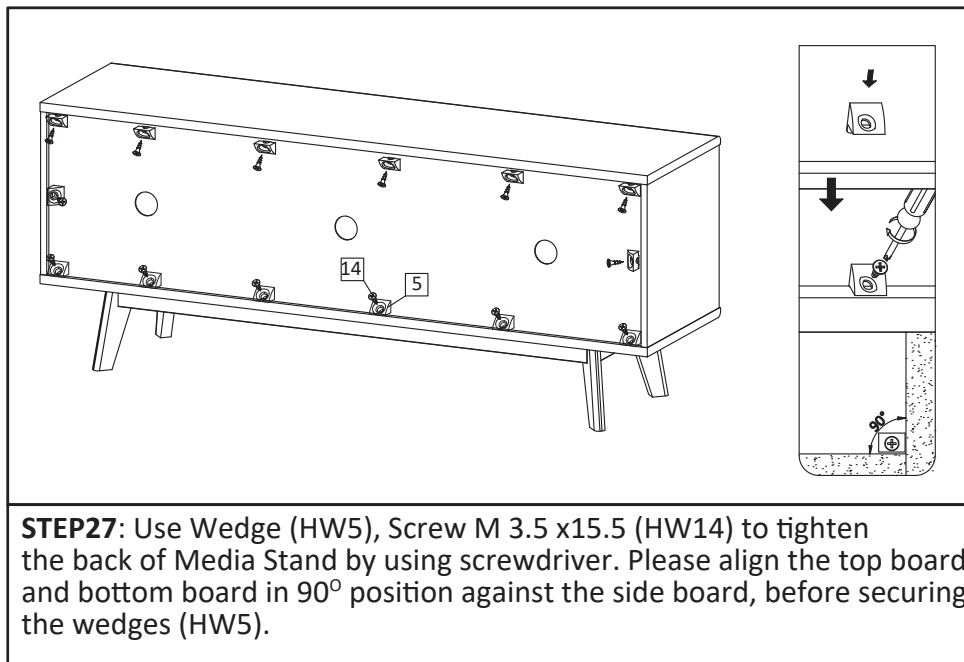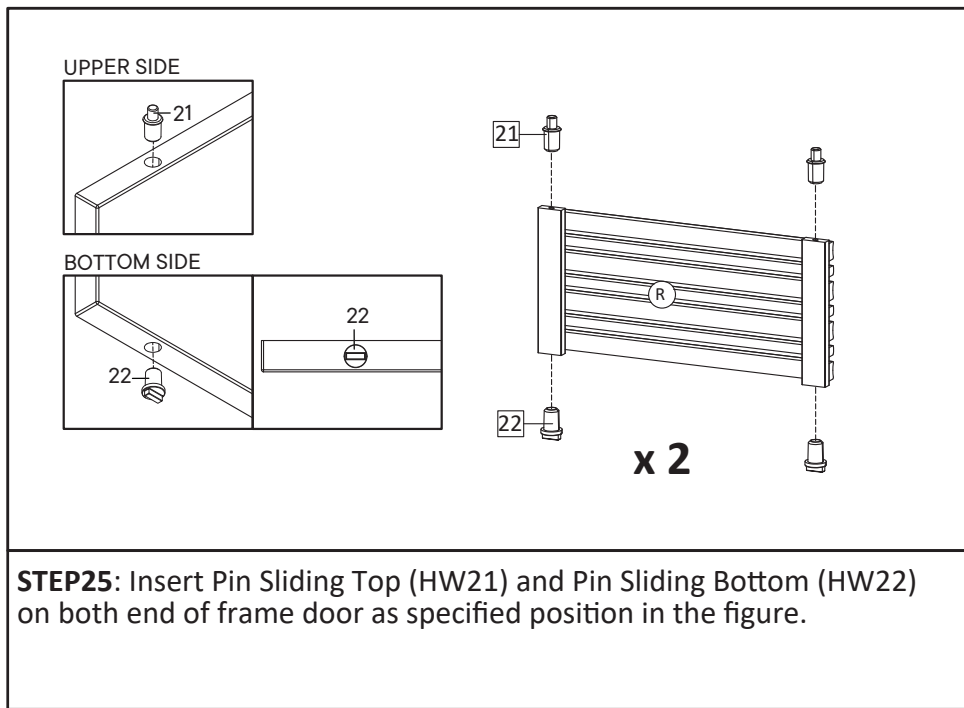

# TIPPING RESTRAINTS KIT INSTALLATION GUIDANCE

Different wall materials require unique wall fasteners.

The wall plugs (AA2) and screws (AA3) are designed for fixing to concrete walls only.

Please consult your local hardware store to ensure you are using the correct hardware for your wall type.

