



Manual



LED Wall-mounted Mirror

Instructions & Installation

Statement

Please read this instruction carefully before installation, and refer to it again during the installation to ensure a safe and correct installation of the mirror.

Compliance

All the electrical components used in this product are ETL LISTED. This product passed ETL certification.

Electrical Safety Instructions

- ⚠️ INSTALLATION should be made by a qualified / registered electrician. DO NOT attempt to install it by yourself, as we will not be responsible for any damage caused during installation.
- ⚠️ According to IEEE regulations, this product is suitable for zone 2 and external zone, not zone 0 or zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles.
- ⚠️ This product is only suitable for permanent installation, please do not plug in the power strip.
- ⚠️ Please make sure to keep the electrical supply off during installation and maintenance. It is recommended to pull out the fuse or switch off the circuit breaker before installation to disconnect the necessary circuits.
- ⚠️ LED mirror adopts three-pin plug, power leads must be connected to ground wire.
- ⚠️ **DO NOT** put hard and sharp materials directly against the mirror surface during operation, otherwise it may result in current leakage and even personal injury accident.
- ⚠️ **Never** forget to turn off the power supply in storm days, otherwise electric components of the product could be damaged.
- ⚠️ **DO NOT** switch off the power supply directly during normal operation, otherwise electric elements of the product may be easily damaged.
- ⚠️ Please turn off the power supply if the product is not used for a long time.
- ⚠️ **DO NOT** remove protective film or corner protectors until the mirror is completely installed.
- ⚠️ **PLEASE KEEP THIS MANUAL BOOK FOR FUTURE REFERENCE.**



LED Wall-mounted Mirror

Wiring

We supply 1m cord and U.S 3-pin plug for easy connection with wall socket. This product all can connect the cord in the wall and be controlled by wall switch.

Cleaning

When the mirror has to be cleaned, please switch off the power first.

DO NOT use abrasives or solvents when cleaning.


DO NOT let water get in the mirror and submerge mirror in water.

Wipe off all water spillages as soon as possible via a soft, damp cloth.

Specification

Product Name:	LED LIGHTED MIRROR	Certificates:	ETL, CE, ROHS
		Input Voltage:	110v
Design Style:	Modern	Power:	As specified on product label
Feature:	Illuminated	Lumen:	2500-3000lm
Mirror Shape:	Circle	Input Frequency:	60Hz
Function:	Anti-fog, memory function	Color Temperature:	3000k-6000k optional
Installation:	Wall mounted	IP Rating:	IP44
Glass Thickness:	5mm	Dimming Function:	Yes
Light Color	Warm/White/Warm white changeable	Hanging Way:	Horizontal
Touch Sensor	Yes	Warranty:	3years
Material:	Copper-free silvered glass + Aluminum frame	Application:	Bathroom, makeup room

Operation Instructions

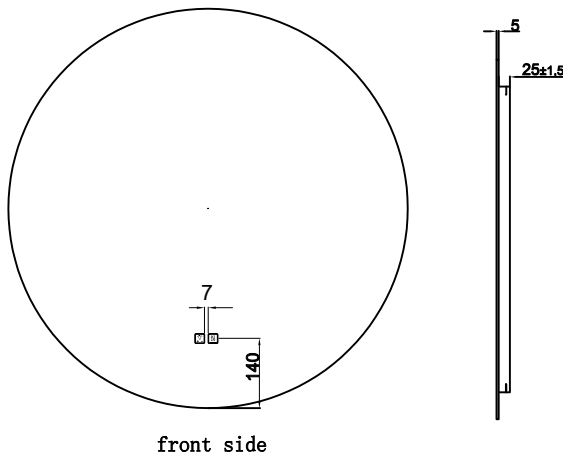


Light on/off

Power on, then press to turn the light on, the light is warm light.


Then second time press , the light change to white light.

The third time press , the light change to warm white light.

Then press again to turn the light off.




LED Wall-mounted Mirror



Dimming instruction


Power on, press to turn the light on, then keep pressing , the brightness will change accordingly.

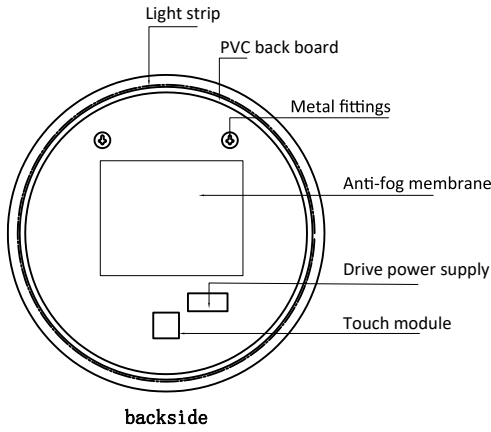


Fog-free instruction (For the led mirror with anti-fog function)

Power on, press , the mirror can be defogging.


Installation




Ruler




Spirit Level




Electrical Drill



Screwdriver



Hammer




2 x screws and white nylon screw type plug



4 x spacer

Step 1

Stick spacers on mirror backside to keep the mirror be flat, and measure the distance of A(two hooks center distance).

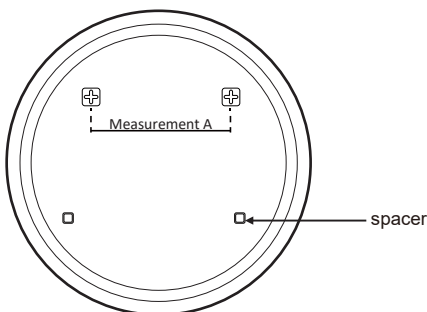


Size	Measurement A(mm)
	388±5mm
	388±5mm
	82±5mm
	388±5mm
	388±5mm



LED Wall-mounted Mirror


Step 2

Marked 2 dots on wall with length of A, and drill holes.

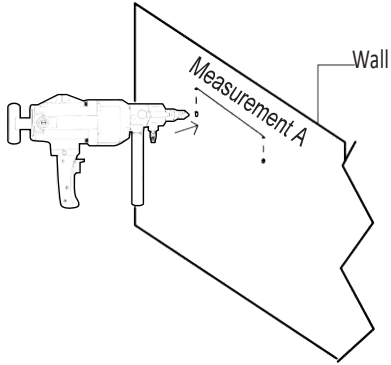


Step 3

Put the white nylon screw type plug in the holes and screws in to the plug.

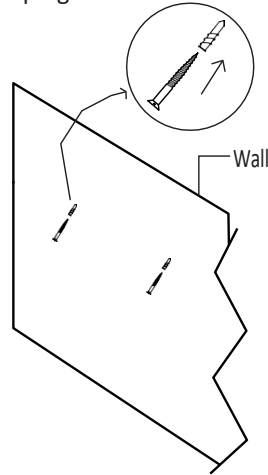

Step 4


Hang the mirror to wall.

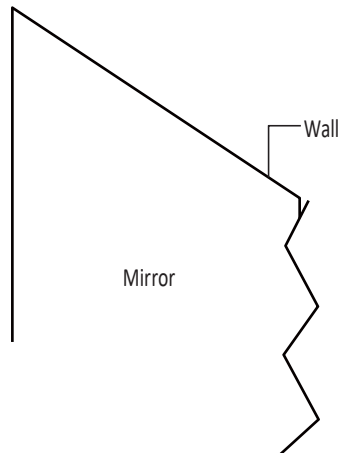

★★★★ About the wire connection ★★★★★

There are two ways to connect the circuit for the mirror.

Connection way ①: Plug the 3-pin plug in the socket on the wall.

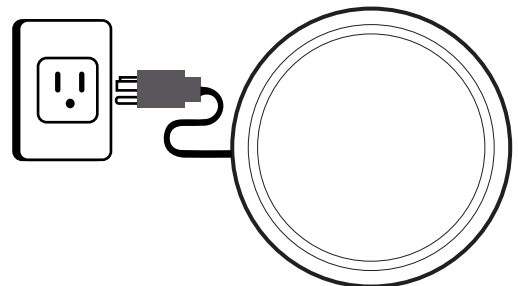



LED Wall-mounted Mirror

Connection way ②: Connect the mirror wire with wall switch wire via connector.

