


# ASSEMBLY INSTRUCTIONS

## Console Table

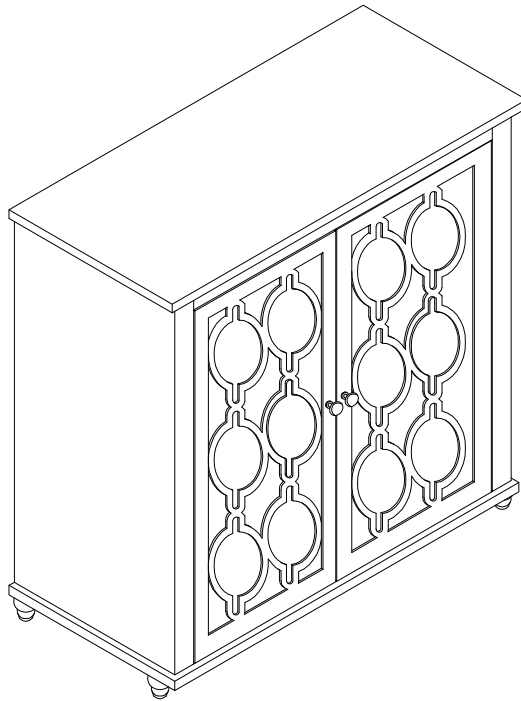

### NOTE TO CUSTOMERS:

- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.

## To insert a cam lock: (Please read below instructions before assembling)





Diagram A



1. Insert cam screw into hole as shown in diagram A .





Diagram B



Make sure not to insert the cam screw:  
Too deep as shown in figure B as this will cause the  
cam screw to be misaligned and unable to  
interlock properly.







Diagram C



Also avoid inserting the cam screw too close to the  
surface of the hole as shown in figure C, as this will  
cause the cam lock to be too loose, and not interlock  
properly.




2. Connect the panels together.



ARROW SIGN



3. When inserting the cam lock make sure the arrow  
of the cam lock faces the cam screw.





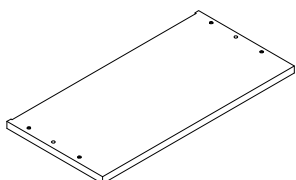


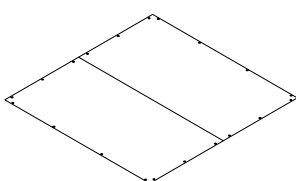




4. To tighten the cam lock turn the cam lock clockwise  
90-180 degree or until the arrow is facing opposite  
the place cam lock was inserted.

**NOTE: DO NOT USE AN AUTOMATIC  
SCREWDRIVER TO TIGHTEN CAM LOCKS.**









### Note:

- Read these instructions carefully before assembling.
- Tools required : Phillips screwdriver, flat screwdriver.
- Find a clean, smooth area on which to work , such as a carpet, in order to avoid scratching the wood surfaces.
- Wait to dispose of the packing material until assembly is complete and all parts and hardware are accounted for.
- Two or more people might be required for assembly.


## Part List

<p>A1</p> <p>Quantity of 4</p>  <p>Leg</p>	<p>A2</p> <p>Quantity of 1</p>  <p>Bottom Panel</p>	<p>A3</p> <p>Quantity of 1</p>  <p>Top Panel</p>	<p>A4</p> <p>Quantity of 1</p>  <p>Left Side Panel</p>
<p>A5</p> <p>Quantity of 1</p>  <p>Right Side Panel</p>	<p>A6</p> <p>Quantity of 1</p>  <p>Back Panel</p>	<p>A7</p> <p>Quantity of 1</p>  <p>Left Door</p>	<p>A8</p> <p>Quantity of 1</p>  <p>Right Door</p>
<p>A9</p> <p>Quantity of 1</p>  <p>Shelf Panel</p>	<p>A10</p> <p>Quantity of 1</p>  <p>Front Rail</p>		

## Hardware List


<p>B1</p> <p>Quantity of 8</p>  <p>Cambolt &amp; Camlock</p>	<p>B2</p> <p>Quantity of 5</p>  <p>Wood Dowel</p>	<p>B3</p> <p>Quantity of 1</p>  <p>Magnet with screw</p>	<p>B4</p> <p>Quantity of 20</p>  <p>Screw</p>	<p>B5</p> <p>Quantity of 4</p>  <p>Shelf Support</p>
<p>B6</p> <p>Quantity of 2</p>  <p>Knob with bolt</p>	<p>B7</p> <p>Quantity of 8</p>  <p>Screw</p>	<p>B8</p> <p>Quantity of 2</p>  <p>Screw</p>		



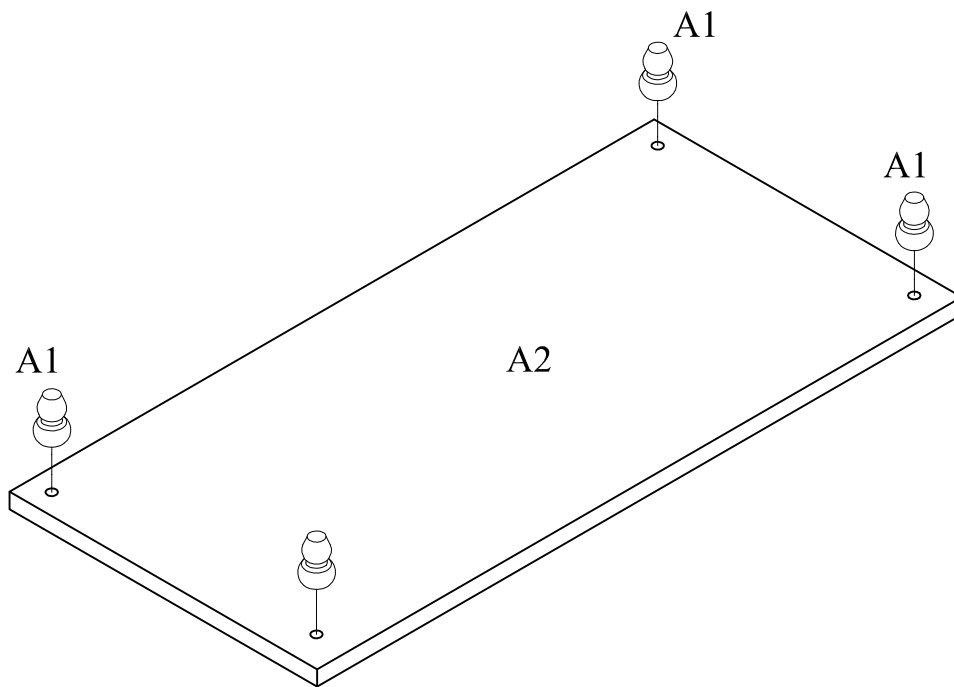

## Step 1

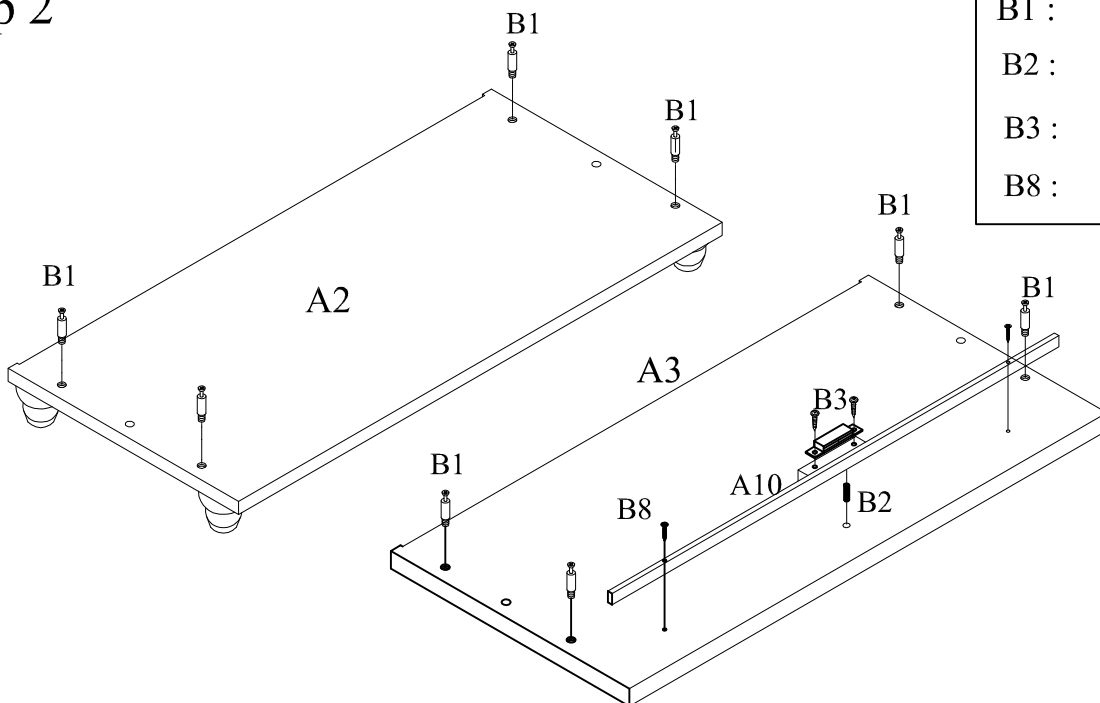

Attach and tighten Legs A1 to Bottom Panel A2.


## Step 2





B1 :		8pcs
B2 :		1pc
B3 :		1set
B8 :		2pcs

- 1). Attach and tighten Bolts B1 to Bottom Panel A2 and Top Panel A3.
- 2). Attach Front Rail A10 to Top Panel A3 using Screws B8 and Wood Dowel B2, then attach Magnet B3 to Front Rail A10 using included screws.

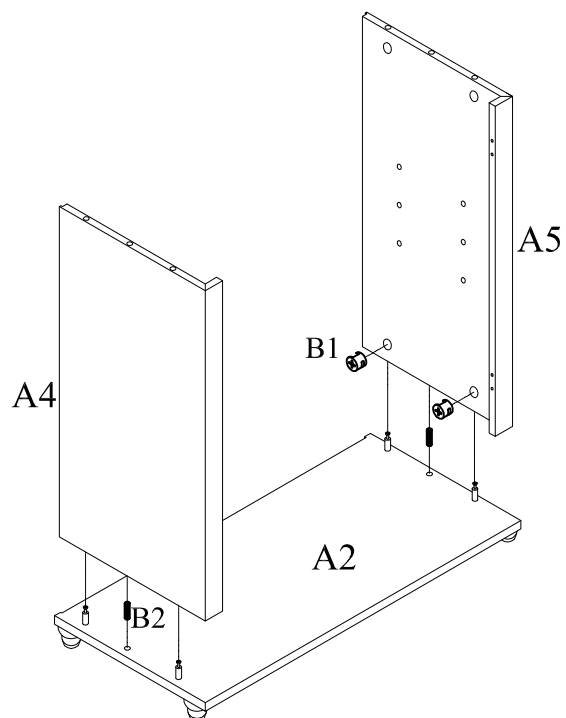
## Step 3





B1 :		4pcs
B2 :		2pcs

Assemble Side Panels A4&A5 (L&R) to Bottom Panel A2 using Camlocks B1 and Wood Dowels B2.
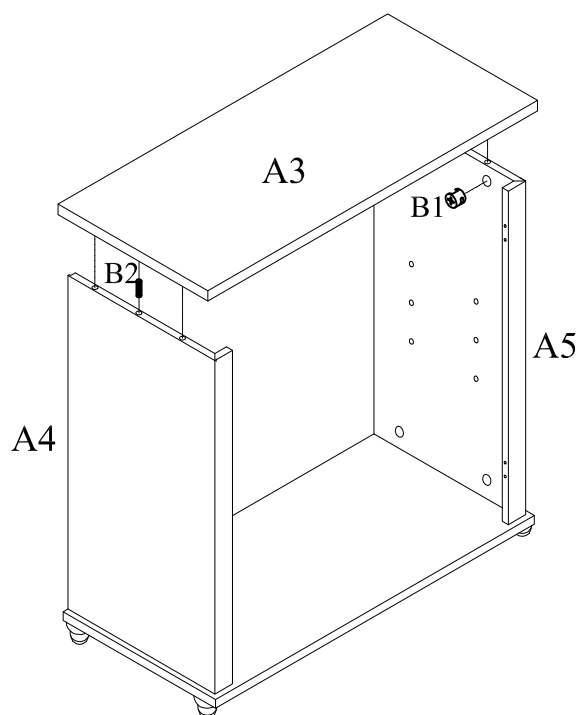
## Step 4




B1 :		4pcs
B2 :		2pcs

Attach Top Panel A3 to Side Panels A4&A5 (L&R) using Camlocks B1 and Wood Dowels B2.




## Step 5

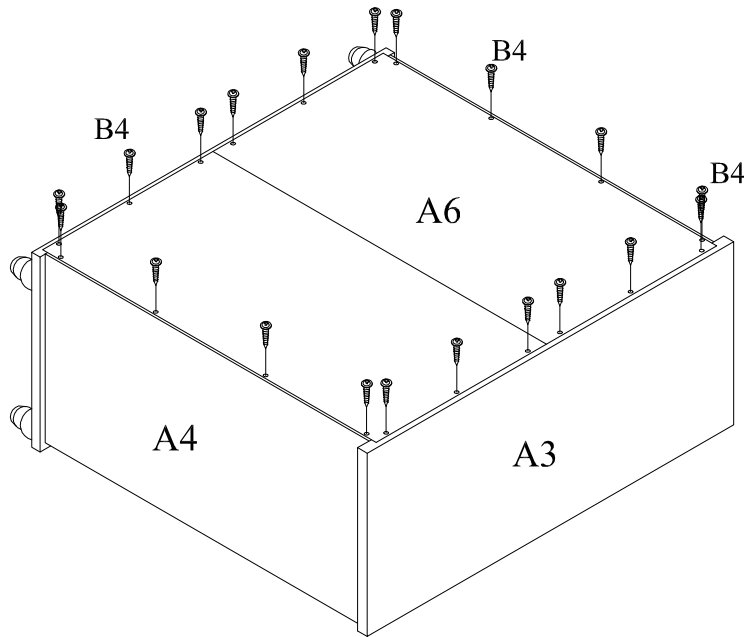
B4:  20pcs



Assemble Back Panel A6 to the back of the unit using Screws B4.


## Step 6

B5 :  4pcs  
 B6 :  2pcs  
 B7 :  8pcs

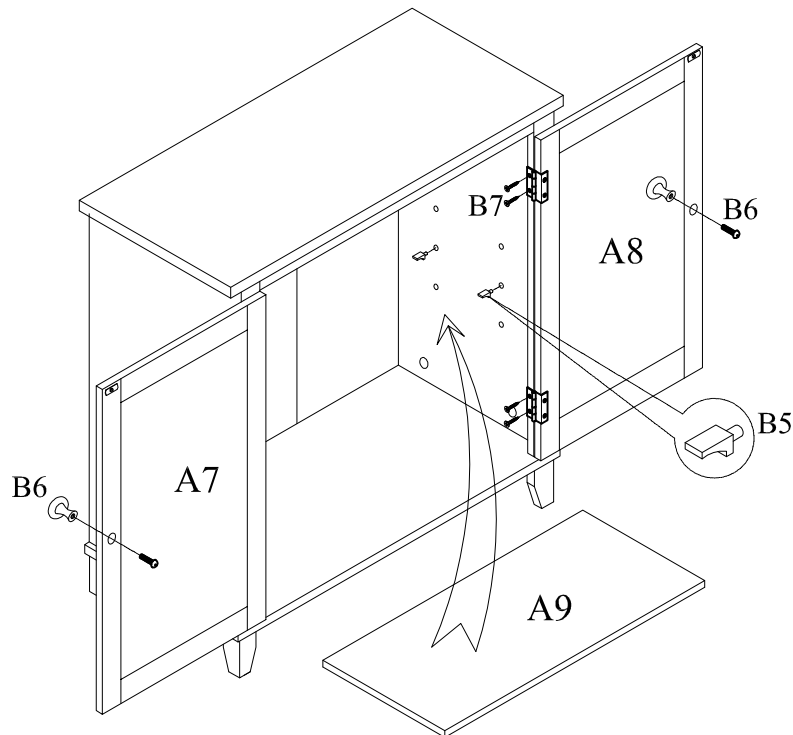

- 1). Assemble Doors A7&A8 (L&R) to Side Panels A4&A5 (L&R) using Screws B7 .
- 2). Attach Knobs B6 to Doors A7&A8 (L&R) using included bolts.
- 3). Insert Shelf Supports B5 into the holes on the Side Panels A4&A5 (L&R), then put Shelf Panel A9 onto Shelf Supports B5.

Step 7

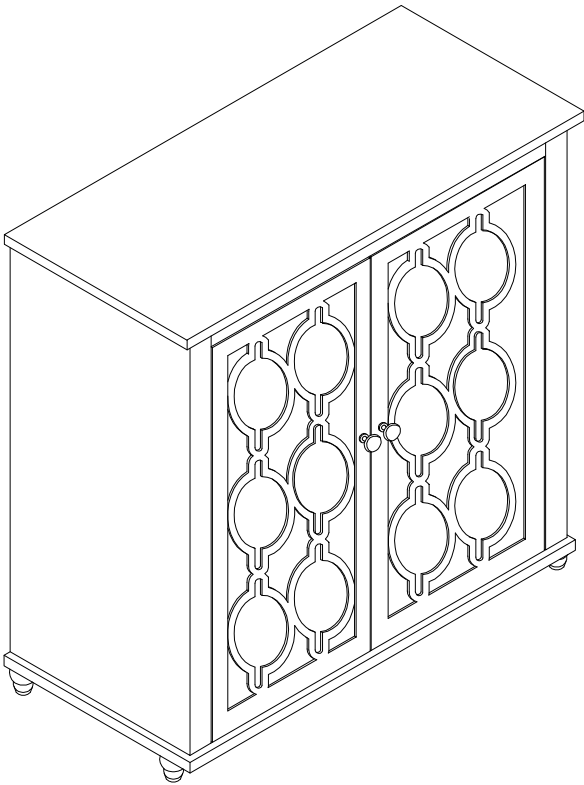

APPENDIX: Dimension of Hardwares in this AI.

<div>B1.</div> <div></div> <div>Cambolt &amp; Camlock</div>	<div>B2.</div> <div></div> <div>Wood Dowel</div>	<div>B8.</div> <div></div> <div>Screw</div>
<div>B3&amp;B4.</div> <div></div> <div>Screw</div>	<div>B6.</div> <div></div> <div>Bolt for knob</div>	<div>B7.</div> <div></div> <div>Screw</div>