

USER MANUAL

Welcome to the smart lighting system!

Thank you for choosing our product. Are you ready to explore the world of smart lighting? Begin your journey by downloading the app, your gateway to effortlessly controlling your lighting devices from any location. Our products are expertly designed to integrate seamlessly with your home Wi-Fi, enabling you to manage multiple devices simply by touching your smartphone or tablet.

At our company, we are committed to delivering exceptional service and continuously improving our app and lighting solutions to meet and exceed your expectations. Why wait? Illuminate your surroundings with the elegance and convenience of our system today. Let's brighten your space and enhance your smart living experience.


Product&Notes

What's in the Box



- Smart Ceiling Fan Light

PACKAGE CONTENTS



ST4x35mm Screws and
concrete for install the
hanging plate to the ceiling




ST3x25mm Screws and
concrete for remote holder



M4x25mmScrews
and caps for install
the mounting plate
to J-Box(Not included)



Nuts Cap



Remote and holder

Installation and Safety Instructions


- 1.**Power Safety:** Before starting any wiring, ensure power is completely disconnected at the circuit breaker or fuse. Simply switching off the wall light switch is insufficient to prevent electrical shock.
- 2.**Professional Installation:** A qualified, licensed electrician must perform the installation.
- 3.**Mounting Requirements:**
 - >> The outlet box and mounting structure must be securely attached and capable of supporting at least 50 lbs.
 - >> Use only UL-listed (or CUL-listed for Canadian installations) outlet boxes labeled "FOR FAN SUPPORT."
- 4.**Clearance:** The fan blades must be installed with at least 7 feet of clearance from the floor to the blade tips.
- 5.**Reversing Fan Direction:** Do not engage the reversing switch while the fan blades are moving. Turn off the fan and wait until the blades have fully stopped before changing the direction (if applicable).
- 6.**Blade Safety:** Keep all objects and body parts clear of the fan blades' path to prevent injury or damage.
- 7.**Caution When Cleaning:** Exercise care when working near or cleaning the fan to avoid injury or damage.
- 8.**Cleaning Instructions:** Do not use water or detergents. Clean blades with a dry dust cloth or a lightly dampened soft cloth only.
- 9.**Wiring Guidance:**
 - >> After making electrical connections, gently push and arrange the wires upward into the outlet box.
 - >> Grounded conductors should be separated on one side of the outlet box.
- 10.**Electrical Diagrams:** Any provided electrical diagrams are for reference only, as light fixtures may vary.
- 11.**Use Approved Replacement Parts:** Use only approved replacement parts. This equipment complies with FCC Class B digital device regulations to reduce harmful interference.

Warning:


- >> To reduce the risk of fire, electric shock, or personal injury, mount the fan only to an outlet box marked "Acceptable for Fan Support."
- >> If the existing outlet box is not rated for fan support, it must be replaced.
- >> Do not bend blade brackets (flanges) during assembly or after installation.
- >> Do not insert objects into the blade path.
- >> If uncertain about any aspect of the installation, consult a qualified electrician.

It is recommended to have two people work together during the installation.


For added safety, you can use a hook to hang the lamp by its edge or use a safety rope to secure the fan. This precaution helps prevent the fan from falling and damaging other items or products.

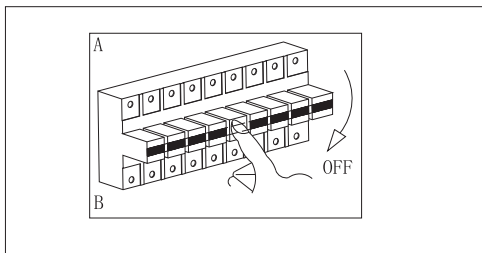


1. Please confirm that the voltage matches the product, and turn off the power at the installation location to ensure safety.

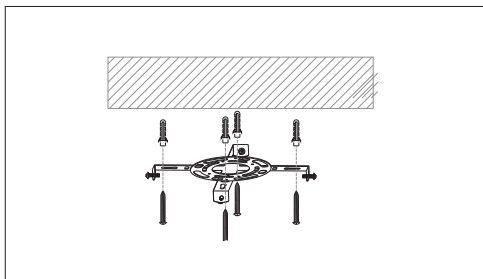


2. Securely attach the mounting plate to the ceiling.

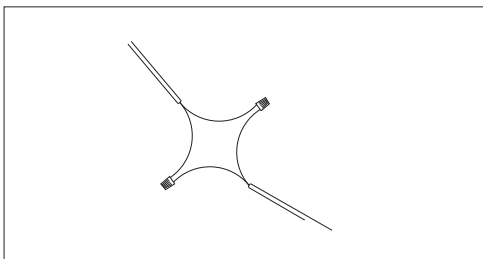


3. Connect the lamp driver input to the power source correctly and securely.

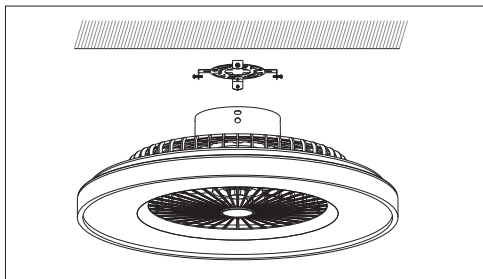

4. Rotate the lamp body to align the screws on the mounting plate with the holes on the leftmost hub.

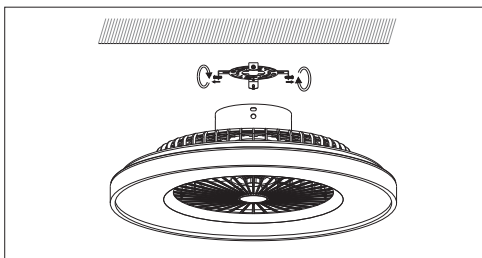

5.Tighten the four screws on the mounting plate to ensure the fixture is securely installed.Then align the screws with the mounting slots of the luminaire and secure them by turning counterclockwise. Finally, tighten all four screws firmly.

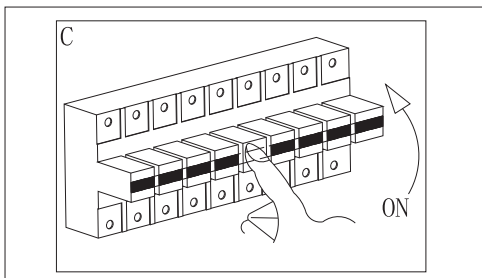

6.Turn on the power switch.

Install the App

What You Need:

- A Wi-Fi router supporting the 2.4GHz and 802.11b/g/n bands. 5GHz is not supported.
- A smartphone running iOS or Android.

1.Download the App from the App Store or Google Play.

2.Register a account.


Note:Please select your region and country.

3. Connect

Steps:

1. Turn on your smartphone's Bluetooth;
2. Open the App, In the top corner of the Devices screen, click "+" and select "Add Device" to confirm that the device is paired.
3. Each time the device without distribution network is powered on, confirm the light is breathing or blinking pairing mode;
If not, you need to use the switch to reset: on-off-on-off-on;
4. Find the device, choose Wi-Fi and enter password, press "Next".
Click "Add", and wait patiently. After that, click "Done", and the device is successfully added to the App.
If you have any questions. You can contact us via our after-sales email or leave a message on our official social media account.

Remote Control

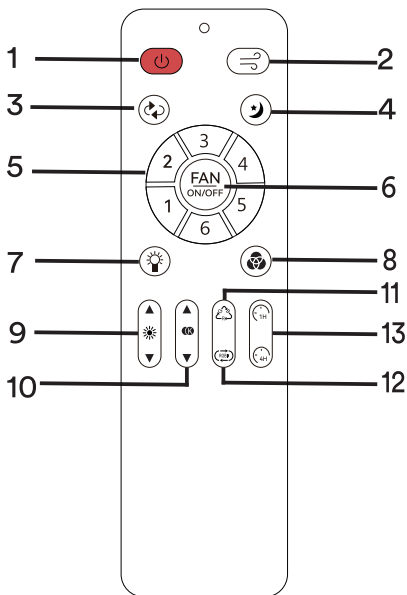

1: Turn on/off 3: Fan rotates: forward/ in reverse 5: Fan speed: 1 is the weakest, 6 is the strongest 7: Turn on white color 9: Change brightness 11: Change RGB color 13: Countdown Timing 1 Hour/4 Hours	2: Wind mode: nature/soft 4: Night light 6: Fan on/off, Long press 5 seconds to trigger the pairing mode 8: Turn on RGB color 10: Change color temperature 12: Change RGB mode
--	---

The remote control and the fan light are paired by default at the factory, so there is no need to pair them.

If the remote control doesn't work, please re-pair it as below.

1. Connect the fan light to the power supply and make sure the fan light works normally (the light comes on slowly);
2. Turn the fan light off for 5~10 seconds and then turn it back on by wall switch;
3. Press the button twice and the light blinks three times;
4. Remote control pairing is successful, at this time you can press the button to control the fan light.

Long press the button "6" for 5 seconds to make the fan light enter App pairing mode;

FAQ

1. Why does the flickering occur with products?

the products are factory set to the default network configuration. If the device has not been connected to the network, it will flash for three minutes each time it is powered on.

If the device is connected to the network, it will stop flashing and will automatically connect to the network when it is switched off and on via the wall switch after 15 seconds.

2.Can I share with family and friends?

Yes, you can share access to your devices. In the App, from your main device list, click on one of the devices press the "z" button on the top right and click on "Share Device" to give or revoke sharing permissions. In order to share, the other user should already have downloaded the App and registered an account.

3.Can I group multiple devices together?

Yes, you can group multiple same-type devices by room, location, or however else you want. The same devices can be in multiple groups. For example, if you create a group for "Bedroom" and another group for "Entire House", your Bedroom lights can be included in both groups. From your main device list, click on one of the devices you want to group, press the "..." button on the top right for advanced settings, and click "Create Group". You'll be able to name a new group and choose which devices you'd like to group together.

4.How many devices can I control?

- The maximum number of timers that can be added to a single device: 30
- Maximum number of devices that can be added in a single home: 120
- The maximum number of Tap-to-Run that a single home can create: 100
- Maximum number of Automation that can be created in a single home: 100
- The maximum number of tasks that can be added in a Tap-to-Run: 150
- The maximum number of tasks that can be added in an Automation: 150
- The maximum number of conditions that can be added in an Automation: 10
- The maximum number of mobile devices that can simultaneously log in to an account is: 200
- The maximum number of Homes that can be created by a single App account is: 20
- The maximum number of home members that can be added in a single home is: 20
- The maximum number of rooms that a single home can create is: 20
- The maximum number of devices that can be added in a single room is: 50
- The maximum number of devices that can be added in a single device group is: 100
- The maximum number of device groups that a single home can create is: 20
- The maximum number of each device group that can be shared with other users is: 20
- The maximum number of each device that can be shared with other users is: 20
- The maximum number of each App account that can be invited by other homes is: 20

5.What should I do,when I find a problem with the purchased product?

Please email us with your order ID. We are dedicated to ensuring your 100% satisfaction. Rest assured if the problem is with this product, we'll be more than happy to exchange it for a new one immediately.

Important Information

Troubleshooting

Can't connect to your Wi-Fi network.

Make sure you entered the correct Wi-Fi password during the Wi-Fi setup.

Check whether there are any Internet connection problems.If the Wi-Fi signal is too weak, reset your Wi-Fi router and try again.

Parameter information

Name	Smart Ceiling Fan Light
Input Voltage	120VAC,60Hz
Power	Fan 15W Light 28W
Color Temperature	2700K-6500K+RGB
CRI	Ra > 90
Lumens	2800lm
Beam Angle	120°
Rated Life	25000h



Made in China

CAUTION:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.