

# APPLICATION OPERATION MANUAL



Scan to download APP

Read the manual carefully  
before use and keep it properly

The Intelligent fragrance application "ScentArea" applies to the fragrance machine with wifi function, compatible with iOS, Android system.

When you connect the device to WIFI first time, keep the phone and APP in the same wifi(LAN). And the AP mode can control the device without network.

The machine can be set for 5 groups for different working periods , it can set different working days, working times according to different requests and suit for different places.

The users can set the total capacity of oil bottle, current oil level and oil consumption , The machine can intelligently calibrate the remaining days of remaining oil, customize the essential oil type of the devices, and check the status of the equipment in real time.

When the administrator connects the equipment with the network, administrator can authorize the device operation rights to the sharers through the mobile phone number or QR code, and the authorization can be canceled,then the sharers don't have the sharing rights, so the device is more secure.

Users can set the equipment groups: customize the group name, add the equipment to the corresponding group to achieve group management, one group of equipment can be set the same relevant data.

## 1 Installation and registration instructions

①Scan the QR code and download the APP(ScentArea)

②Regist and set the password

③License the APP. Permissions(by phone number or email) the authorization: location services, connect to Bluetooth, send notifications, etc.

## 2 App connect the device

①AP Model:Press "UP" 15 seconds (4 beeps) to reset machine, open your phone's wifi settings, "M50-ALOS"can be found in the phone wifi setting, connect it. The default passwords is 12345678, then open

ScentArea APP,click APP, then choose AP mode.

Note: In AP mode, one mobile phone can only connect one diffuser; repeat to connect the device same as before operation if power off.

②WIFI Model:Press "Mode" 15 seconds(4 beeps),open ScentArea app, Add equipment, enter the password of the local wifi, phone wifi and APP wifi should be the same.

## 3 Home page

①Scan the QR code of the Shared device.


②Find the specified device by the device name.



③Add equipment by AP model or WIFI model.

④Drop down the window to refresh, showing the configured devices on the LAN.

◇ Press the equipment after connect the WIFI,the user can set top device, cancel top device, rename device, share device and cancel the device ect.

◇ Share devices:Enter the phone number or create a QR code to share the devices, other users can operate the devices. View the share history in the 'my menu' and unshare at any time.

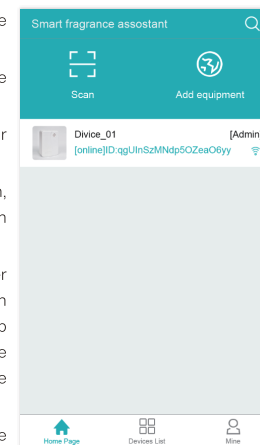

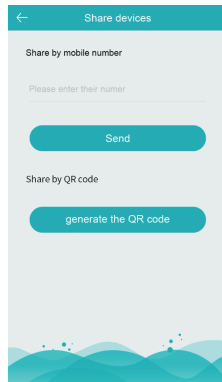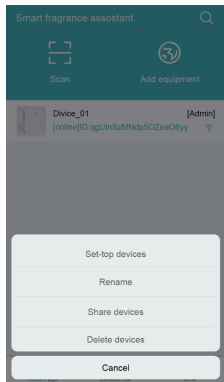

#### 4 Operation Instruction

- ◇ Capacity of bottle:choose the size of the bottle.
- ◇ Current capacity:oil capacity.
- ◇ Oil consumption:Enter the current oil consumption.
- ◇ Type of oil:Enter the current Oil name.
- ◇ Remaining: calibrate the remaining days of current oil.
- ◇ Running state:Turn on/Turn off the device.
- ◇ Fan:Turn on/Turn off the fan.
- ◇ Devices lock:Lock/unlock the device.




- ◇ Working model: 5 groups to set the dates, timed the work and pause time ect.
- ◇ Device address:The device gets the network location address after connecting the WIFI.

The warning lights show atomization abnormal warning, air pump abnormal warning, fan abnormal warning, power shortage warning.  
 More information:Take a photo or choose a photo to replace the device head or scene,current devices group information,turn on or off the push message function etc.

#### 5 Device list

After connect and configured,the device is on the ungrouping devices,the user can customize the new group.

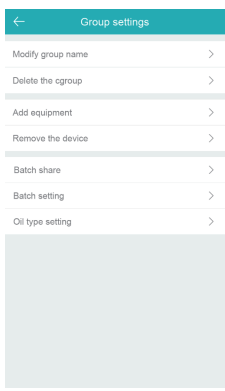

- Click "new group"
- ◇ Rename the group:Rename the group.
  - ◇ Cancel the group:Cancel the group.
  - ◇ Add device:Add the ungroup devices to the new group .
  - ◇ Remove device:Remove the device from the new group.
  - ◇ Batch share:share all devices of the group.
  - ◇ Batch set:Control all devices of the group.
  - ◇ Batch type of oil:Set all type of oil of devices in the group.

#### 6 Mine

- ◇ Register and set the password.
- ◇ Share history: View share history,cancel the share authorization.

- ◇ Push message:Send message when oil storage,device abnormal ect.
- ◇ User manual:Instruction of user manual.
- ◇ Warranty:the warranty items.
- ◇ About device:equipment operation,maintenance and troubleshooting ect.
- ◇ Set:Feedback, version information and logout.

#### 7 Notes

- ①The Intelligent fragrance application ScentArea only applies to the fragrance machine with wifi function.
- ②When you connect wifi to the phone first time, Keep app and device on the same wifi.
- ③ If the located wifi is changed, Please reset the machine to match the new wifi again.
- ④The WIFI model can only be suit for 2.4GHZ.
- ⑤If the APP cannot connect to the device due to wifi diconnected, APP reconnected, login error or signal problem, press MODE for 15 seconds(4 ticks) to reset and match the machine again.

尺寸:80\*130mm