


Assembly & Installation Instructions

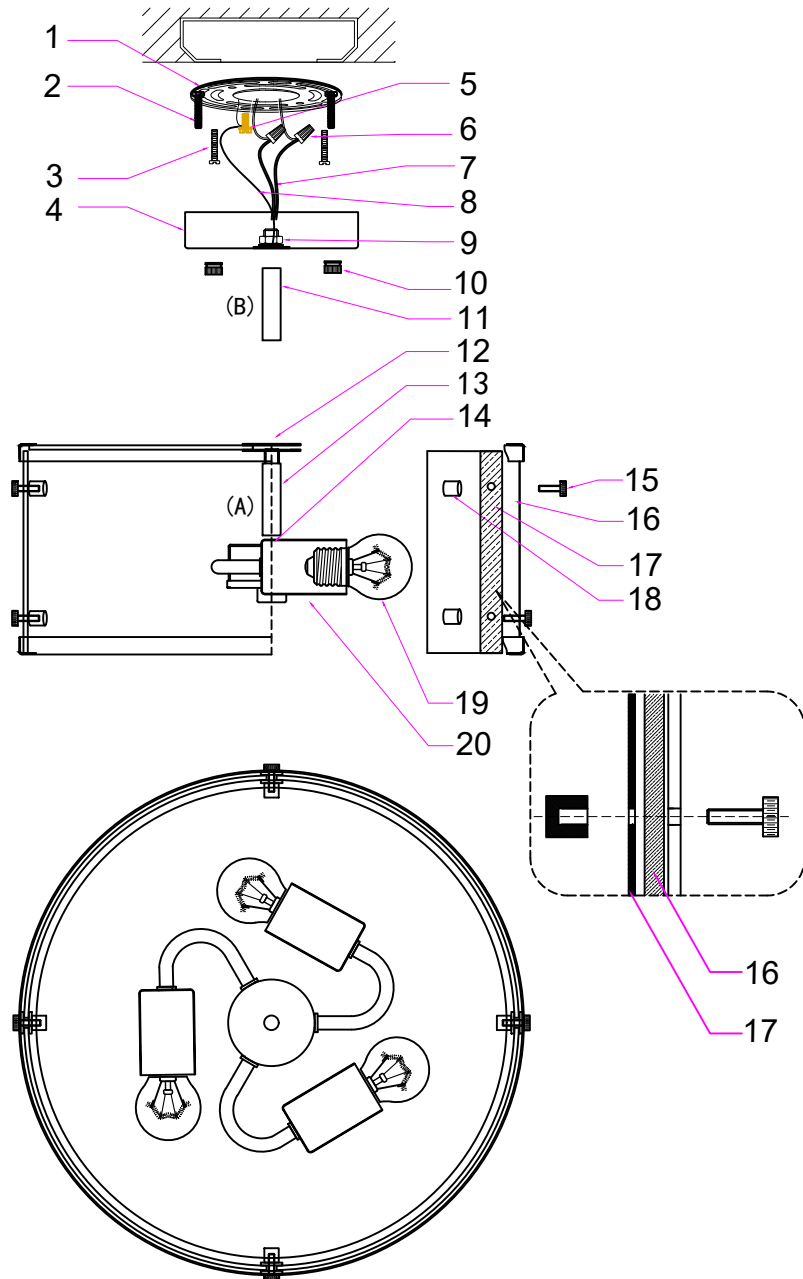

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

A: Secure the flat bracket (17) and glass panels (16) to the inner side of the hardware ring (12) with threaded rods (15) and nuts (18).

B: Feed the main wire (7) and ground wire (8) through straight tube A (13), then fasten straight tube A onto the threaded nipple (14). Route the assembly through the center hole of the hardware ring (12), and then lock in place with straight tube B (11).

C: Feed the main wire (7) and ground wire (8) through the ceiling canopy (4), then secure the canopy to straight tube B (11) using lock washers and nuts (9).

D: Secure the mounting bracket (1) to the junction box with junction box screws (3);

E: Connect the wires using wire connectors (6) as follows:

(1) Connect the BLACK wire of the main wire (7) to the LIVE wire

(2) Connect the WHITE wire to the neutral wire.

(3) Secure the fixture ground wire (8) and external ground wire on the mounting bracket (1) with green screws (5).

Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.

F: Feed the threaded rod (2) through the ceiling canopy (4), then secure the fixture by tightening the decorative cap nut (10).

G: Install the bulbs (19) (not included) onto the lamp holder (20) as indicated.