




Triac Dimmable




5CCT Adjustable
Color Temperature

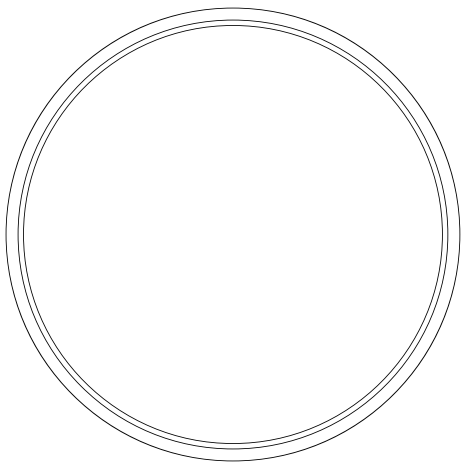


User Manual

Product Introduction

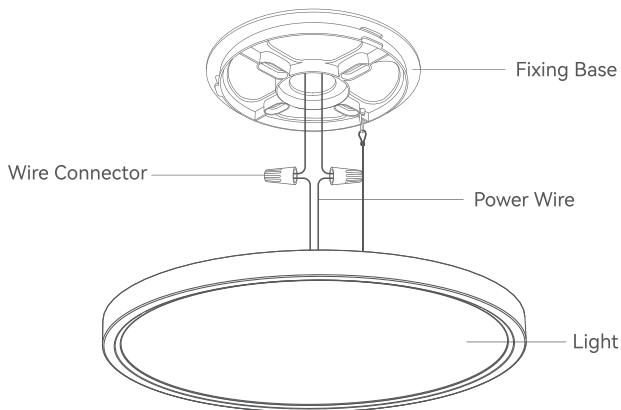




Packing List



Light



Fixing Base



User Manual



× 3

Tapping screw



× 2

Metric screw



× 3

Expansion pipe




× 3

Wire connector




Installation Instructions

1





2




Please rotate the fixing base
counterclockwise to remove it.

3




Install the fixing base onto the ceiling using screws.

4




Attach the light to the fixing base, then connect its L/N power wires to the supply.

5




Rotate the light clockwise to secure it onto the fixing base.

6



7





Triac Dimmable



Switch Control



5CCT Adjustable
Color Temperature



Color Temperature
Switch



Troubleshooting Guide

Fault Phenomenon	Possible Causes	Solution
Flickering lights	Incompatible dimmer model	Replace compatible dimmer (See approval list on page 6)
	Fixture malfunction	Please contact Amazon's Customer Service team for return and exchange support
	Loose wiring connections	Turn off power and check all terminal connections
No illumination	Wiring fault	Check wiring connections
	Fixture malfunction	Contact authorized service center for replacement
Incorrect color temperature	Wrong CCT switch position	Adjust switch on fixture base
	Mixed LED batches	Replace all LEDs from same production lot
Insufficient brightness	Dimmer not at maximum setting	Rotate dimmer to 100% output position
Installation failure	Incorrect mounting procedure	Follow step-by-step installation diagram (See pages 2 and 3)

Safety Precautions

Read and follow the safety instructions below:

- Turn OFF the main power at the fuse or circuit breaker before installing the light fixture or making any electrical connection.
- Consult a qualified electrician to ensure correct branch circuit conductors.
- Do not use diluent, gasoline, or corrosive liquid to clean at risk of discoloration or damage.
- Do not attempt to change the light source. Replace it with a new light when the light source expires.
- Do not install the light in a damp location such as bathroom.
- For indoor use only.

Grounding and Bonding Requirements

This luminaire is designed and manufactured as a double-insulated (Class II) electrical product, which means:

(no accessible conductive parts requiring grounding).

No grounding connection is required



Class II