

# Assembly & Installation Instructions

## IMPORTANT SAFETY INSTRUCTIONS:

- **Warning:** If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electric contractor.
- **Warning:** This product can expose you to chemicals including lead, which is known to the State of California, to cause cancer or birth defects or other reproductive harm. For more information, please go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)
- **Caution:** Electrician installation highly recommended. All glass is fragile, use care when handling glass component(s) and or lamp(s). Read instructions carefully and turn electricity off at the main circuit breaker panel before beginning installation.


## Important Notice:

This is a generic instruction sheet used for various fixtures.  
The finish, numbers of heads/arms, and style of fixture / glass / shade / diffuser may vary.



(Required Supply Circuit: 120V, 60Hz. Bulb Type: 1\*E26\*60W Max)

Compatible Bulb Type  
(NOT Included)

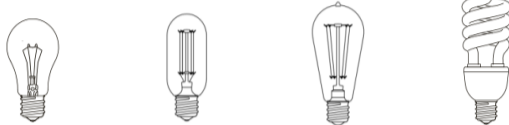

The mostly suggested bulb type is 8W LED ST58 or A19 bulb

## COMPONENTS INCLUDED IN THE PACKAGE

Fixture with hardwares and glass



Parts included in parts bag.  
Parts X 2 for 2 pack item



## ASSEMBLY & INSTALLATION STEPS:

1. Open the box from top, take out all the components, parts bag and manual from the box carefully.
2. Check all the components against the parts list. Make sure get each parts on list. If any parts missing and glass damage, please contact the seller to get a replacement.  
Parts are NOT included for which is shown as 0 under QTY.

| PARTS LIST                 |     |      | (Parts QTY X 2 for 2 pack item) |     |      |
|----------------------------|-----|------|---------------------------------|-----|------|
| Part Name                  | QTY | Code | Part Name                       | QTY | Code |
| Junction Box               | 0   | A    | Wire Nut                        | 3   | I    |
| Leading Wire (1.25")       | 0   | B    | Wire                            | 2   | J    |
| Mounting Screw             | 2   | C    | Socket                          | 1   | K    |
| Cross Bar Mounting Bracket | 1   | D    | Glass                           | 4   | L    |
| Stud                       | 2   | E    | Light Bulb                      | 0   | M    |
| Back Plate                 | 1   | F    |                                 |     |      |
| Washer                     | 2   | G    |                                 |     |      |
| Cap Nut                    | 2   | H    |                                 |     |      |

3. Refer to the illustration while doing assembly and follow the steps as below:

- I Screw on the bulb (M) onto socket (K) before installation.
- II Thread two studs (E) onto the mounting bracket (D) at proper position.
- III Attach the mounting bracket (D) to the junction box (A) by two mounting screws (C).  
Adjust the mounting bracket to make the fixture installed at a horizontal level.
- IV Connect wires according to the wiring diagram as below.
- V Attach the backplate (F) to two studs (E) and fix with two washers (G) and cap nuts (H).

## Illustration of assembly and wiring:

- I. M → K
- II. E → D
- III. C,D → A
- IV. B, J → I
- V. G,H,F → E

