

Installtion manual

Dimensions: D21"H26"L5

Bulb Type : E12 bulb not included

Weight: 12.5 LBS



Thank you for choosing world famous brand chandelier. We are providing the finest quality crystal chandelier for our customers. Our master designers and craftsmen intend to give a professional insight on lighting design & product quality. Prompt and efficient services are our priority. We enclosed detail instructions on how to install your chandelier properly. Please read all instructions carefully & thoroughly.

D21"H26"L5

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURN OFF THE CIRCUIT BREAKER

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package


Please open the box carefully and check all the items are inside the box.

01

D21"H26"L5

Step 1



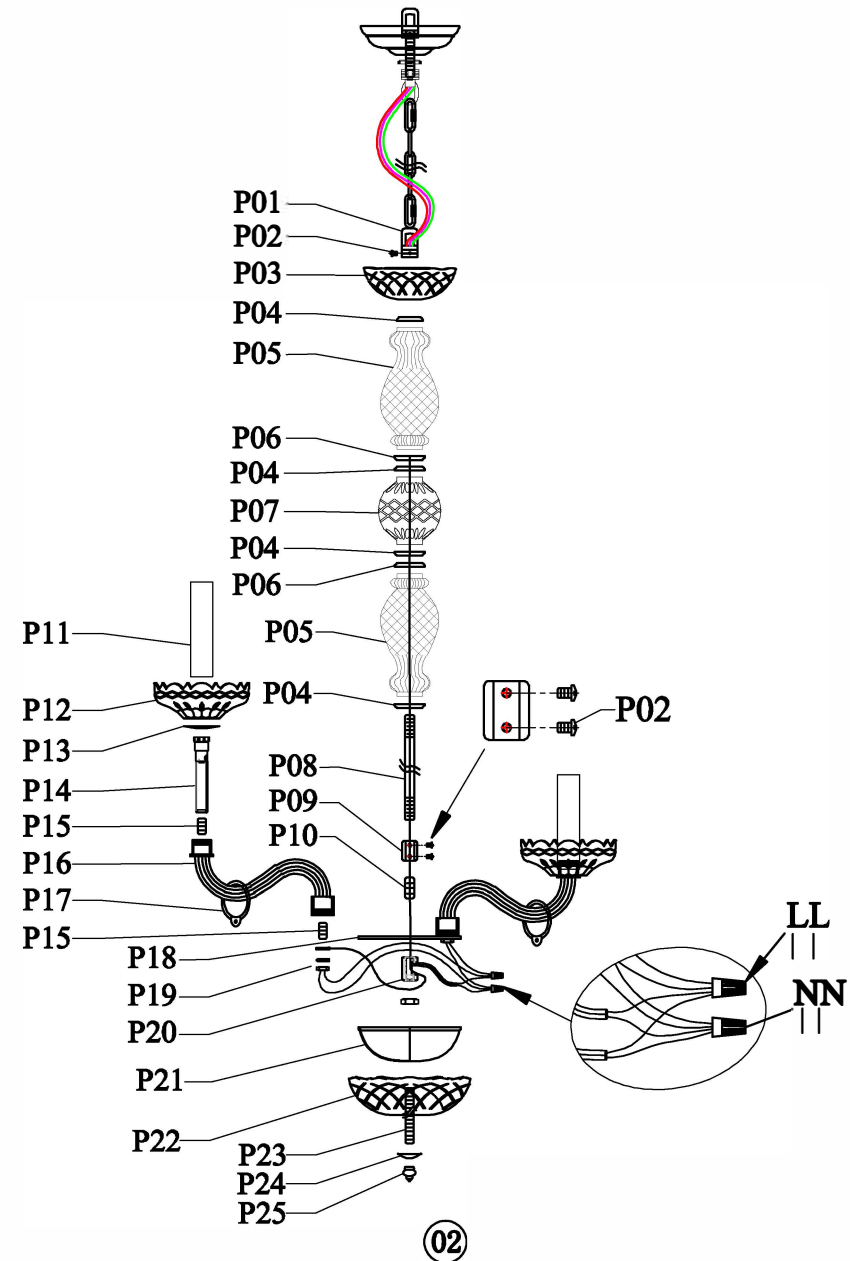












Frame Assembly Diagram



















D21"H26"L5

Please use the partslist to ensure you are not missing any parts.








PARTS LIST

Part#	Picture	Description	Qty	Check list
ZA		ø5.3" Canopy	1	
ZB		4" Crossbar	1	
ZC		Canopy ring	1	
ZD		Canopy lock	1	
ZE		L59" Chain04P Plain Design	1	
ZF		Power Cord 10.5'/SPT-1-18# Clear/Gold	1	
P01		loop	1	
P02		Ground Screw	3	
P03		ø4.7" Glass dish	1	
P04		big check ring	4	
P05		Glass column	2	
P06		big check ring	2	
P07		Glass column	1	
P08		Both end threaded pipe	1	
P09		Metal finial	1	

D21"H26"L5


Part#	Picture	Description	Qty	Check list
P10		Nipple	1	
P11		L4.13" Metal tube	5	
P12		ø4.7" Glass dish	5	
P13		Crystal Drop Holder	5	
P14		Socket	5	
P15		Nipple	10	
P16		Glass S-shape Arm	5	
P17		Glass ring	5	
P18		ø5.1" Around metal plate	1	
P19		Hex nut	6	
P20		Hickey	1	
P21		Receiver bowl	1	
P22		ø5.9" Glass dish	1	
P23		Nipple	1	
P24		Small flying saucer	1	
P25		Finial	1	

D21"H26"L5

Part#	Picture	Description	Qty	Check list
A		1050-14#*23	5	
B		1050-14#*1+911-2"	25	
C		1050-14#*6*2 +2024-14#*1 +911-2.5"	5	
D		1050-14#*1+2024-14#*1 +911-2.5"	5	
E		1050-14#*1+911-2.5"	5	
F		1050-14#*3+911-2.5"	5	
G		1050-14#*3+701-40#	1	

D21"H26"L5

Step 2 Canopy Installation Instruction

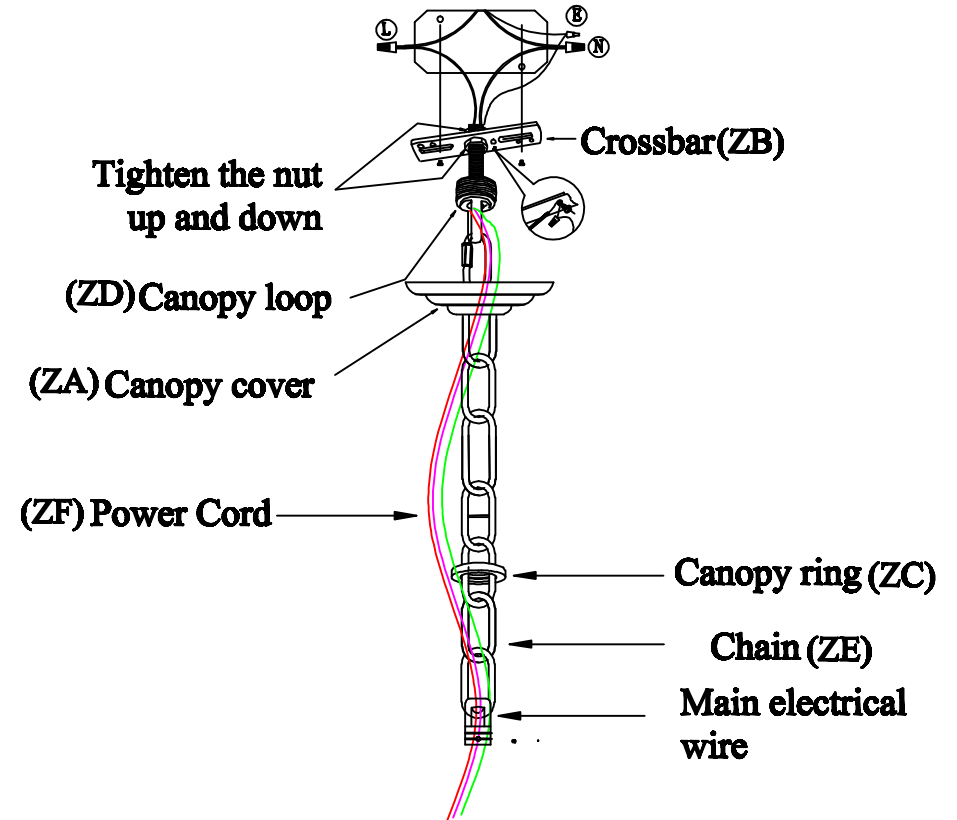

"L" = Hot wite
 "N" = Neutral wite
 "E" = Ground wite

D21"H26"L5

IMPORTANT: Test sockets with bulb before dressing the fixture.


1. Attach the crossbar to the electrical box.
2. Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
3. Screw 2.5" nipple into the crossbar and fasten with hex-nut.
4. Pull wires up through the nipple.
5. Screw loop only onto threaded pipe.
6. Hang the fixture on chain.
7. Make the electrical connections as detailed in the drawing above.
8. Secure the canopy cover with threaded canopy ring

07

D21"H26"L5

Step 3

Frame Assembly Diagram

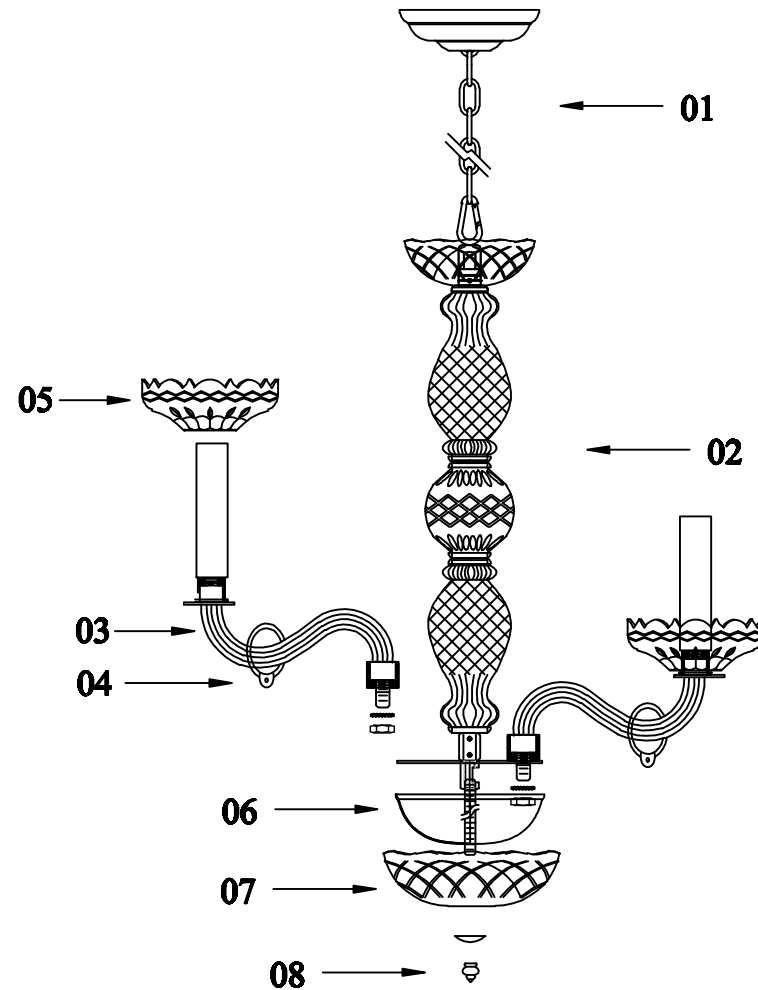

08

D21"H26"L5

Frame Assembly Instructions

Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Hang the chain (01) on the ceiling.
2. Hang the lamp body (02) on the chain (01).
3. Break up the lamp body (02) and assemble the glass arm (03) to the lamp body (02) then assemble the lamp body (02).
4. Put the glass ring (04) and glass dish (05) on the glass arm .
5. Hang (06)/(07)/(08) on the lamp body (02).
5. Hang up the crystal in accordance with the Crystal Dressing Diagram.
6. Hang crystal "A", "B", "C", "D", "E", "F", "G",
Connect both ends of C with D.


The end !

09

D21"H26"L5

Step 4 Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

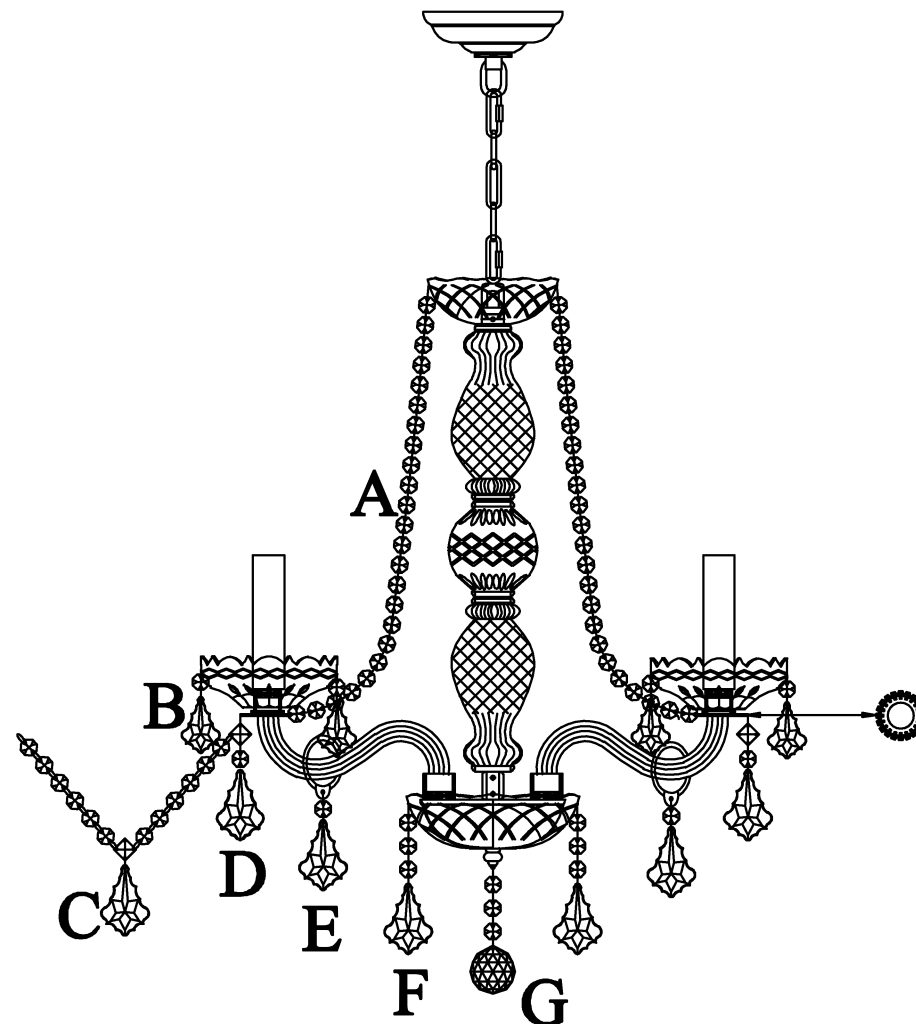

10

Congratulations !

You are now done installing

. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a chamois in clean warm water and wipe gently, then polish with a dry chamois.

Warranty

The finish and frame of your new chandelier or fixture warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserved the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.