


edishinē

Vanity Light

[Instruction Manual]

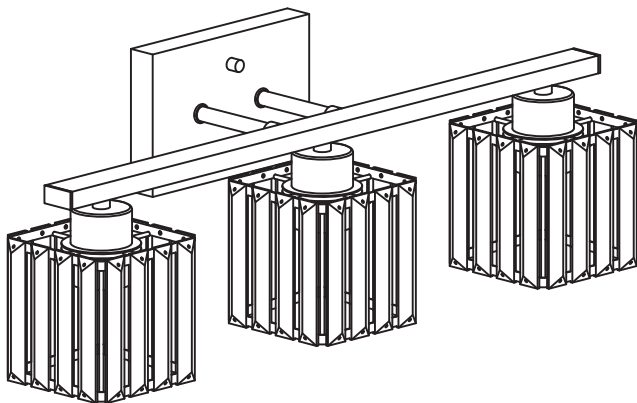

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

Warning:

Risk of fire. Min 75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Part	Description	Quantity
1	Vanity Light	1pc
2	Wire Connectors	3pcs
3	Fixture Screw	2pcs
4	Outlet Box Screw	2pcs
5	Decorative Nut	2pcs
6	Instruction Manual	1pc

Installation Instructions




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL




FIG.3 FUSE BOX


STEP 01: POWER OFF

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home;

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to the fixture installation location.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies or turn off the individual switch that supplies power to the fixture installation location.

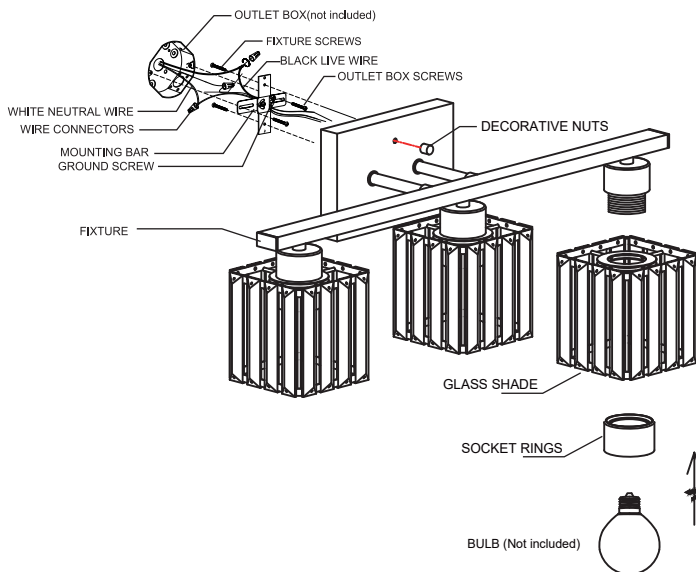

STEP 02: Lighting Fixture Installation

1. Take out all the parts in the package and place them on a clean surface.
2. Unscrew decorative nuts and fixture screws, use outlet box screws to connect mounting bar to outlet box.
3. Use connectors to connect the black wire of the fixture to the black wire of the outlet box, connect white wire of fixture to white wire of outlet box with connectors, use connectors to connect the ground wire of the fixture to the ground wire of the outlet box, use green ground screw to connect ground wire of fixture to mounting bar. Carefully put the wire back into the outlet box.
4. Use fixture screws to install fixture on mounting bar and fix it with decorative nuts.
5. Use socket ring to fix glass shade to fixture.
6. Install the bulbs.

Specifications

- Input Voltage: 120VAC 60Hz
- Max. load Power: incandescent Bulb 60W x 3 Socket
- Socket Type: Standard medium E26 (bulb not included)

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.

