① ② ③		⑤	light fixture 1pcs	⑦	 short hanging tube 1pcs	⑨	long hanging tube 2pcs	cross screw driver 1pcs	X 1PCS X 1PCS	
④	square profile 4pcs	⑥	② long screw 8pcs ⑥ round plate 1pcs	⑧	short hanging tube 1pcs	⑩ ⑪	⑩ canopy 1pcs ⑪ cap nut 2pcs	X 3PCS X 3PCS	X 3PCS X 3PCS	

Please operate with gloves to avoid leaving stains on the lampshade.





how to assemble the lampshade together



how to install the profile to the lampshade





how to install the profile to the round plate

1.Assemble the split lampshade ① to be a complete lampshade with screw ③. (please don't tighten the screw ③ until all of the lampshades are put in the open end holes and adjust all parts in level, rotate to fasten the screw ③ at last)

2.Install the square profile ④ to the round plate ⑥ with screw ②, don't tighten the screw ② at this step.

3.Install the profile ④ to the lampshade ① with screw ②, use screw driver to fasten all of screws ② at last.



4.Rotate to install the short tube ⑦ to the light fixture ⑤.

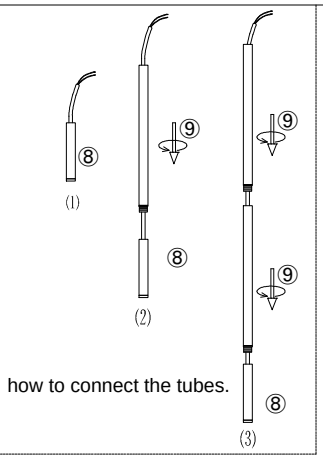

how to connect the tubes.



5.Let the wire of the fixture ⑤ go through the lampshade ① and tube ⑧, rotate tube ⑧ to fasten lampshade with fixture together.(can connect more tubes to get the height you need)



6. Rotate to install the canopy ⑩ to the fixture.



7.Install the bracket to the ceiling junction box with screw ⑫.
8.Connect the wire to your home line with cap connector ⑬.
9.Install the fixture to the bracket with cap nut ⑪.
10.Install the bulb ⑭ .

X9104M-5/X0251M-5

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !