


FULL SIZE LOFT BED ASSEMBLY INSTRUCTIONS

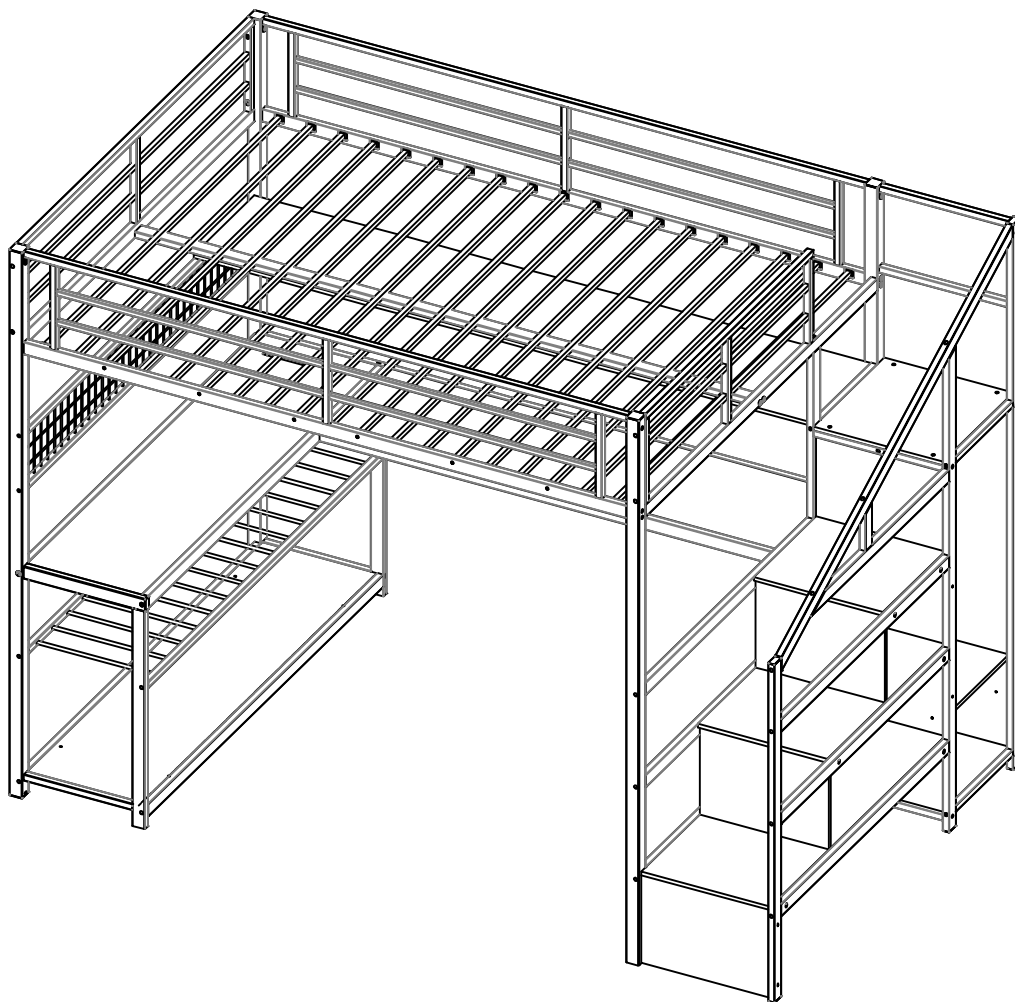

SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.

The use of water or sleep flotation mattresses is prohibited.

13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed; for example, but not limited to, hooks, belts and jump ropes.

14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Up bed (bunk bed and tribed included)


Mattress size	Length	Width	Thickness
Full Standard	74"-75"	53"-54"	6"

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.


19. Replacement Parts:

Replacement Parts, including additional guardrails, may be obtained from any of our (Zhongshan Besway Technology Co., Ltd) dealers.




















Bed parts view

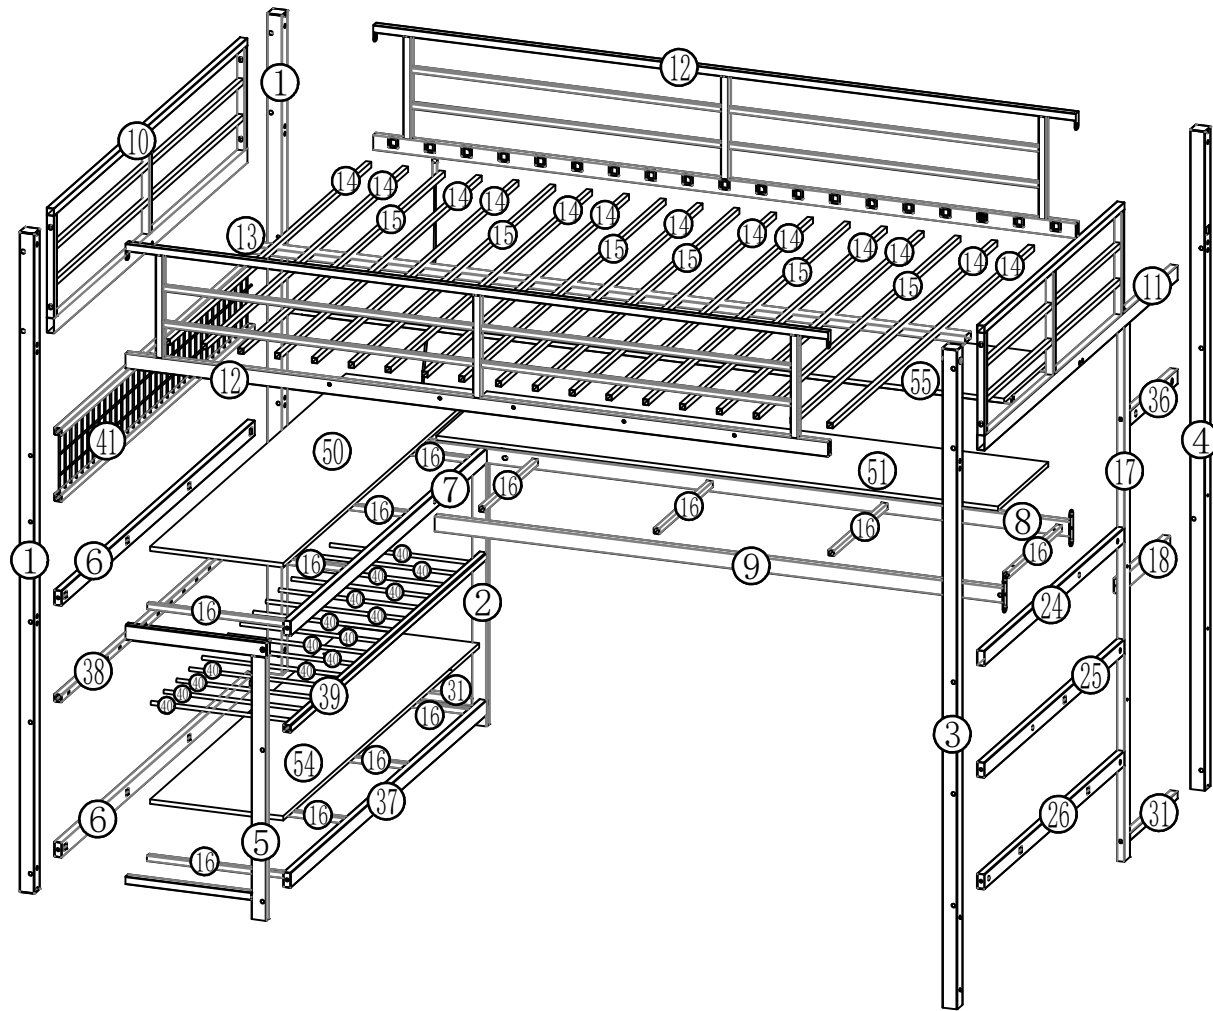


Stairs part view

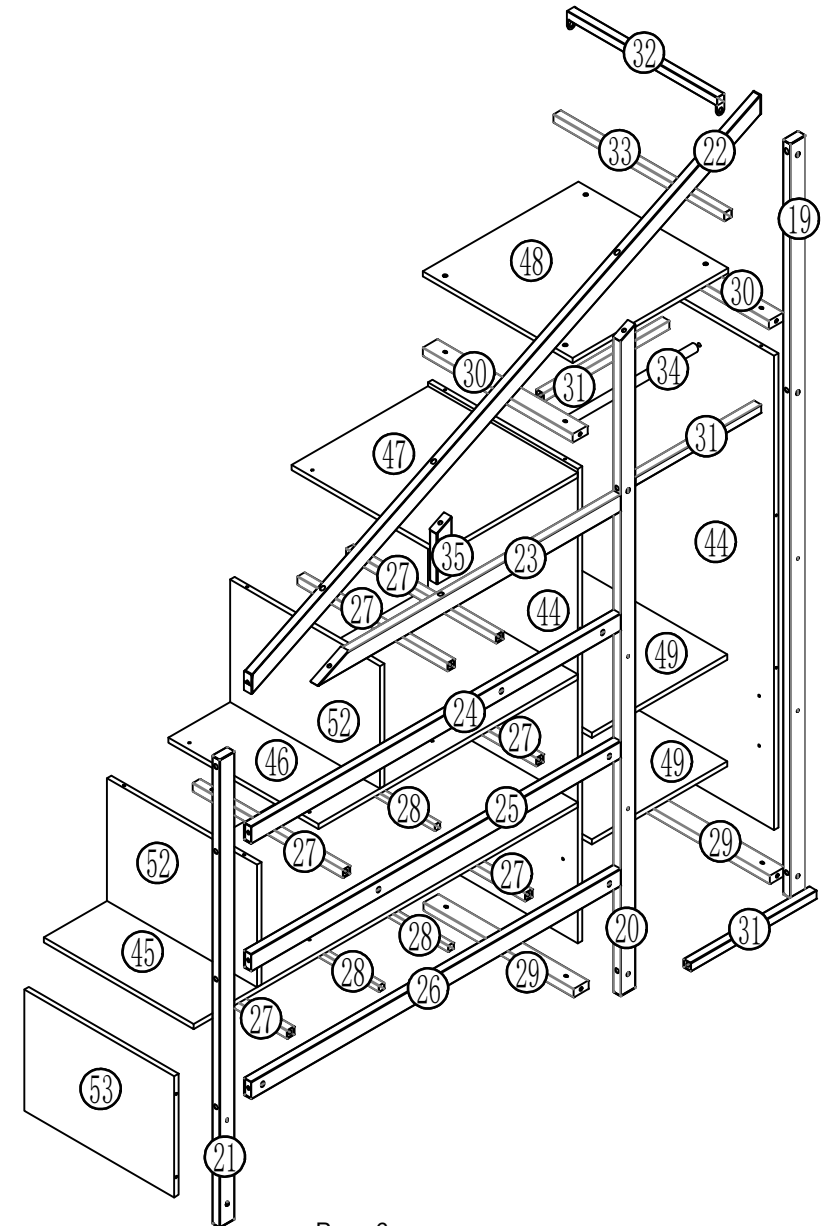

Part List

							
1-2pcs	2-1pcs	3-1pcs	4-1pcs	5-1pcs	6-2pcs	7-1pcs	8-1pcs
							
9-1pcs	10-1pcs	11-1pcs	12-2pcs	13-1pcs	14-13pcs	15-6pcs	16-12pcs
							
17-1pcs	18-1pcs	19-1pcs	20-1pcs	21-1pcs	22-1pcs	23-1pcs	24-2pcs
							
25-2pcs	26-2pcs	27-6pcs	28-3pcs	29-2pcs	30-2pcs	31-5pcs	32-1pcs
							
33-1pcs	34-1pcs	35-1pcs	36-1pcs	37-1pcs	38-1pcs	39-1pcs	40-15pcs
							
41-1pcs	42-2pcs	43-2pcs	44-2pcs		45-1pcs	46-1pcs	47-1pcs
							
48-1pcs	49-2pcs	50-1pcs					
							
51-1pcs		52-2pcs	53-1pcs				
							
54-1pcs		55-1pcs					


Hardware List

 P Socket 1pcs			 Q Light strips 1pcs				 T 4PCS		 U 2PCS			
												
A 4*10 4PCS	B 8*15 5PCS	C 8*35 38PCS	D 8*55 65PCS	E 6*30 18PCS	F 8*15 11PCS	G 4*35 20PCS	H 4*50 8PCS	J 5*10 4PCS	L 3PCS	K 38PCS	M 1PCS	O 2PCS

Step 1: Use hardware L,D,F to connect #1,#6,#10,#38 and #41 together.



Please strictly follow the instructions to use the screws and avoid the situation where screws of a certain specification are insufficient.

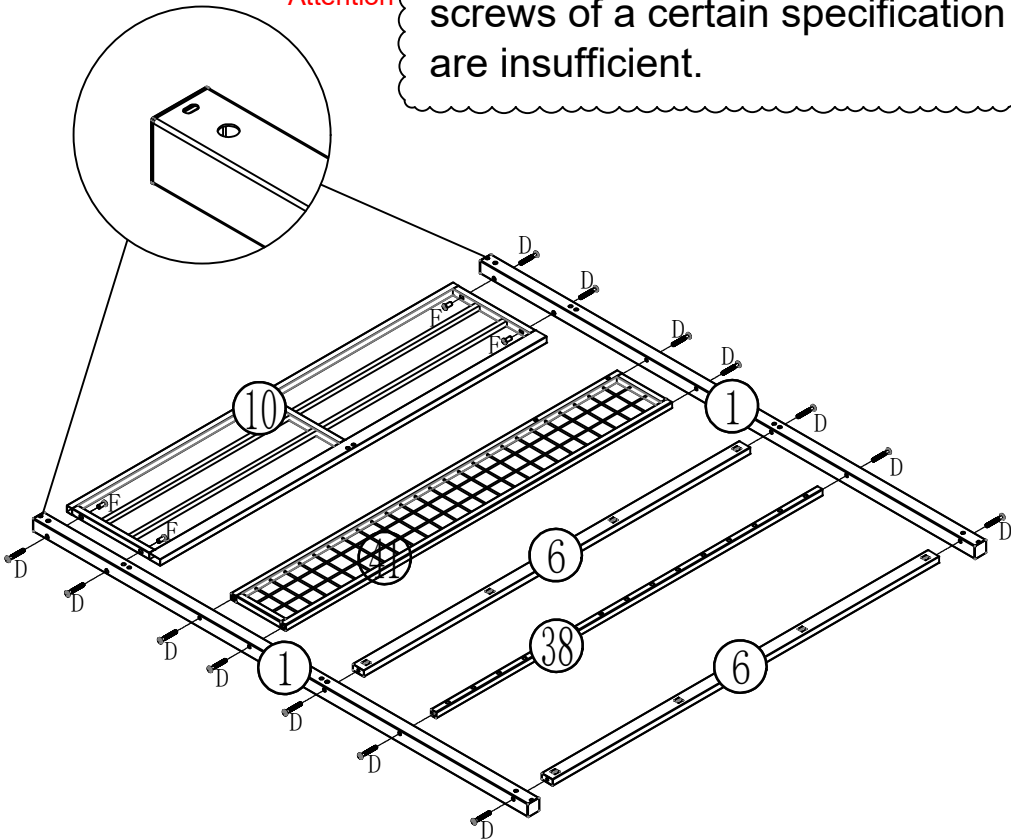

D
8*55-14PCS




F
8*15-4PCS



L

Step 2: Use hardware L,D,F to connect #3,#4,#11,#17, #24,#25,#26,#31 and #36 together.

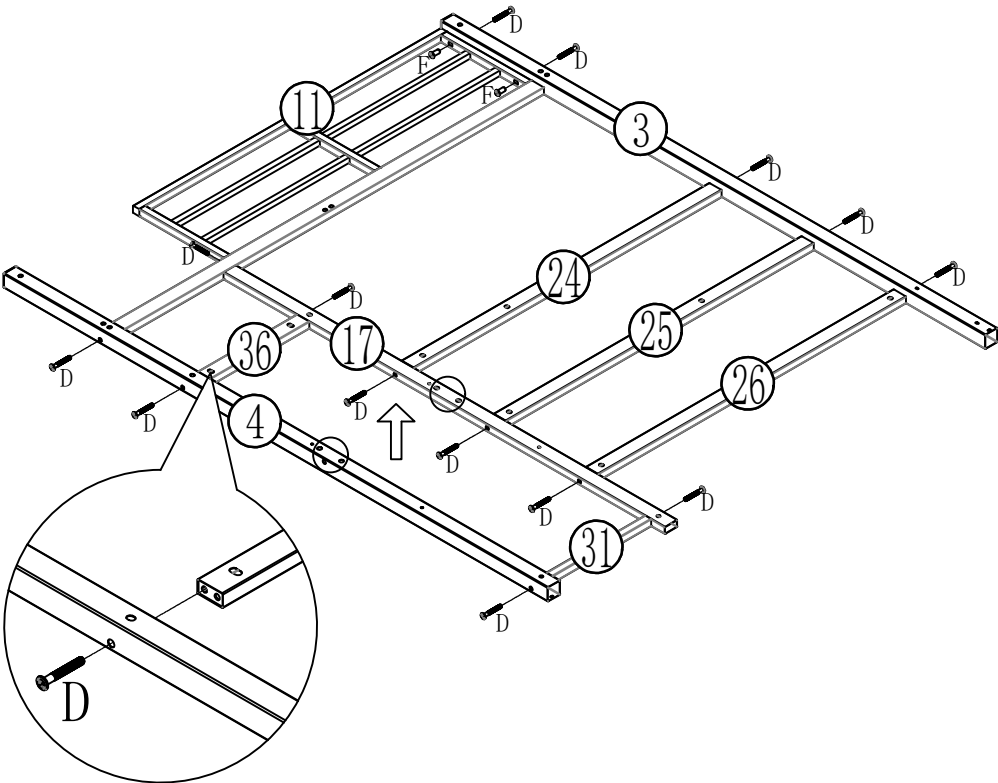

D
8*55-14PCS




F
8*15-2PCS



L


Step 3: Use hardware L,D to connect #5 to the previously installed components.

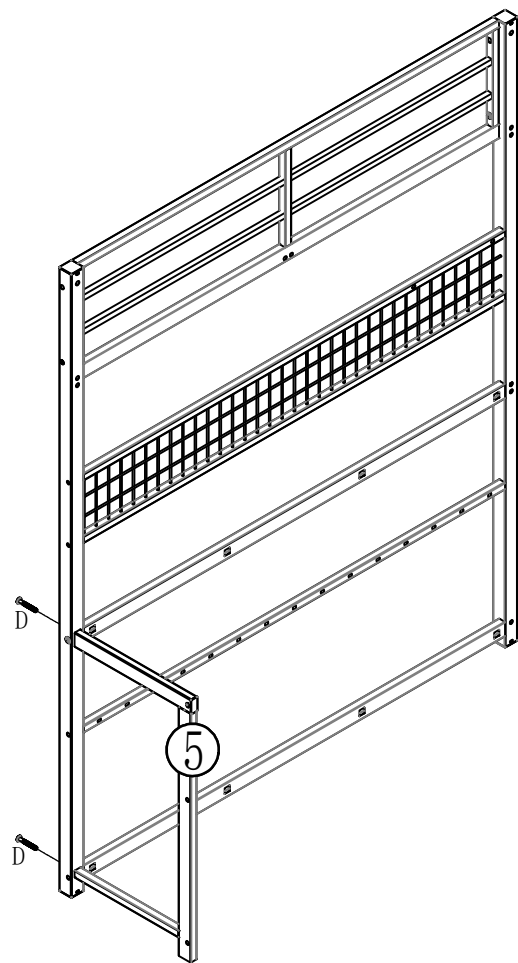

D
8*55-2PCS

L

Step 4: Use hardware L,C to connect #42 and #43 together.


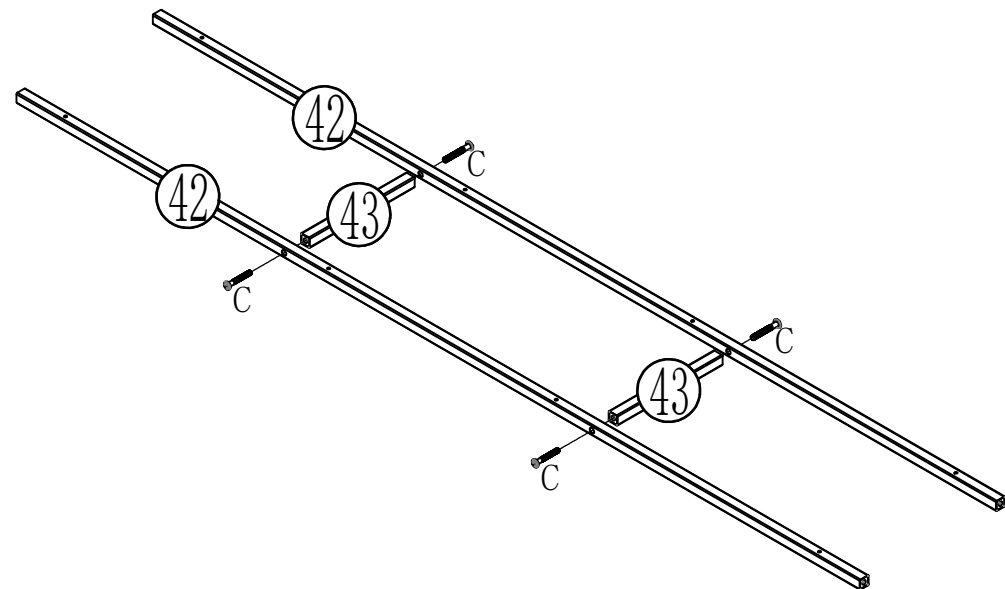


C
8*35-4PCS

L

Step 5: Use hardware L,C,D to connect "Step 4" and #8 to the previously installed components.


Step 6: Use hardware L,C,D,F to connect #12 and #32 to the previously installed components.

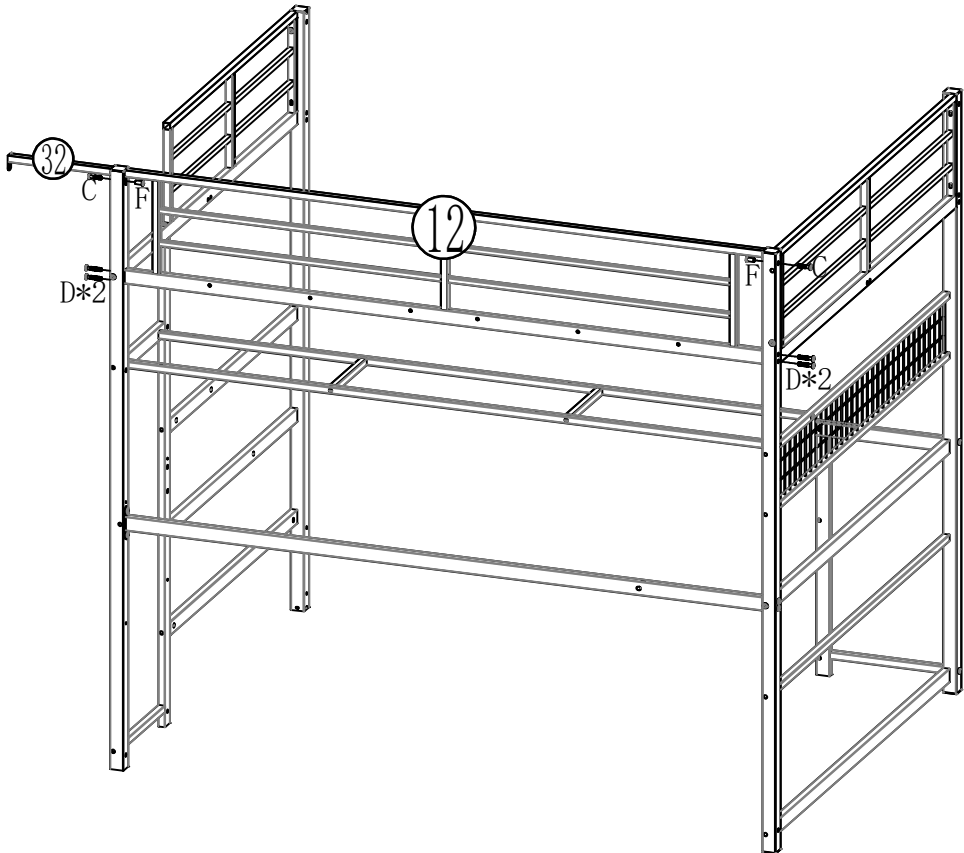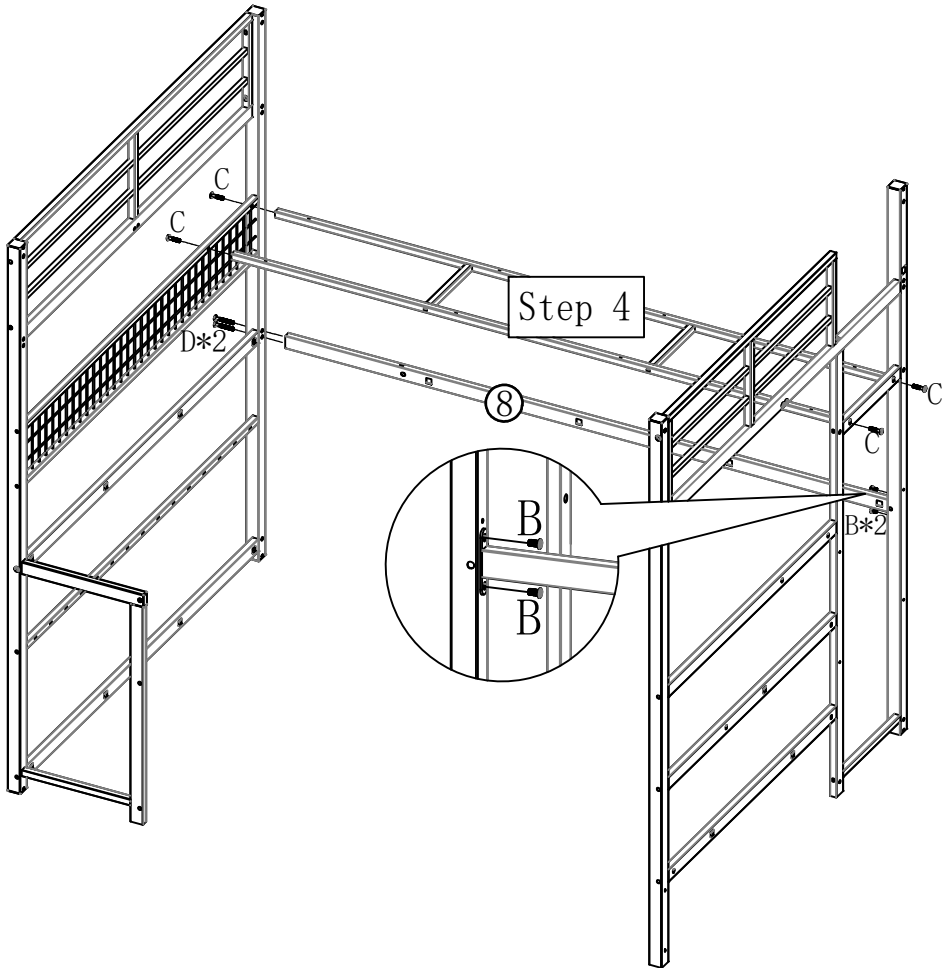


B
8*15-2PCS


C
8*35-4PCS



D
8*55-2PCS


L



C
8*35-2PCS


D
8*55-4PCS


F
8*15-2PCS


L


Step 7: Use hardware L,D to connect #2 and #31 to the previously installed components.

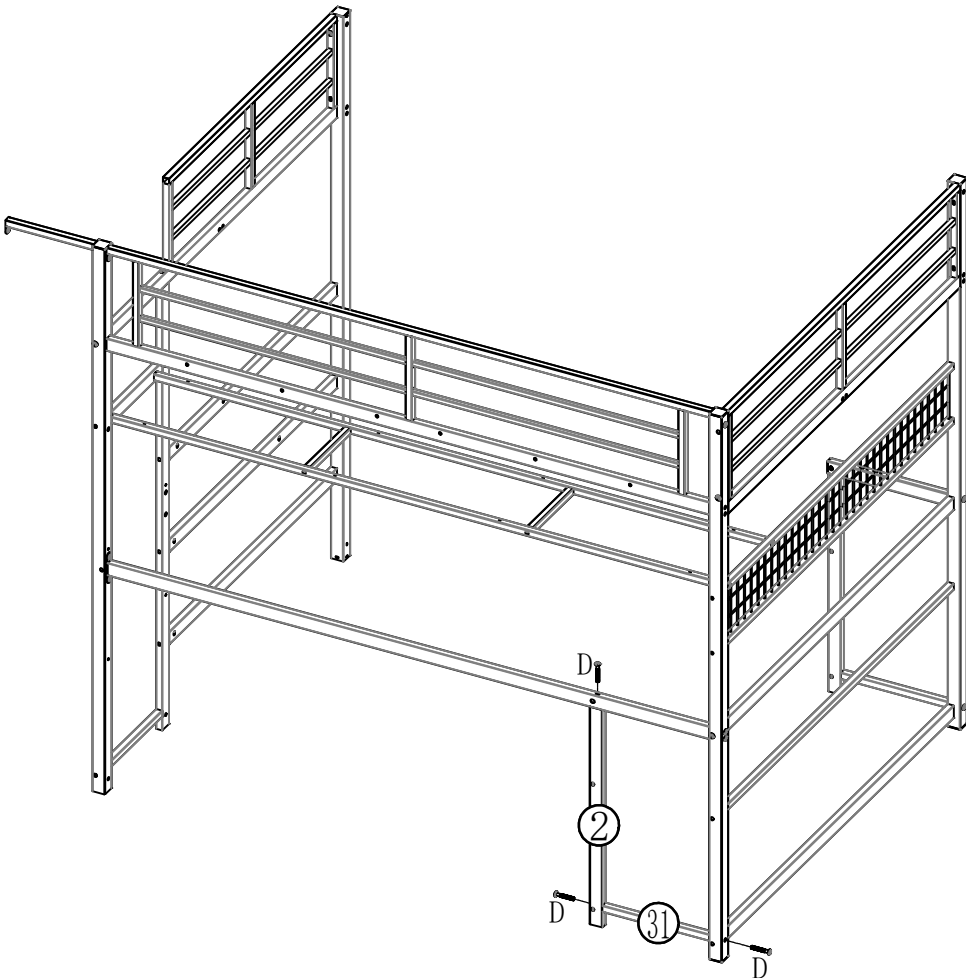

D
8*55-3PCS

L


Step 8: Use hardware L,C to connect #7,#16,#37,#39 and #40 to the previously installed components.

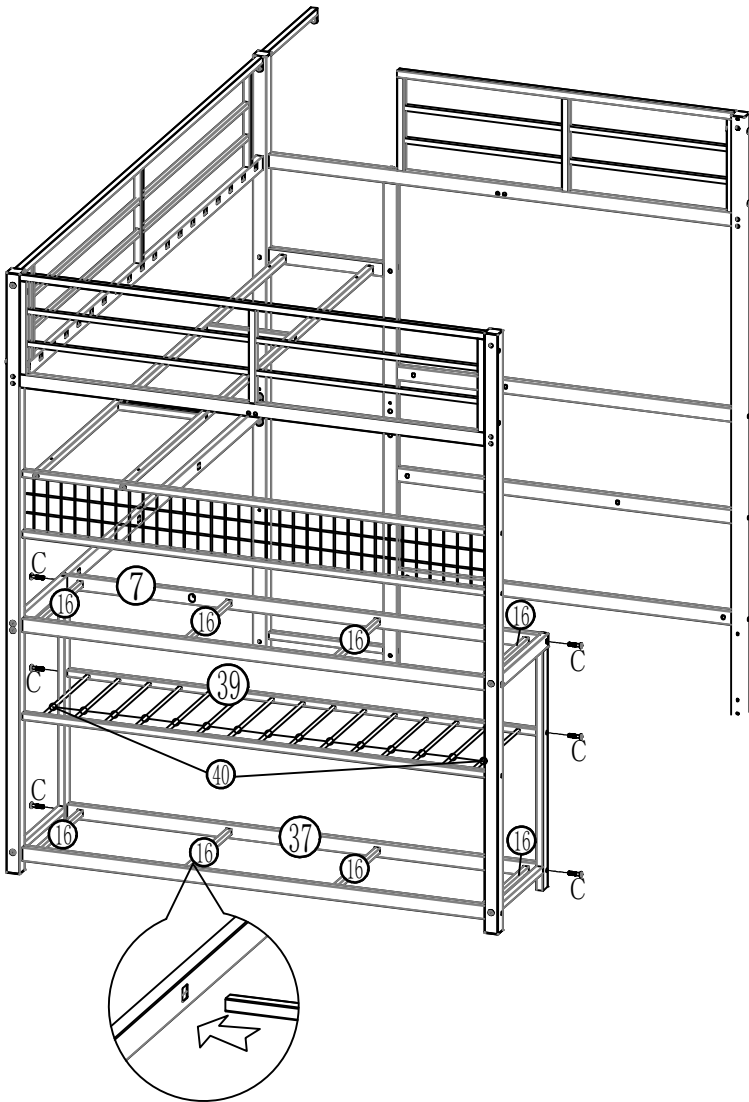

C
8*35-6PCS

L


Step 9: Use hardware L,B,C to connect #9 and #16 to the previously installed components.

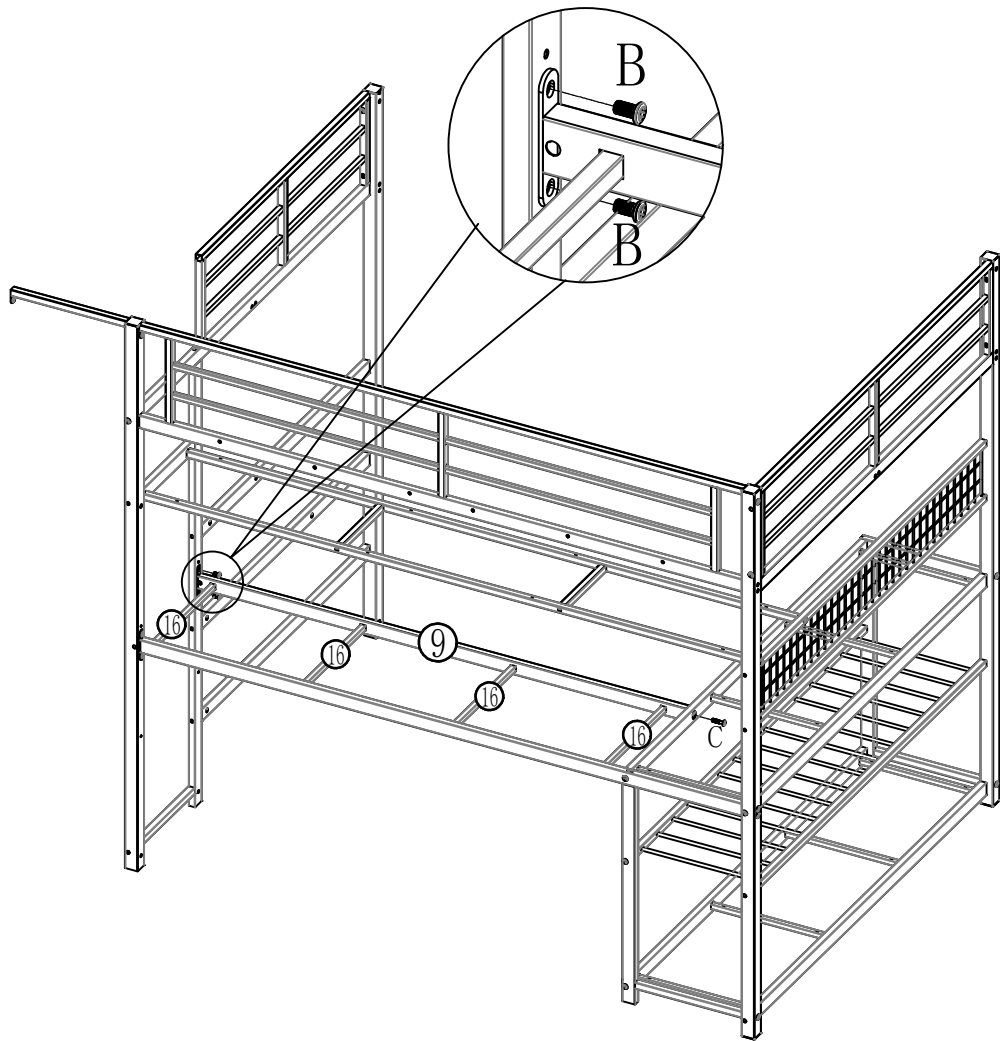

B
8*15-2PCS




C
8*35-1PCS



L


Step 10: Use hardware L,C,D to connect #18 to the previously installed components.

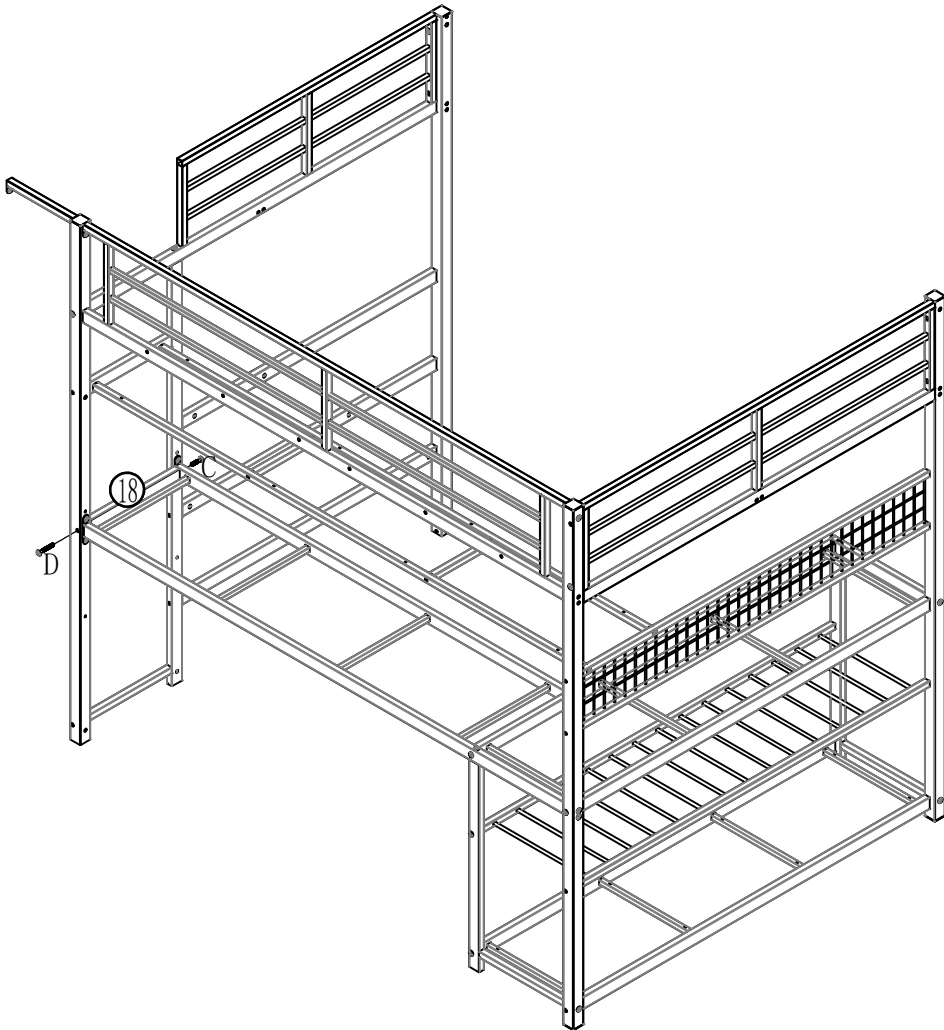

C
8*35-1PCS




D
8*55-1PCS



L


Step 11: Use hardware L,C to connect #13 to the previously installed components.

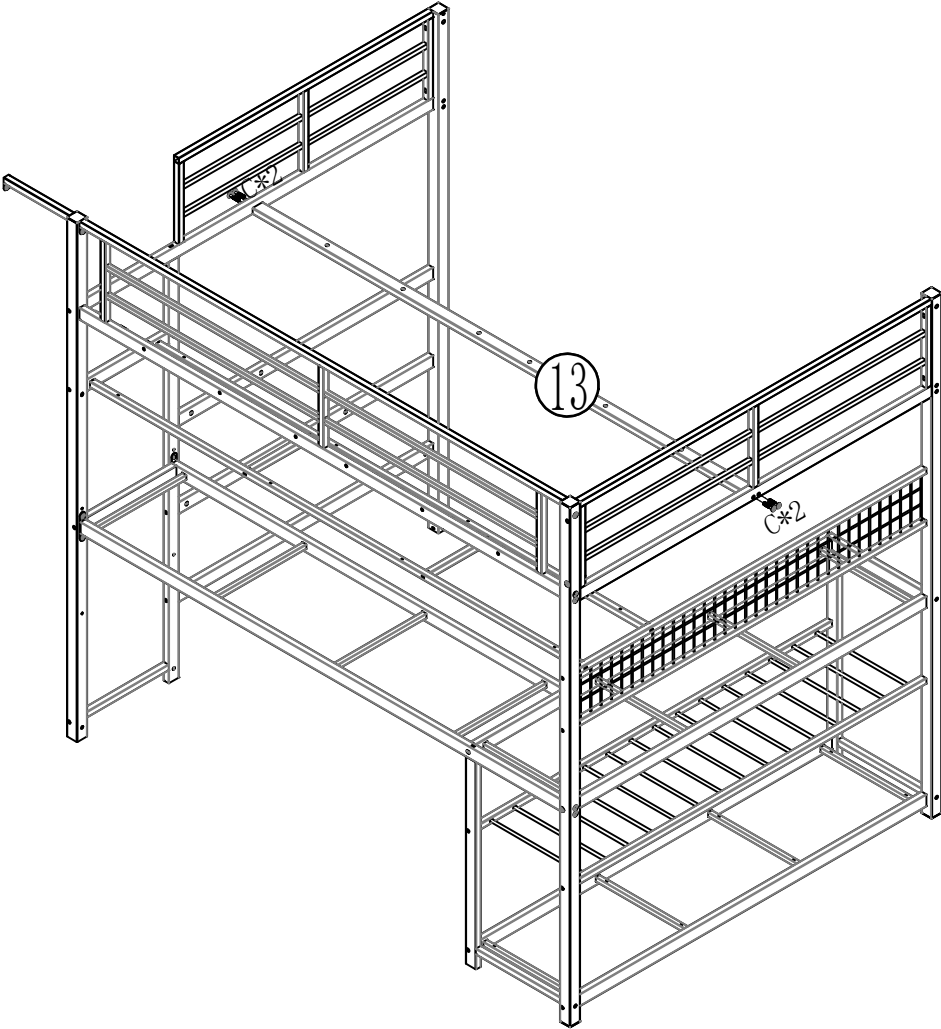

C
8*35-4PCS

L

Step 12: Install part #K to parts #12, Then Use hardware L,E to connect #15 to the previously installed components.

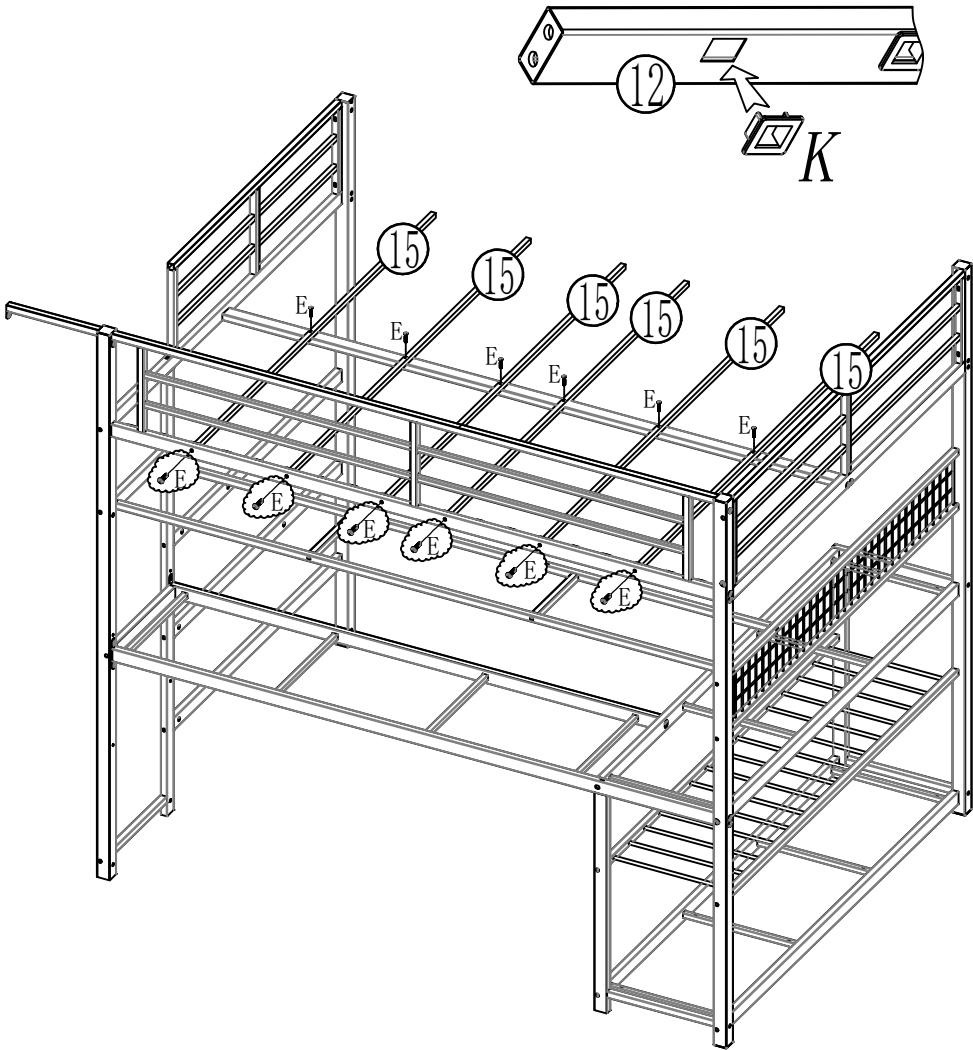


E
6*30-12PCS

K-19PCS


L

Step 13: Connect #14 to the previously installed components.

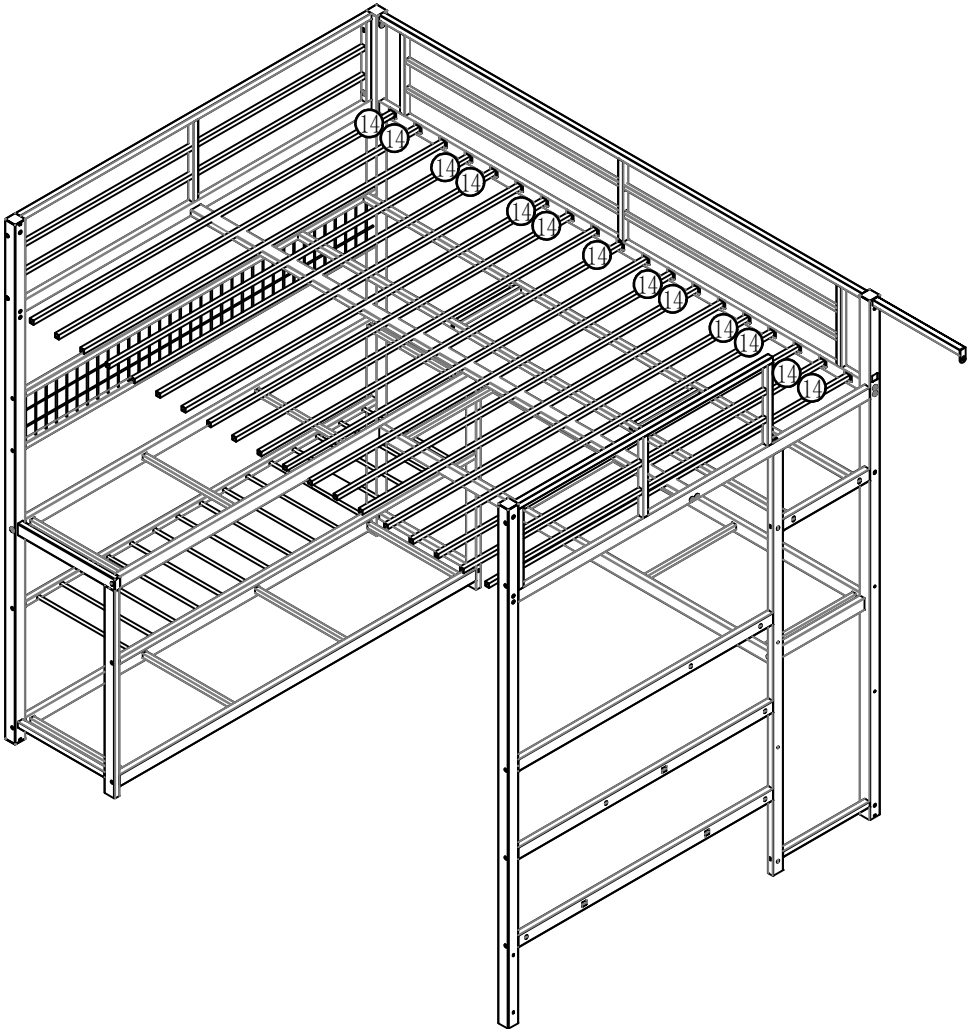

14-13pcs

Step 14: Install part #K to parts #12, Then Use hardware L,C,D,F,E to connect #12 to the previously installed components.

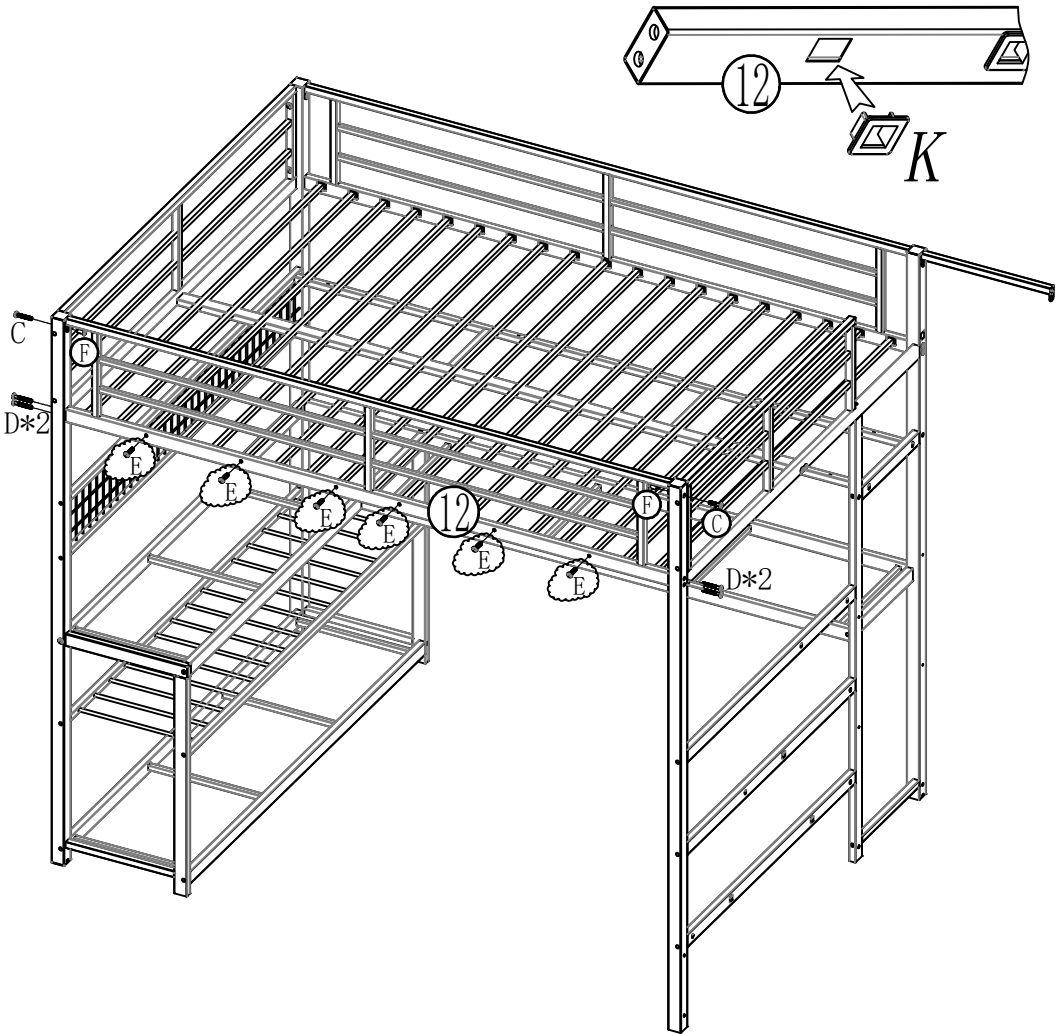

C
8*35-2PCS




D
8*55-4PCS




E
6*30-6PCS



F
8*15-2PCS




K-19PCS




L

Step 15: Use hardware L,B,C,D,F,G,H to connect #19,#29, #30,#33 and #44 to the previously installed components.

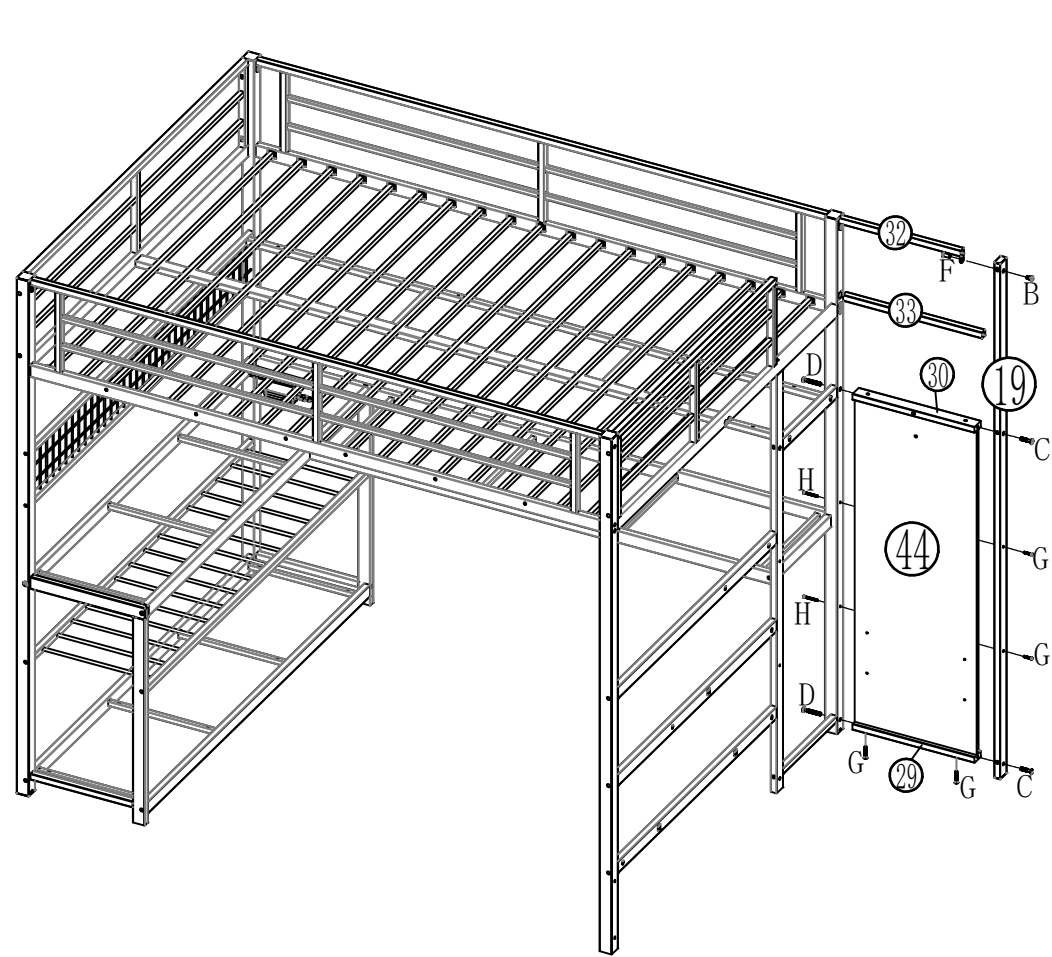


B	C	D	F	H	G
8*15-1PCS	8*35-2PCS	8*55-2PCS	8*15-1PCS	4*50-2PCS	4*35-4PCS

Step 16: Use hardware L,C,G to connect #29,#30 and #44 to the previously installed components.

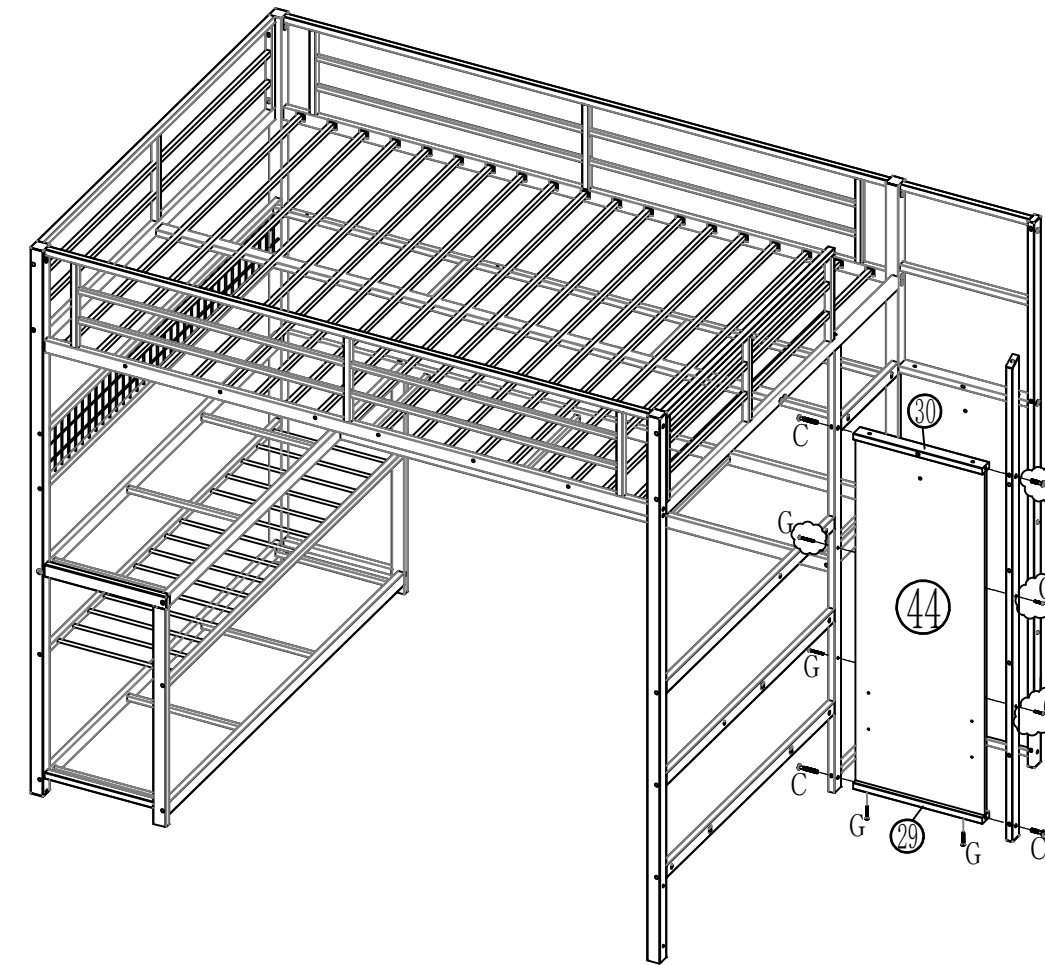

C	G	L
8*35-4PCS	4*35-6PCS	


Step 17:Use hardware L,C,G to connect #29,#30 and #45 to the previously installed components.

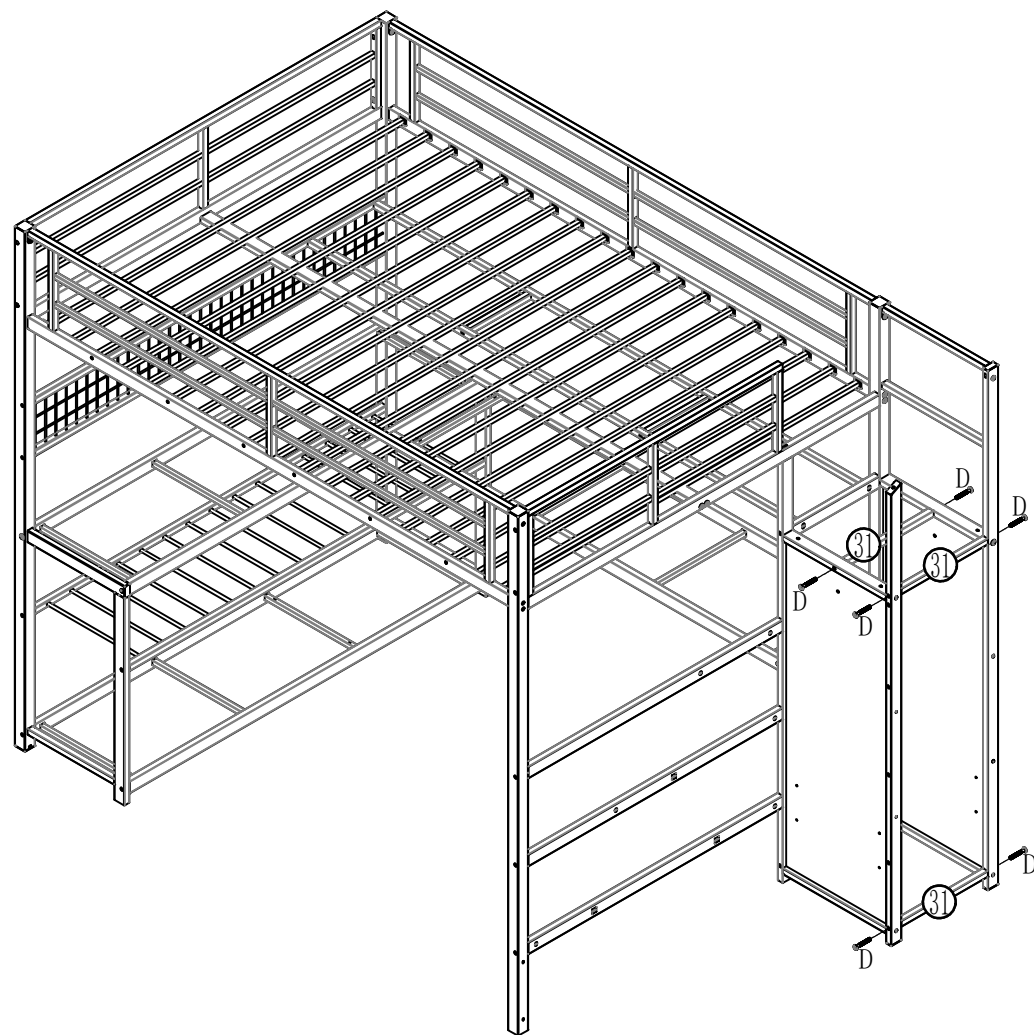


D
8*55-6PCS


L

Step 18:Use hardware L,C,D to connect #20,#21,#27 and #28 to the previously installed components.

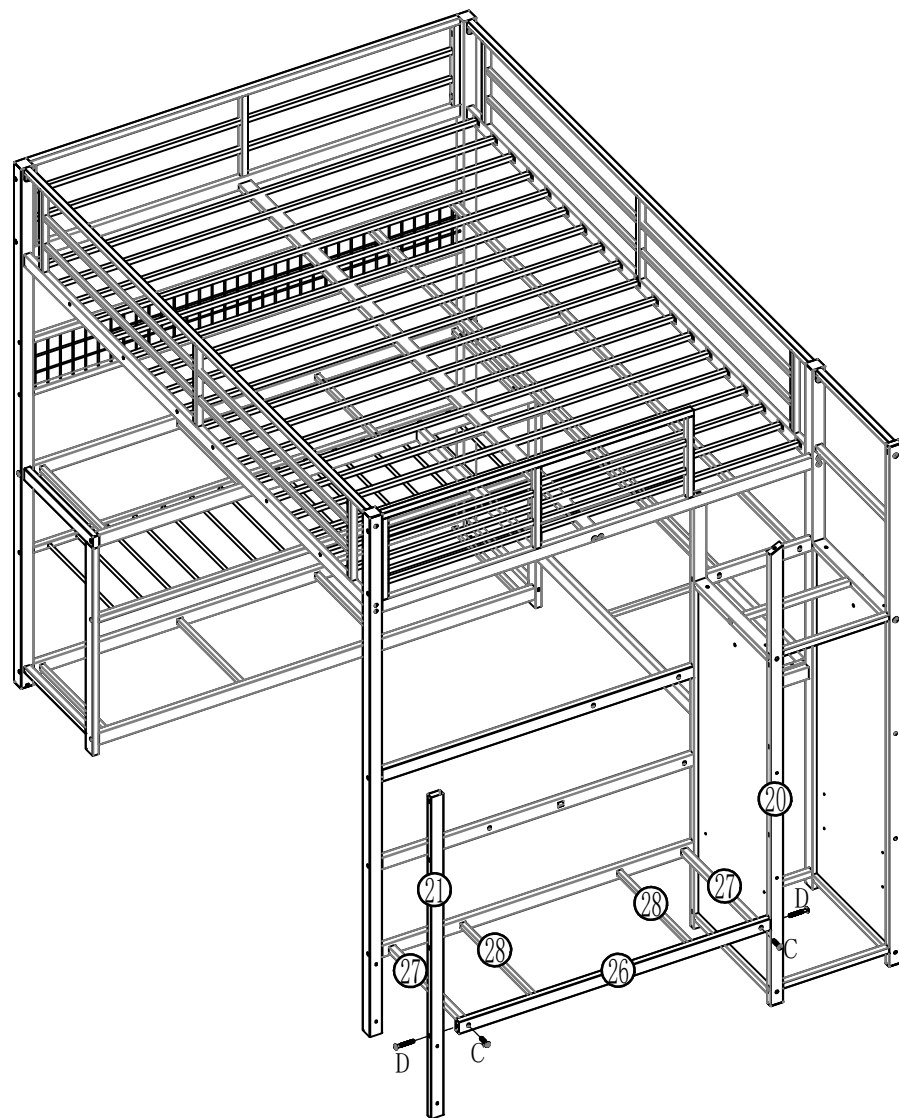



C
8*35-2PCS


D
8*55-2PCS


L

Step 19:Use hardware L,C,D to connect #25,#27 and #28 to the previously installed components.

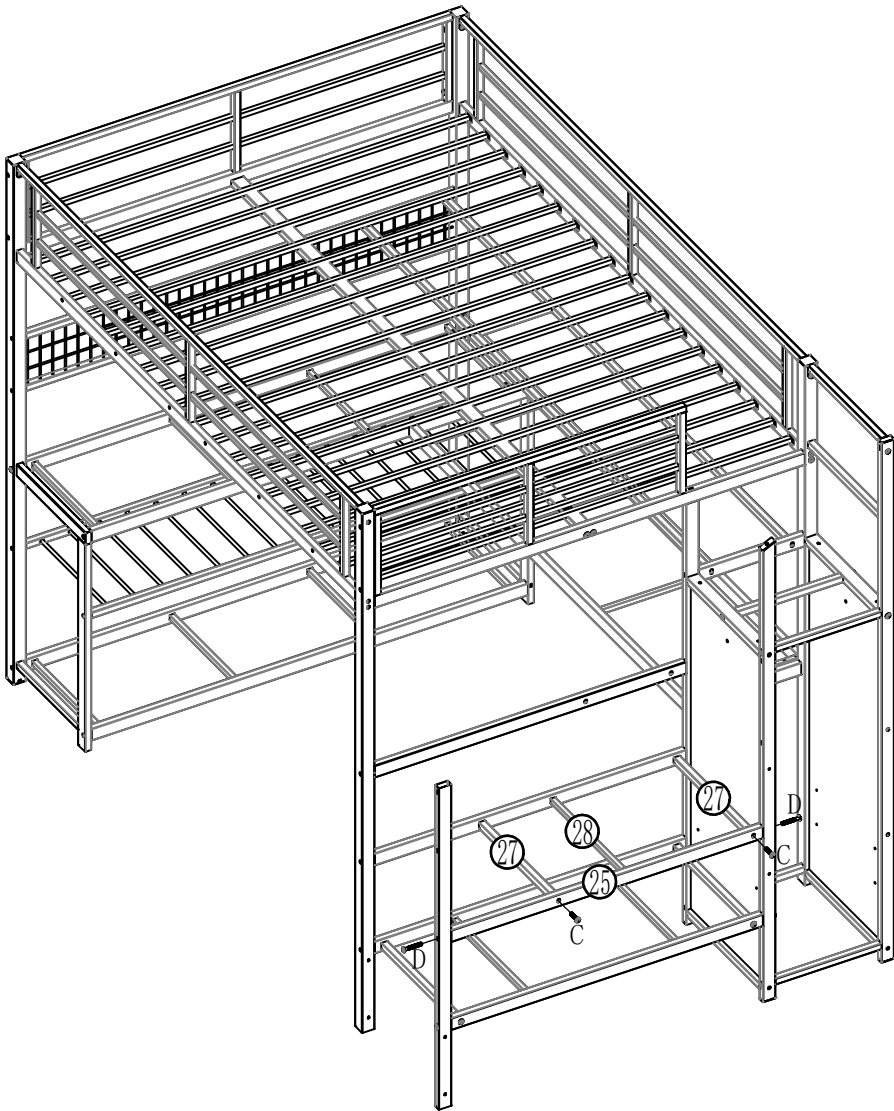

C
8*35-2PCS




D
8*55-2PCS



L

Step 20:Use hardware L,C,D to connect #24 and #27 to the previously installed components.

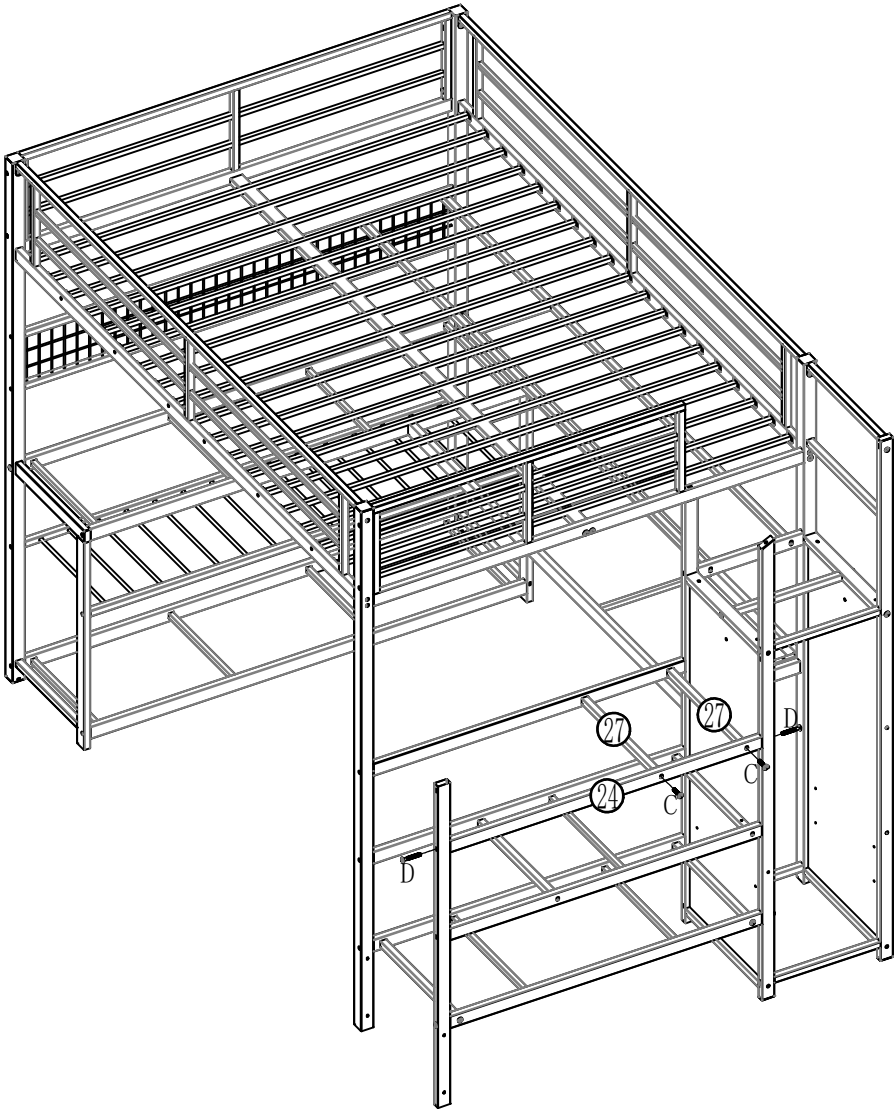

C
8*35-2PCS




D
8*55-2PCS



L


Step 21:Use hardware L,D to connect #22,#23 and #35 to the previously installed components.

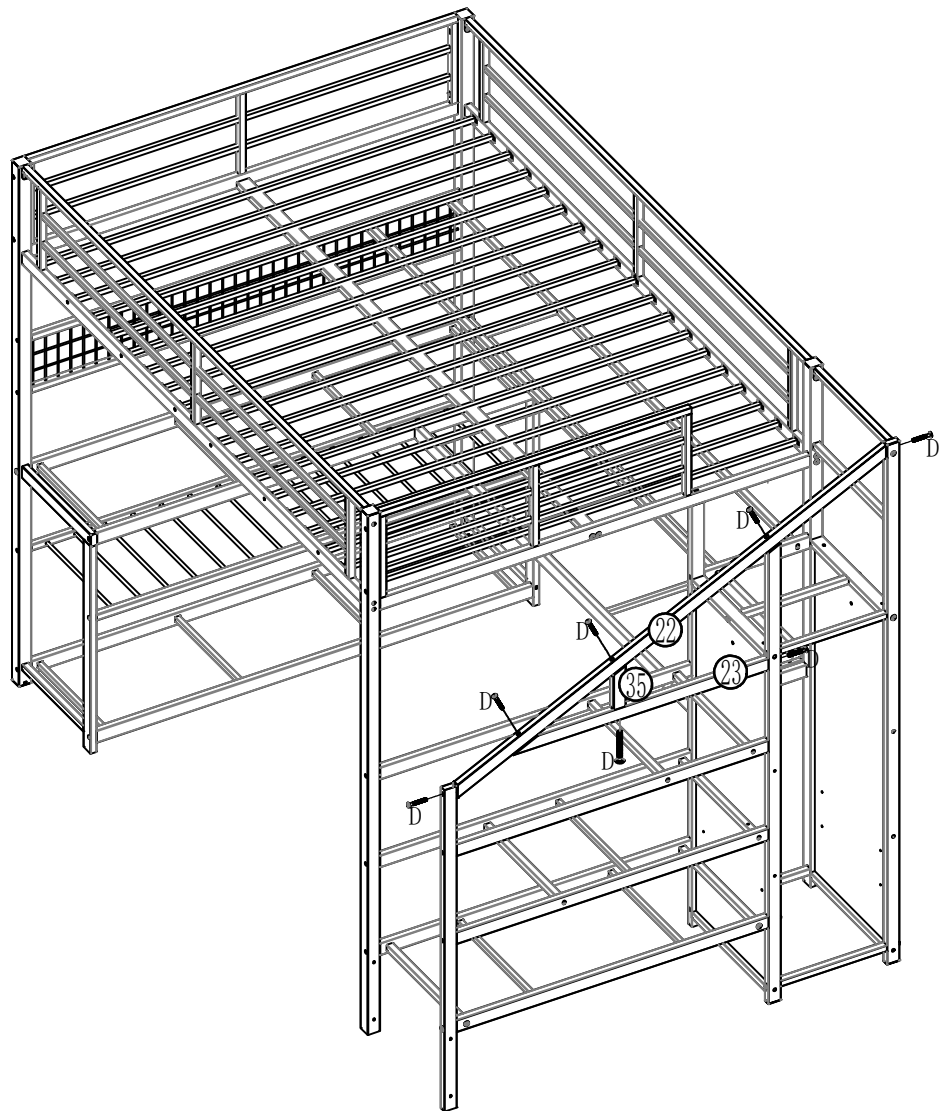

D
8*55-7PCS

L


Step 22:Use hardware O to connect #50,#51,#54 and #55 to the previously installed components.

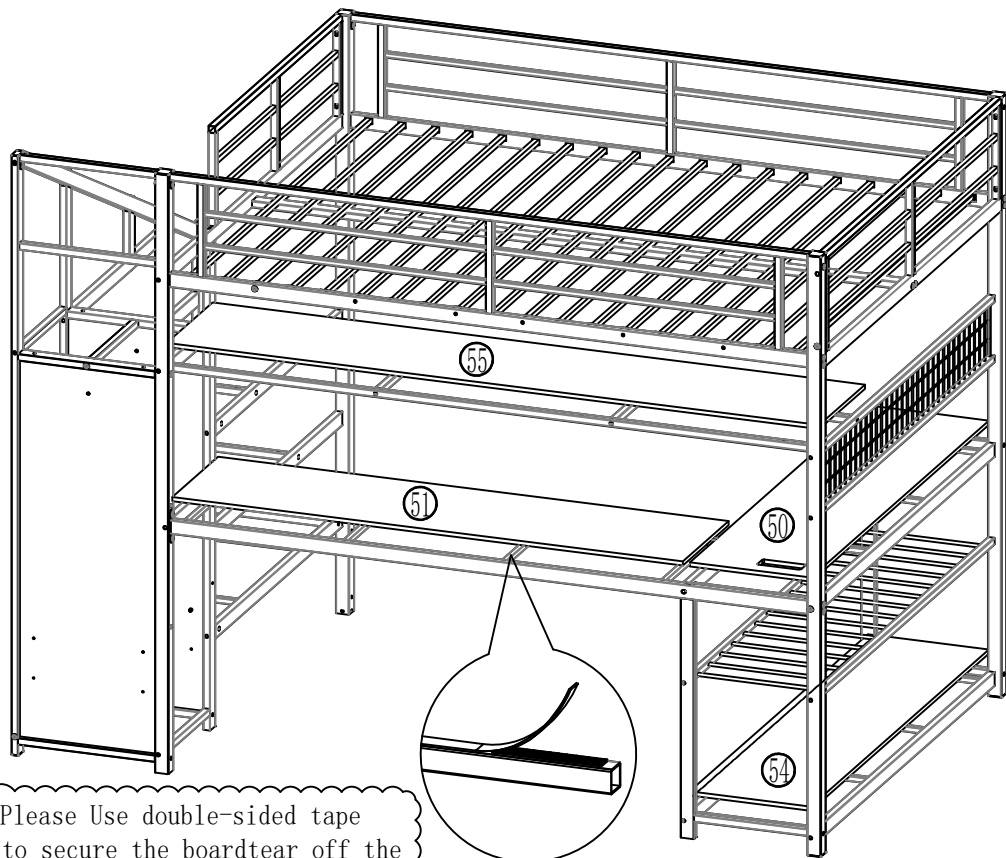

Please Use double-sided tape to secure the boardtear off the adhesive tape before placing the board.

O
1PCS

Step 23: Use hardware L,O,H to connect #45,#46,#47 and #48 to the previously installed components.

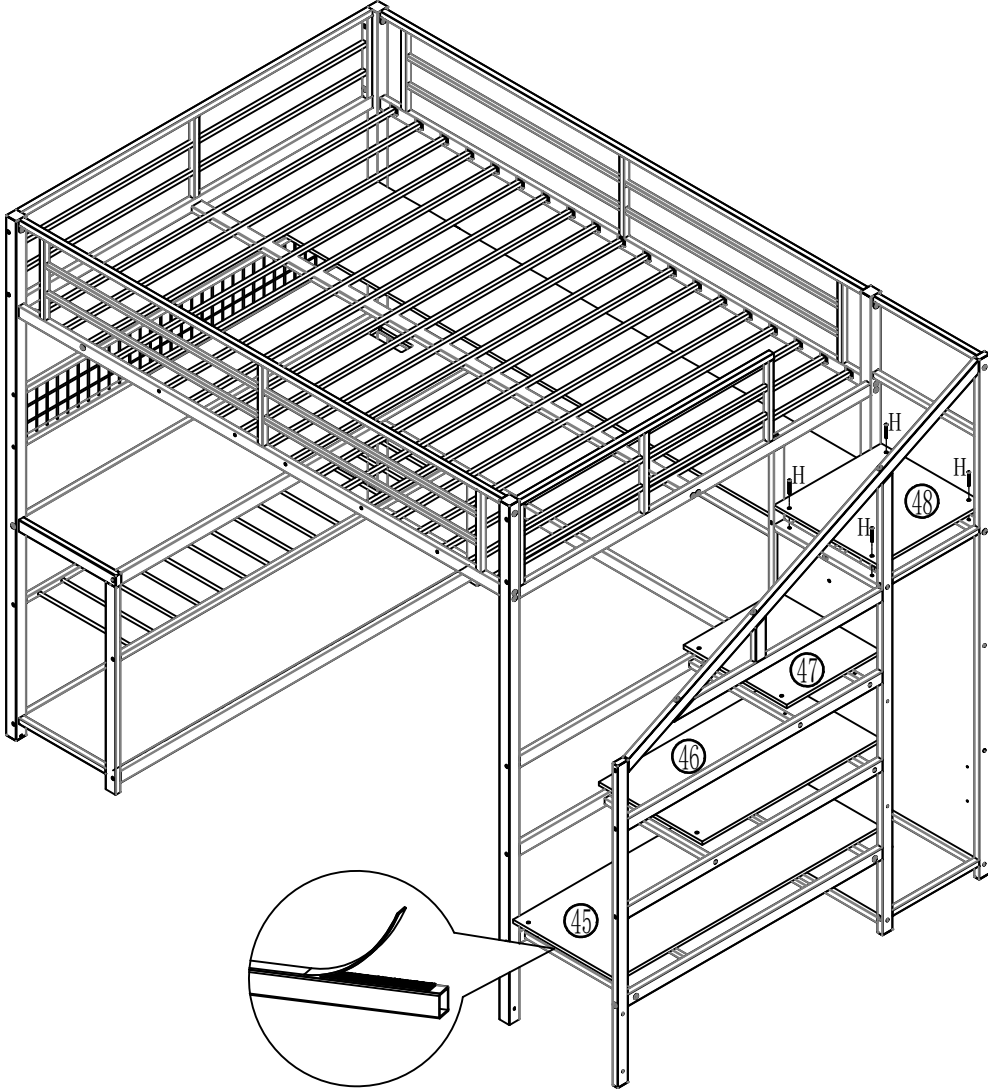

H
4*50-4PCS




O
1PCS



M

Step 24: Use hardware L,A,G,H to connect #52 and #53 to the previously installed components.

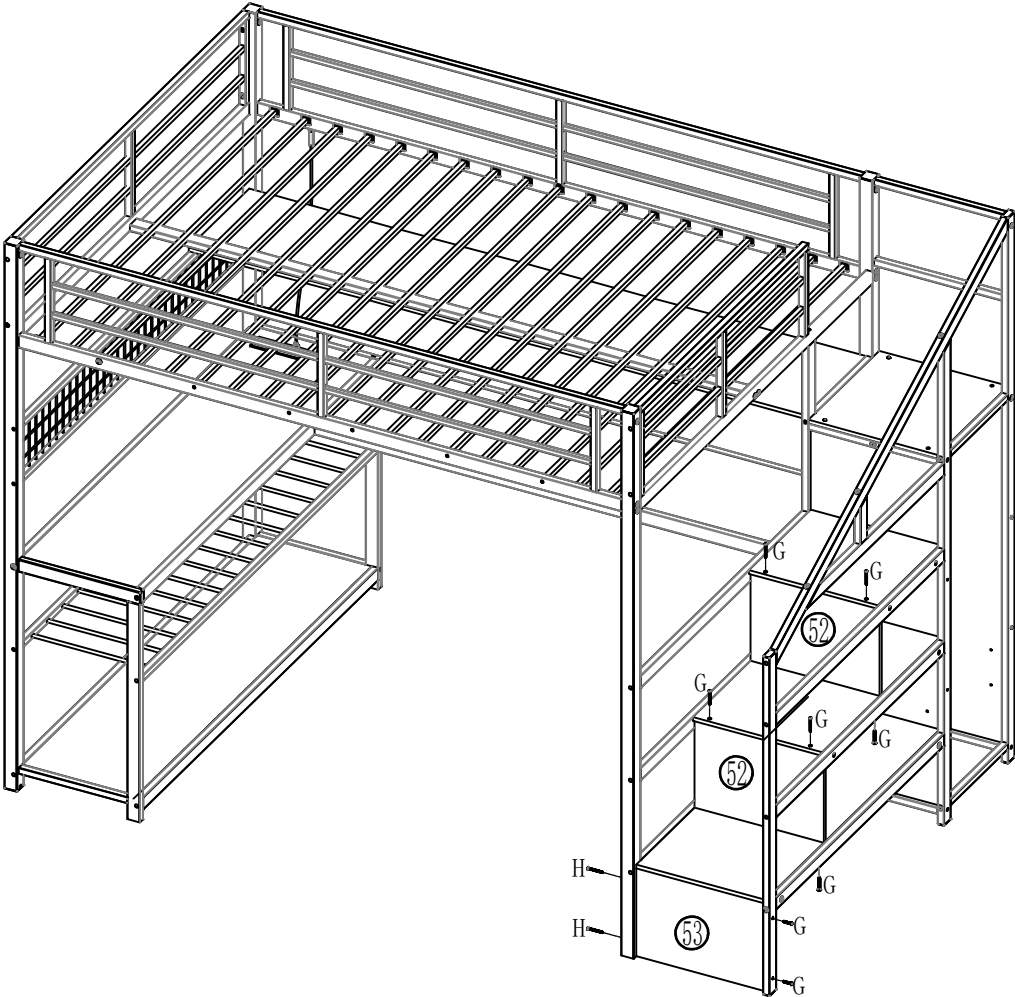

H
4*50-2PCS




G
4*35-10PCS



M

Step 25: Use hardware L,C,J to connect #34 and #49 to the previously installed components.

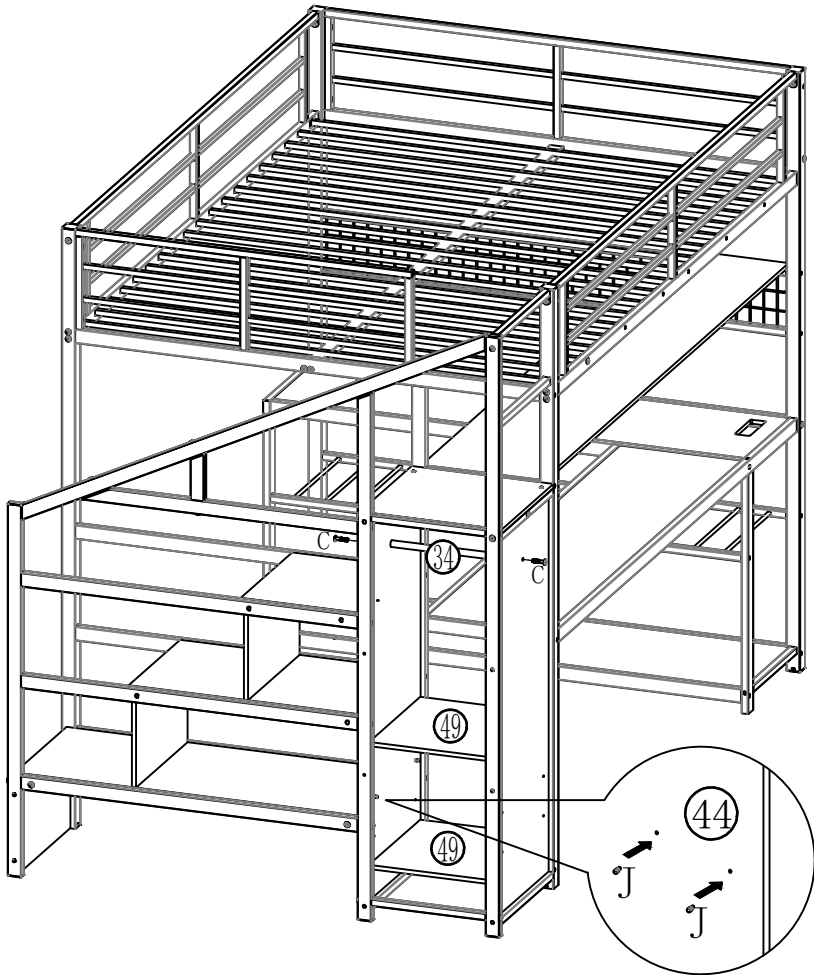


C
8*35-2PCS

J
5*10-4PCS

L

Step 26: First Use hardware M、A install #P to #41 and then Stick part Q (light strip) at back of #12 and connect the partP (socket) with USB.

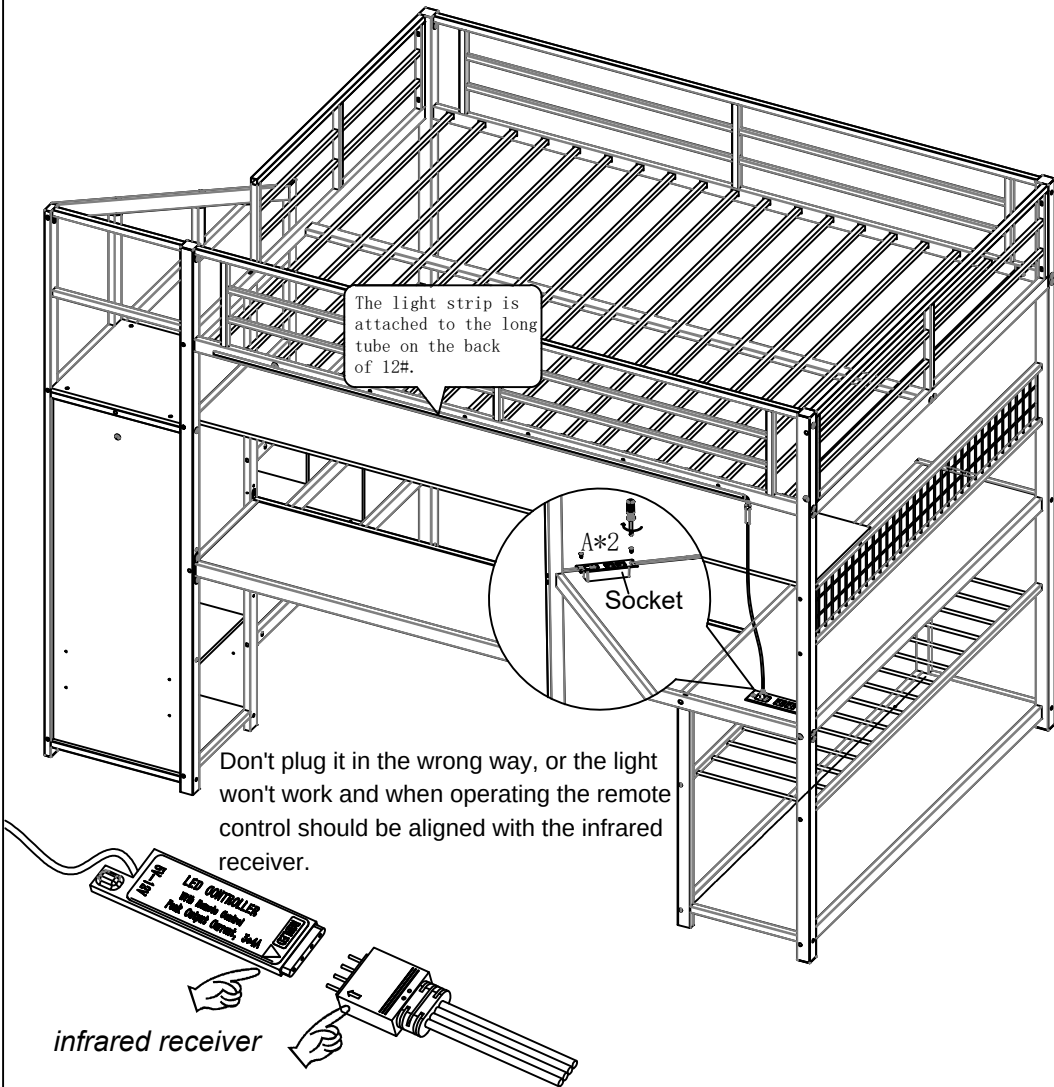



A
4*10-2PCS

Q
Light strips-1pcs

P
Socket-1pcs

M

Completed loft bed.

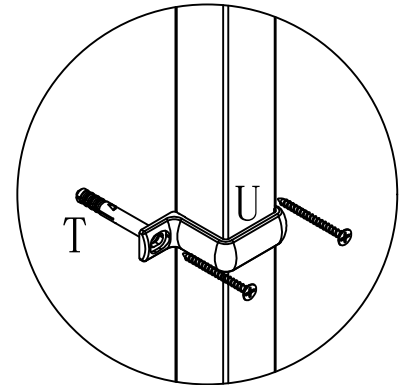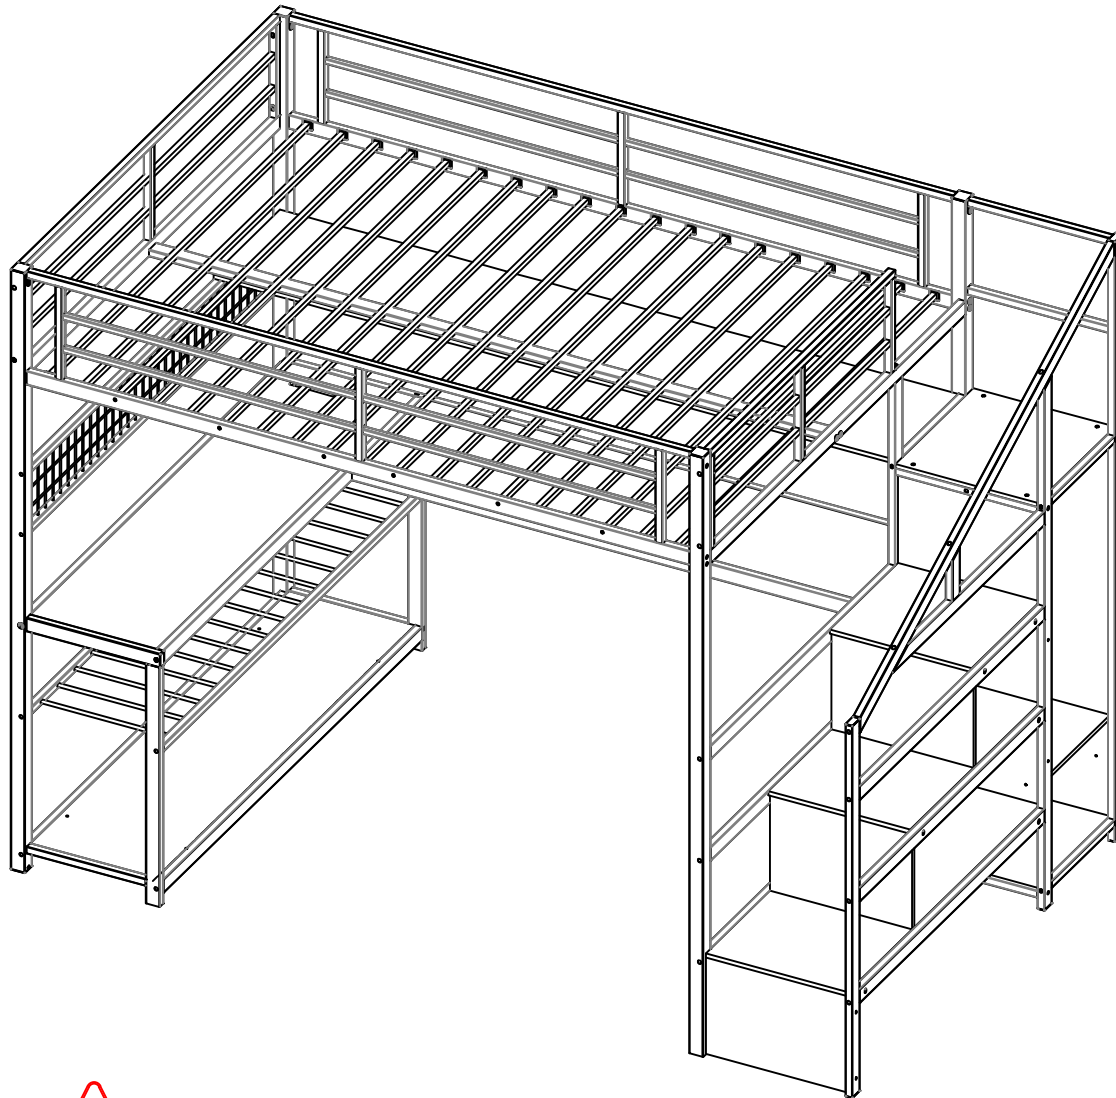

Tips:
If you feel that the bed is a little wobbly then please use the parts "U" and "T" for reinforcement



Please make sure all bolts are fastened before use, thank you.