

### Ceiling

#### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

#### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

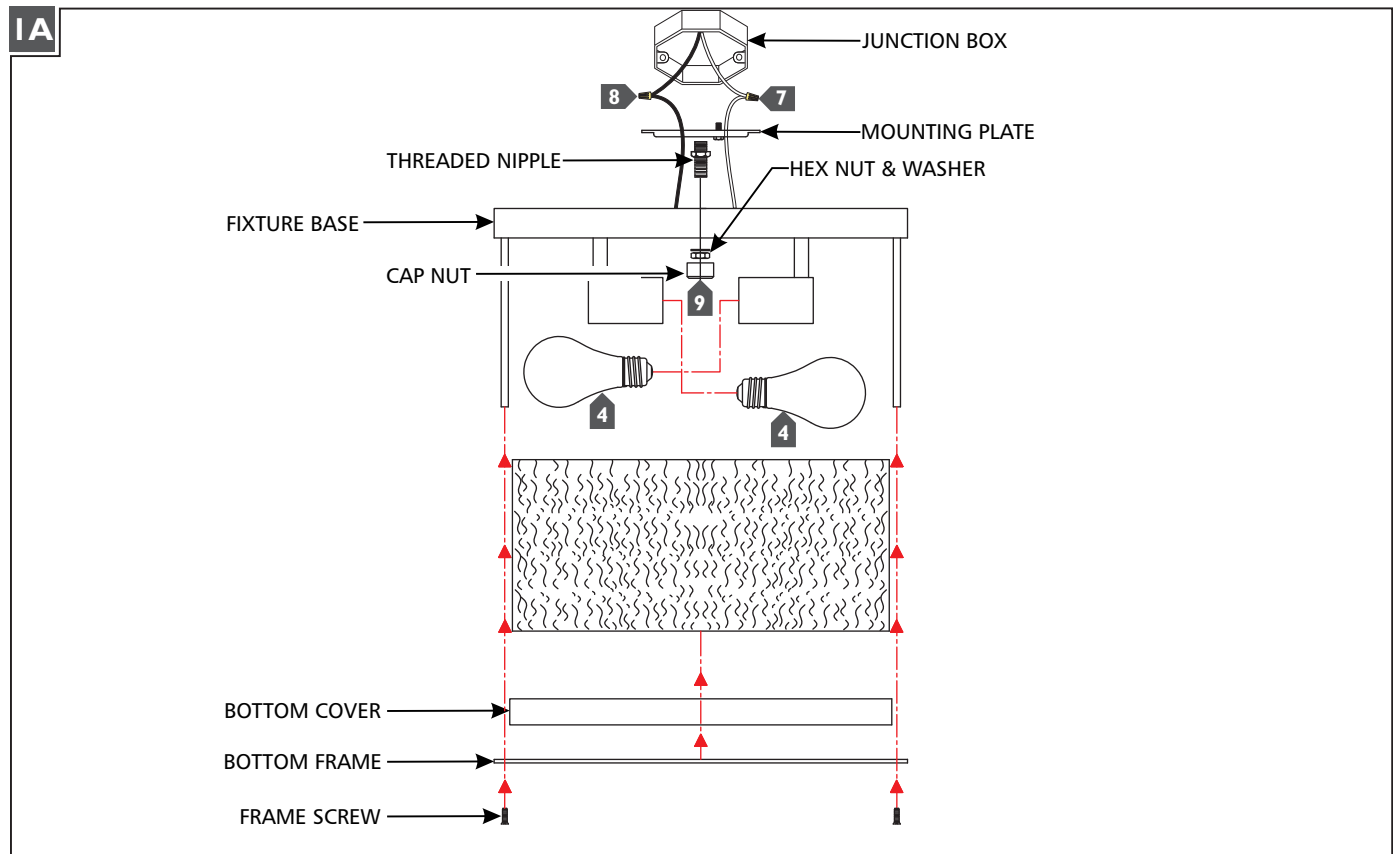

- 1 If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the junction box.
- 3 Remove the frame and cover by unscrewing the frame screws.
- 4 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 5 Insert the glass into the fixture frame, place the bottom cover on the bottom frame, and secure the bottom frame to the fixture frame using the frame screws.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Place the fixture base and washer onto the threaded nipple, then secure them in place by screwing the hex nut onto the nipple followed by the cap nut.