


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.


NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

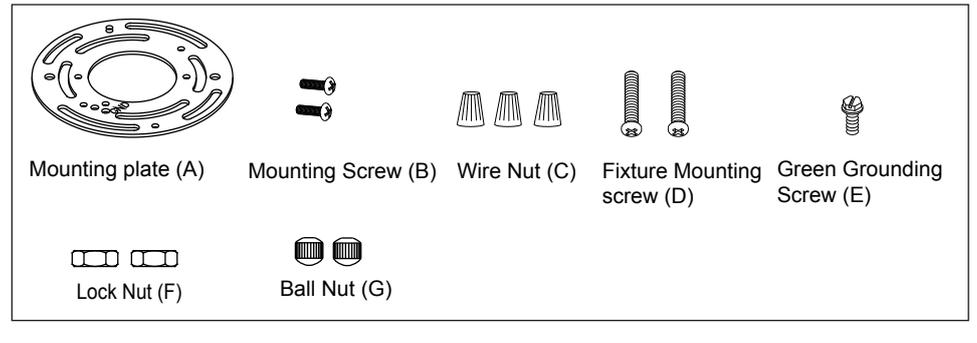

Installation Steps

Turn off the power at fuse or circuit box

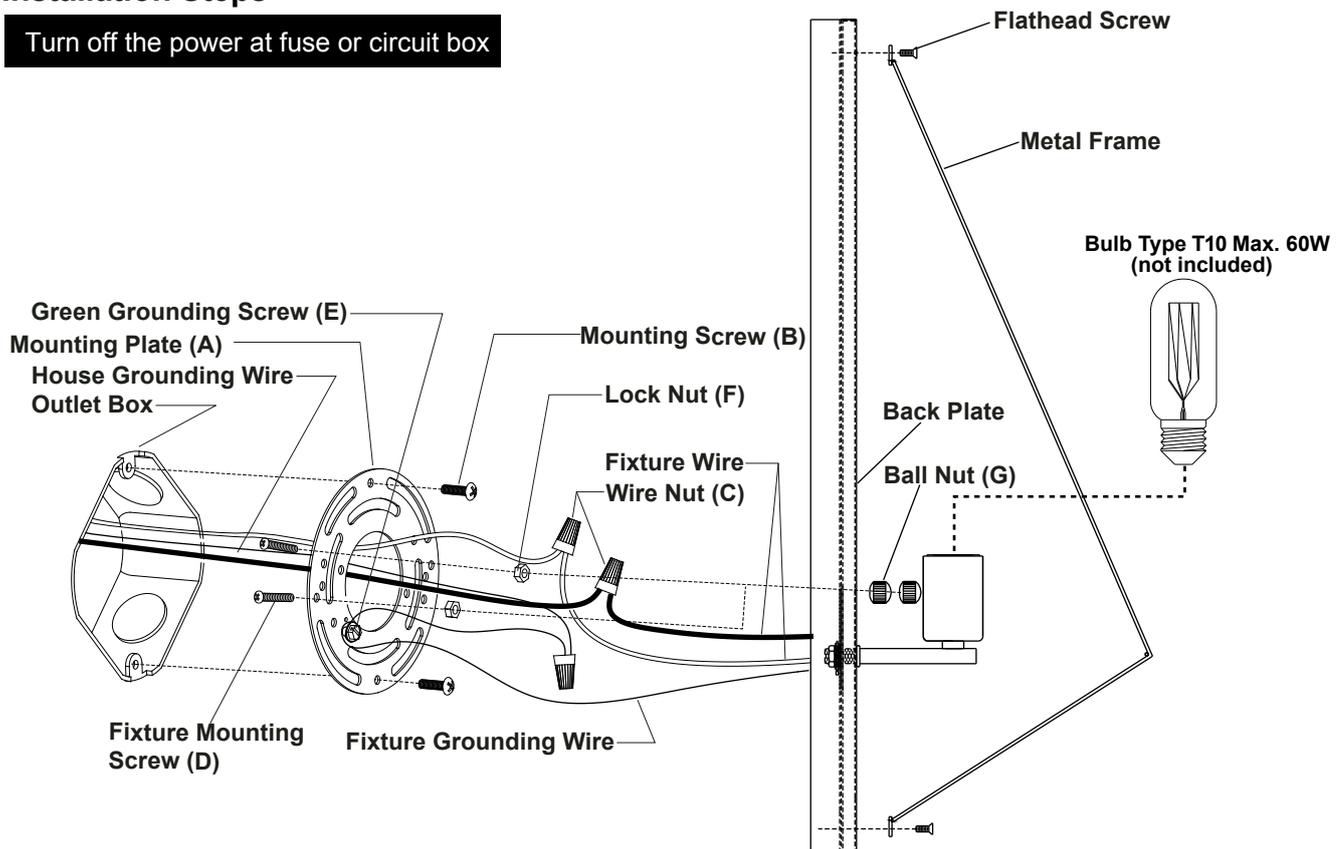


1. Attach the metal frame onto the fixture light and tighten it with the flathead screws.
 2. Thread two fixture mounting screws to the mounting plate, and secure them with two lock nuts.
- Note:** Make sure that the fixture mounting screws are lined up horizontally, to ensure that the fixture will be level.
3. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 Carefully put the wires back into the outlet box.
 4. Attach the back plate to the mounting plate by inserting the headless screws, then secure it with ball nuts.
 5. Install a bulb (not included). See relamping label on socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

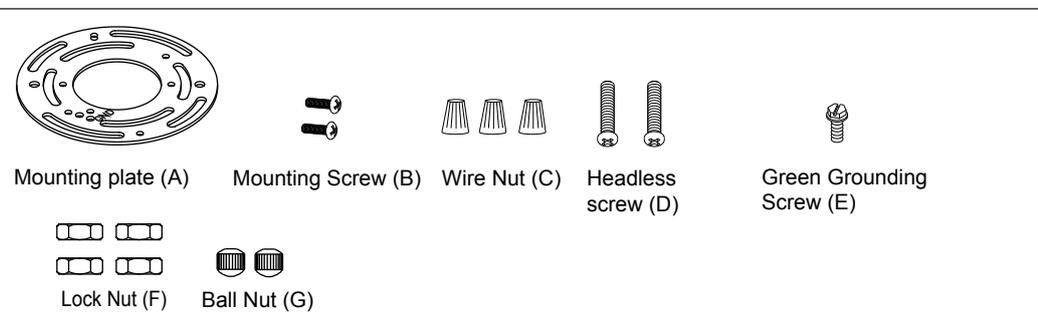

Mounting plate (A) Mounting Screw (B) Wire Nut (C) Headless screw (D) Green Grounding Screw (E)

Lock Nut (F) Ball Nut (G)

← Mounting Hardware (1 SET)

