


# Assembly & Installation Instructions

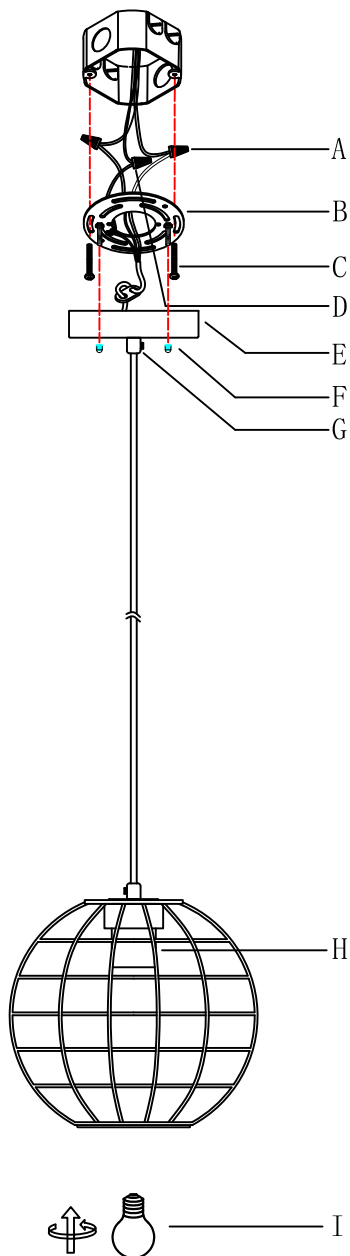

## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

1. Turn off the power.
  2. To adjust the height, loosen the plastic screw (G), slide the 8 shape fastener to the desired height, then tighten the plastic screw.
  3. Secure the mounting bracket (B) to the junction box with the mounting screws (C).
  4. Connect the wires using the wire caps (A) as follows:  
Connect the fixture **BLACK** wire to the home **LIVE/ HOT** wire.  
Connect the fixture **WHITE** wire to the home **NEUTRAL** wire.  
Secure the fixture ground wire and external ground wire to mounting bracket with green screw (D).
- \*Note:** Ensure no bare wire is exposed to prevent leakage.
5. Use decorative nuts (F) to fix the back plate (E) to the mounting bracket (B).
  6. Install the E26 bulb (not included) (I) into the lamp holder (H).  
Turn on the power.