

EL1499RA; EL1499R EL1499R-277; EL1499R-277A

4" Low Voltage Remodel Housing



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

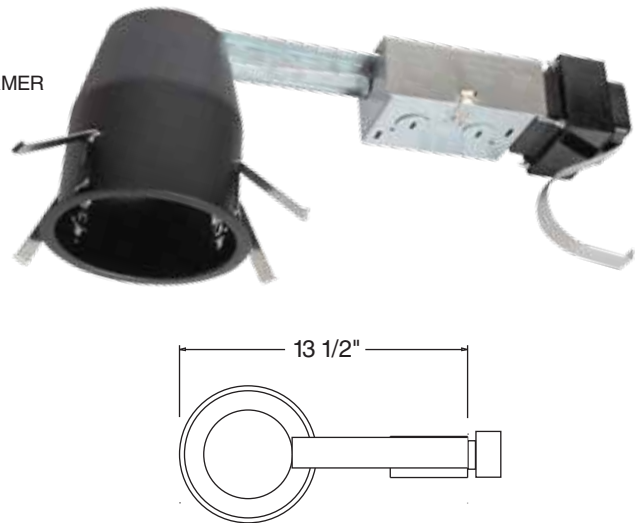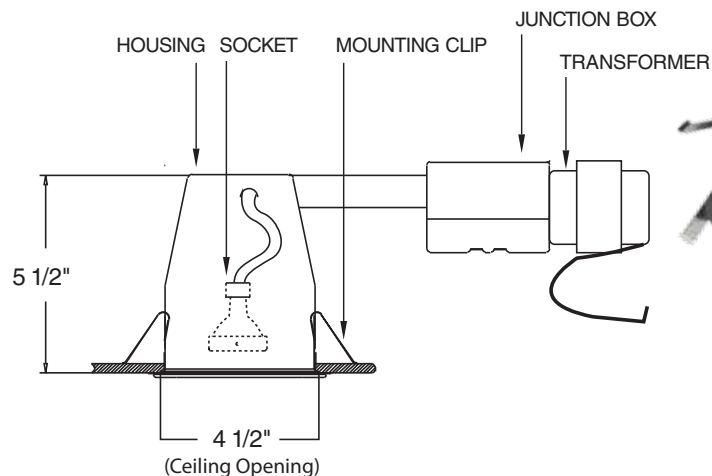

PRODUCT SPECIFICATIONS

Housing Features: For use in existing ceilings. Thermally protected magnetic transformer. Single wall construction.

Lamp: 50W Maximum Bi-Pin; MR16-G5.3 Base

Lamp Holder: GU5.3 Bi-Pin Socket with reflector

EL1499RA and EL1499RA-277A housings meet restricted airflow requirements (Per ASTM-E283).

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

EL1499R } Transformer: 120V/12V/50W
EL1499RA } Magnetic AC Type.

EL1499R-277 } Transformer: 277V/12V/50W
EL1499R-277A } Magnetic AC Type.

Note: Use only dimmers specifically designed for use with magnetic transformer. Low voltage luminaires may produce audible sound when used with dimmers.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: (4) remodel clips secure housing and accommodate various ceiling thicknesses.

Mounting Frame: Stamped galvanized steel material for corrosion resistance.

Labels: • U.L. listed for damp locations.
• U.L. listed for feed through.

CATALOG NUMBER

Example: EL1499RA - EL1421C

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com

© ELCO LIGHTING 2012 All Rights Reserved. Rev. Aug 2012. ELCO Lighting reserves the right to make specification and design changes without notice.

ELCO
LIGHTING



ELCO Lighting®