


TIMBER FRAME INSTALLATION

The screen can be mounted using a timber frame with beading.

- Ensure that there is plenty of room for thermal expansion - you must leave a space of 1/4" along the long edge and 1/2" along the short edge
- Use timber beading at least 1 3/16" in depth to retain the screen.
- Nail or screw the bead in place to make a back support for the screen, then position the screen in the frame and fit the bead to hold the screen in place.
- Ensure that the frame is strong enough to withstand the additional weight and wind loading.

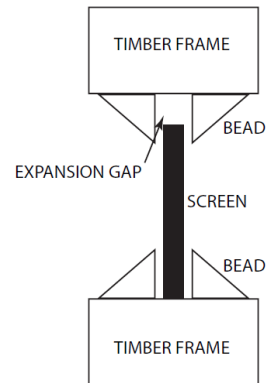


Note: For best result paint all the timber components before assembly.

ROUTING TIMBER INSTALLATION

This option can only be used if timber is routed before the frame is assembled.

- Rout a slot in the timber frame 5/16" wide. The slot must be 13/16" deep in the base timber to retain the lattice and 13/16" deep along each side. At the top, the slot must be 1 3/16" deep. This is so that there is enough room for the lattice to expand and contract.
- When the sheet is installed in the frame, there should be 1/4" movement in the width of the sheet and 1/2" in the length for expansion and contraction.

Note: For best results paint or stain the timber before the panel is installed.

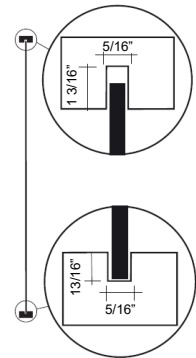

If the panel buckles in the heat, you have not allowed enough gap for expansion.

15 Year Manufacturer's Warranty

Design Flow Pty Ltd warrants to the original purchaser that Matrix screening, fencing and flooring products will be free of structural faults due to defects in manufacturing for a period not exceeding 15 years from the date of purchase.

Whilst the colour formulation of the materials has been designed to withstand many years of exposure to the sun and weather, the warranty does not cover natural fading or a reduction of material properties over time.

This warranty is only valid where the product has been installed according to the manufacturer's installation instructions.

All warranty matters are to be referred through the original place of purchase. Valid warranty claims will be settled by either full replacement or satisfactory repair of the faulty product.

Warranties and remedies including compensation for consequential or direct losses, other than those set out above are hereby excluded, except to the extent where to so exclude would contravene any law (including the Trade Practices Act (Cth. 1974) or cause any part of this warranty to be void.

OUTDECO USA
2045 Corte Del Nogal
Carlsbad CA 92011
P: 760-444-4193
E: info@outdecousa.com