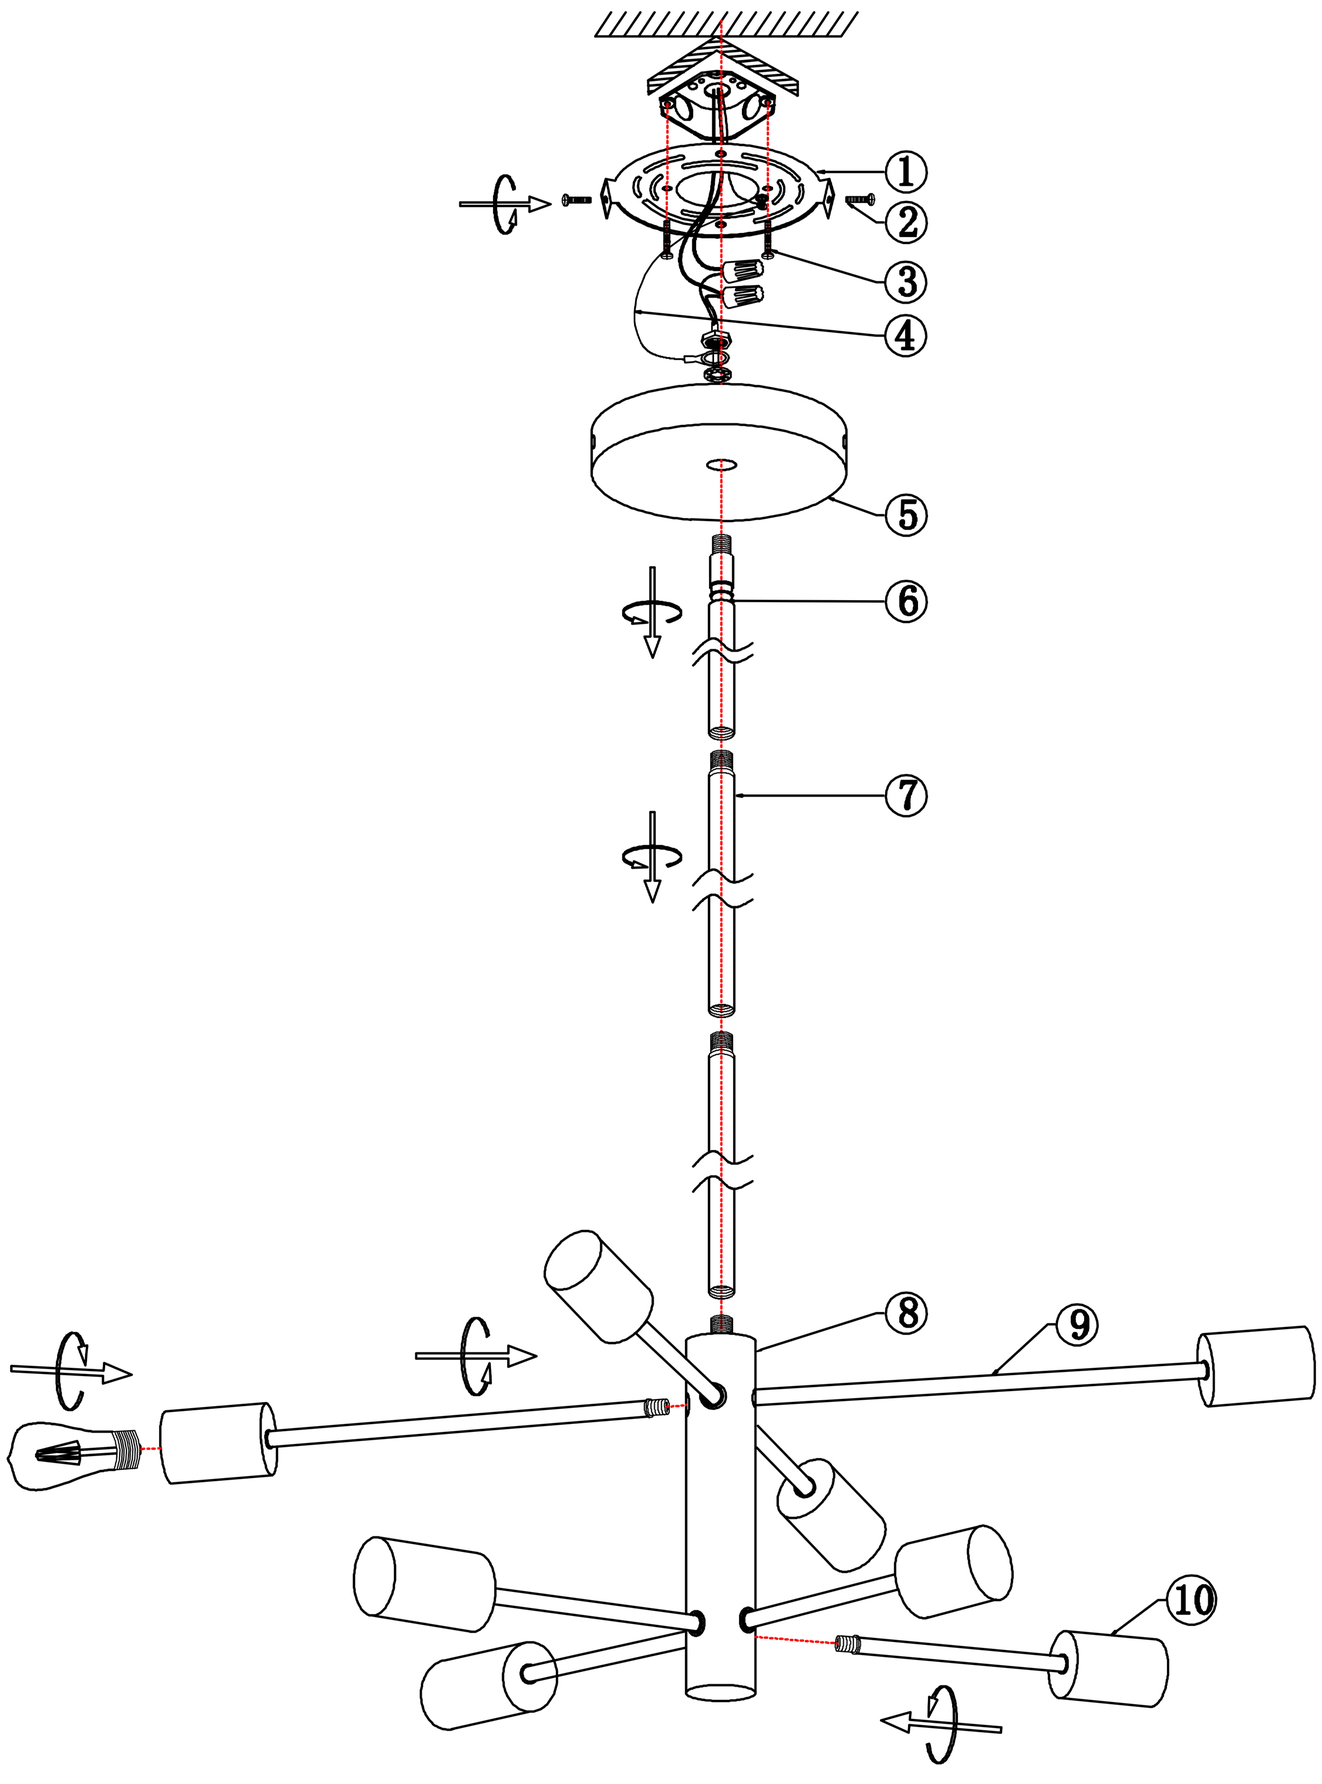

Installation Steps:

Step 1: Lock arm A(9) and arm B(10) to the lamp body (8).
Step 2: Pass the main line through the connecting rod (7) and fix the connecting rod on the lamp body (8), and then lock the remaining connecting rod in turn.
Step 3: Fix the connection rod + universal joint(6) on the connection rod (7).
Step 4: The ground wire (4) and the canopy (5) are fixed on the connecting rod + universal joint (6) with the nut of the connecting rod + universal joint (6).
Step 5: Fasten the mounting plate (1) to the ceiling with screws (3).
Step 6: Use the green screws on the mounting plate (1) to lock the ground wire (4) to the mounting plate (1).
Step 7: Separate the positive "L" and negative "N" poles of the main and power cables using the P3 wiring cap in the fittings (11).
Step 8: Fix the canopy (5) on the mounting plate (1) with screws (2).
Step 9: Install light bulbs (without light bulbs).

Accessories:

1: Mounting Plate*1
2: Screws*2
3: Screws*3
4: Ground Wire*1
5: Canopy*1
6: Rod+Universal joint*1
7: Rod*5
8: Lamp Body*1
9: Light Arms A*4
10: Light Arms B*4
11: Fittings*1
12: Wrench*1

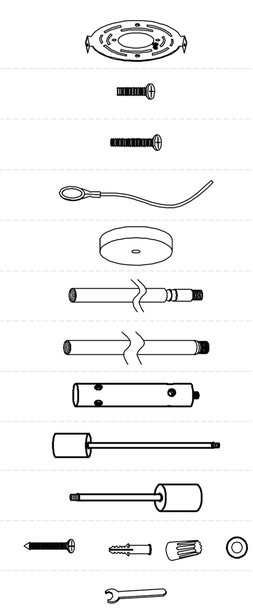

Notice: This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect items and contents carefully. If any damage or defect is found, do not install it.