KOHLER®

Mariposa®

5.5’ Bath

K-1229-W1

Features

- Bask™ heated lumbar support with three temperature settings.
- Textured bottom surface.
- Reversible drain.
- 66" (1676 mm) x 36" (914 mm) x 20" (508 mm)

Material

- Acrylic

Installation

- Drop-in installation.

Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

KOHLER®

Mariposa®

5.5’ Bath

K-1229-W1

No change in measurements if connected with drain illustrated. (K-7161-AF)

Recommended faucet area.

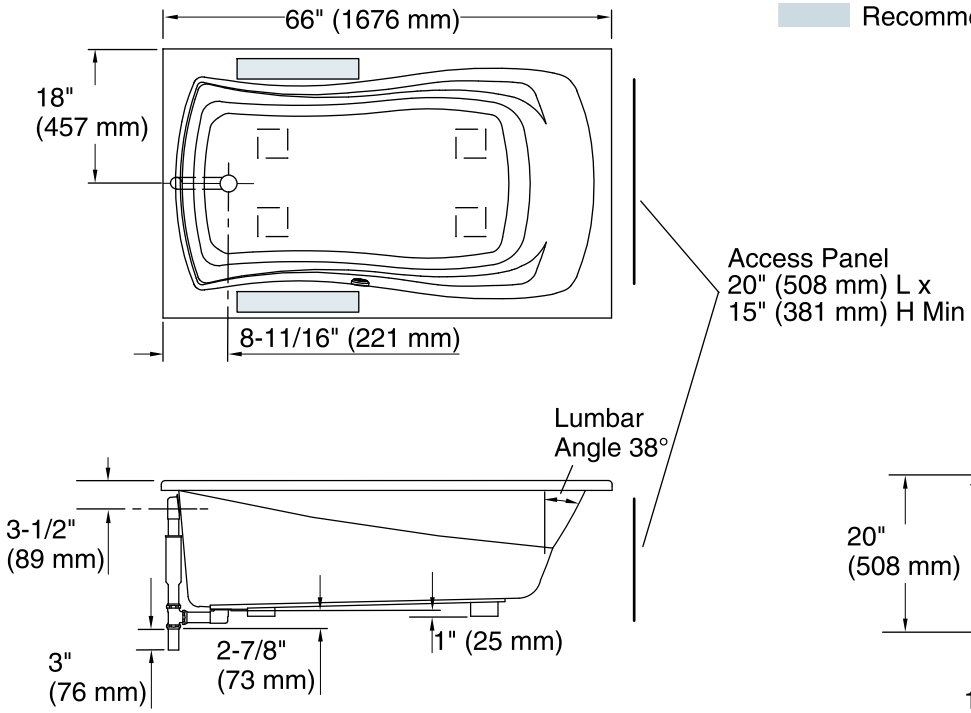



Drop-in Rim Detail

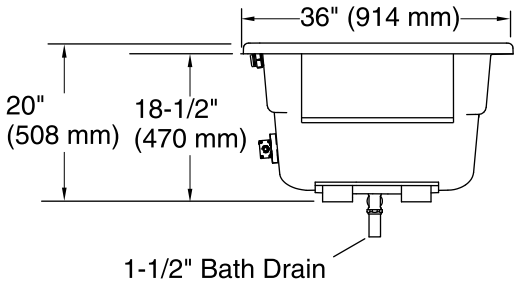

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Reversible
Basin area, bottom:	48" x 24" (1219 mm x 610 mm)
Basin area, top:	59" x 30" (1499 mm x 762 mm)
Weight:	65 lbs (29.5 kg)
Minimum floor load:	39 lbs/ft² (190.4 kg/m²)
Water depth:	14" (356 mm)
Water capacity:	67 gal (253.6 L)
Cutout:	Drop-in, 64" x 34" (1626 mm x 864 mm)
Electrical rating:	Heated Surface: 120 V, .5 A, 60 Hz, 65 W

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Locate a GFCI-protected 120 V, 15 A, grounded electical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.