

The Dimplex Collection

ELECTRIC FIREBOXES

Stoves & Inserts



 **Dimplex**[®]

Direct-wire Fireboxes

33" Slimline Firebox

Beauty, simplicity and safety: it's a combination that makes Dimplex fireboxes a great choice for any space.

Refined through 15 years of innovation, the patented Dimplex flame effect is the most authentic in the industry. While looking every bit as good as masonry fireplaces, Dimplex electric fireboxes provide unmatched flexibility and ease of installation as venting or gas lines are not required.

- A smart, practical and efficient zone heating solution, designed to warm up to 400 square feet.
- Choose from our wide selection of easy-to-install plug-in and direct-wired fireboxes.
- Can be installed in virtually any location.
- Several design options to choose from including cabinet surrounds, door and trim kits.



BFSL33 | 33" slimline direct-wire firebox shown with door kit
Includes 3-piece removable trim kit and 3-stage remote control



Cabinet Options



Corner depth: 37"

BFSL-BMBLK | White and black cabinet
Flat wall: 50³/₄" W x 45³/₄" H x 11³/₄" D




Corner Convertible

Door Kit



BFSL33DOOR
Single pane, tamperproof glass.

Dimensions

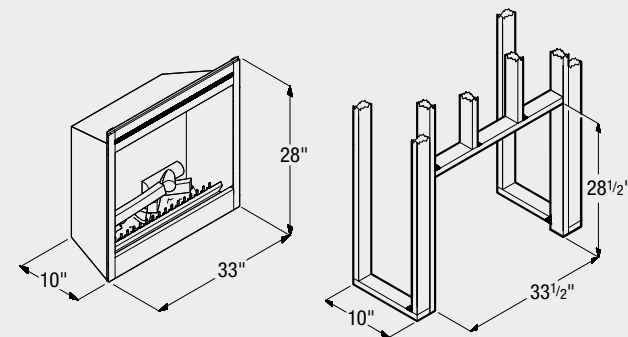

39" 2-sided Firebox



BF392SD | 39" 2-sided direct-wire firebox
Includes 3-stage remote control




Remote

Doors & Trim Kits

BFGLASS39BLK | 39" tamperproof glass door
BFSDOOR39BLK | 39" glass swing doors, black accents
BFDOOR39BLKSM | 39" bi-fold look glass door
BF4TRIM39 | 4-piece trim kit, black

Dimensions

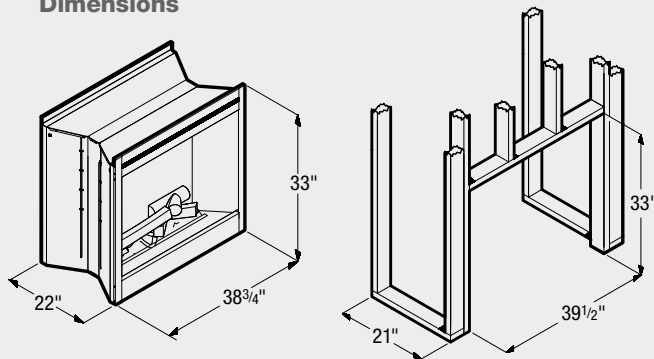

Direct-wire Firebox Features



Flame

A blend of technology, artistry and craftsmanship – the patented Dimplex flame technology creates the illusion of a true fire.



Thermostat

Includes a thermostat controlled fan-forced heater to ensure consistent comfort.



Supplemental Heat

Includes a powerful fan-forced heater designed to keep the rooms you spend the most time in warm and comfortable. Reduce your central thermostat temperature and cut your heating costs!



Direct-wire

Designed to be direct-wired to a 120 or 240 volt circuit for a seamless look. (Optional plug kit available if desired).



Options

Door kits, trim kits and control options available.



Year-round Enjoyment

Enjoy the ambiance of the flame with or without heat for year-round enjoyment.



Economical

Economical to operate. Costing only pennies per hour.*



Green

The green alternative. No harmful particulates or emissions and 100% efficient. Produces 90% less carbon dioxide than an average direct vent gas fireplace.



Safe

Front glass stays cool, making it safe to touch.

Specialty Features



Remote

Includes a convenient remote control for ease of use at your fingertips.



Corner Convertible

Mantel converts from corner to flat-wall in seconds.

*Based on national average residential electricity rate. Rates vary.

Direct-wire Fireboxes

45" Firebox



BF45DXP | 45" direct-wire firebox shown with bi-fold look glass door kit and black trim kit

Doors & Trim Kits

BFGLASS45BLK | 45" tamperproof glass door
BFDOOR45BLKSM | 45" bi-fold look glass door
BF4TRIM45 | 4-piece trim kit, black

39" Fireboxes



BF39DXP | 39" direct-wire firebox shown with tamperproof glass door kit and black trim kit
BF39STP | 39" direct-wire firebox without brick-look interior

Cabinet Options



BF39-STN
Stone-look surround
46" W x 37" H x 3" D



BC39W2
White cabinet
62³/₄" W x 47¹/₂" H x 21¹/₄" D

Doors & Trim Kits

BFGLASS39BLK | 39" tamperproof glass door
BFSDOOR39BLK | 39" glass swing doors, black accents
BFDOOR39BLKSM | 39" bi-fold look glass door
BF4TRIM39 | 4-piece trim kit, black

33" Firebox



BF33DXP | 33" direct-wire firebox shown with tamperproof glass door kit

Cabinet Options



BF33-STN
Stone-look surround
40³/₄" W x 32" H x 3" D



BC3336W2
White cabinet
57¹/₂" W x 43¹/₂" H x 20" D




BCC3336W5
White corner cabinet
58" W x 43¹/₂" H x 30¹/₂" D

Doors & Trim Kits

BFGLASS33BLK | 33" tamperproof glass door
BFSDOOR33BLK | 33" glass swing doors, black accents
BFDOOR33BLKSM | 33" bi-fold look glass door
BF4TRIM33 | 4-piece trim kit, black

Dimensions

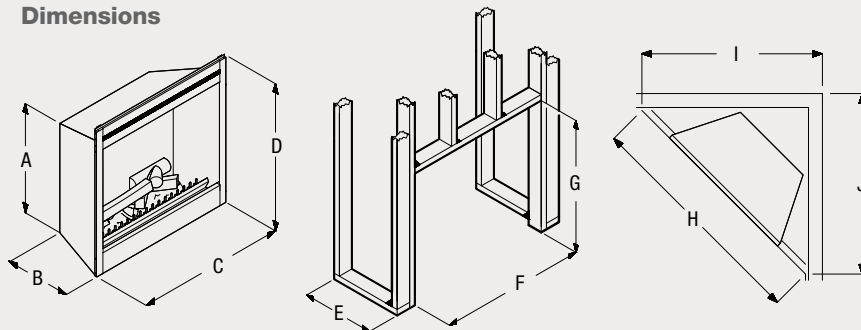

	A	B	C	D	E	F	G	H	I/J
BF33DXP	25 ³ / ₄ "	14 ¹ / ₄ "	32 ³ / ₄ "	28 ¹ / ₂ "	15"	33 ¹ / ₂ "	29 ¹ / ₂ "	48"	34"
BF39STP/ DXP	30 ¹ / ₈ "	15 ¹ / ₄ "	38 ³ / ₄ "	32 ³ / ₄ "	16"	39 ¹ / ₂ "	33 ¹ / ₂ "	54"	38"
BF45DXP	30 ¹ / ₈ "	15 ¹ / ₄ "	44 ³ / ₄ "	32 ³ / ₄ "	16"	45 ¹ / ₂ "	33 ¹ / ₂ "	60"	42"

Direct-wire Firebox Specifications

	BFSL33	BF33DXP	BF39STP	BF39DXP	BF392SD	BF45DXP
Firebox width	33"	32 3/4"	38 3/4"	38 3/4"	38 3/4"	44 3/4"
Hand-finished inner-glow logs and pulsating embers	•	•	•	•	•	•
Flame technology	LED	Incandescent	Incandescent	Incandescent	Incandescent	Incandescent
Authentic brick-look interior		•		•		•
Flame operates with and without heat	•	•	•	•	•	•
Volts	120/240/208	120/240/208	120/240/208	120/240/208	120	120/240/208
Wattage	1,223/2,423/1,823	1,440/2,700/2,100	1,440/2,700/2,100	1,440/2,700/2,100	1,440	1,440/2,700/2,100
BTUs	4,080/8,160/6,120	5,000/9,200/7,200	5,000/9,200/7,200	5,000/9,200/7,200	5,000	5,000/9,200/7,200
Amps	10.2/10.1/8.8	12.0/11.3/10.1	12.0/11.3/10.1	12.0/11.3/10.1	12.0	12.0/11.3/10.1
Remote control	3-stage included	3-stage optional	3-stage optional	3-stage optional	3-stage included	3-stage optional
Purifire® Air Treatment System		•	•	•		•
Limited warranty	2-year	2-year	2-year	2-year	2-year	2-year

Door Kits



Tamperproof Glass Door

BFSL33DOOR | For BFSL33
 BFGLASS33BLK | For BF33DXP
 BFGLASS39BLK | For BF39STP
 BF39DXP
 BF392SD
 BFGLASS45BLK | For BF45DXP



Glass Bi-fold Look Door

BFDOOR33BLKSM | For BF33DXP
 BFDOOR39BLKSM | For BF39STP
 BF39DXP
 BF392SD
 BFDOOR45BLKSM | For BF45DXP



Swing Door

BFSDOOR33BLK | For BF33DXP
 BFSDOOR39BLK | For BF39STP
 BF39DXP
 BF392SD

Trim Kit



Trim Kit

3" black surround trim,
 for use as 3-piece or 4-piece
 BF4TRIM33 | For BF33DXP
 BF4TRIM39 | For BF39STP
 BF39DXP
 BF392SD
 BF4TRIM45 | For BF45DXP

Control Options

Available with all direct-wire fireboxes



WRCPF-KIT
 Wall switch
 remote control kit



TS521W
 Wall-mount thermostat



BFRC-KIT
 3-stage remote control kit
 included with
 BFSL33/ BF392SD



BFPLUGE
 Plug kit, includes 7 ft. cord

Plug-in Fireboxes

Plug-in Firebox Features



Flame

A blend of technology, artistry and craftsmanship – the patented Dimplex flame technology creates the illusion of a true fire.



Supplemental Heat

Includes a powerful fan-forced heater designed to keep the rooms you spend the most time in warm and comfortable.



Year-round Enjoyment

Enjoy the ambiance of the flame with or without heat for year-round enjoyment.



Safe

Front glass stays cool, making it safe to touch.



Economical

Economical to operate. Costing only pennies per hour.*



Green

The green alternative. No harmful particulates or emissions and 100% efficient. Produces 90% less carbon dioxide than an average direct vent gas fireplace.



Remote

Includes a convenient remote control for ease of use at your fingertips.



Quick Assembly

Sets up in minutes with step-by-step assembly instructions.



Instant Ambiance

Plugs into any standard household outlet.



25" landscape firebox
DF2550 | Logs
DFG2562 | Glass



DF2608 | 26" firebox with logs



DF3015 | 30" firebox with logs

Ember Bed Options




DF3215 | 32" firebox with logs



33" landscape firebox
DF3033ST | Logs
DFG3033 | Glass

Ember Bed Options

Dimensions

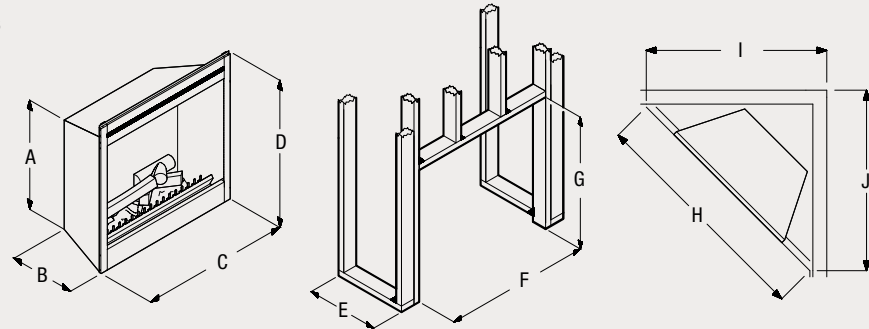

	A	B	C	D	E	F	G	H	I/J
DF2550/DFG2562	18 1/8"	8 7/8"	26"	18 7/8"	9"	24 1/2"	18 1/4"	38 3/4"	27 1/2"
DF2608	22 3/4"	9"	27 3/8"	23 1/2"	9"	26 3/4"	23 1/8"	42"	29 5/8"
DF3015	25 1/2"	10 1/2"	31 1/2"	25 1/2"	11 3/4"	30 1/2"	25 3/4"	44 1/2"	31 1/2"
DF3215	29 1/4"	13"	36 1/2"	31 3/4"	n/a	n/a	n/a	n/a	n/a
DF3033ST/DFG3033	22 3/8"	9 1/8"	33 1/8"	23 3/8"	9 1/2"	31 3/4"	22 3/4"	47 1/2"	33 5/8"

Specialty Features



Ember Bed Options

Choose from logs molded from actual wood for incredible realism or a tumbled glass ember bed for a contemporary alluring effect.



Direct-wire Option

Fireplace can be direct-wired for a seamless look.

* Based on national average residential electricity rate. Rates vary.

BLF Series Direct-wire Option



BLF34 | 34" fireplace with glass ember bed
34 1/4" W x 19 1/2" H x 7" D



BLF50 | 50" fireplace with glass ember bed
Optional Cohesion Trim available
50 1/4" W x 19 1/2" H x 7" D



BLF74 | 74" fireplace with glass ember bed
74 1/4" W x 19 1/2" H x 7 1/2" D


Cohesion Trim



DT1267BLK | Black
DT1103BW | Burnished Walnut

Installation – Mounting Options

ON WALL

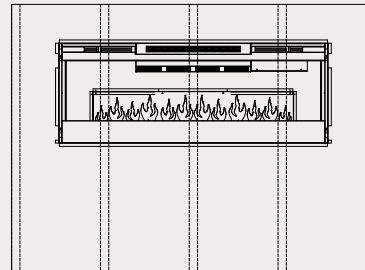


BLF34 | BLF50 | BLF74

BLF34 | Mount to a min. of two (2) studs.
BLF50 | Mount to a min. of two (2) studs.
BLF74 | Mount to a min. of three (3) studs.

PARTIAL RECESSED

2 x 4 Framing

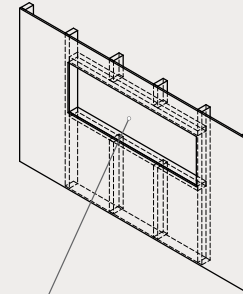


Framing Dimensions

BLF34 – 30 1/2" W x 16 1/2" H
BLF50 – 46 1/2" W x 16 1/2" H

FULLY RECESSED (FLUSH TO WALL)

2 x 8 Framing

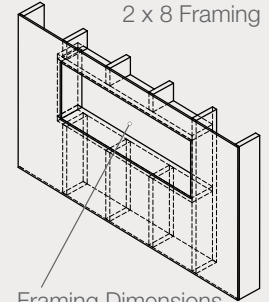

Framing Dimensions

BLF34 – 33" W x 18 1/2" H
BLF50 – 49" W x 18 1/2" H
BLF74 – 73" W x 18 1/2" H

Plug-in Firebox Specifications

	DF2550	DFG2562	DF2608	DF3015	DF3215	DF3033ST	DFG3033	BLF34	BLF50	BLF74
Firebox width	25"	25"	26"	30"	32"	33"	33"	34"	50"	74"
Flame technology	LED	LED	Incandescent	Incandescent	Incandescent	LED	LED	LED	LED	LED
Ember bed	Logs	Glass	Inner-glow logs	Inner-glow logs	Inner-glow logs	Inner-glow logs	Glass	Glass	Glass	Glass
Flame operates with and without heat	•	•	•	•	•	•	•	•	•	•
Volts	120	120	120	120	120	120	120	120	120	120/240
Wattage	880	880	1,440	1,500	1,500	1,000	1,000	1,220	1,230	1,230/2,430
BTUs	3,000	3,000	4,915	5,120	5,120	3,415	3,415	4,163	4,197	4,197/8,290
Amps	7.3	7.3	12.0	12.5	12.5	8.3	8.3	10.2	10.3	10.3/10.1
Authentic brick-look interior			•	•	•					
Adjustable flame speed and interior light controls			•	•	•					
Purifire® Air Treatment System				•	•					
Slow start / fading embers					•					
Bi-fold doors and mesh screen					•					
Limited warranty	2-year	2-year	2-year	5-year	10-year	5-year	5-year	2-year	2-year	2-year

Fireplace Inserts



DLG1058
27" open hearth insert
27" W x 11" H x 14¹/₄" D



DLGM29
27" Opti-myst® insert
27" W x 13" H x 14¹/₄" D



DFI2310
23" deluxe fireplace insert
23¹/₄" W x 19¹/₂" H x 10³/₄" D
Available with expandable
trim kit DFI23TRIMX



DFI2309
23" standard fireplace insert
23¹/₄" W x 19¹/₂" H x 10³/₄" D
Available with expandable
trim kit DFI23TRIMX

Stoves



Mini Cube
DMCS13R
Red gloss finish
13" W x 14¹/₂" H x 8" D



Celeste
TDS8515TB
Black gloss finish
29³/₄" W x 27" H x 17¹/₂" D



Cube
DCS19W
White gloss finish
18¹/₂" W x 22" H x 13¹/₄" D



Celeste
TDS8515TC
Cream gloss finish
29³/₄" W x 27" H x 17¹/₂" D

Fireplace Inserts & Stoves Specifications

	DLG1058	DFI2310	DLGM29	DFI2309	DMCS13R	DCS19W	TDS8515TB/TC
Flame technology	LED	LED	LED	Incandescent	Incandescent	Incandescent	Incandescent
Ember bed	Logs	Logs	Logs	Logs	Lava	Lava	Logs
Flame operates with and without heat	•	•		•		•	•
Built-in fan-forced heater	•	•		•	•	•	•
Volts	120	120	120	120	120	120	120
Wattage	1,225	1,375	n/a	1,375	1,370	1,480	1,550
BTUs	4,181	4,692	n/a	4,692	4,674	5,050	5,120
Amps	n/a	11.5	2.7	11.5	11.4	12.3	12.5
Remote control	Multi-function	on/off	on/off	on/off	n/a	n/a	3-stage
Purifire® Air Treatment System							•
Limited warranty	1-year	1-year	1-year	1-year	90-day	90-day	1-year

Your authorized Dimplex dealer:

Specifications, finishes and dimensions are subject to change and should be taken as a guide only. Protected by one or more of the following patents: U.S. Patents: 5,642,580, 6,050,011, 6,162,047, 6,269,567, 6,564,485, 6,615,519, 7,134,229, 8,361,367. Canadian Patents: 2,175,442, 2,310,073, 2,310,414, 2,321,716, 2,357,182, 2,412,074, 2,455,380. Other patents pending. © 2013 Dimplex North America Limited.

Connect with us online:



Dimplex
Better solutions through innovation