

PENDANT LIGHT (ROD) Assembly Instructions

MODEL#: 8219PL-01GD-US, 8219PL-01BK-US




CAUTION

• Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

• Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder




Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

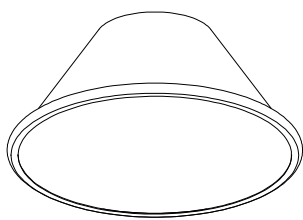


Glass




Mounting Unit




canopy




Rods




lamp body



Mounting Screws



Wire Nuts




cap nuts


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

PENDANT LIGHT (ROD)
Assembly Instructions
MODEL#: 8219PL-01GD-US, 8219PL-01BK-US

STEP 1
Connect the metal tube to the ceiling panel and lamp body

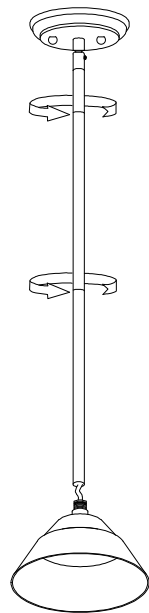

STEP 2
Install the hanging plate on the reserved box;





STEP 3
 Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:


Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:


White Supply Wire or Insulated Wire (other than green) with silver conductor

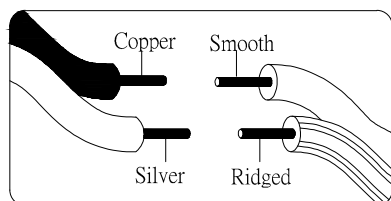

STEP 4
Fix the connected lamp body onto the hanging plate with nuts

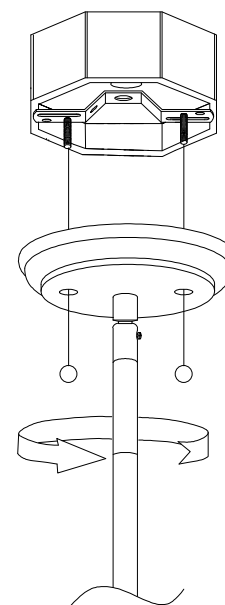

STEP 5
Fix the lampshade onto the lamp body with an iron ring

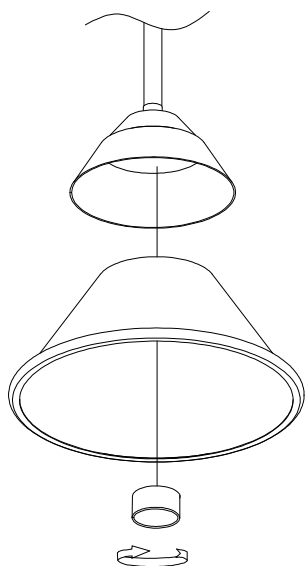

STEP 6
Install the bulb (Bulbs NOT Included) E26 "A" MAX60W

