


Barn Door Hardware Installation Manual

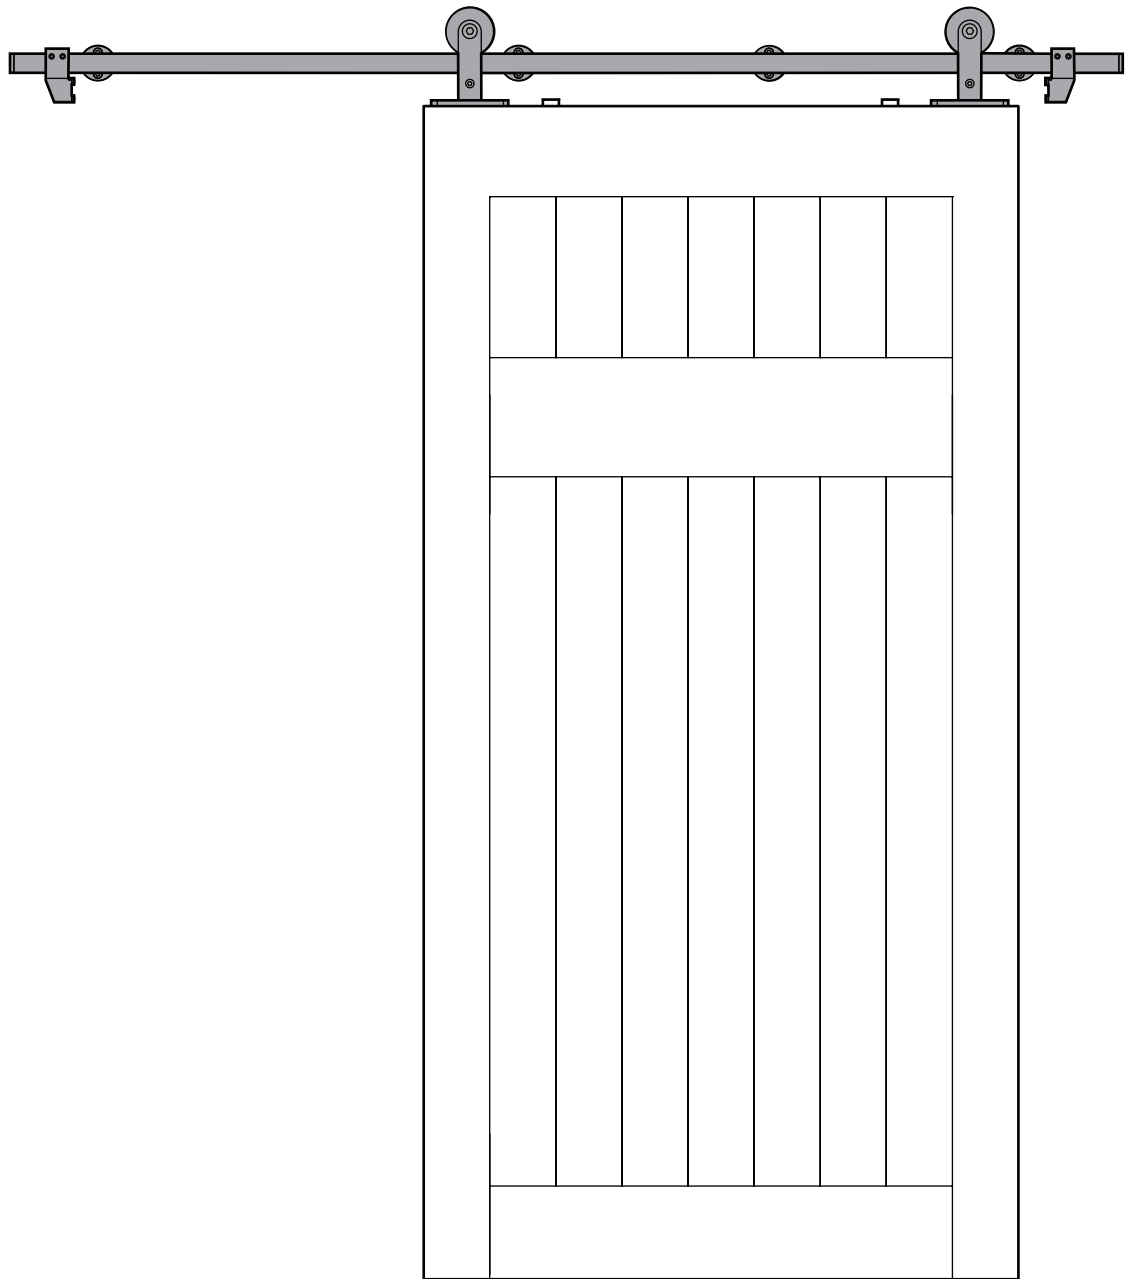

※ Hahaemail Hint

Hi, don't let the assembly details dissuade you. Just be patient and methodical during the assembly and you will be very pleased with the results. Hope this installation manual will help you a lot. Any problem, just contact us to **ushahaemail@outlook.com**.

WARNING

- Failure to wear proper safety gear (i.e., eye protection) may result in serious injury or death.
- Always wear proper safety gear before using power tools.
- Improper operation of power tools may result in loss of control, serious injury or death.
- Always ensure you have complete control of the power tool and the work area is free of hazards before operating a power tool.
- Lack of secure clamping of the door may result in unexpected movement of the door, loss of power tool control and serious injury or death. Always securely clamp the door in place before cutting, or drilling the door.
- Lack of, or improperly installed Anti-jump Disc may result in the door coming off the track and cause serious injury or death. Installation of Anti-jump Disks are required for safe operation of this hardware. Installed properly, the Anti-jump Disks will keep the door securely attached to the track.

CAUTION

- Mishandling of heavy objects (i.e., doors) may cause a loss of balance and serious injury. Always be sure you have a secure hold the object and are balanced before moving the object. Always wear safety shoes when lifting heavy objects.
- Getting body parts (i.e., hair fingers) caught in moving parts may cause pinching and serious injury. Do not put fingers in parts that may move and always remove or contain anything on our body that may become entangled with a moving part.
- Closing sliding doors with your hand on the end of the door may result in your hand, or fingers, getting caught between the door and other solid objects (i.e., another door, molding) causing serious injury. Always use the door handle to close doors.

Usage Statement:

Use of excessive force when opening, and closing, the doors) may result in damage to the hardware. Always hold the handle and gently open and close the doors.

Single Door Hardware Kit Includes









A		B		C													
Floor Guide		Tube Plug		Spacer													
																	
X1_{PC}		X2_{PC}		<table><tr><td>5FT</td><td>6FT</td><td>6.6FT</td></tr><tr><td>4</td><td>4</td><td>4</td></tr><tr><td>7.5FT</td><td>8FT</td><td></td></tr><tr><td>6</td><td>6</td><td></td></tr></table>		5FT	6FT	6.6FT	4	4	4	7.5FT	8FT		6	6	
5FT	6FT	6.6FT															
4	4	4															
7.5FT	8FT																
6	6																
D		E		F													
Door Stopper		Hex Wrench		Hanger													
																	
X2_{PC}		X1_{PC}		X2_{PC}													
G		H															
Junction Plate		Rail															
																	
X1_{PC}		X2_{PC}															


Chart: Track Junction

5FT	5.1" 19.7" 5.1" 5.1" 19.7" 5.1"	59.8"
6FT	8.2" 19.7" 8.2" 8.2" 19.7" 8.2"	72.2"
6.6FT	9.8" 19.7" 9.8" 9.8" 19.7" 9.8"	78.6"
7.5FT	3" 19.7" 19.7" 3" 3" 19.7" 19.7" 3"	90.8"
8FT	4.3" 19.7" 19.7" 4.3" 4.3" 19.7" 19.7" 4.3"	96"

Installation Steps


STEP 1

Use a level to draw a line at a height of $+2\frac{11}{16}$ " inches above the door to install the track.

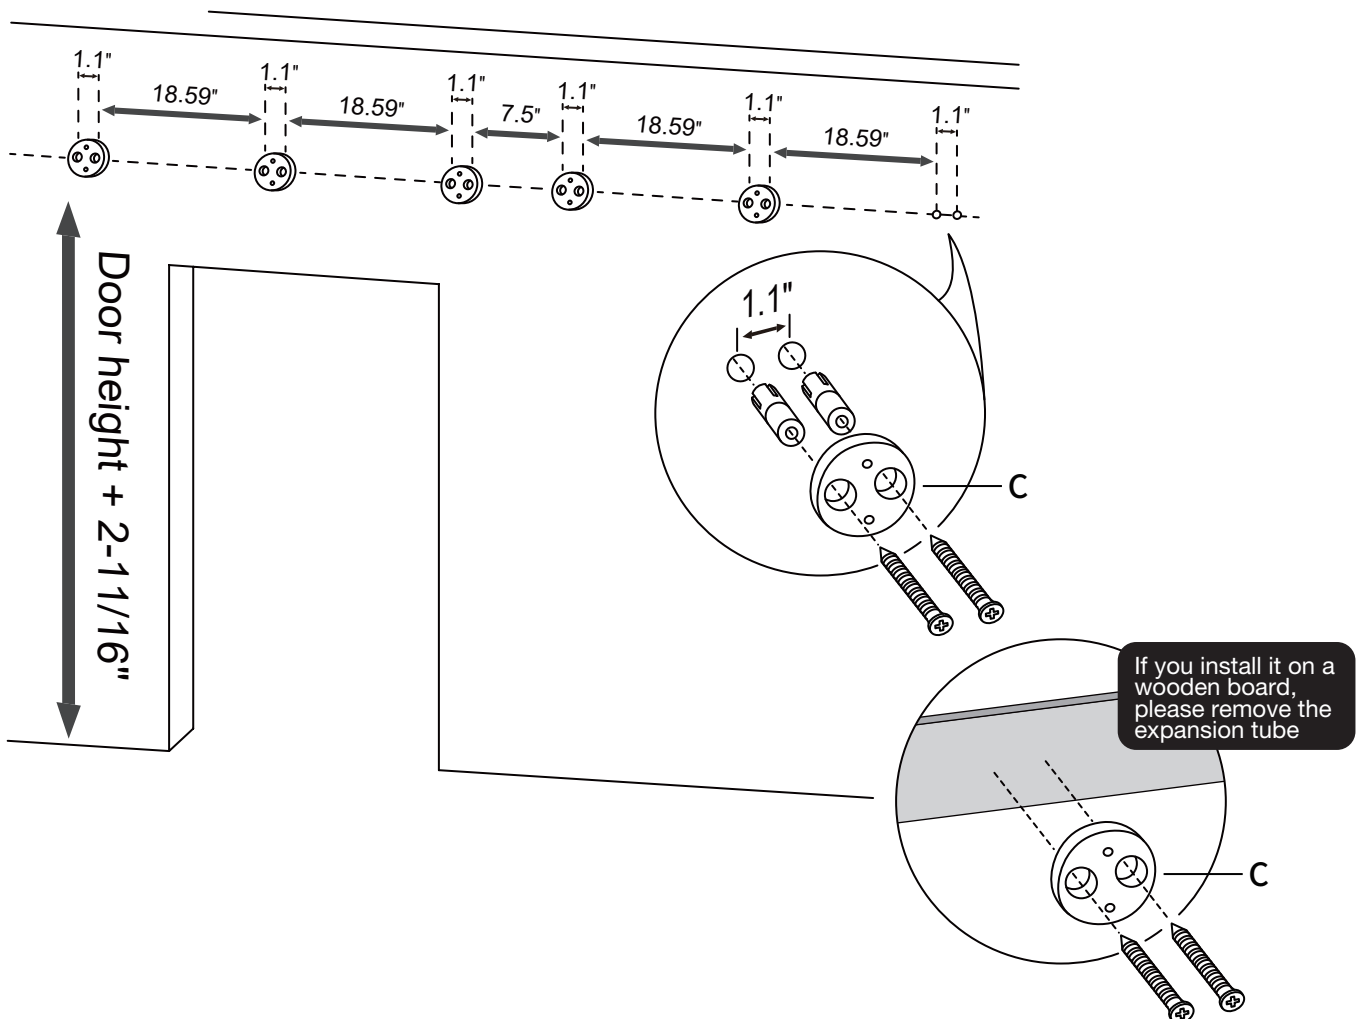


STEP 2

Connect your tracks with junction plates.

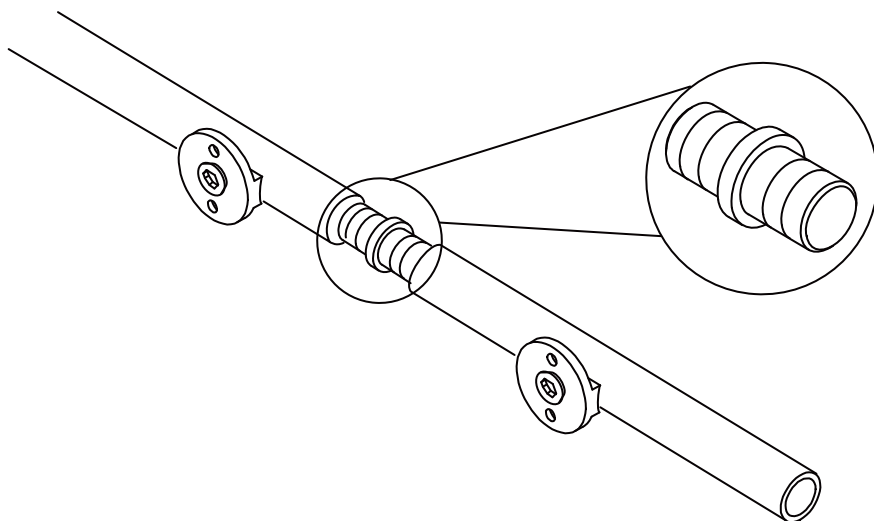


STEP 3

Once you have it install assembled for all parts, position the rail on the wall exactly where you need it to be.

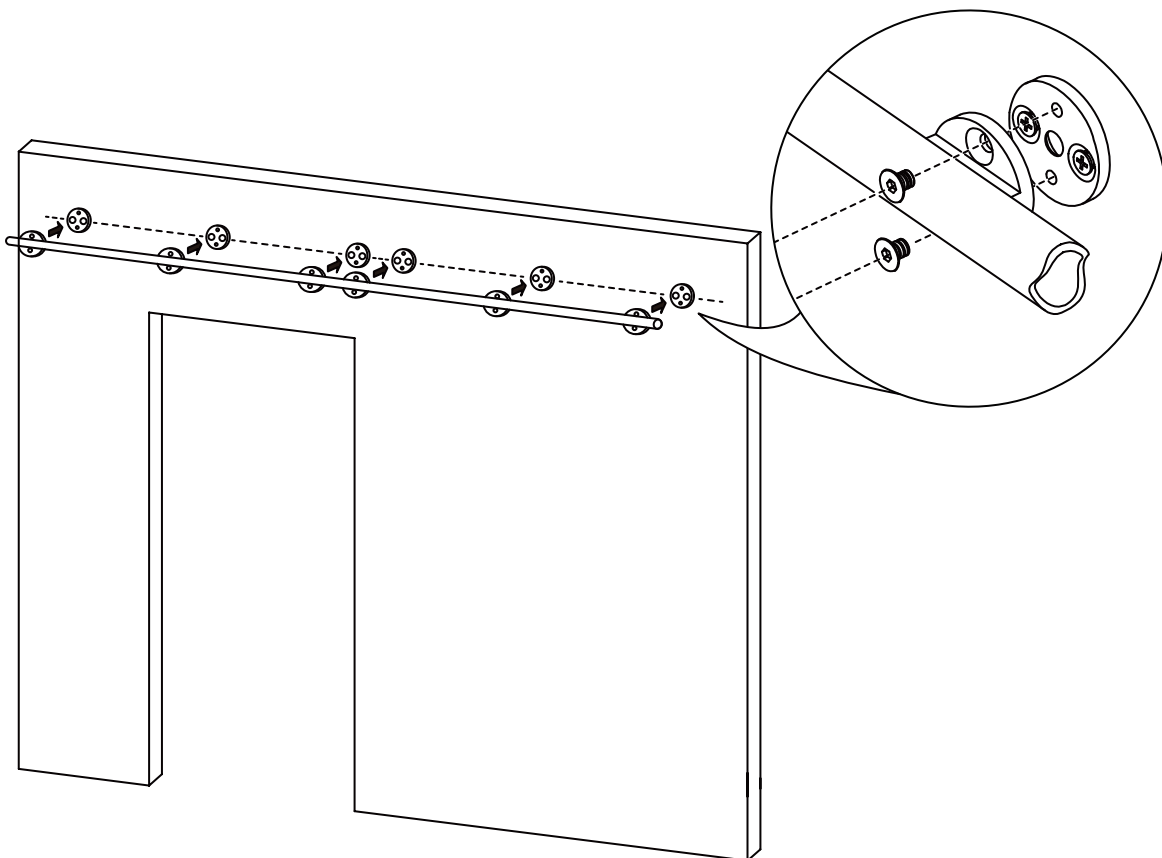


STEP 4

Install the hangers to your door as the photo.

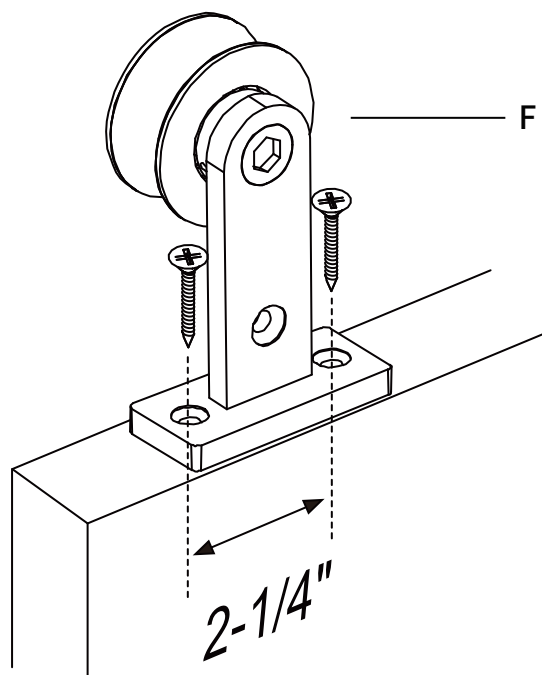

STEP 5 / Cut the floor guide slot at the bottom of the door.

Cut a 3/4" wide, 3/4" deep slot at the bottom of the door. Recommended: Cut the slot with a router and slot cutter bit.

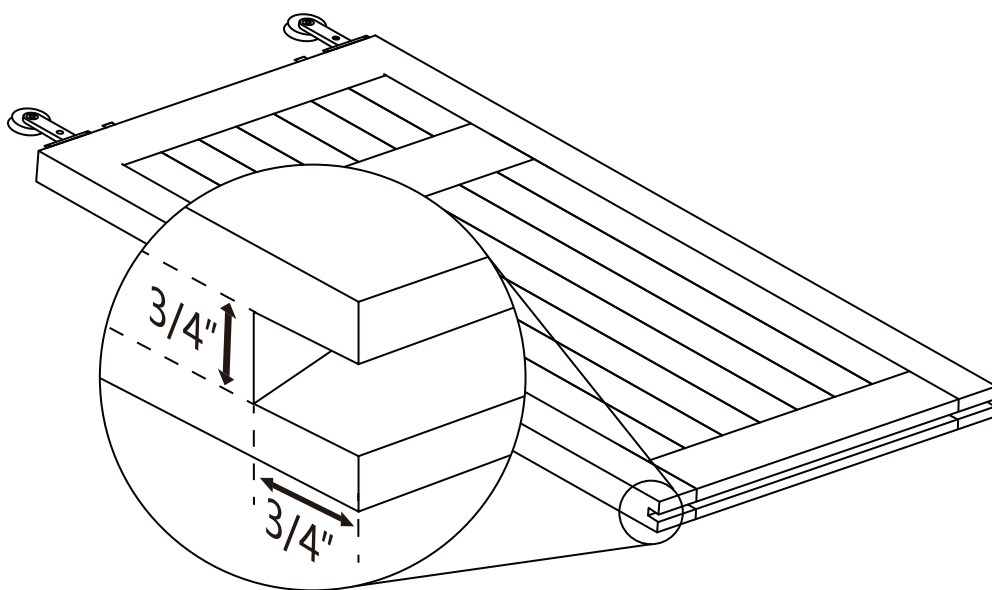

STEP 6

- ① Hang your Steel Hangers on the Track, and then adjust the anti-jump bar up or down so that it could make the hanger clamp the track.
- ② Place the door at your desired close position, put the floor guide under the door, mark the location, and then fix guide to the floor.
- ③ Place the door into the desired closed and open positions and adjust the door stop, then place the pipe plug into the rails.

All your installation is finished!!!

