

Pendant Light Installation Instructions

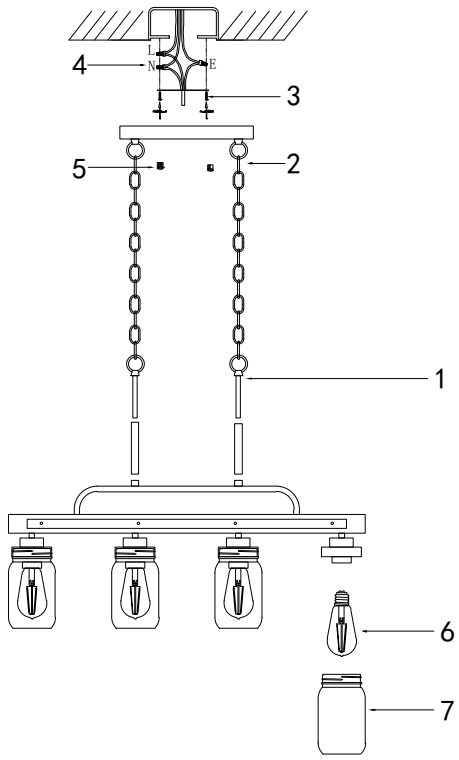

1. Run the wire through the downrod, then attach the downrod to the light body.
2. Run the wire through the chain, then mount the downrod to the ceiling canopy.
3. Turn off the power, and secure the mounting bracket to th e junction box with screws.
4. Connect power wires (L, E, N) to the corresponding wires on the junction box.
5. Mount the main fixture onto the mounting bracket and fast en with screws.
6. Install the E26 bulb.
7. Fit the glass shade in place.

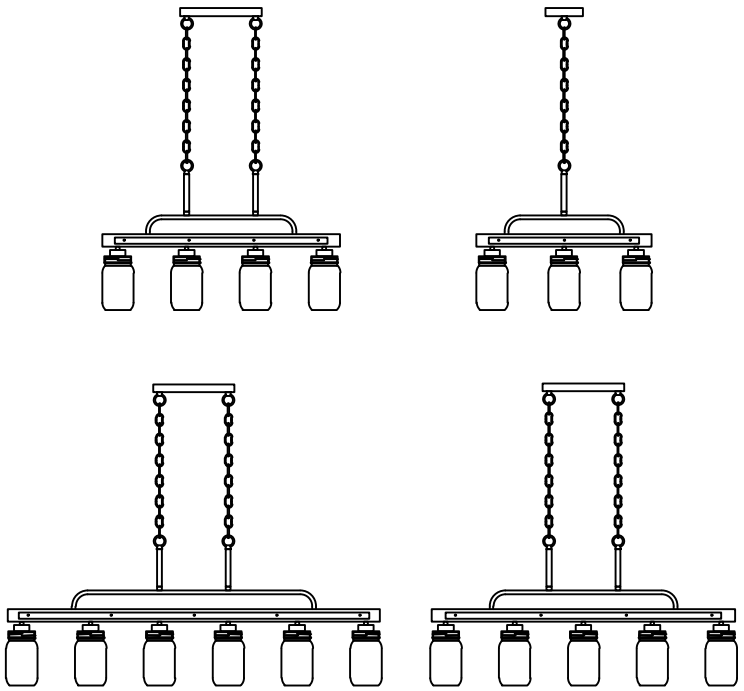

WARNING

(To reduce the risk of fire,electrie shock,or injuiy to persons):

1.We suggest installation by a licensed electrician.

2.Please read the instruction carefully and save it as you may need it at later time.

3.Before you start,NEVER attempt any work without shutting off the electricity until the work is doneA).

Go to the main fuse,or circuit breaker,box in your home.Place the main power switch in the "OFF"position.B)

Place the wall switch in the "OFF"position.

4.Mounting surface should be clean,diy,flat,strong enough and 1 / 4 "larger than the canopy on all side.

Any gaps between the mounting surface and canopy exceeding 3 /16 "should be corrected as required.

S.Make sure that the ceiling or wall can bear the weight of the lamp before fixture.

6.Make sure the voltage you are using is 120V.The maximum wattage is 60W per bulb.

7.Keep the lamp away from acidic objects in case of damaging the surface of the lamp.

8.When replacing bulb,you should tum off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.

9.The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur.

It must be understood that common sense,caution and care must be used with any electrical products.

10.Do not touch the bulb or lamp shade during the lighting fixture working.

Image for finished product: