

48" INDUCTION RANGETOP



ALL FINISHES — STAINLESS STEEL · SIGNATURE BLACK STAINLESS · VEGA · ORION



INDUCTION **HARDWARE**

IRT48 · 48" INDUCTION RANGETOP

PRODUCT DIMENSIONS · INCHES · NOT TO SCALE

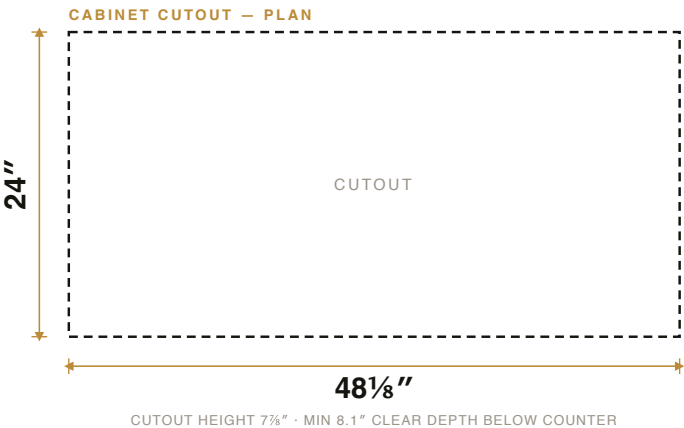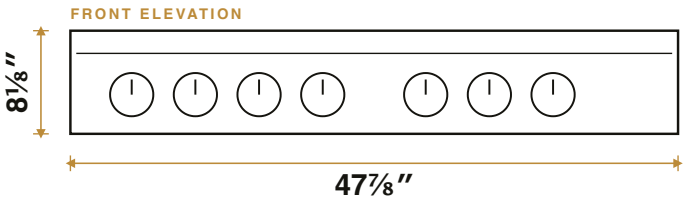

240 V · 50 A · 8 AWG COPPER — VERIFY AGAINST THE UNIT BEFORE CUTTING



SPECIFICATIONS

SKUs	IRT48-SS · IRT48-BS · IRT48-SS-VEGA · IRT48-BS-ORION
Product W x D x H	47 7/8 x 27 3/8 x 8 1/8 in
Cabinet cutout	48 1/8 x 24 in · height 7 3/8 in
Electrical service	240 V · 50 A · 8 AWG copper
Certification	ETL

Installation — Cutout 48 1/8 x 24 in, height 7 3/8 in — verify against the unit before cutting. Min 8.1 in clear depth below counter; knob rail projects 3 3/8 in forward. Land 8 AWG copper at the junction box with service slack.

OVERVIEW

A professional range top driven by hand — front-mounted knobs stay legible and reachable with a full hob. Slide-in induction, no oven below.

KEY FEATURES

- Front-mounted knob bank — knobs, not menus
- 8 AWG copper supply conductor
- Lifetime parts warranty · Restore & Renew refurbishment

48" INDUCTION RANGETOP

IRT48-SS · IRT48-BS · IRT48-SS-VEGA · IRT48-BS-ORION



ELEMENT WATTAGE

Element	Diameter	Standard	Boost
Small	6.3"	1200 W	1500 W
Medium	7"	1800 W	2100 W
Large	10.5"	2300 W	3700 W

7 zones. Standard is the continuous output at level 9; boost runs above it for five minutes, then the zone drops to level 9.

Full-surface induction

Magnetic zones across the whole glass, so a pan heats wherever it lands — no fixed burner geometry to cook around.

Instant, exact control

Power reaches the pan the moment the knob turns and stops the moment it is switched off.

Professional cast-metal knobs

Direct, tactile control you can feel mid-sear, with no menu to dig through.

Cleaner indoor air

No combustion at the cooking surface means no flame and no byproducts vented into the room.

One finish system


Stainless and Signature Black Stainless across every category, with Celestial Edition gold on the knobs.

Lifetime parts warranty

Parts covered for the life of the appliance, backed by the Restore & Renew refurbishment program.

48" INDUCTION RANGETOP

DIMENSIONS & INSTALLATION — ALL FINISHES

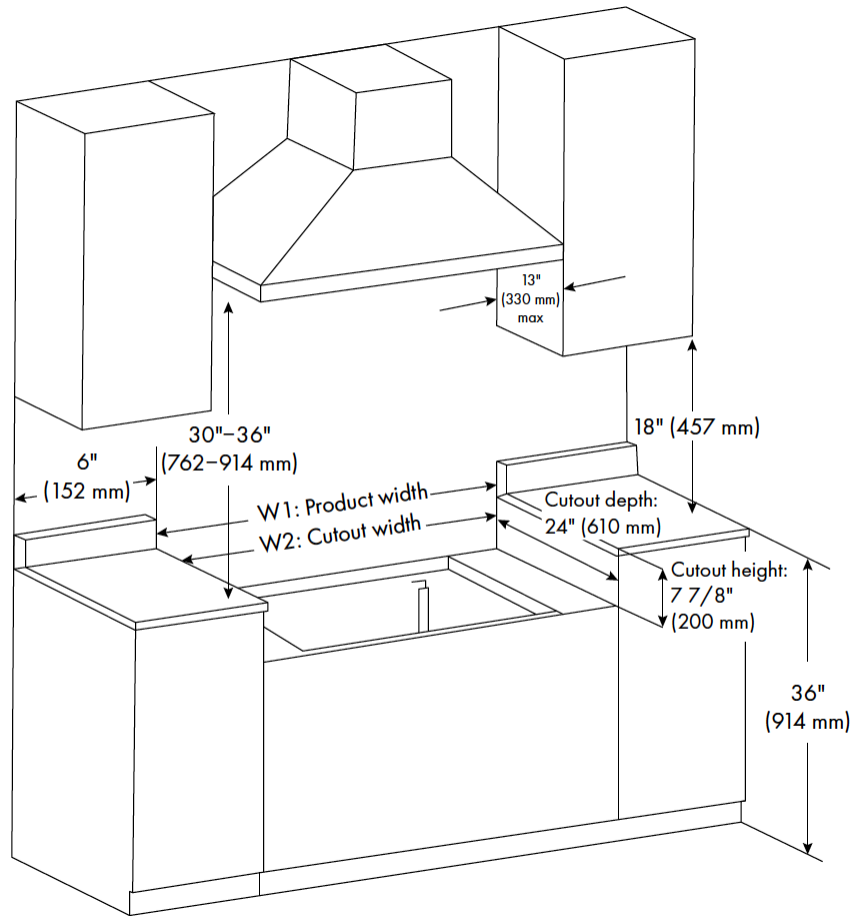

W1 — product width 47 7/8"

W2 — cutout width 48 1/8"

Cutout depth 24"

Cutout height 7 7/8"

SPECIFICATIONS

Nominal width	48 in
Product W × D × H	47 ⁷ / ₈ × 27 ³ / ₈ × 8 ¹ / ₈ in
Cabinet cutout	48 ¹ / ₈ × 24 in · height 7 ⁷ / ₈ in
Supply conductor	8 AWG copper
Electrical service	240 V · 50 A · 8 AWG copper
Clearances	Hood 30–36 in above · 6 in to combustibles
Weight	130 lbs
Glass	European ceramic, edge to edge (France)
Certification	ETL

Dimensions, cutout, electrical service and performance are identical across every finish in this family.

FINISHES

4 FINISHES — ONE PLATFORM

Dimensions, cutout, electrical service and performance are identical across every finish. Only the SKU, the hardware treatment and the exterior finish change.

**Stainless Steel****IRT48-SS**

Brushed 304 stainless with stainless hardware

**Signature Black Stainless****IRT48-BS**

Fingerprint-resistant black stainless with matching hardware

**Vega — Celestial Edition****IRT48-SS-VEGA**

Gold knobs and handles on brushed stainless

**Orion — Celestial Edition****IRT48-BS-ORION**

Gold knobs and handles on black stainless