


RAVELLO

LOUNGE HEATER

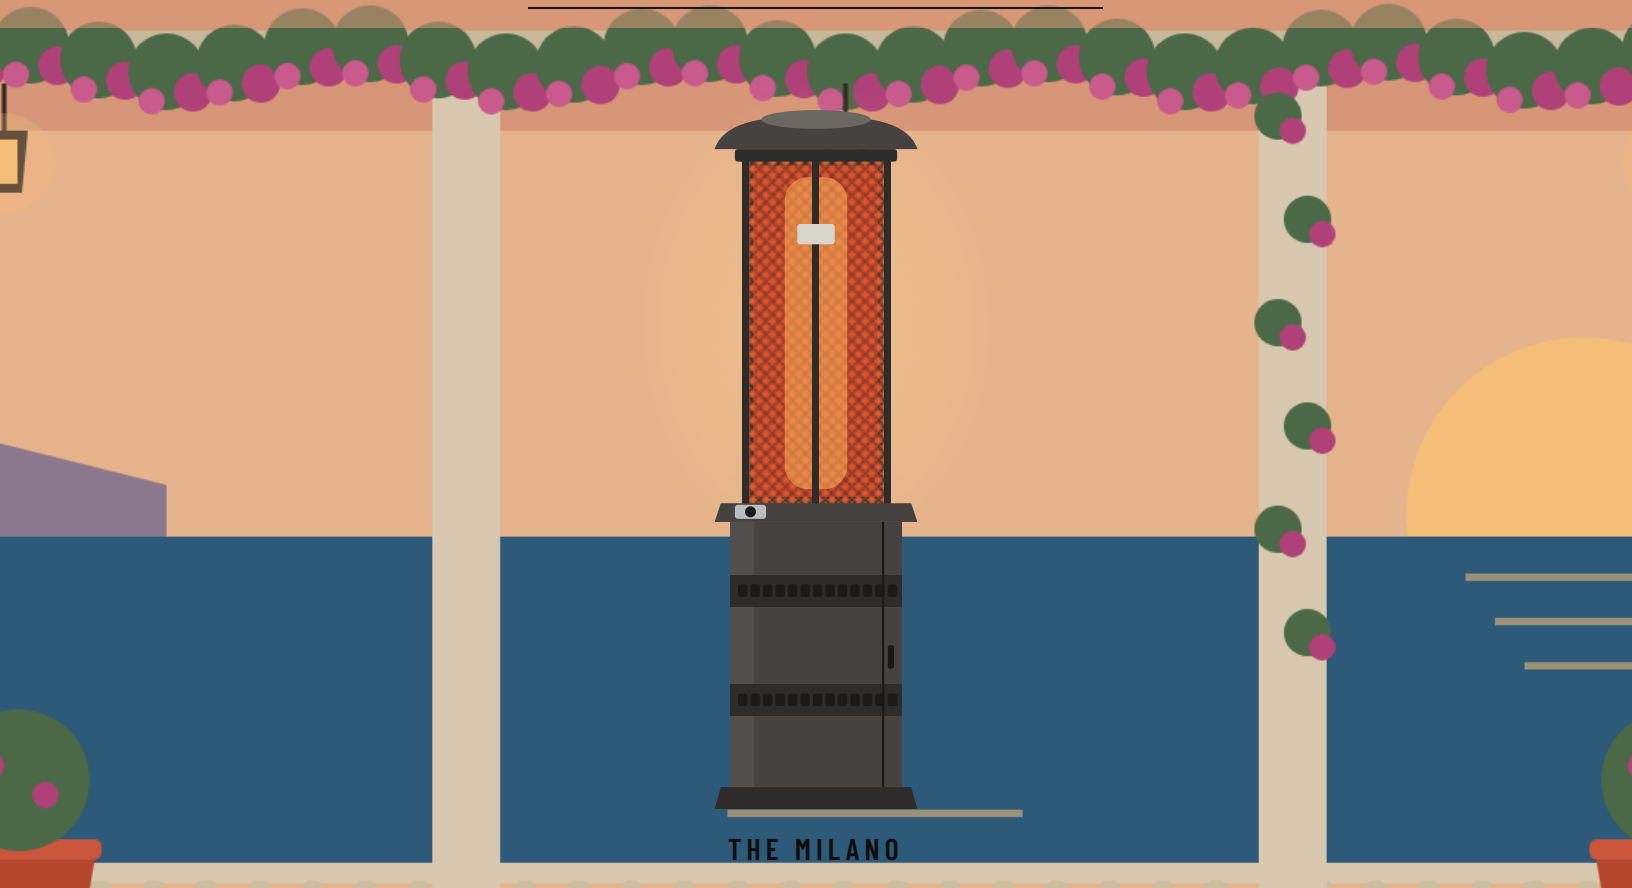

THE MILANO

QUICK START GUIDE · THE MILANO · RAVELLO LOUNGE COLLECTION

Your first evening.

Una sera a Ravello — six steps, one sunset.

17:00	17:45	18:00	18:15	18:30	23:00
<i>Arrivo</i>	<i>Il Gas</i>	<i>La Prova</i>	<i>Accensione</i>	<i>Il Calore</i>	<i>Buonanotte</i>

About 40 minutes · two people · Phillips screwdriver and adjustable wrench.

You'll need the igniter battery and a 20 lb propane cylinder (not included).

READ YOUR OWNER'S MANUAL


FIRST

17:00*Arrivo*

STEP 1

Assemble and place your Milano


- Your Milano arrives in parts. Assemble it with two people using the **11 Assembly Instructions in your Owner's Manual**, about 40 minutes with a Phillips screwdriver and an adjustable wrench.
- Check the hardware bag first: washers A ×9, screws B ×5, C ×17, nuts D ×2, screws E ×6. Handle the glass tube with care.
- Stand it upright outdoors on firm, level, non-combustible ground, clear of awnings, umbrellas, branches and walls by the distances in your Owner's Manual.

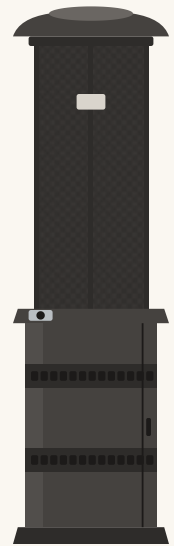**17:45***Il Gas*

STEP 2

Battery and fuel

- Open the base door. Fit the **igniter battery** in the igniter beneath the control panel, + and – as marked.
- Knob OFF, cylinder valve closed. Stand a standard **20 lb LP cylinder with a protective collar** upright in the base and secure it with the **cylinder bracket**.
- Thread the regulator onto the cylinder valve **clockwise, hand-tight**. Keep the hose free of kinks and clear of hot surfaces. Close the door.

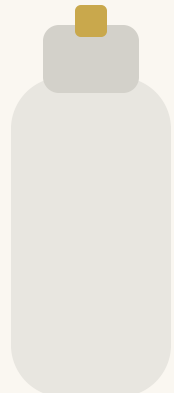

20 lb · bracket

18:00*La Prova*

STEP 3

Test every connection

- Mix **1 part dish soap to 3 parts water**. With the knob OFF, open the cylinder valve.
- Brush it on the hose connections, the regulator and the cylinder valve. **Growing bubbles mean a leak:** close the valve, re-tighten, test again.
- Still bubbling? Don't use the heater; call us. Never test with a flame. Repeat at every cylinder change, and replace a worn or damaged hose before use.

18:15*Accensione*

STEP 4

Light the Milano

- Knob to **OFF**. Open the cylinder valve fully.
- **Push the knob in and turn it counter-clockwise to IGNITE**. Keep it held down: the igniter sparks until the pilot lights.
- Once the pilot is lit, **keep the knob pressed for up to 30 seconds**, then release. The first lighting takes longest while air clears from the line.
- Pilot won't stay lit? Repeat. No light after a minute? Knob to OFF, **wait 5 minutes**, try again.




PUSH IN · TURN TO IGNITE

18:30*Il Calore*

STEP 5

Set the warmth

- Press the knob slightly and turn to **LOW**. Check the flame is steady, then turn to **HIGH** and back to the level you want.
- The burner can be noisy at first: turn to LOW, then up again. Within minutes the emitter screen glows bright red, with tongues of blue flame.
- First use: a little smoke and smell for **about 30 minutes** is normal. Never thick black smoke. If the flame blows out, the safety valve shuts off the gas.

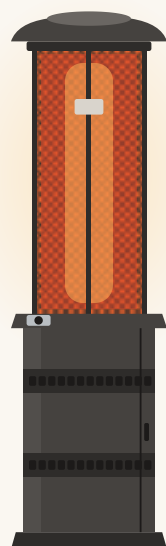**23:00***Buonanotte*

STEP 6

Shut down

- **Push in and turn the knob clockwise to OFF**.
- **Close the cylinder valve** clockwise when the heater is not in use.
- Do not touch or move it for **45 minutes**. Relighting a warm heater? Wait 5 minutes first.

SAFETY FIRST, ALWAYS

If you smell gas

1. Shut off the gas at the cylinder valve.
2. Extinguish any open flame.
3. If the odor continues, move away and call your gas supplier or fire department from a safe place.

OUTDOOR USE ONLY

Never use inside a home, garage, tent, vehicle or any enclosed space. Carbon monoxide can kill.

La Cura *care through the seasons*

THE FINISH

Once cool, a soft cloth with warm soapy water. No abrasive pads, solvents or pressure washers. Near the sea, check often for corrosion.

HOSE & PASSAGES

Each season, check the hose for cracks and clear spiders and insects from the burner and orifices with a pipe cleaner and compressed air.

BURNER & CONTROLS

Keep the burner, pilot and controls dry when washing. If the gas control ever gets wet, don't use it: call us for a replacement.

COVER & STORE

Cover once cool and store upright, sheltered from rain and snow. For long storage, disconnect the cylinder and keep it outdoors.

LIFETIME FRAME · 5 YEARS PARTS · 5 YEARS FINISH · 1 YEAR BURNER

Parts only; labor and freight not included. Full terms at lavaheat.com/warranty-and-product-care



WE'RE HERE TO HELP

customerservice@lavaheat.com · 310-559-1700

lavaheat.com/troubleshooting

Lava Heat Italia · 940 W. Washington Blvd., Los Angeles, CA
90015 · Est. 2001

*Buona
serata.*