INSTALLATION INSTRUCTION

WARNING: Turn off the electricity at the main fuse box (or circuit breaker box) before beginning installation by switching the circuit breaker off or removing the fuse.

WARNING: If cord is damaged, socket must be replaced by a qualified electrician or trained professional.

CAUTION: Consult a qualified electrician to ensure correct branch circuit conductor.

Making the electrical connections

NOTE: If the supply circuit does not have a ground wire, attach the fixture ground wire to the green screw(DD). Never connect the ground wire to the black or the white power cord.

- Twist the stripped wire ends of the fixture and the supply circuit wires together: black(L) to black and white(N) to white.
- Twist on the wire nuts(CC), ensuring that the conductors are no longer exposed.
- Carefully tuck the connected wires and the wire nuts(CC) into the outlet box.

Rated Voltage	120VAC 60Hz
Socket Type	E26
Suitable Bulbs	LED Bulbs/ Edison light bulb
Bulb Wattage	≤60W
Material	Metal

Bulb Not Included

EASY TO INSTALL

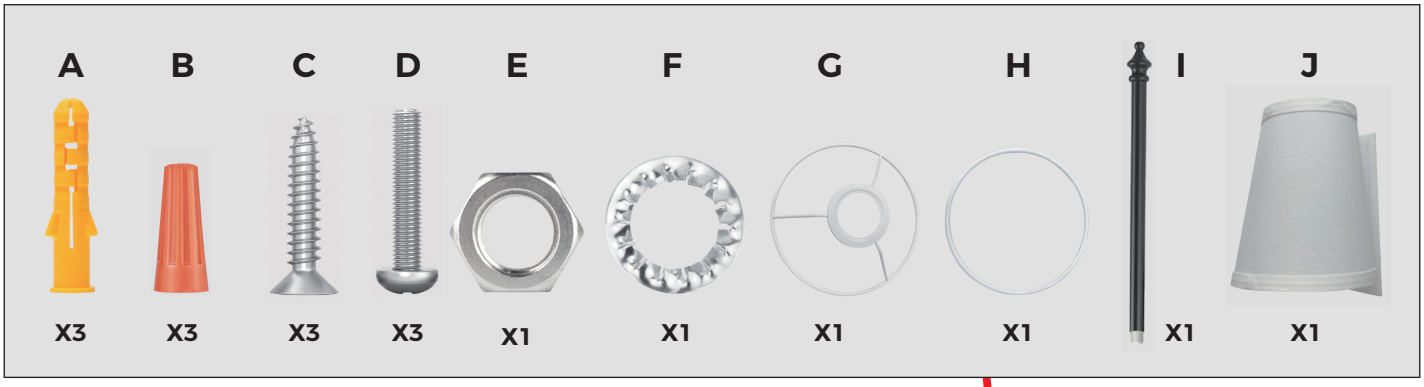

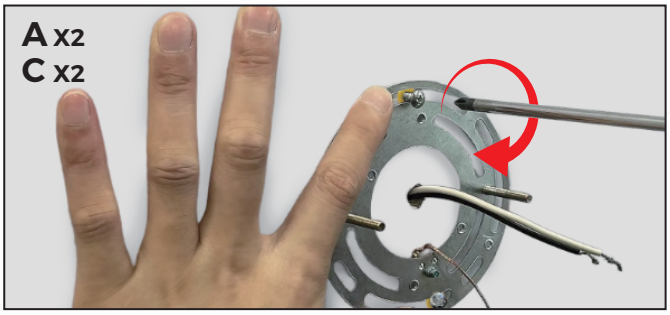

1 Tighten the mounting plate into the outlet box.

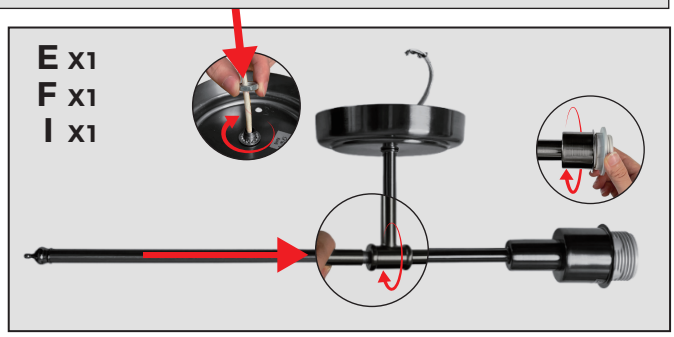

2 Assemble the main accessories of the lighting fixture.

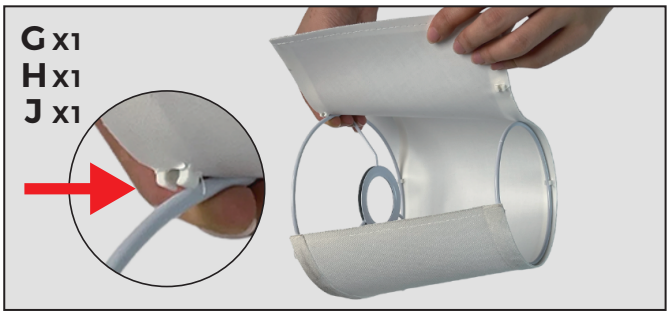

3 Assembly of lampshade.

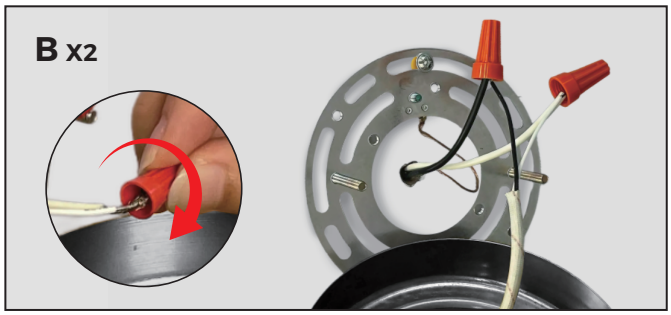

4 Connect fixture wires and junction box wires using the wire nuts.

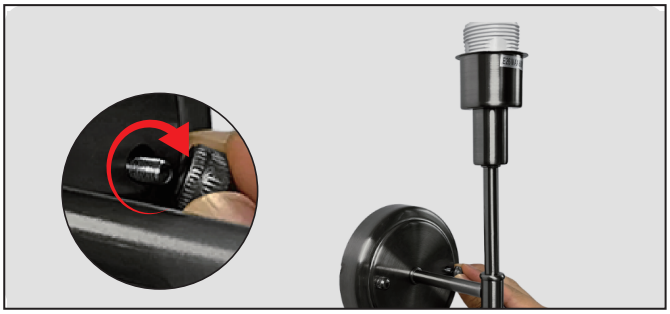

5 Fix the lamp to the wall with outter screws.

6 Place the lampshade on the lamp holder.

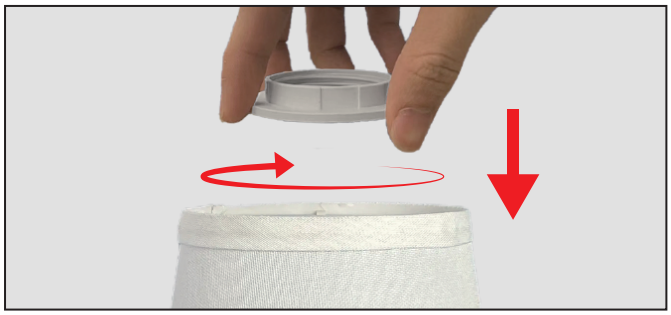

7 Locking the lampshade

8 Complete the installation of lighting fixtures