


Product Installation Instructions

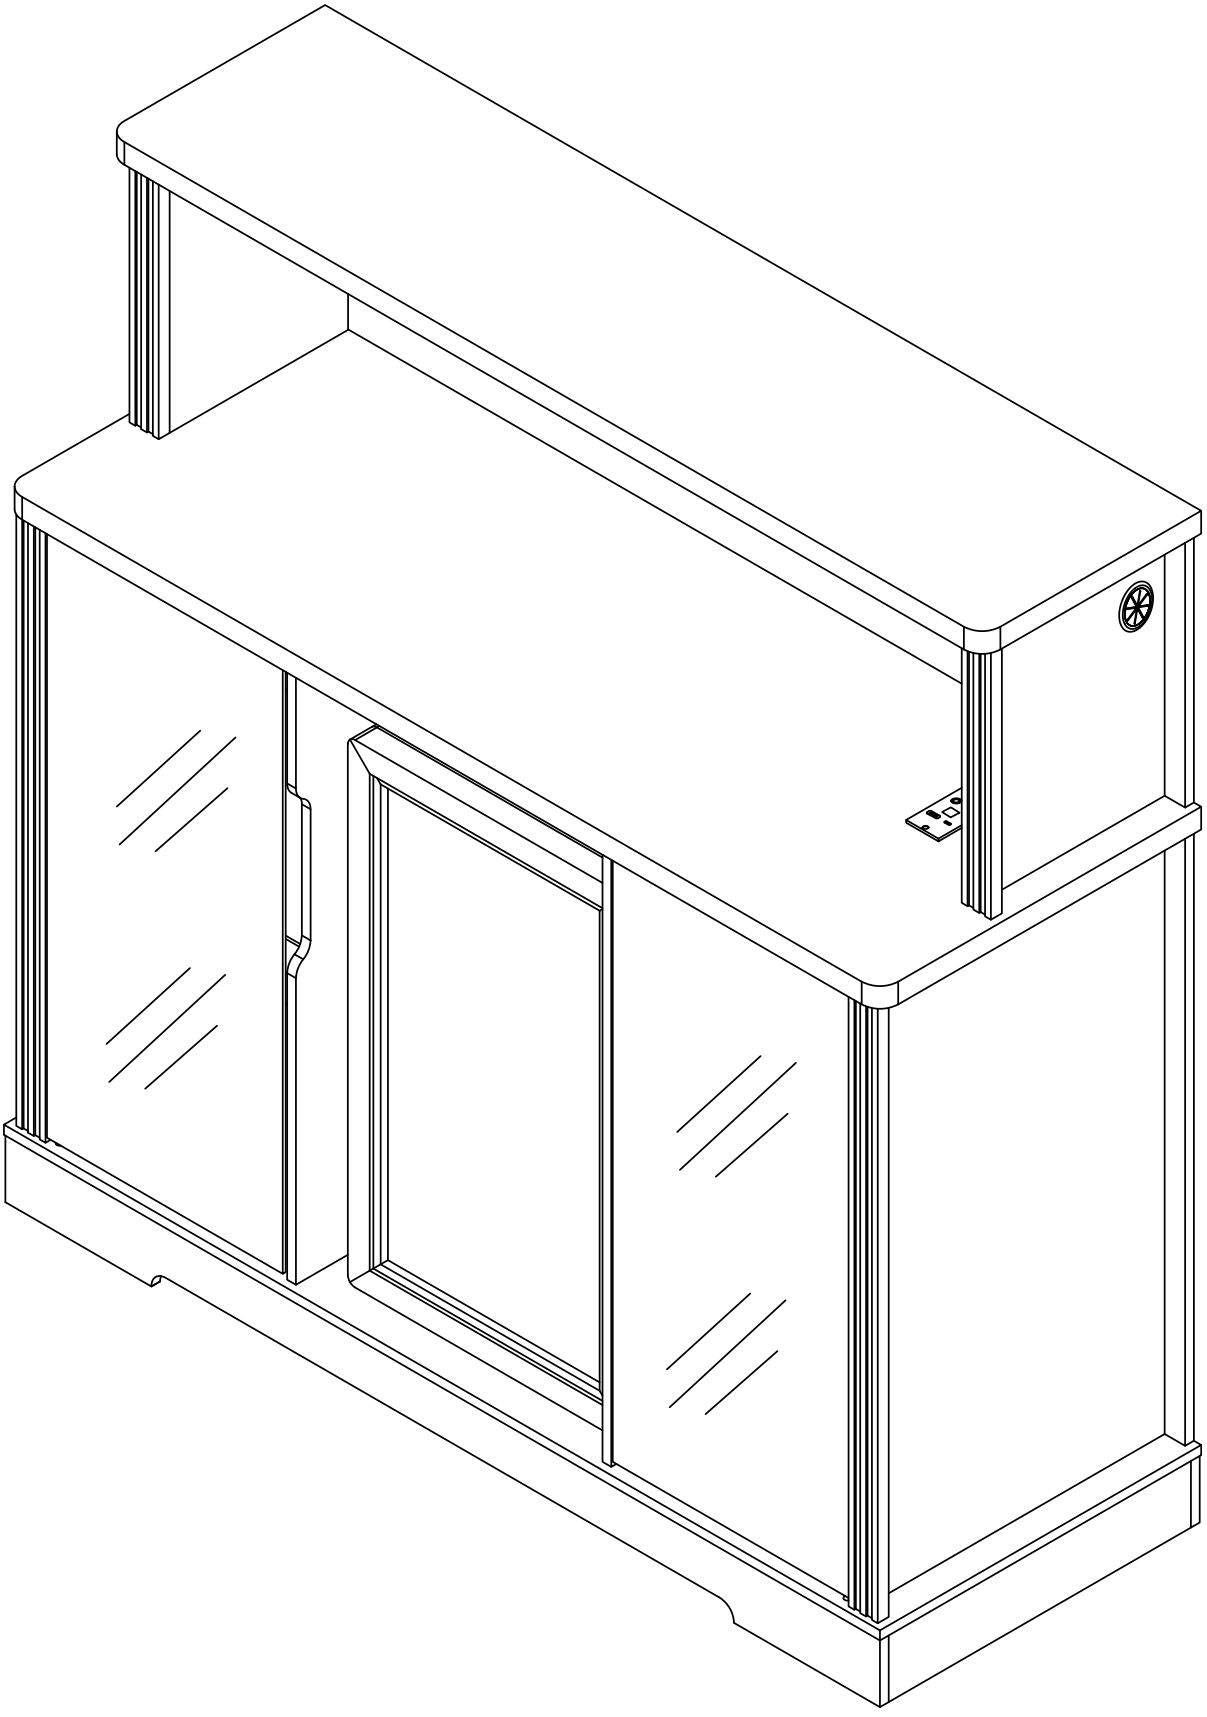


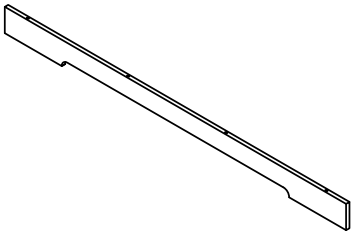


Ax1

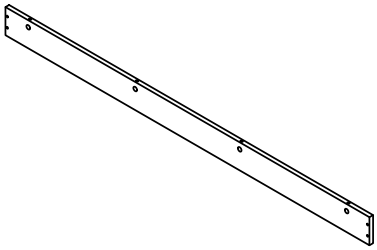


Bx1




Cx2

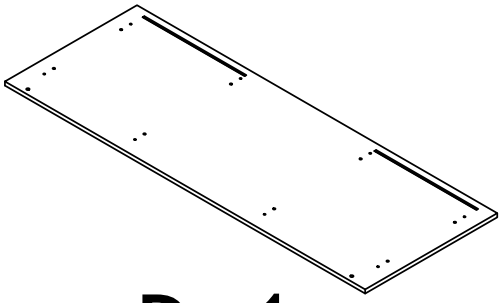


Dx1




Ex1



Fx1



Gx1



Hx2




Ix2




Jx2




Kx1

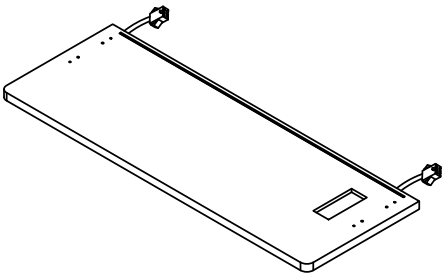


Lx1



Mx1




Nx1




Ox2




Px2

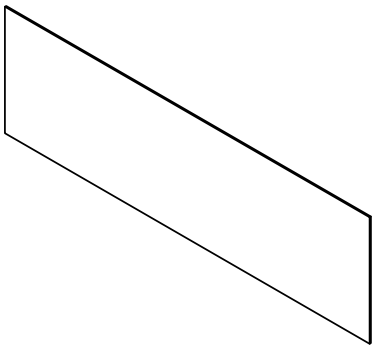


Qx1

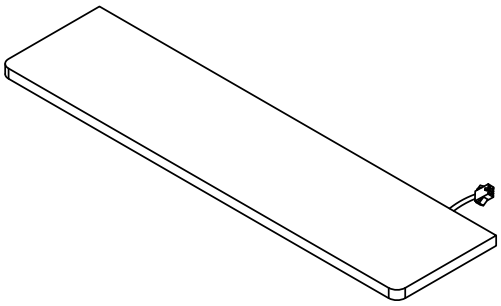


Rx1




Sx2




Tx2



Ux1


















Vx2




Wx1

Accessories list

①		Two In One Screw (6x28mm)	66pcs +6pcs
②		Two In One Nut (10x12mm)	66pcs +6pcs
③		Wood Chipping (6x30mm)	20pcs +4pcs
④		Wire cover	1pcs
⑤		Screw (3.5x25mm)	14pcs +2pcs
⑥		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Iron sheet	2pcs
		Hinge	4pcs / 2pcs / 2pcs
⑦		Non-slip pads (50x10x2mm)	10pcs +2pcs
⑧		Laminate support nail	12pcs +2pcs
⑨		Fixing clip & screw (3x16mm)	24pcs +4pcs
⑩		Wine glass rack & Screw (4x16mm)	8pcs +2pcs 4pcs
⑪		Power strip screw (3x10mm)	2pcs +1pcs 1pcs
⑫		Double end connecting line	1pcs
⑬		Wire Clamp	3pcs +1pcs
⑭	 x2	Anti tipping hardware  (3.5x12mm) x2  x4  (4x45mm) x2  x2	




1pcs




Double-head screwdriver, use as required

Product structure decomposition

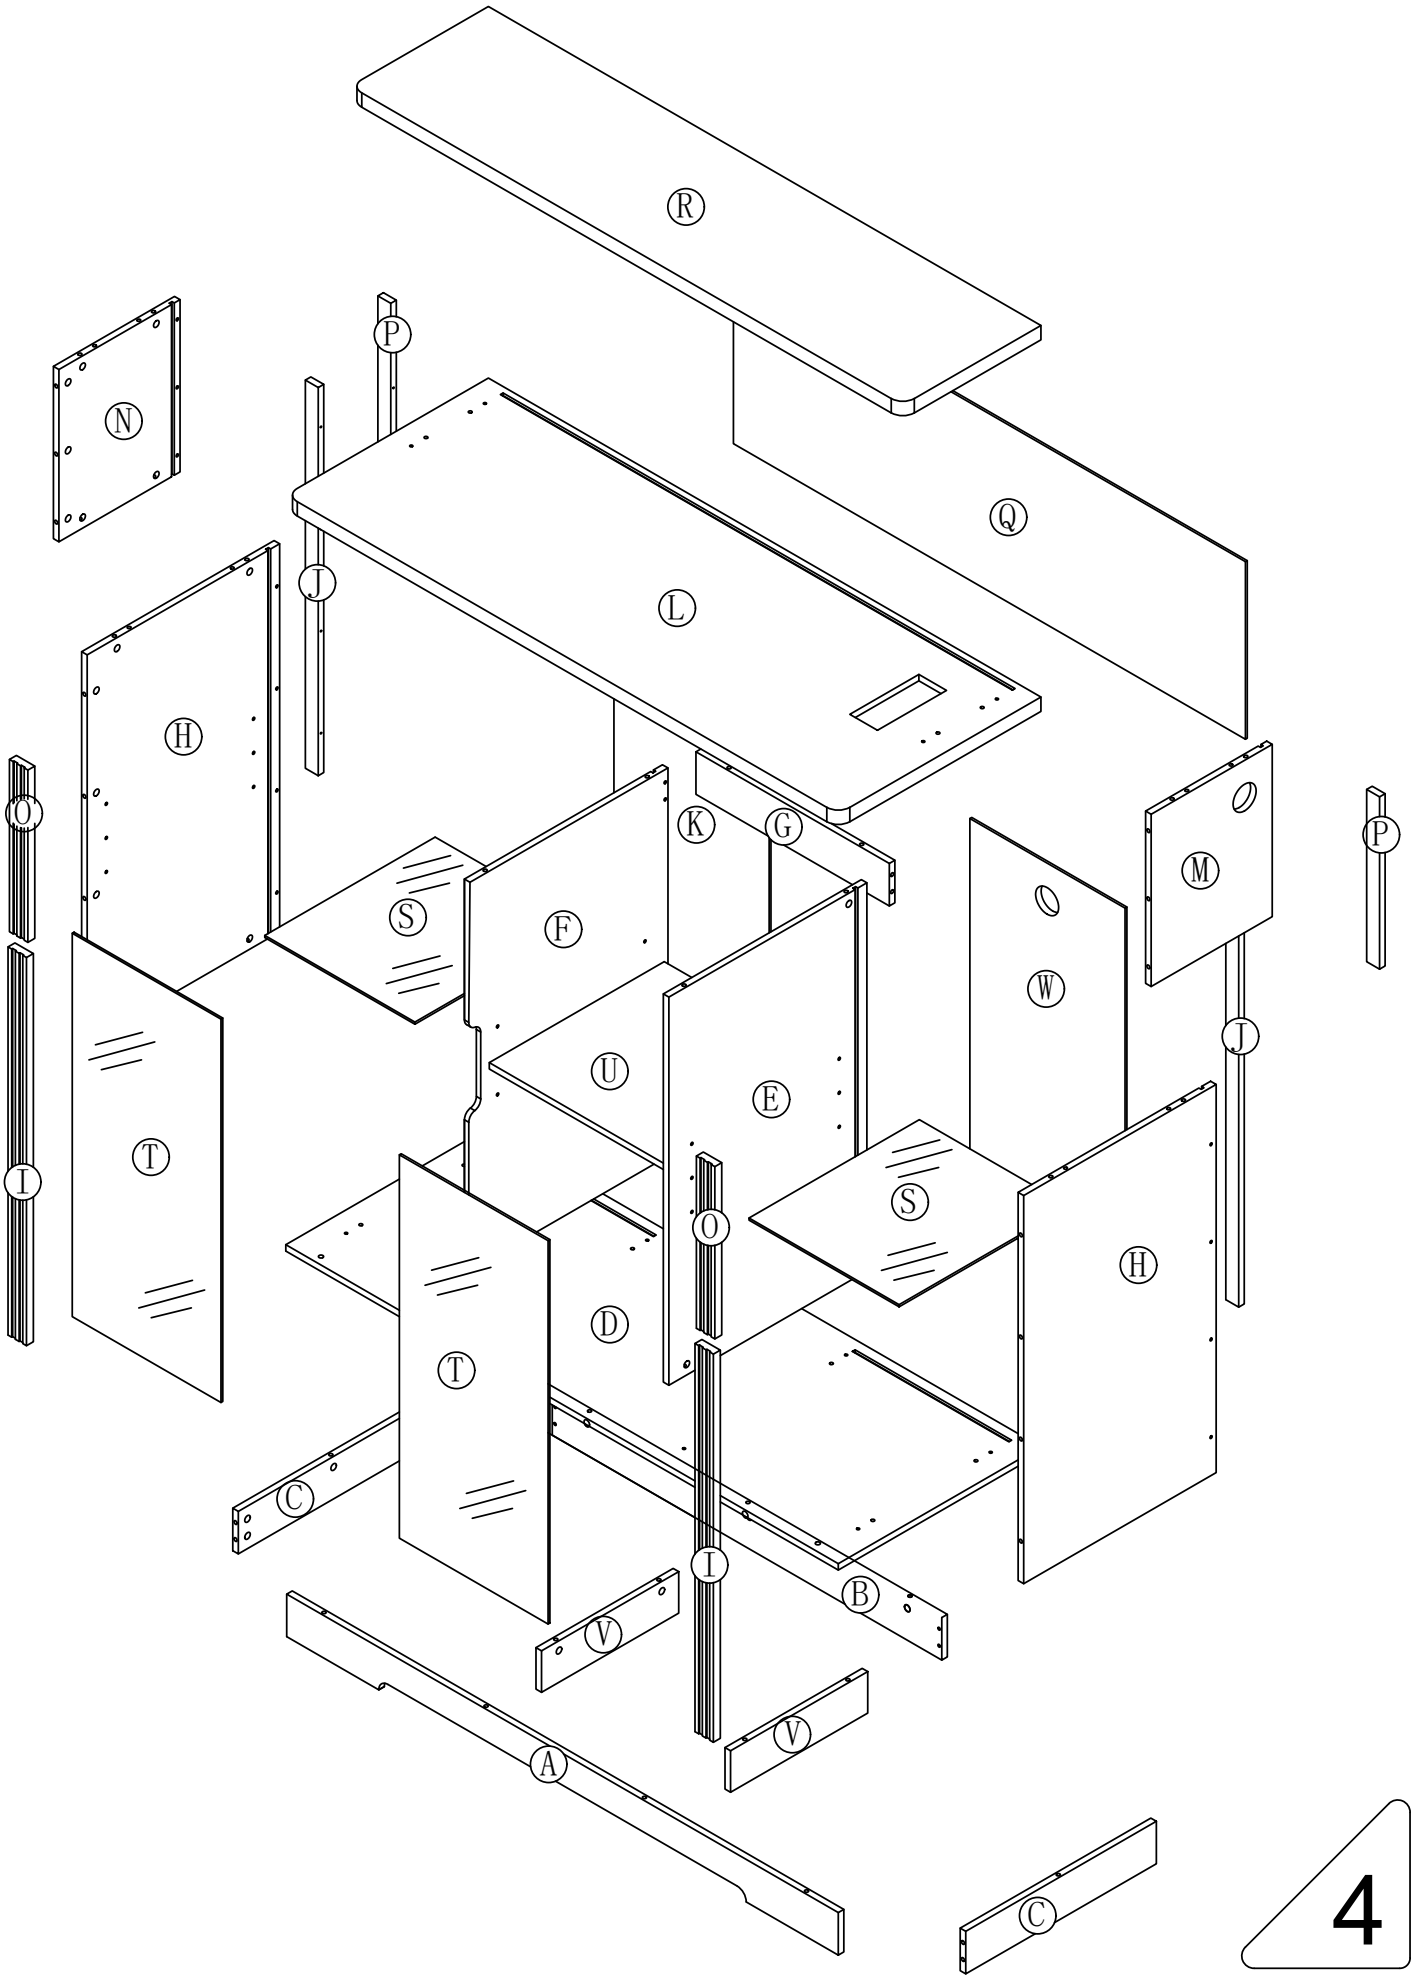


Use parts ① and ②


Step1

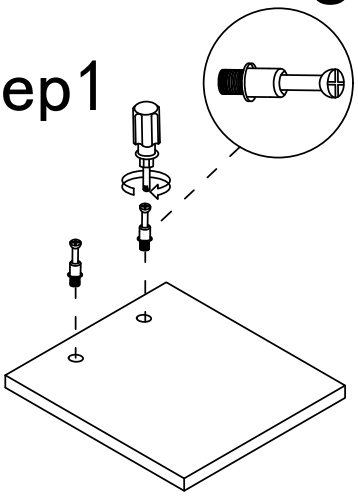


Step2

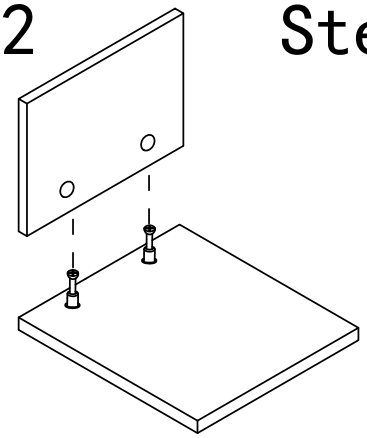


Step3

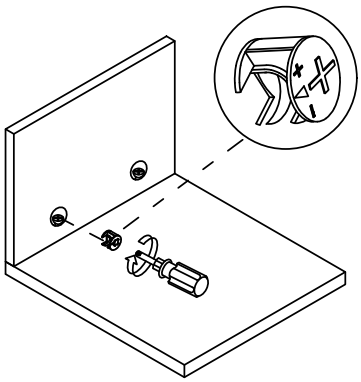

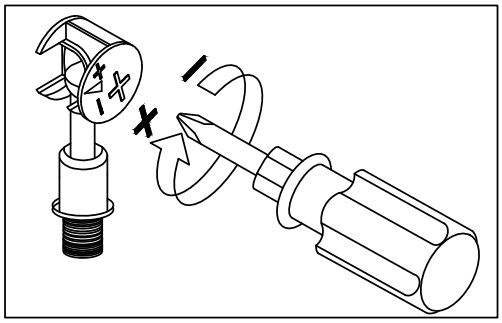



Use a screwdriver to lock in the direction of the "+" sign

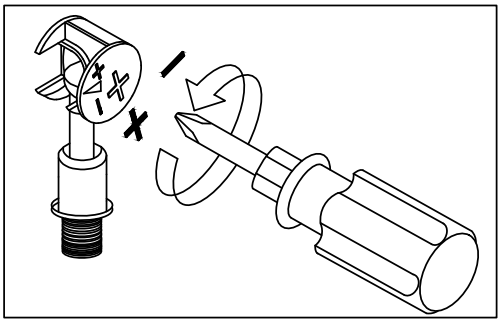

Disassemble along the direction of "-" sign


Step 1



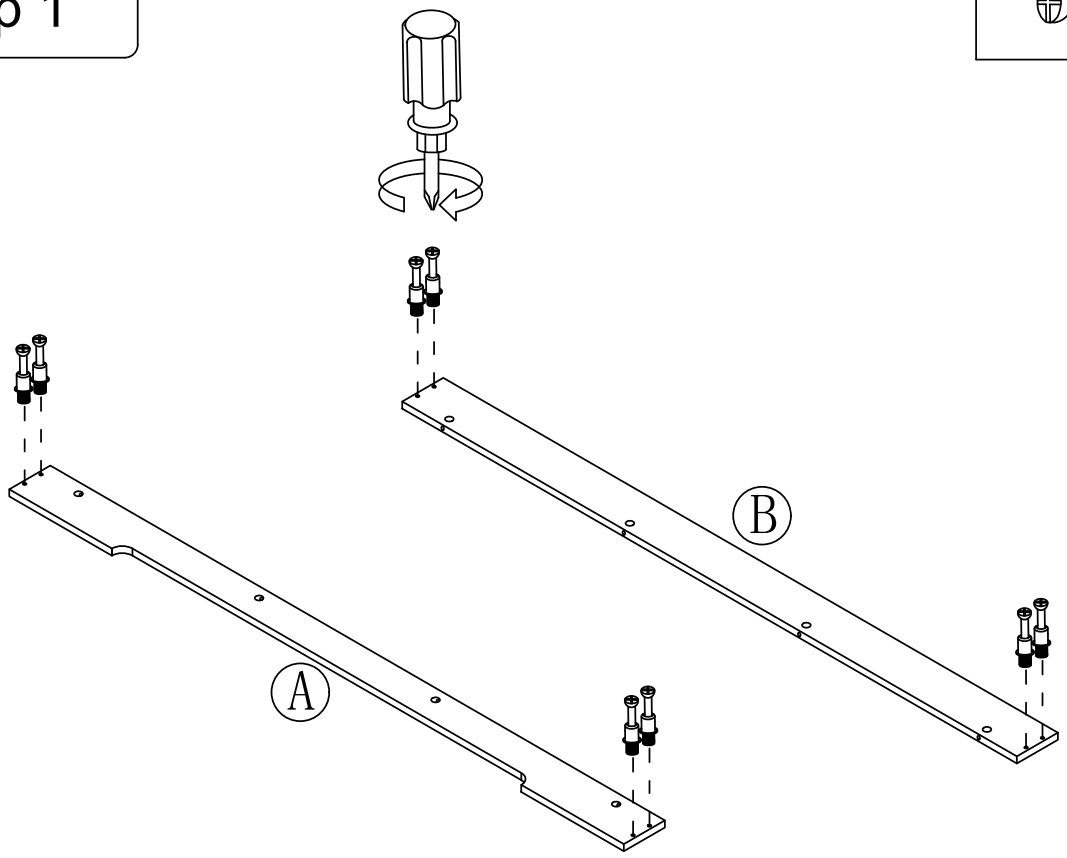



Step 2



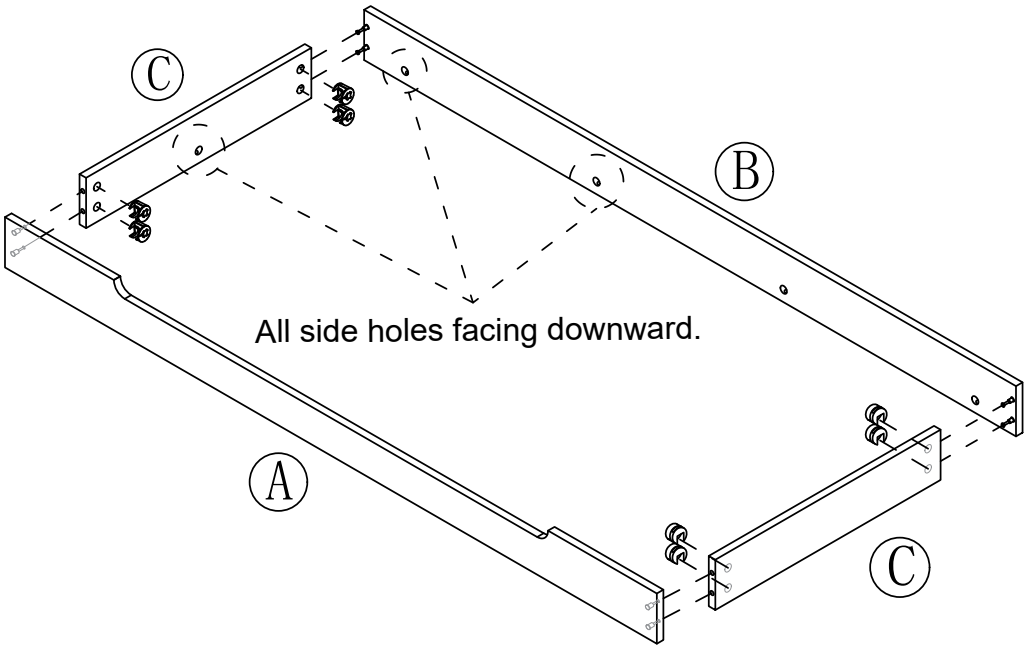


Step 3



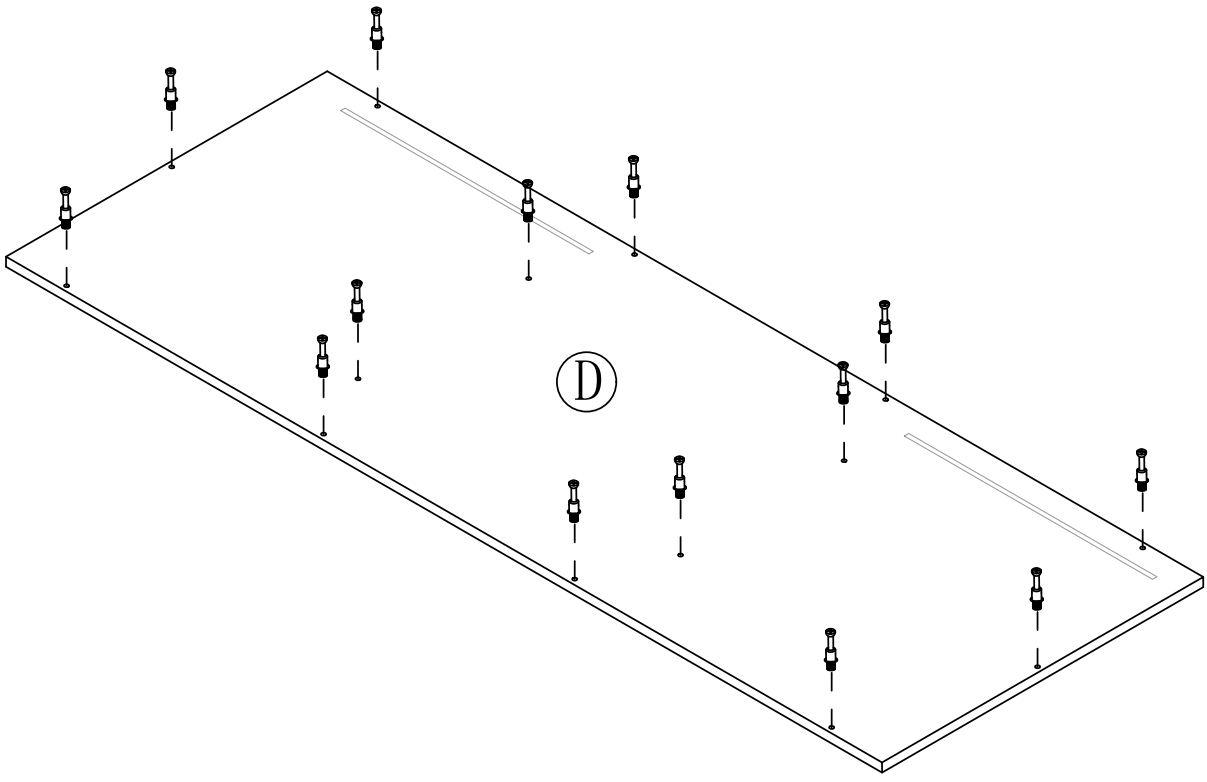

Step4


② x10

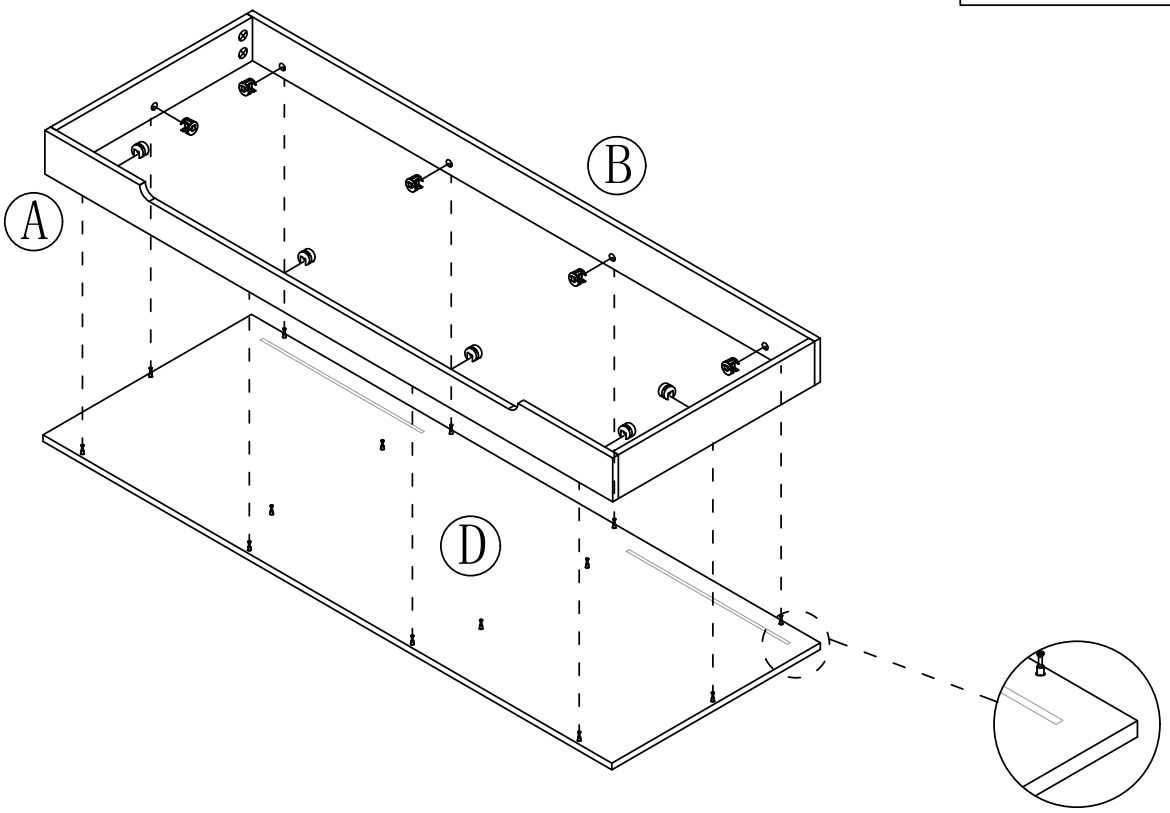

Pay attention to the position of the back slot.

Step 5


② x4

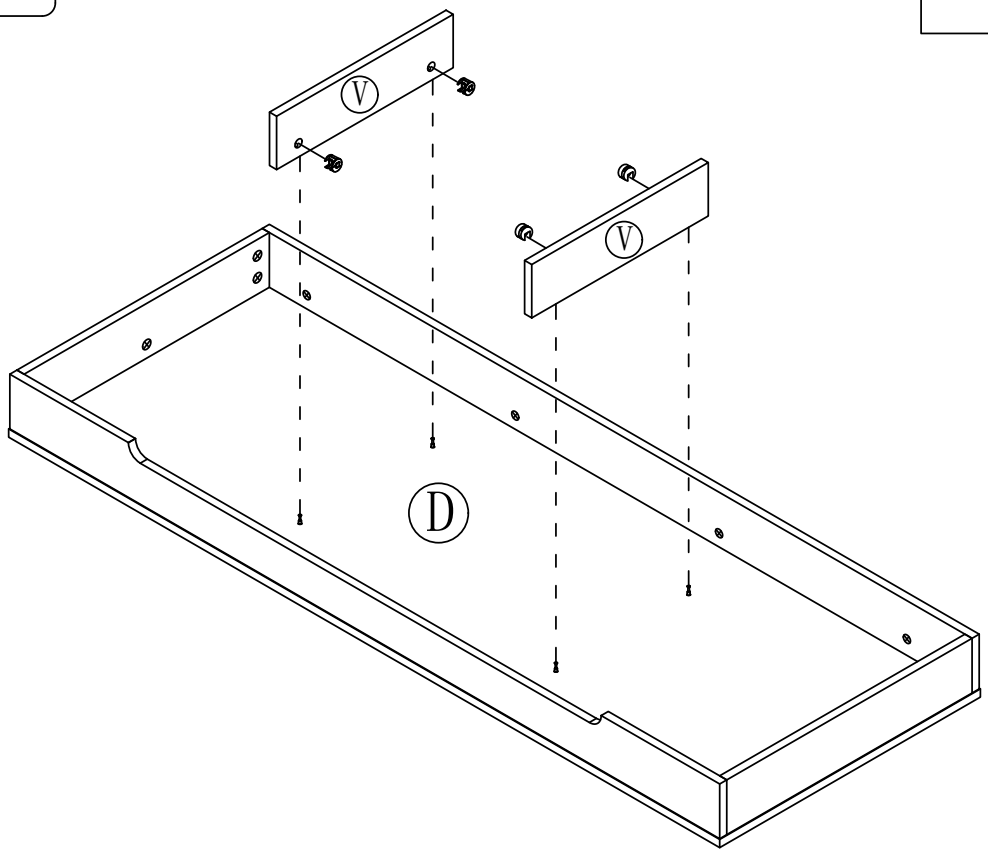

Step6

7 x10


Tear off release paper and stick the black foot pad on the board

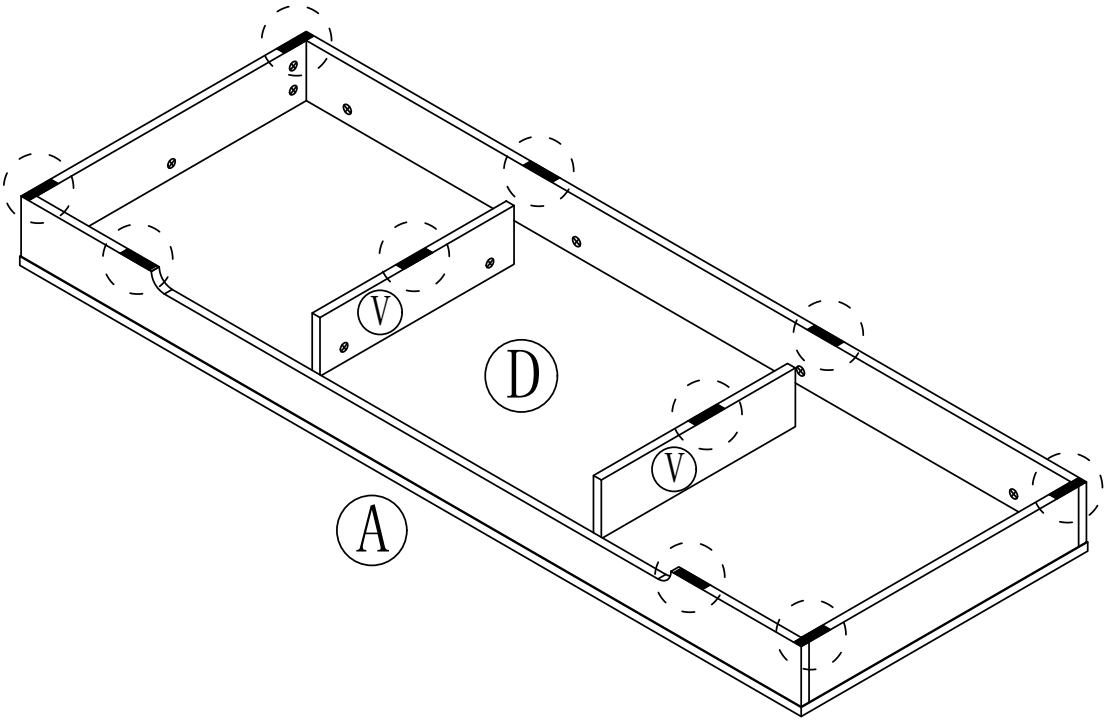


Step 7


1 x8

3 x8

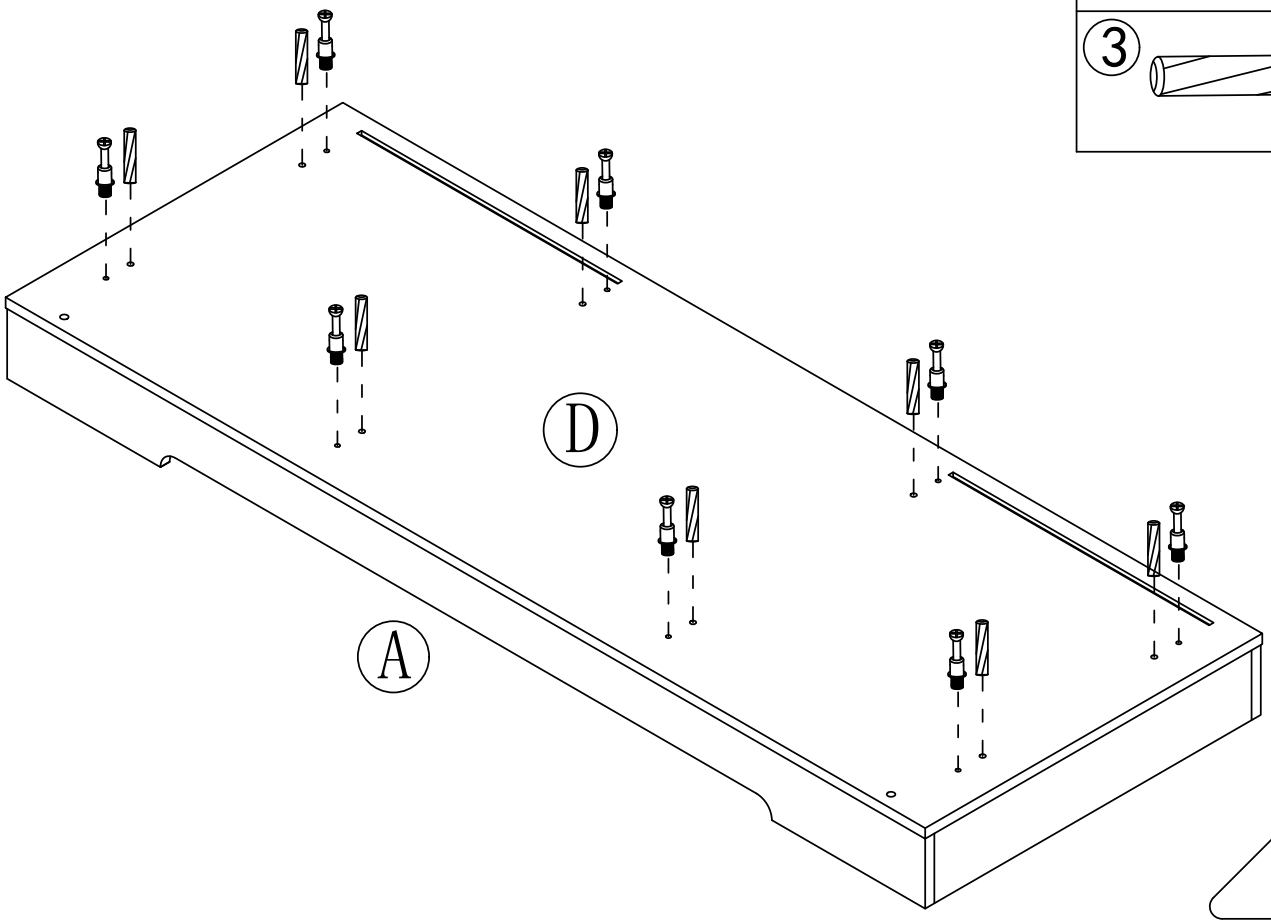



Step8



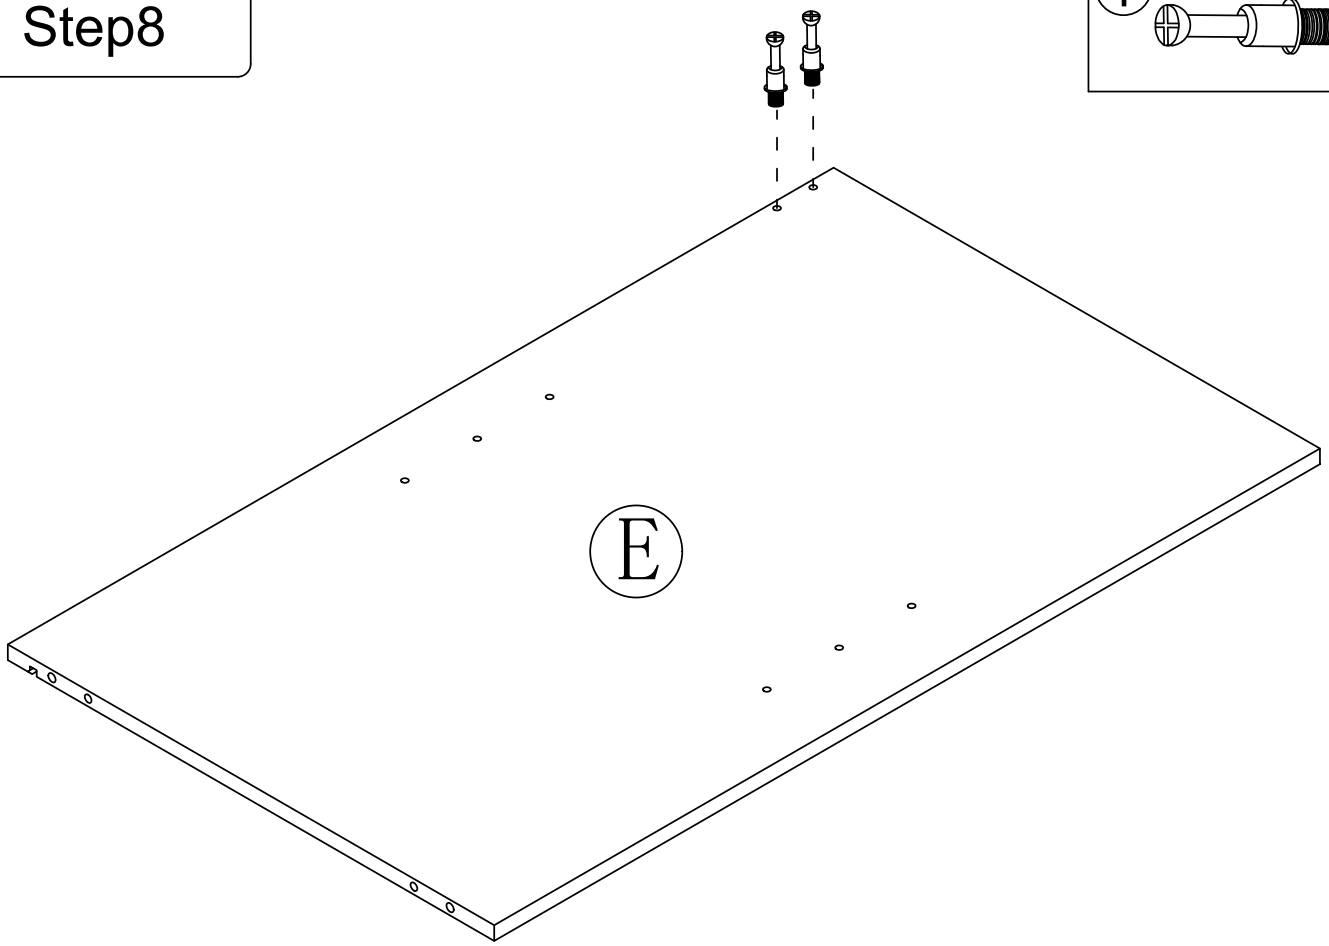


Step 9



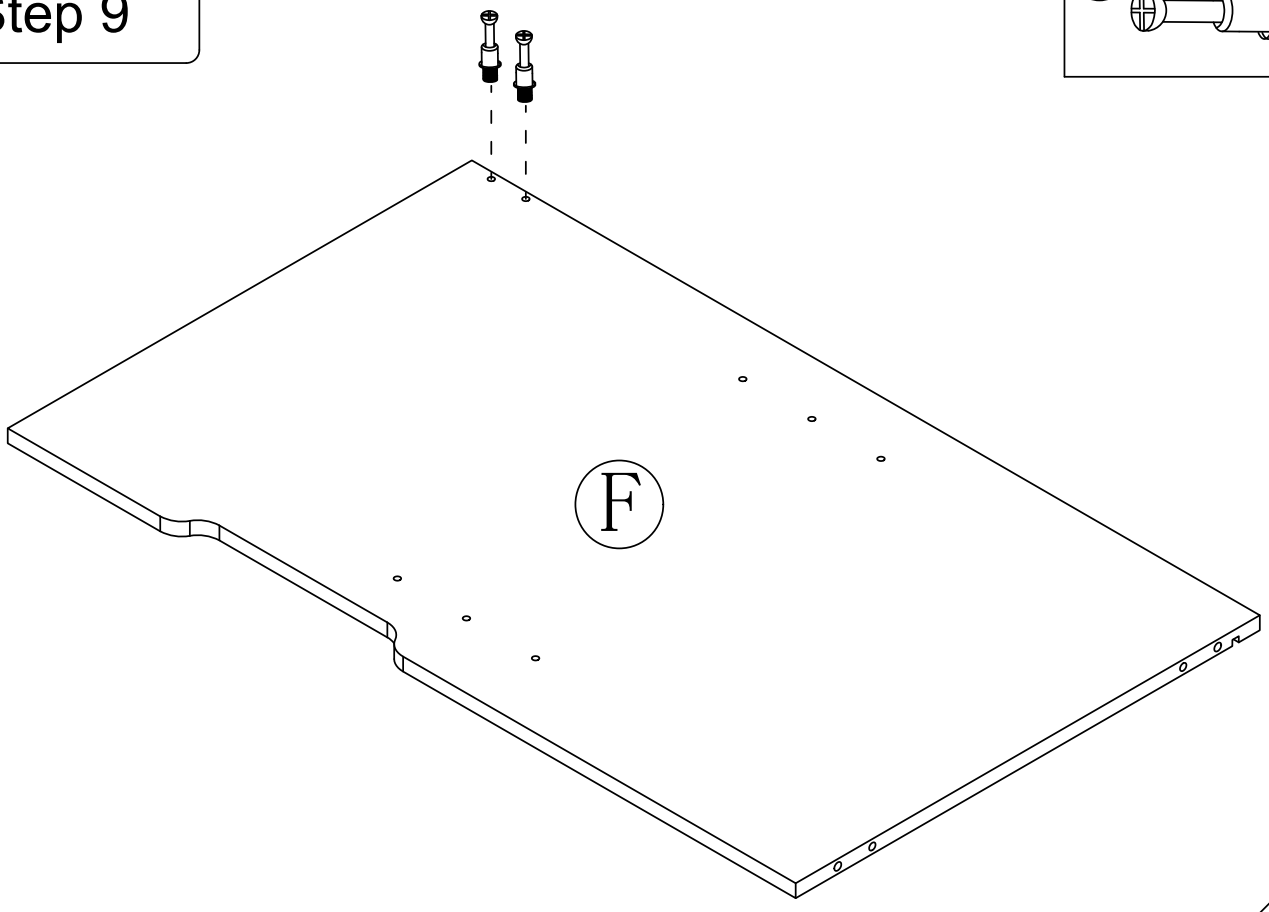

Step10


② x2

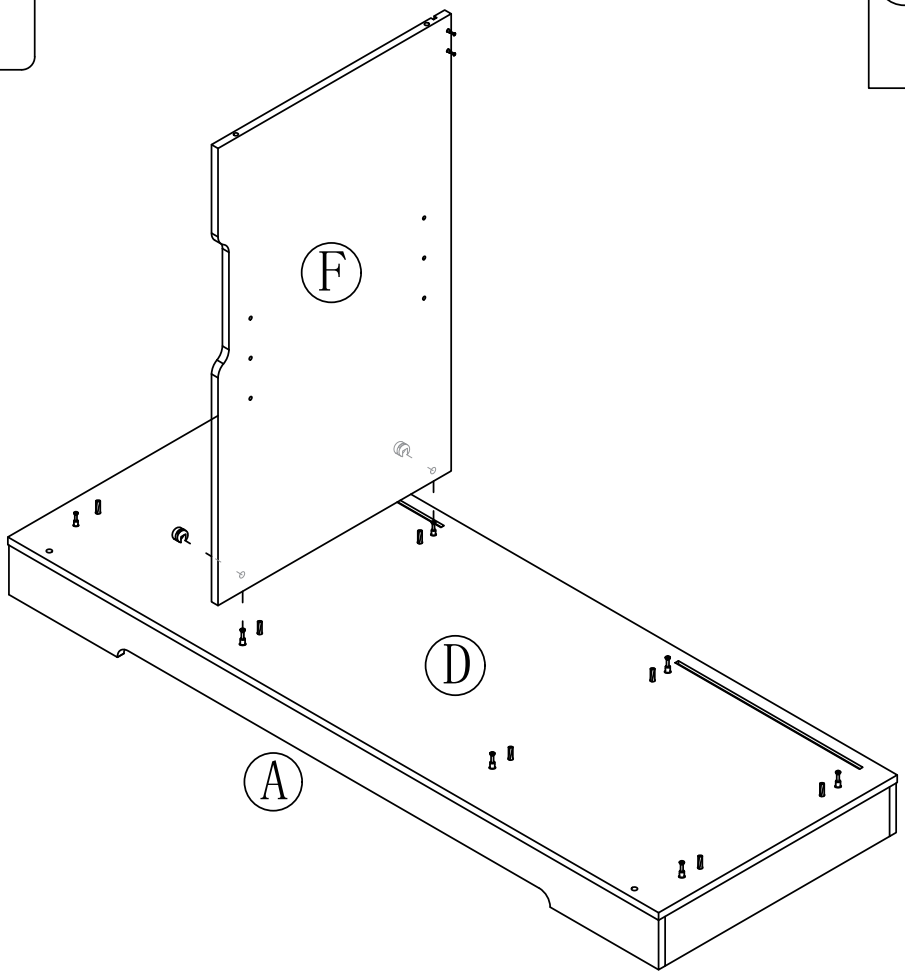

Step 11

② x2


Pay attention to the position of the hole

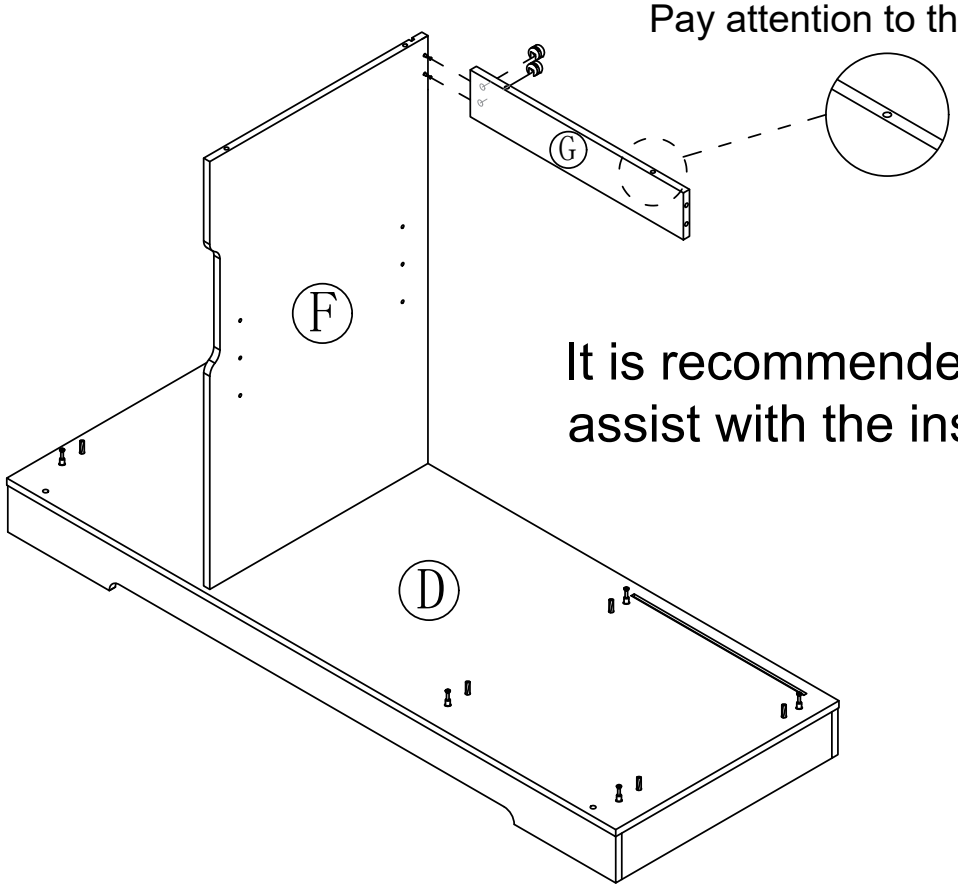

It is recommended to have two people assist with the installation.

Step12


Insert Panel E into Panel D, but do not tighten it to facilitate subsequent installation.

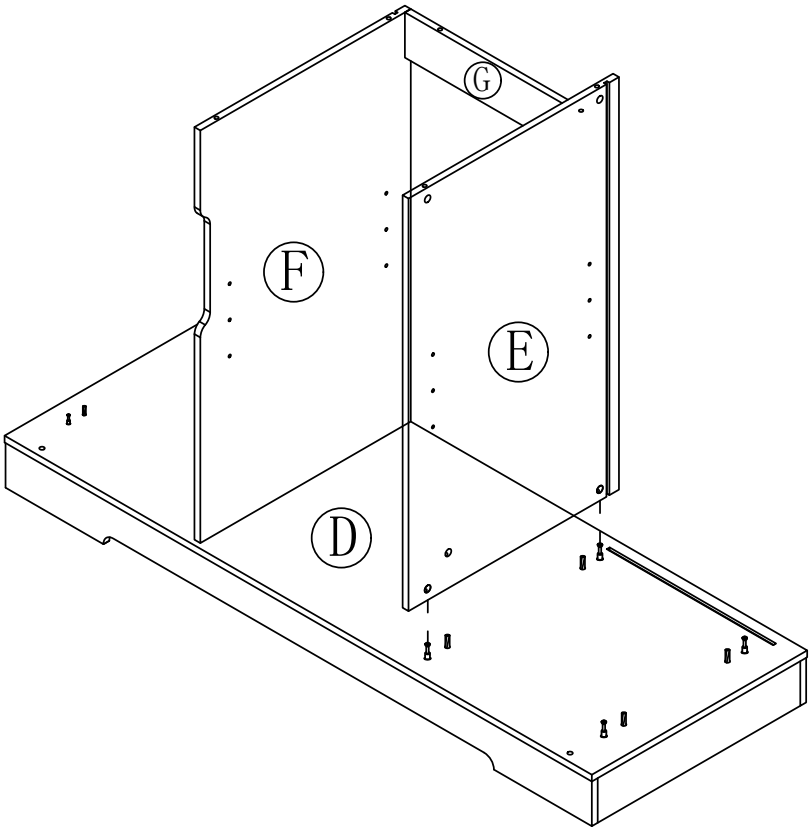

Step 13


1.Bend the E plate a little outward to facilitate the installation of the G plate

2  x2

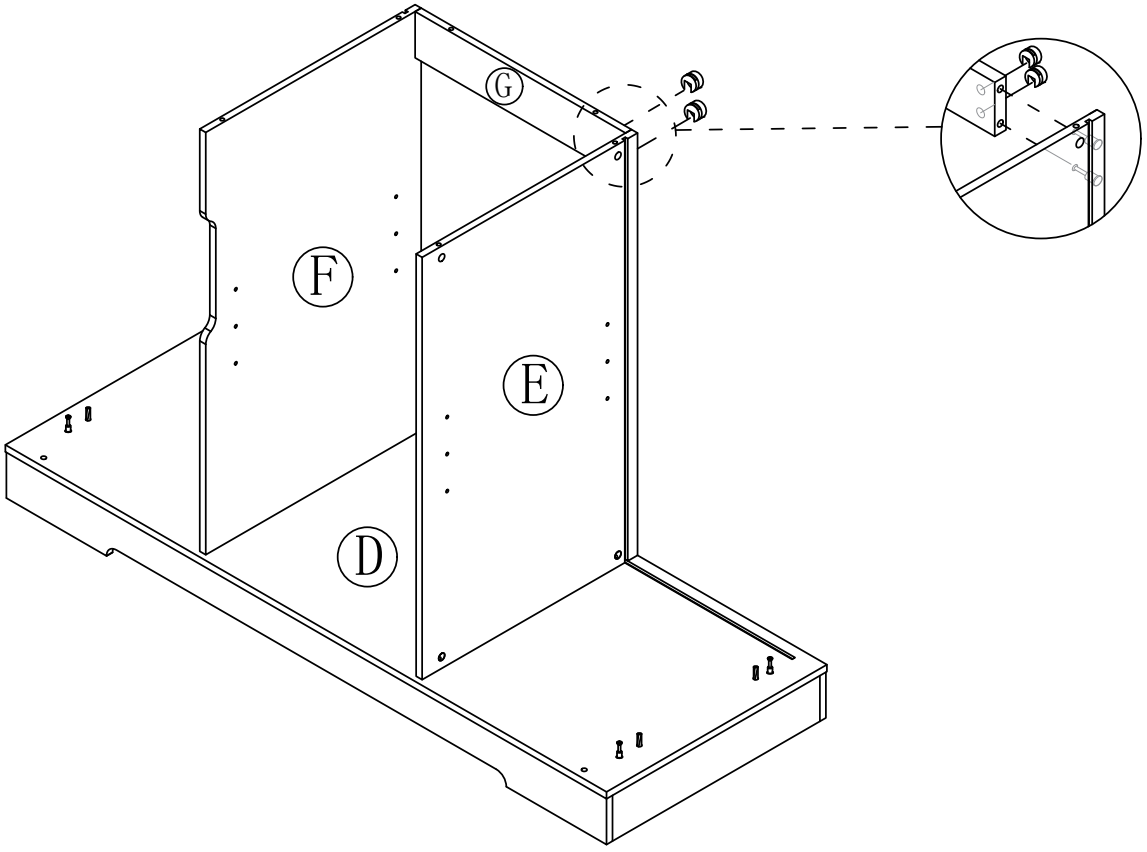



Step 14

②  x2

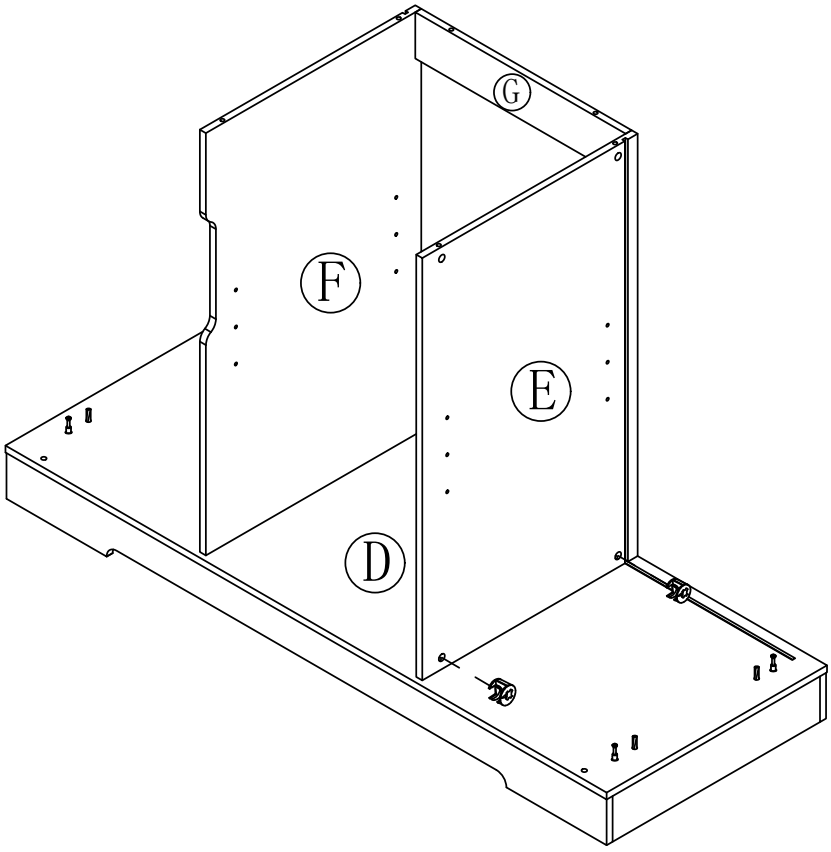

Step 15

①  x8

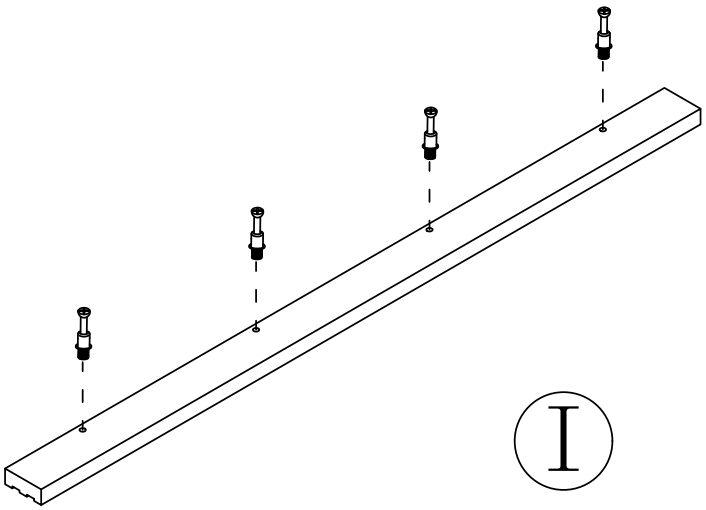



x2

I

Step 16

②  x8

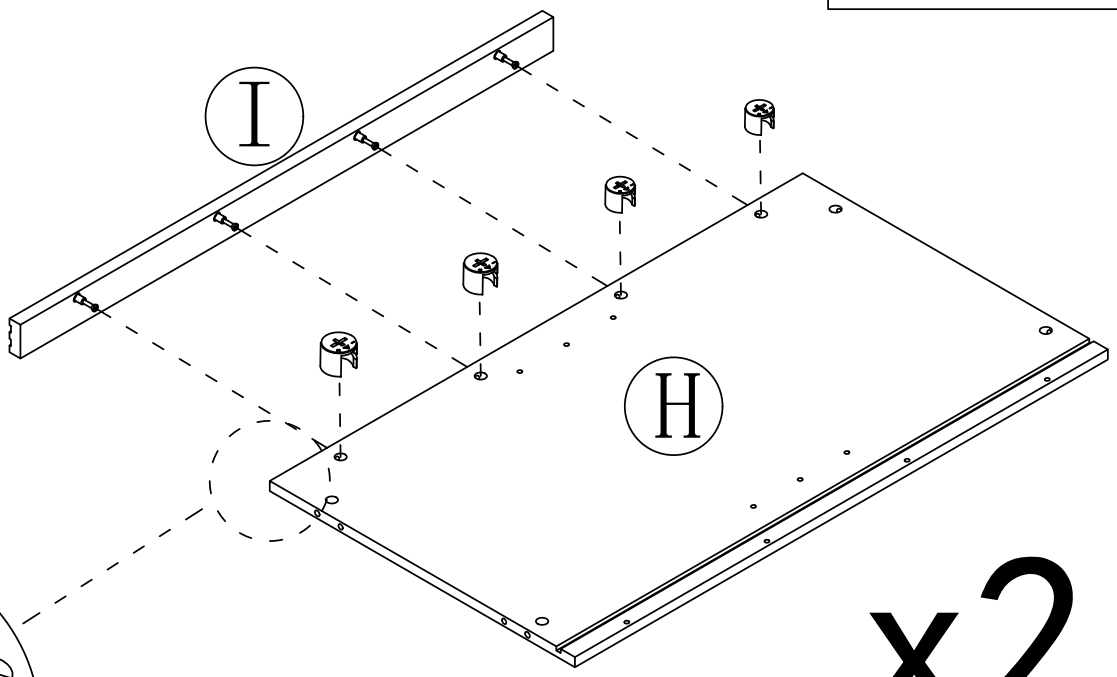


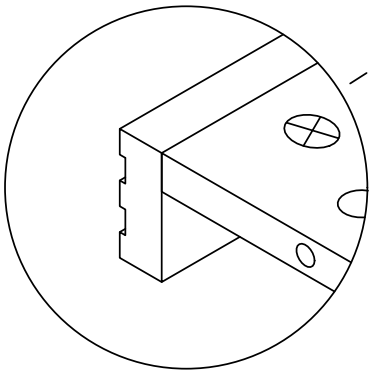


x2

After the installation is completed here, it will be as shown in the left picture.


Step 17

⑤  x8

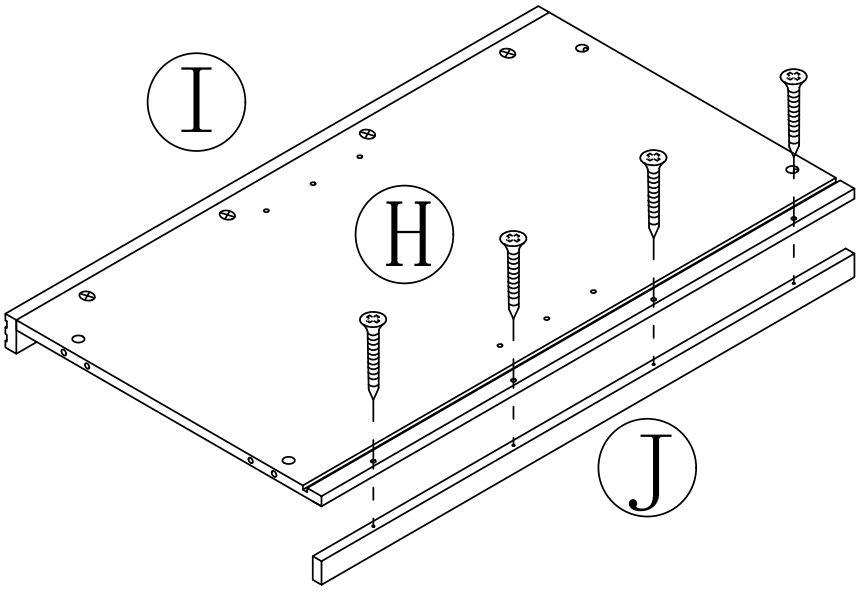


x2


Step 18

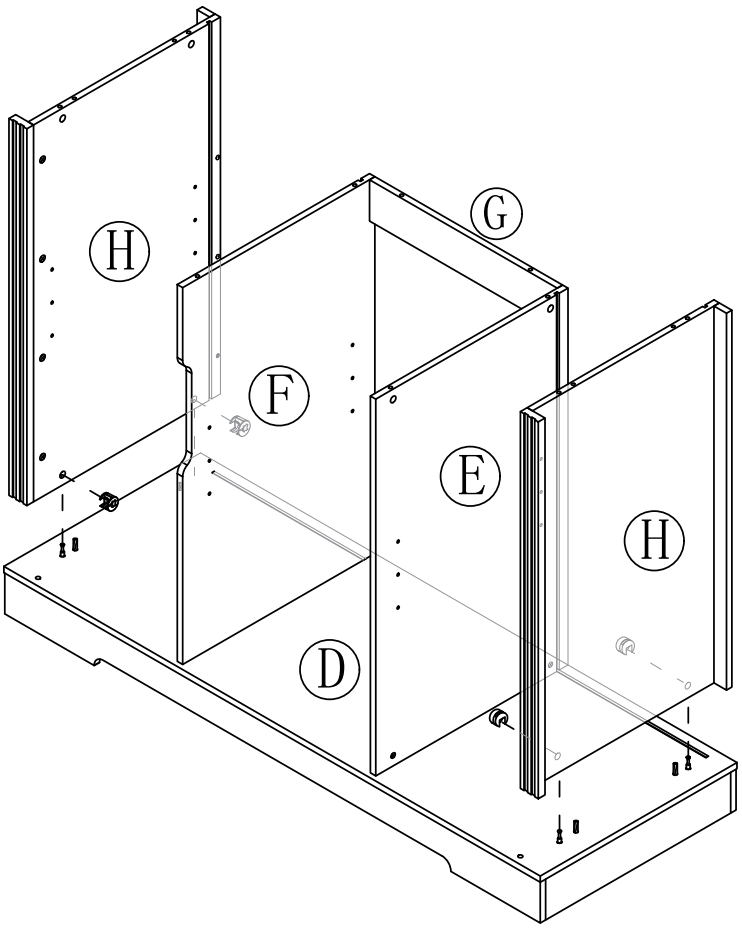


2  x4

Step 19

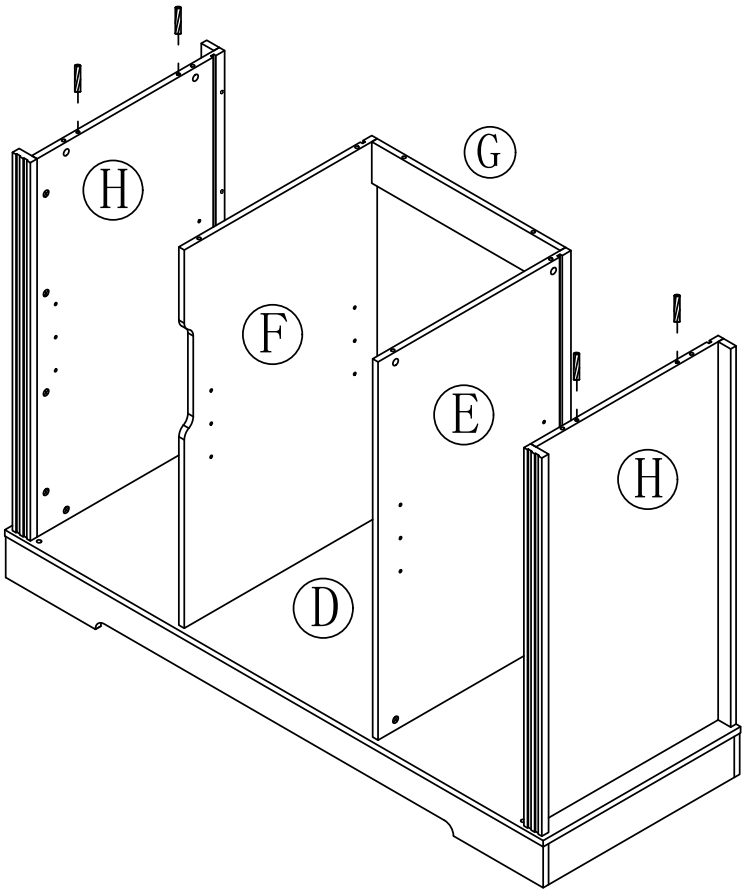



3  x4

Step 20

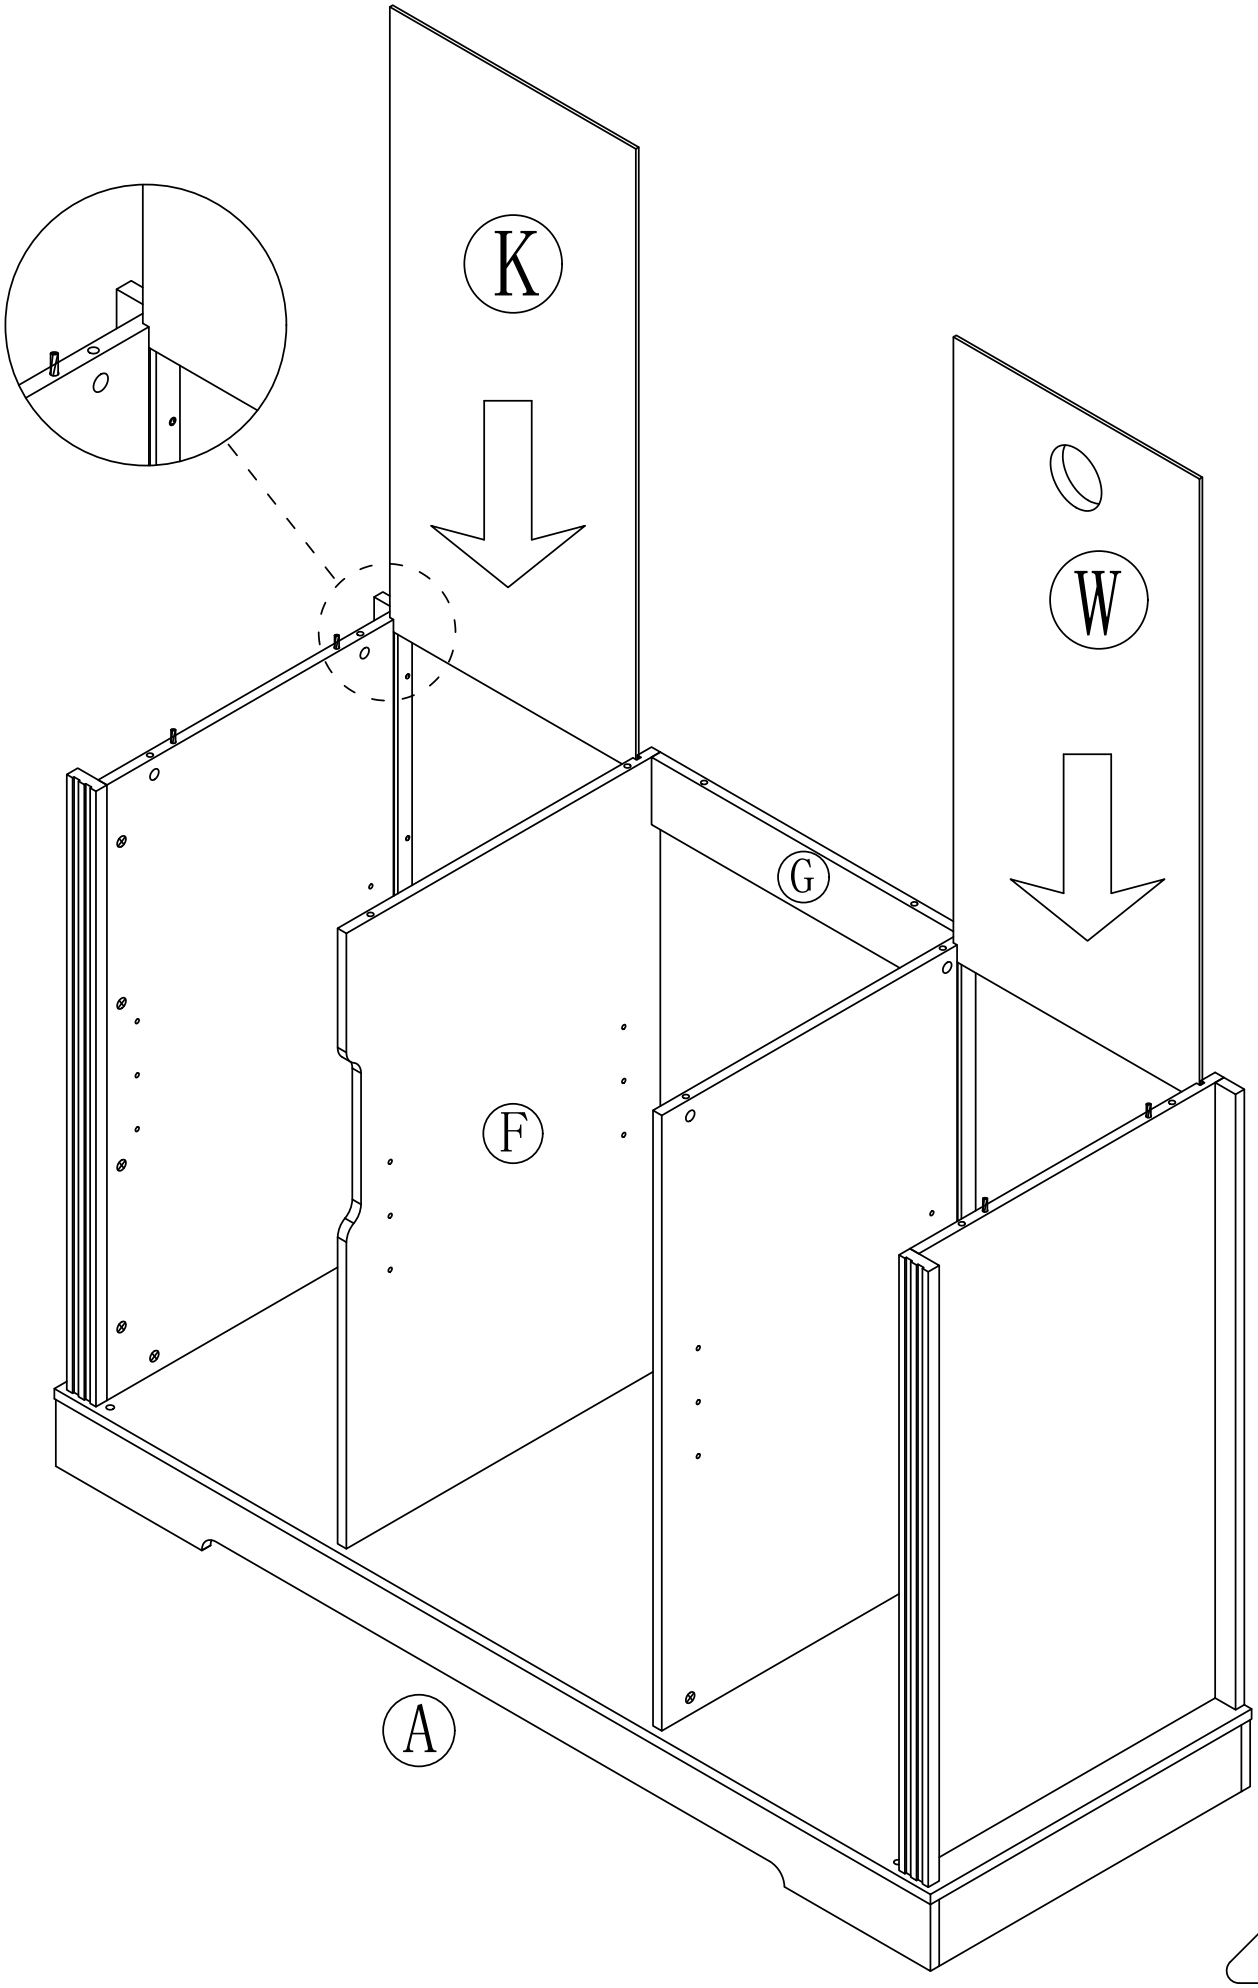



Step 21

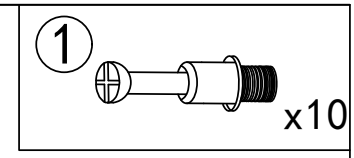

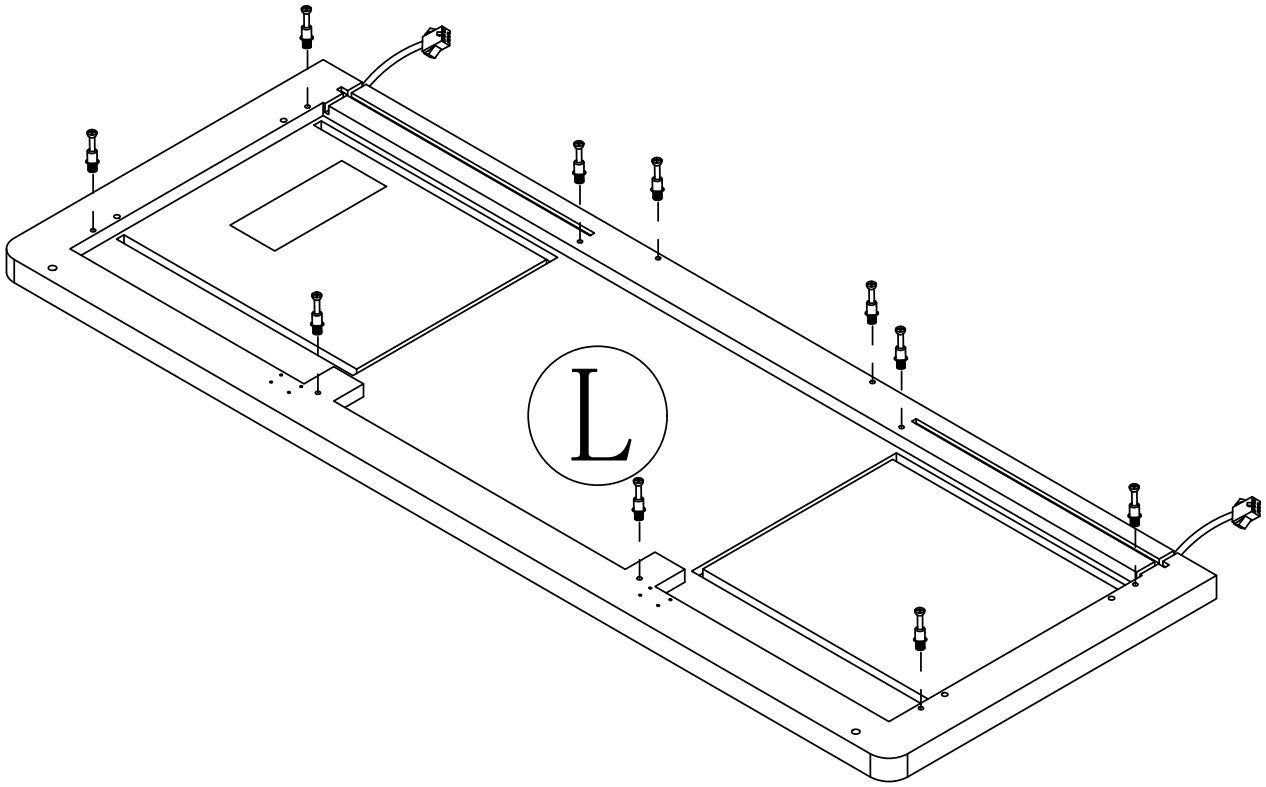


Step 22

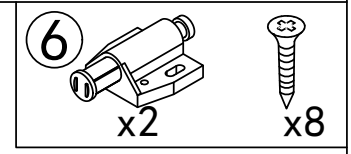

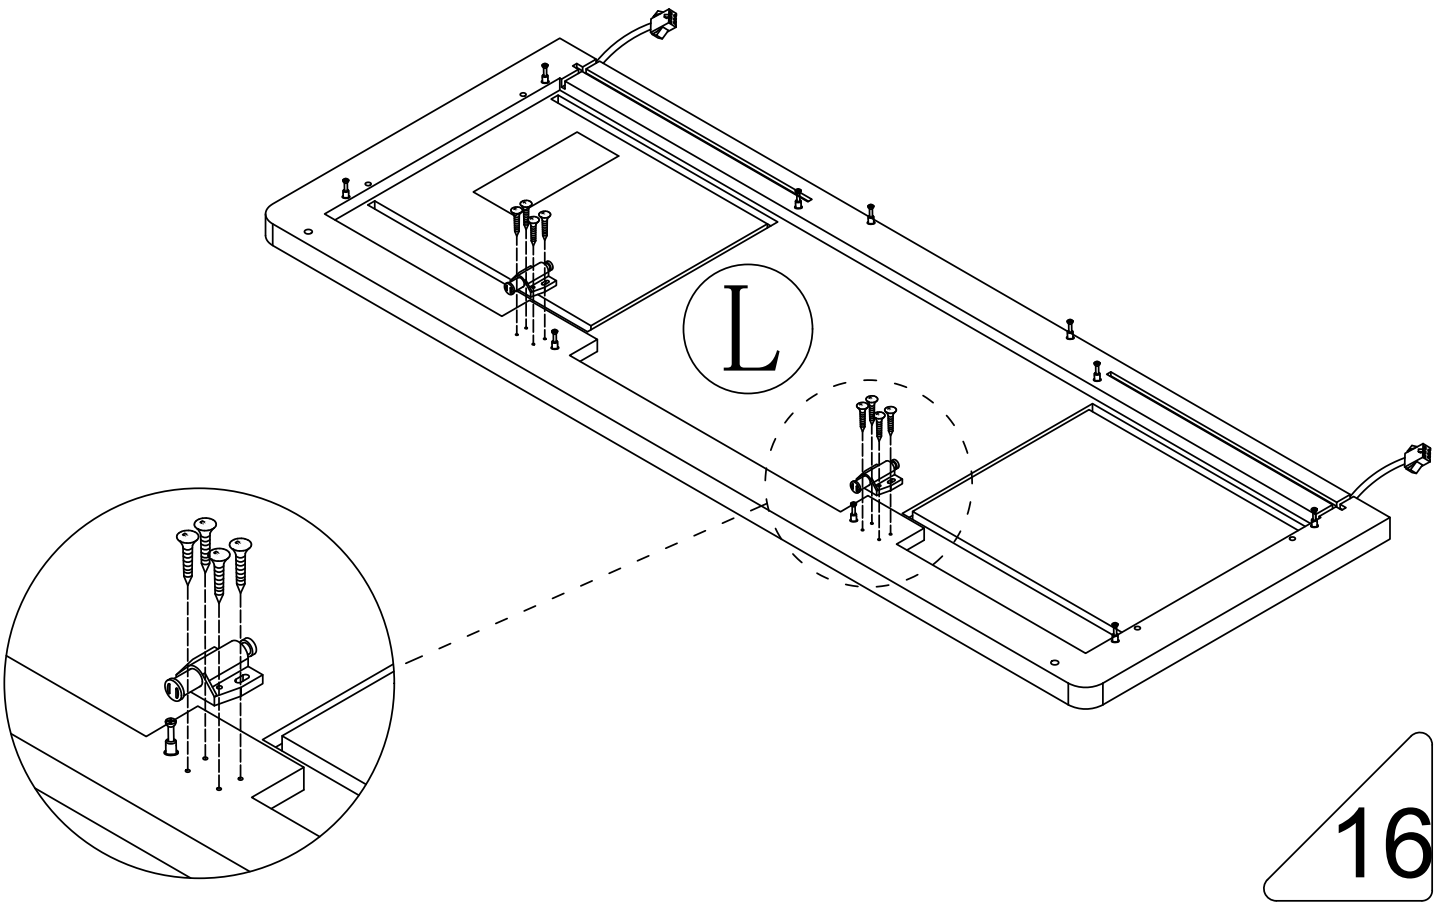



Step 23

2 x10

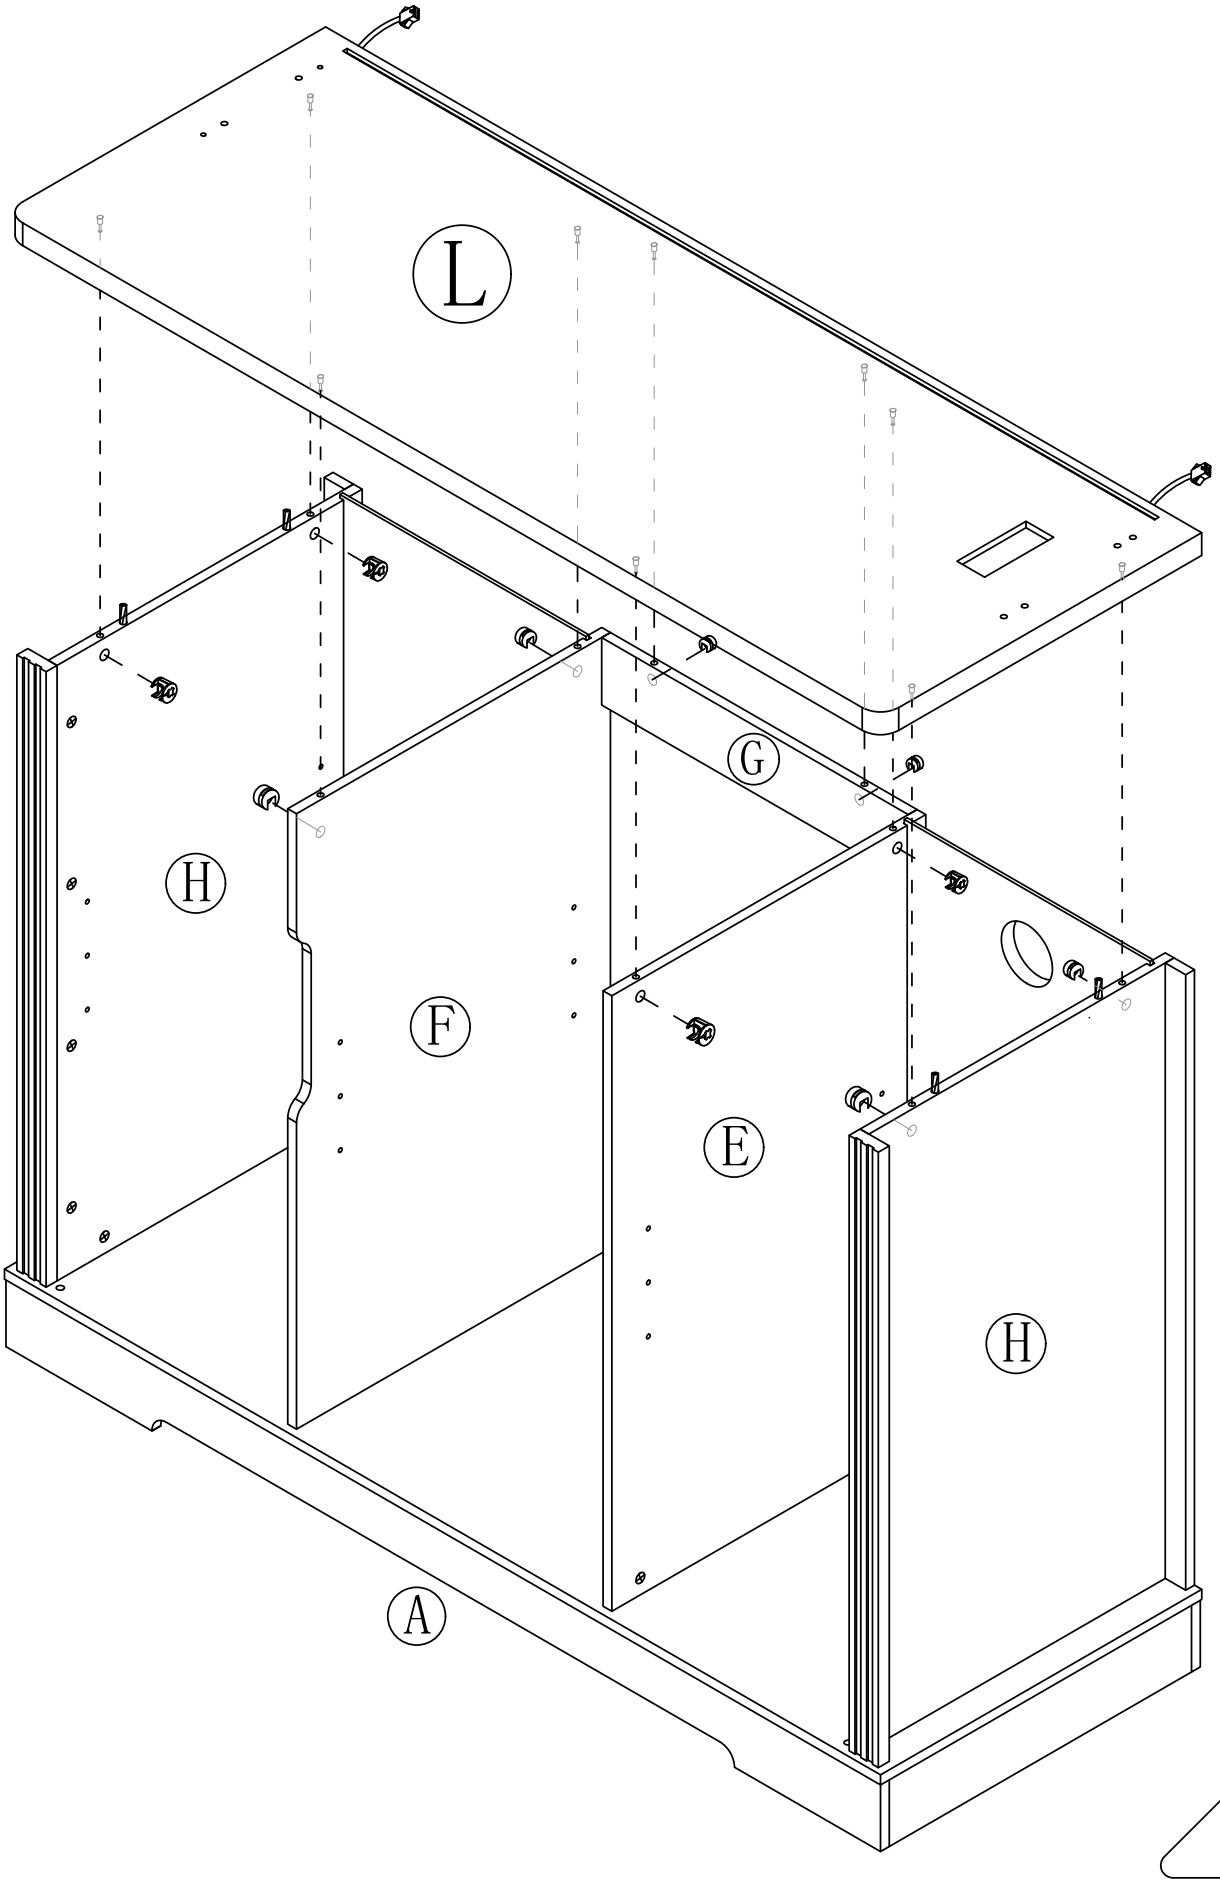



Step 24



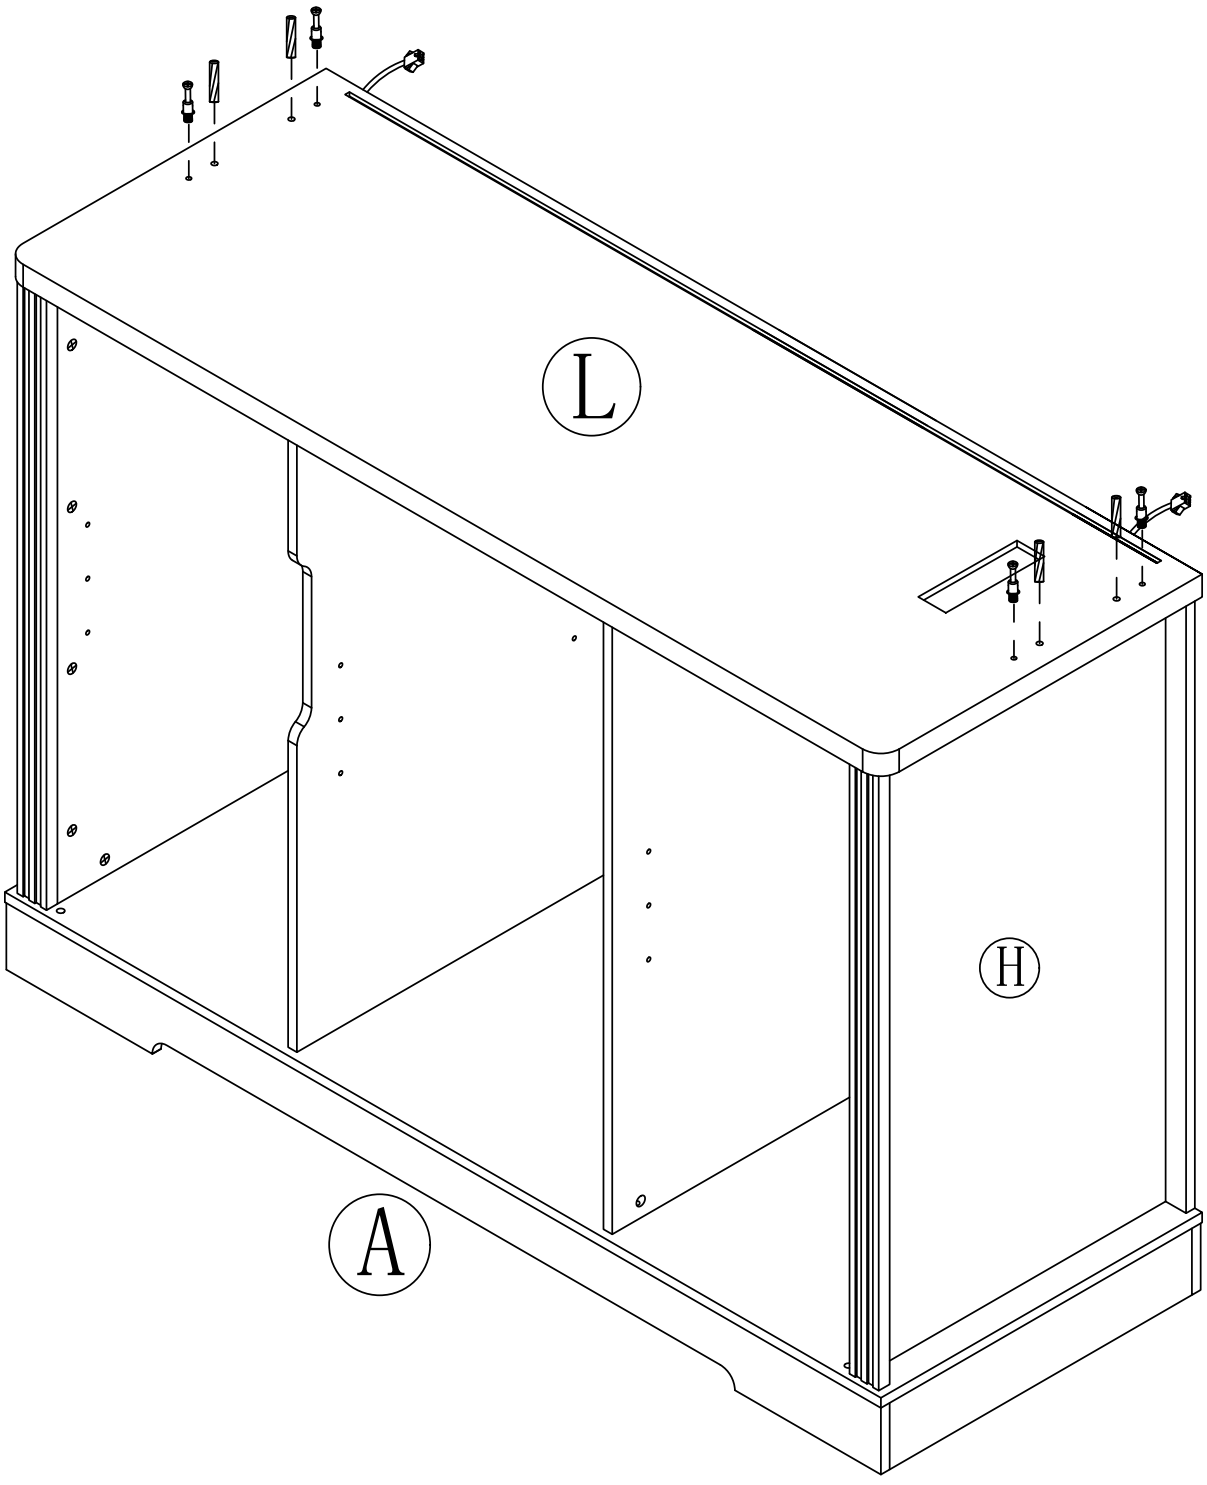



Step 25



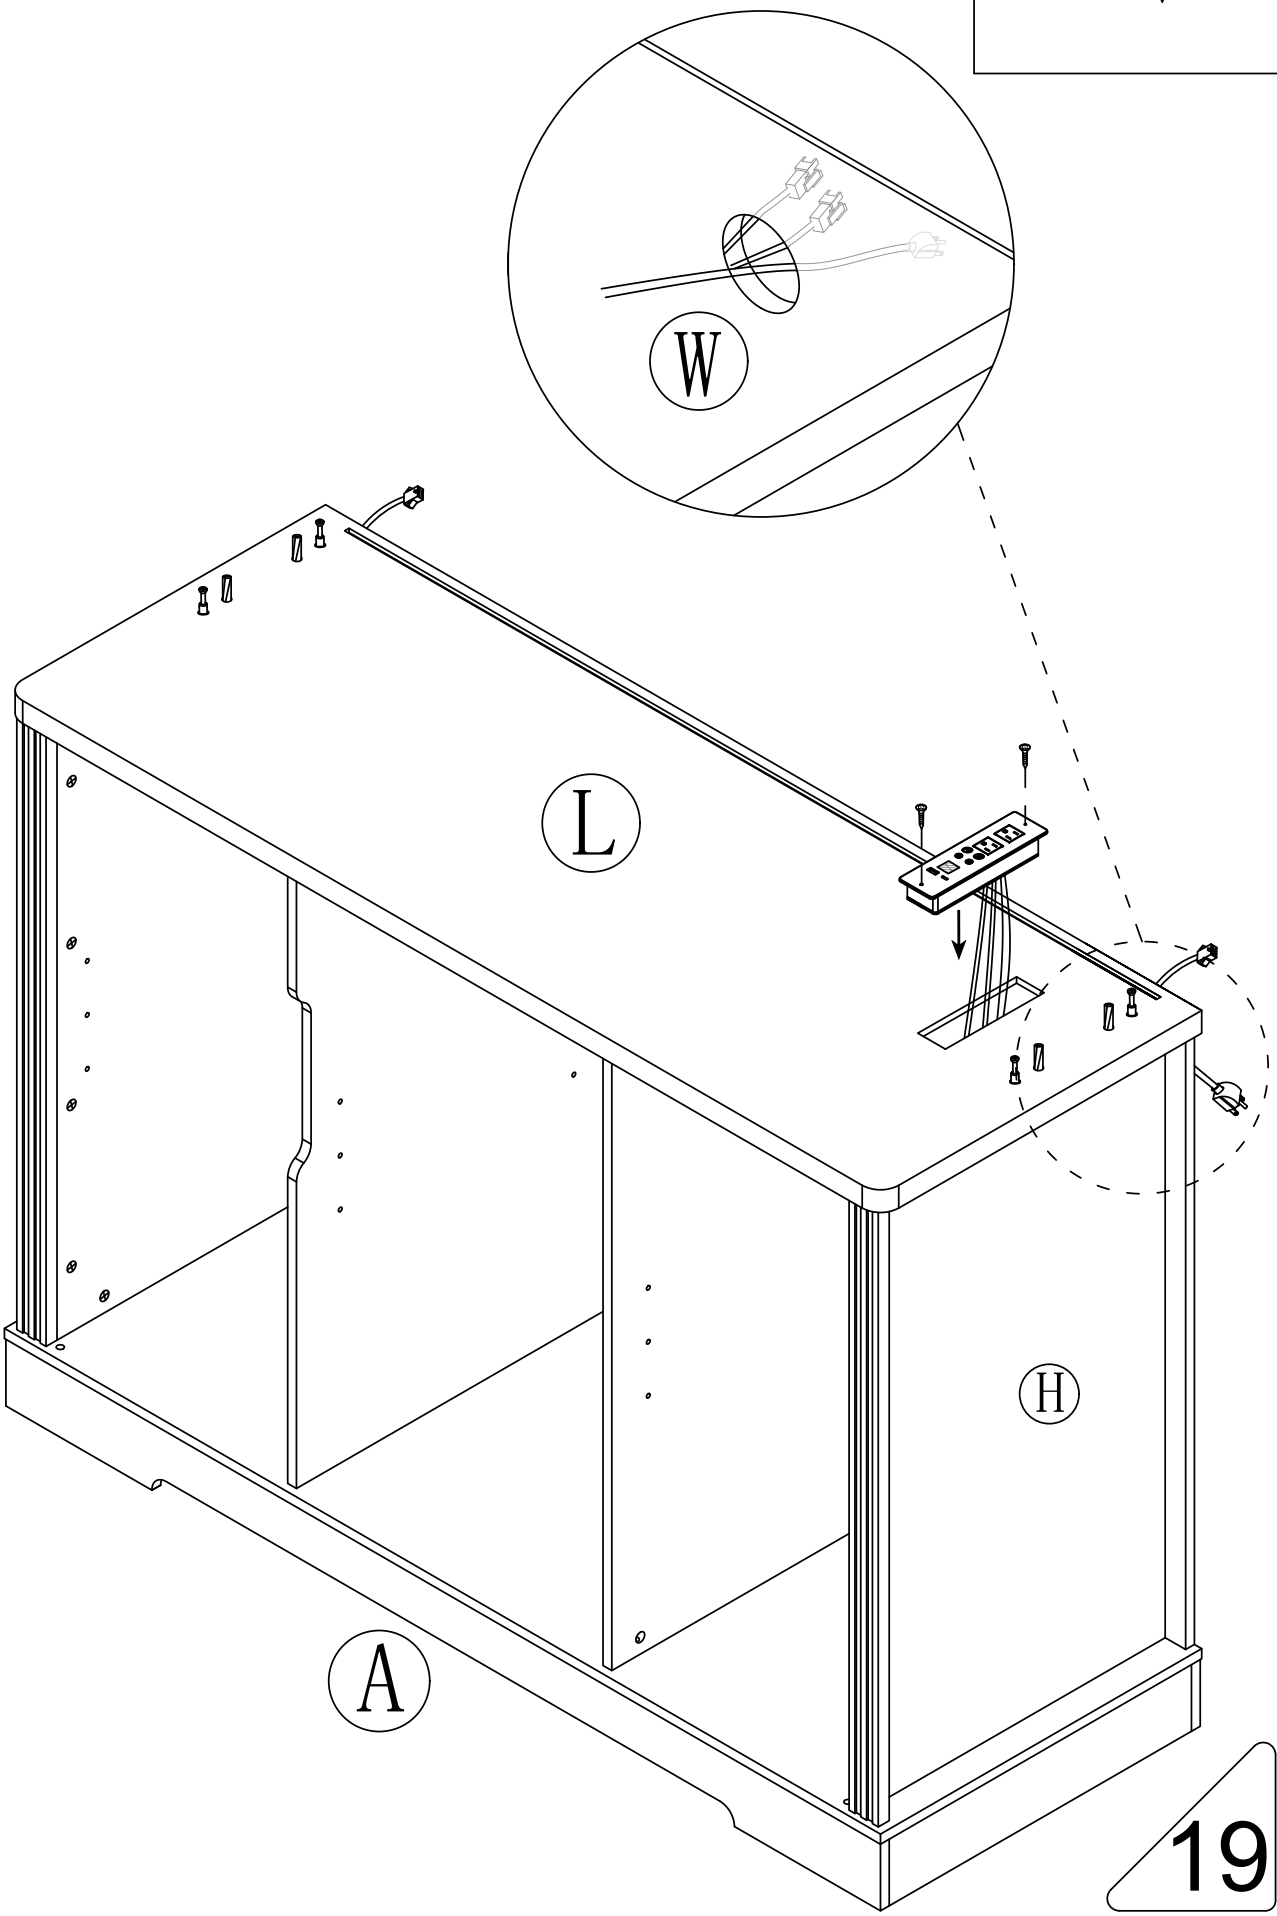


Step 26




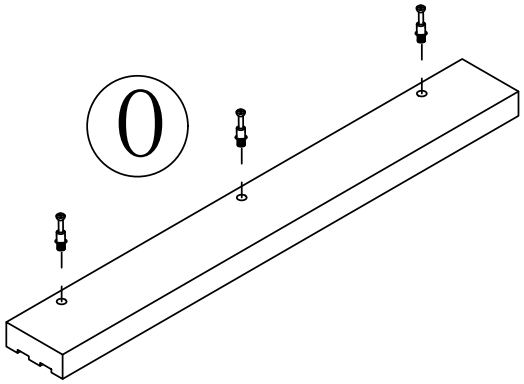

x2

Step 27




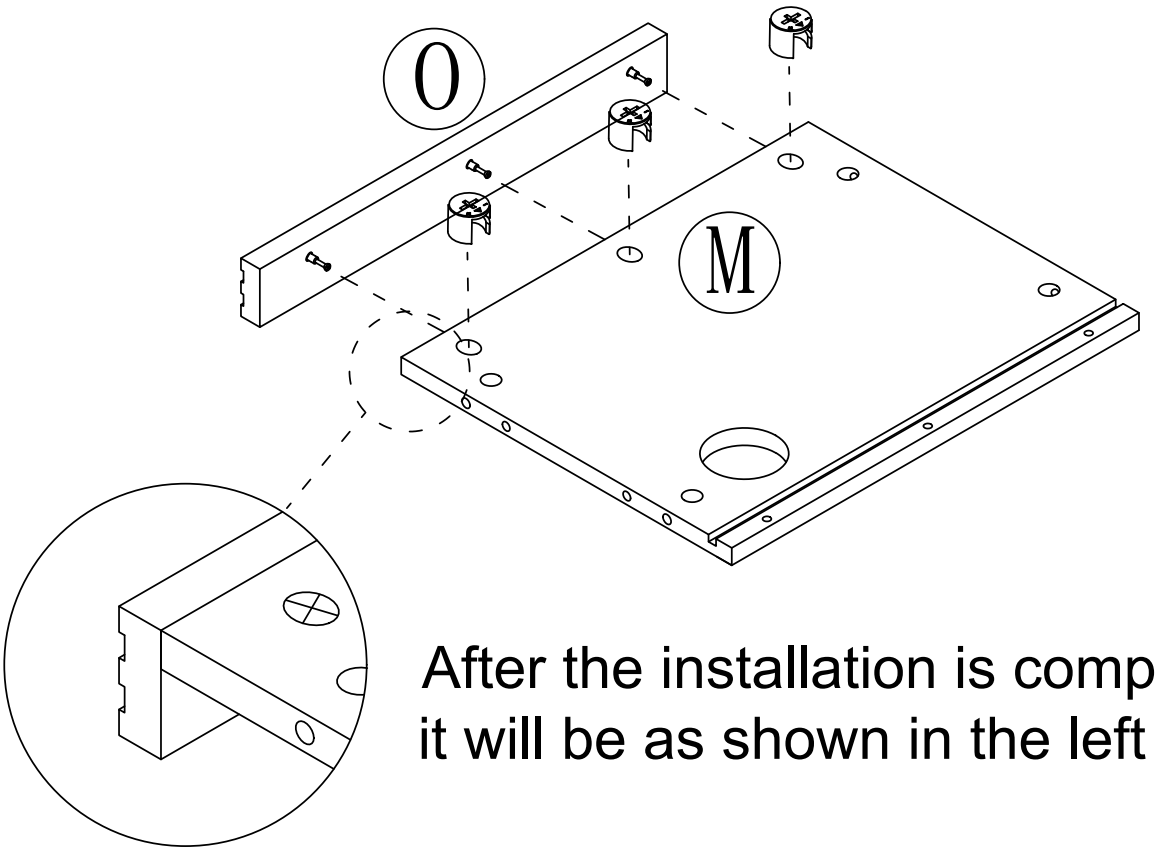

After the installation is completed here, it will be as shown in the left picture.


Step 28

5 x3

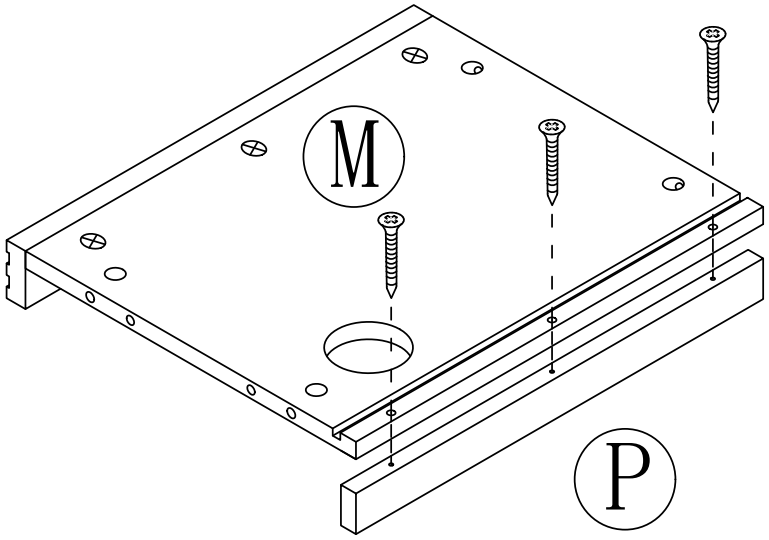


Step 29

④ x1

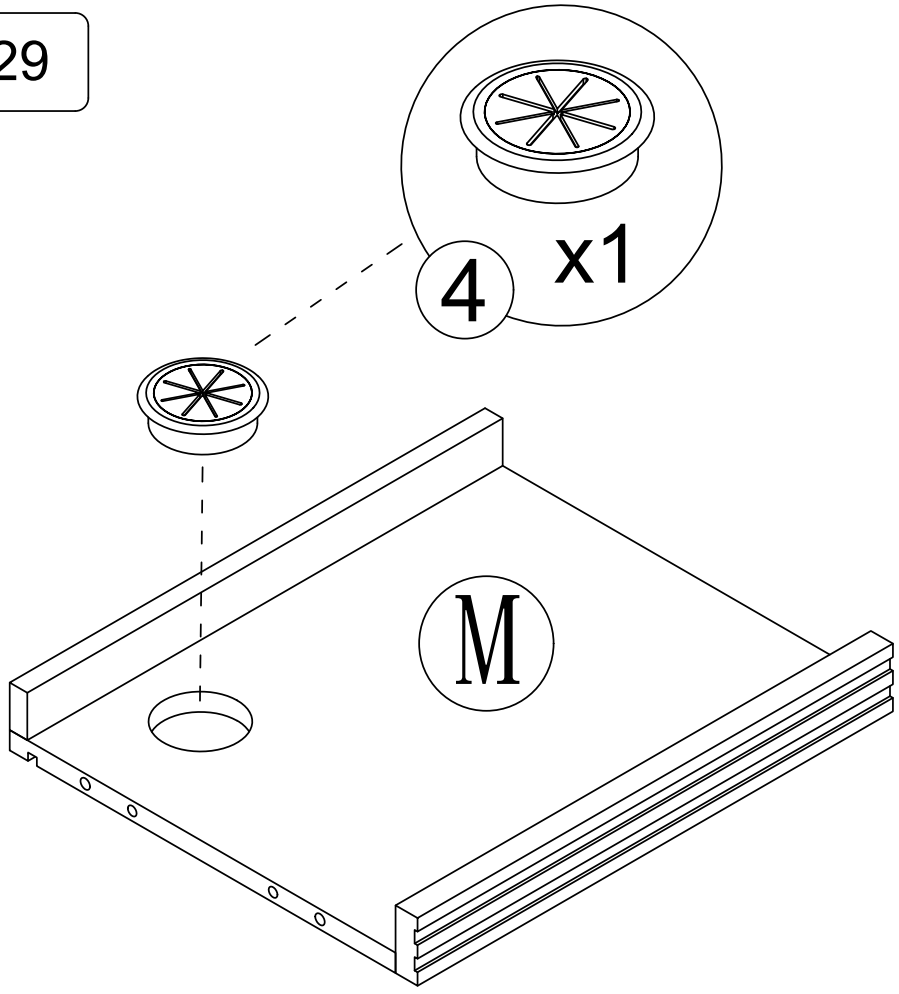



Step 30

2  x3

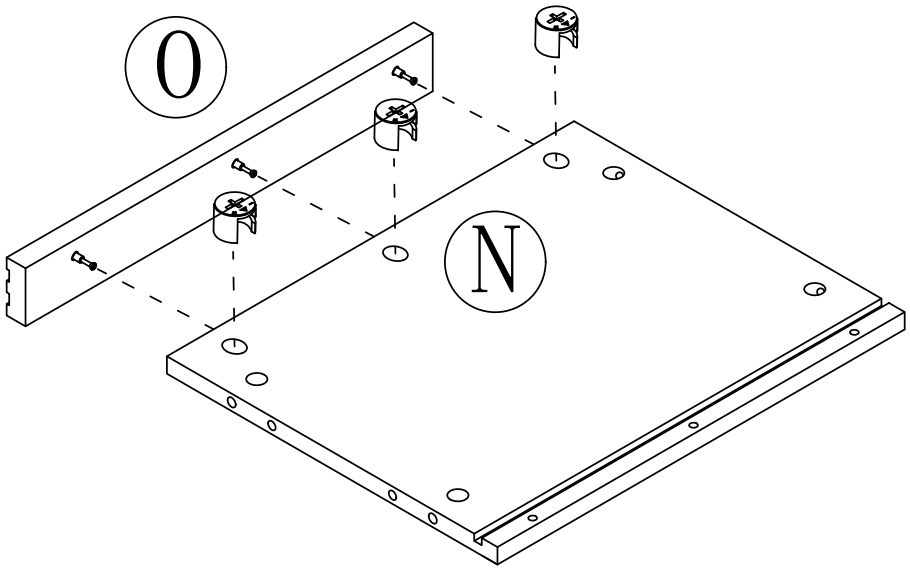


Step 31

5  x3

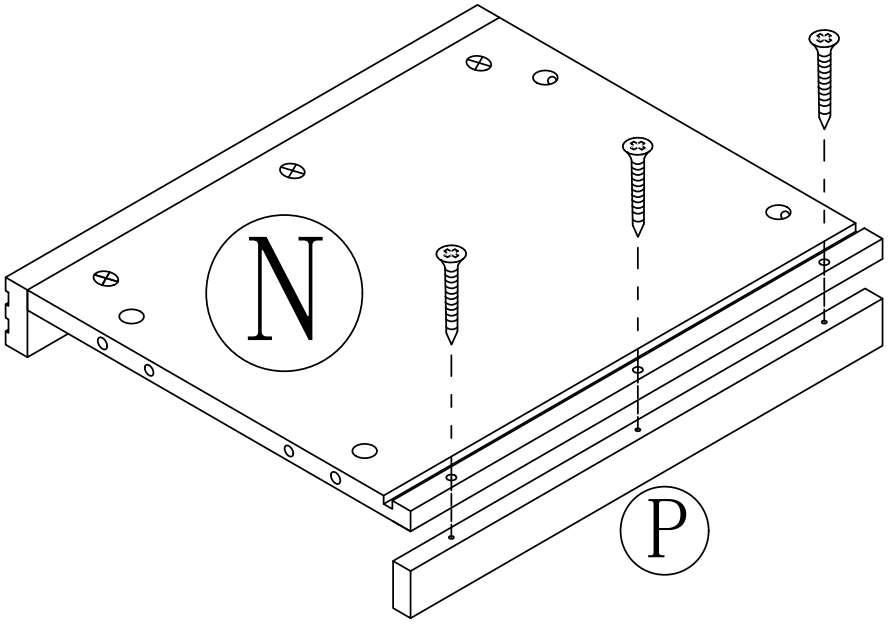



Step 32

2 x4

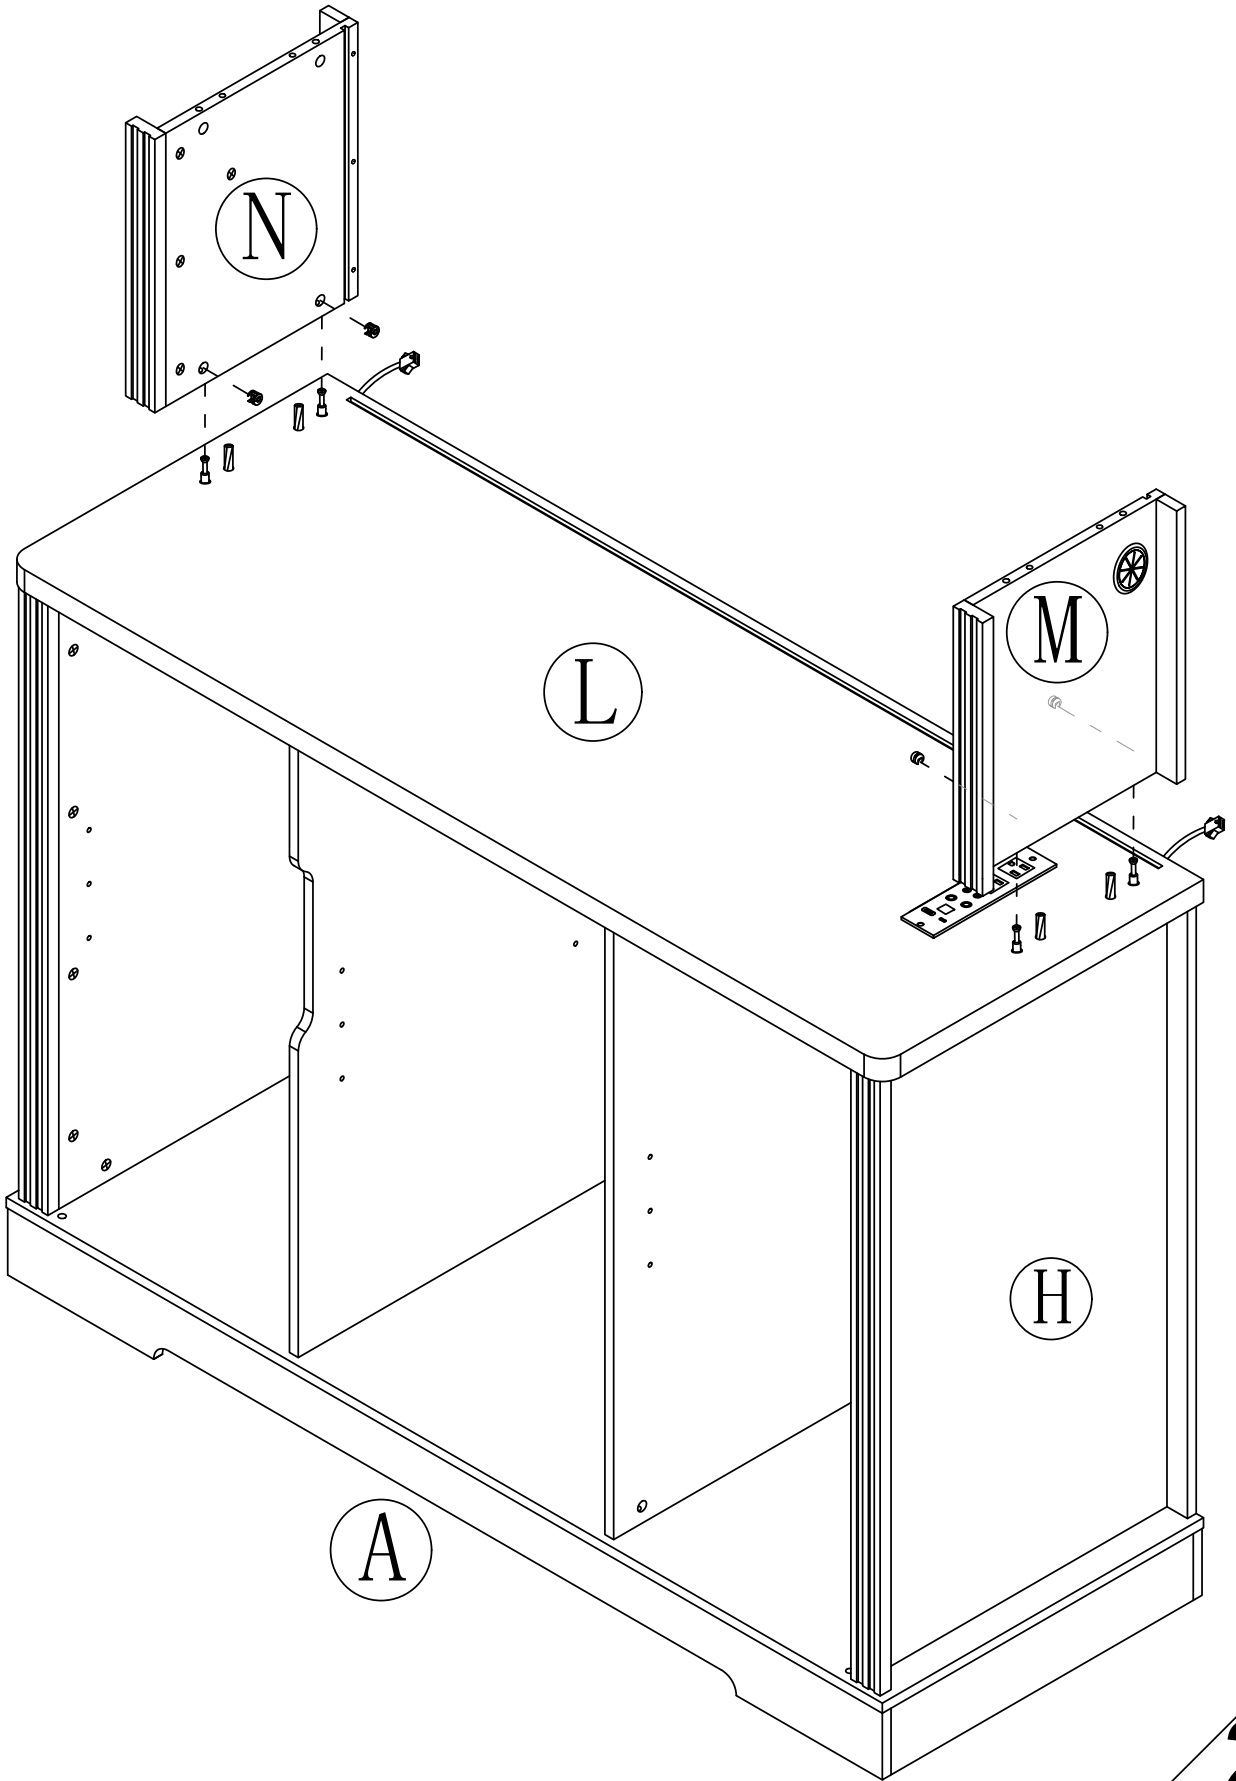


Step 33




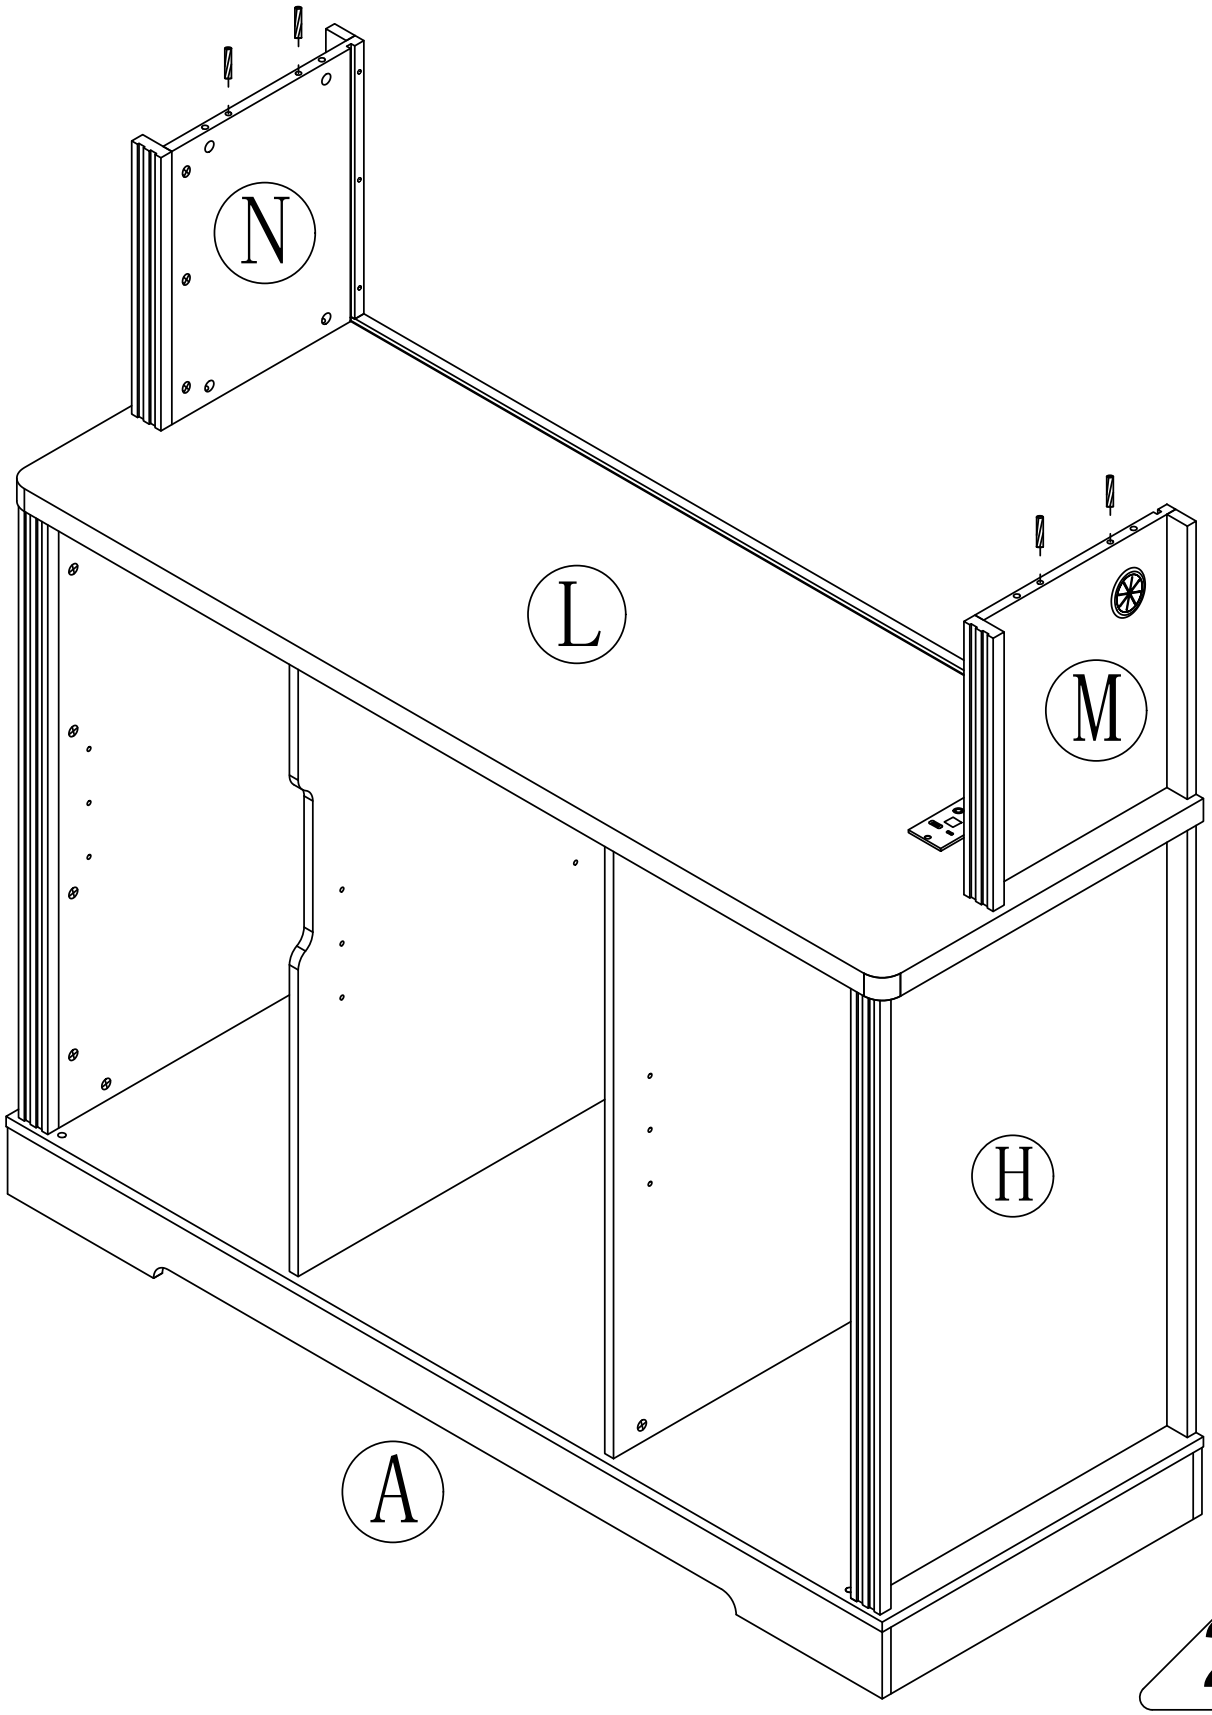


Step 34

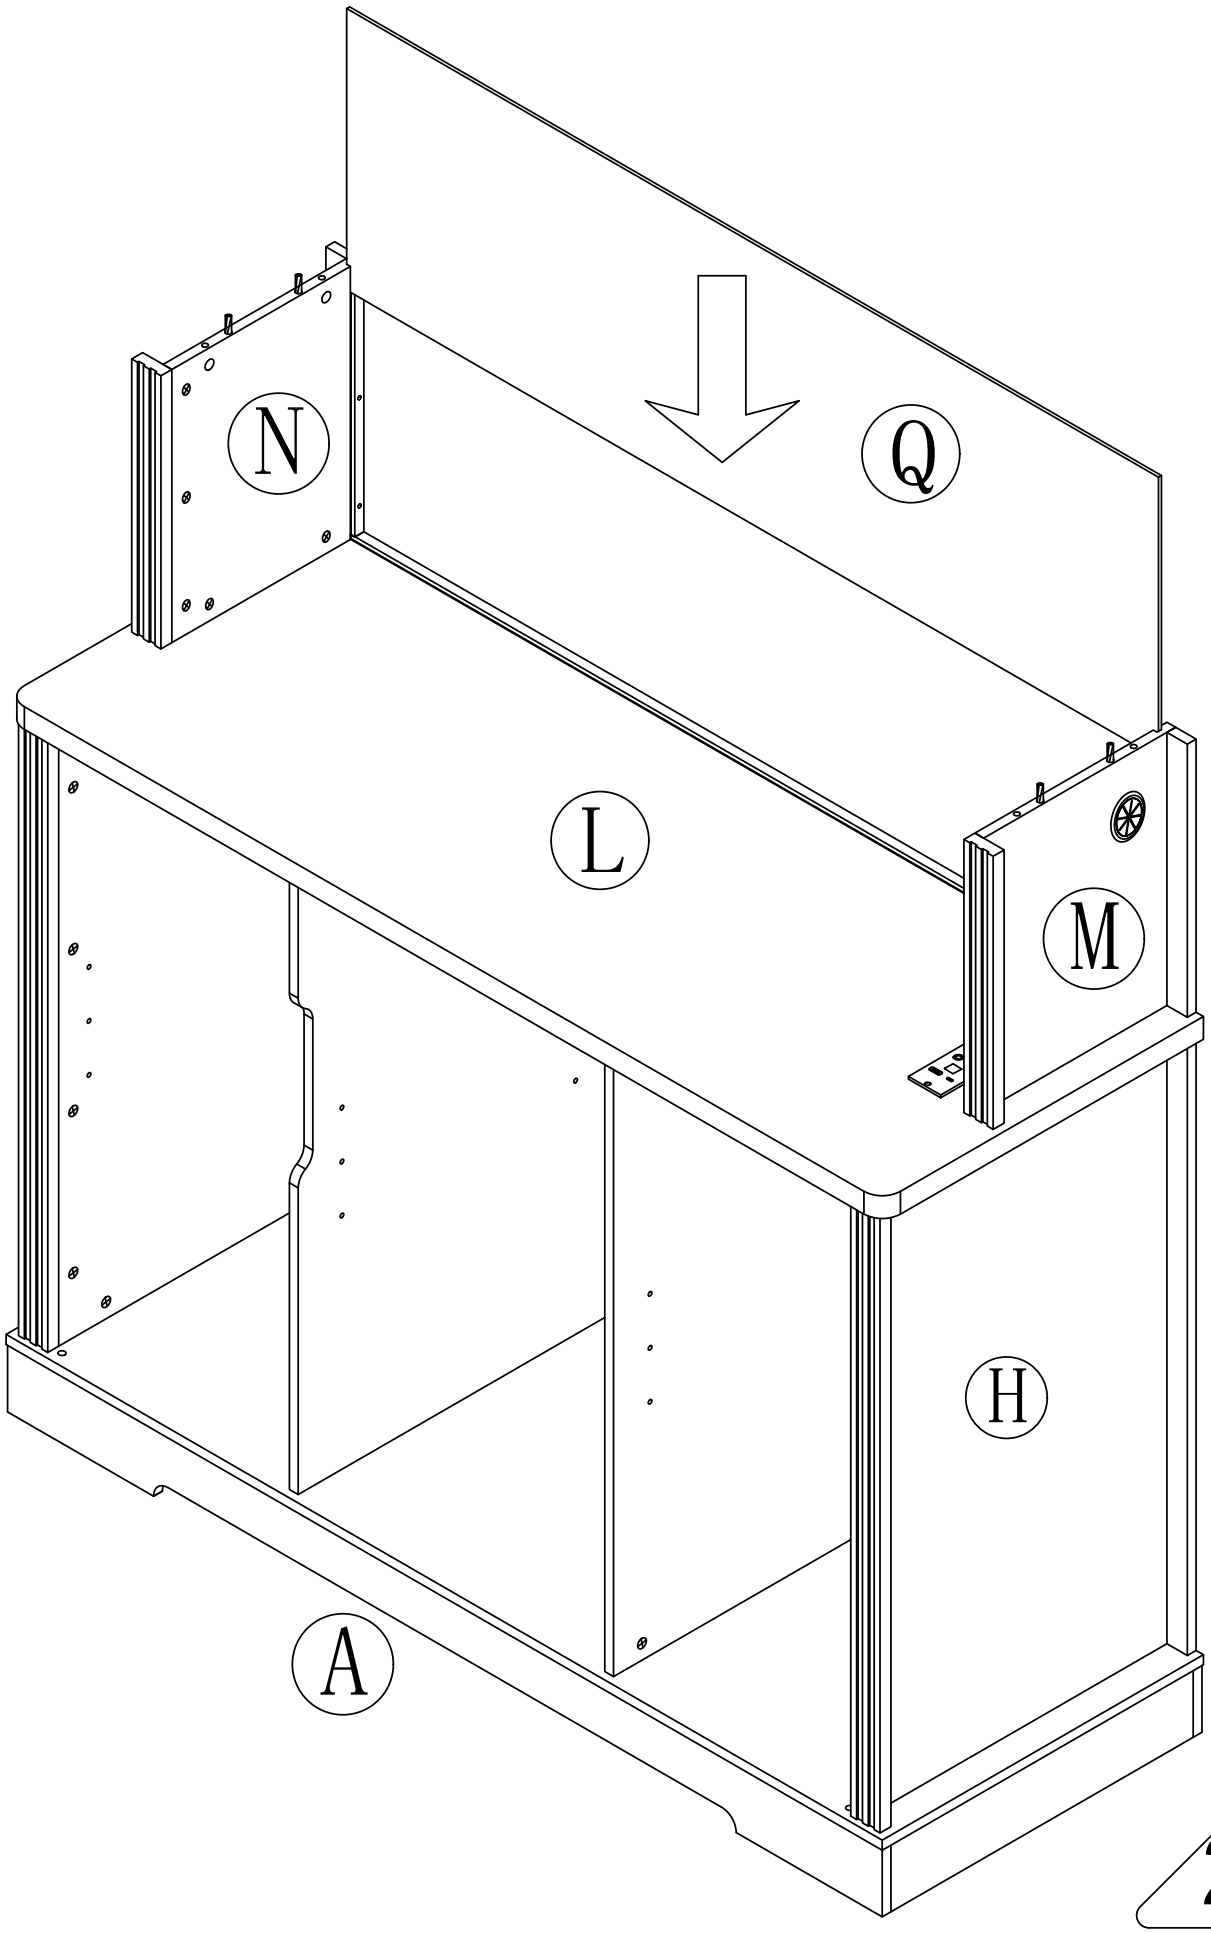



Step 35

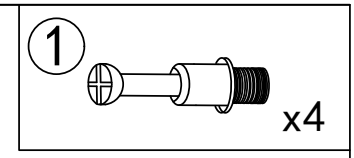

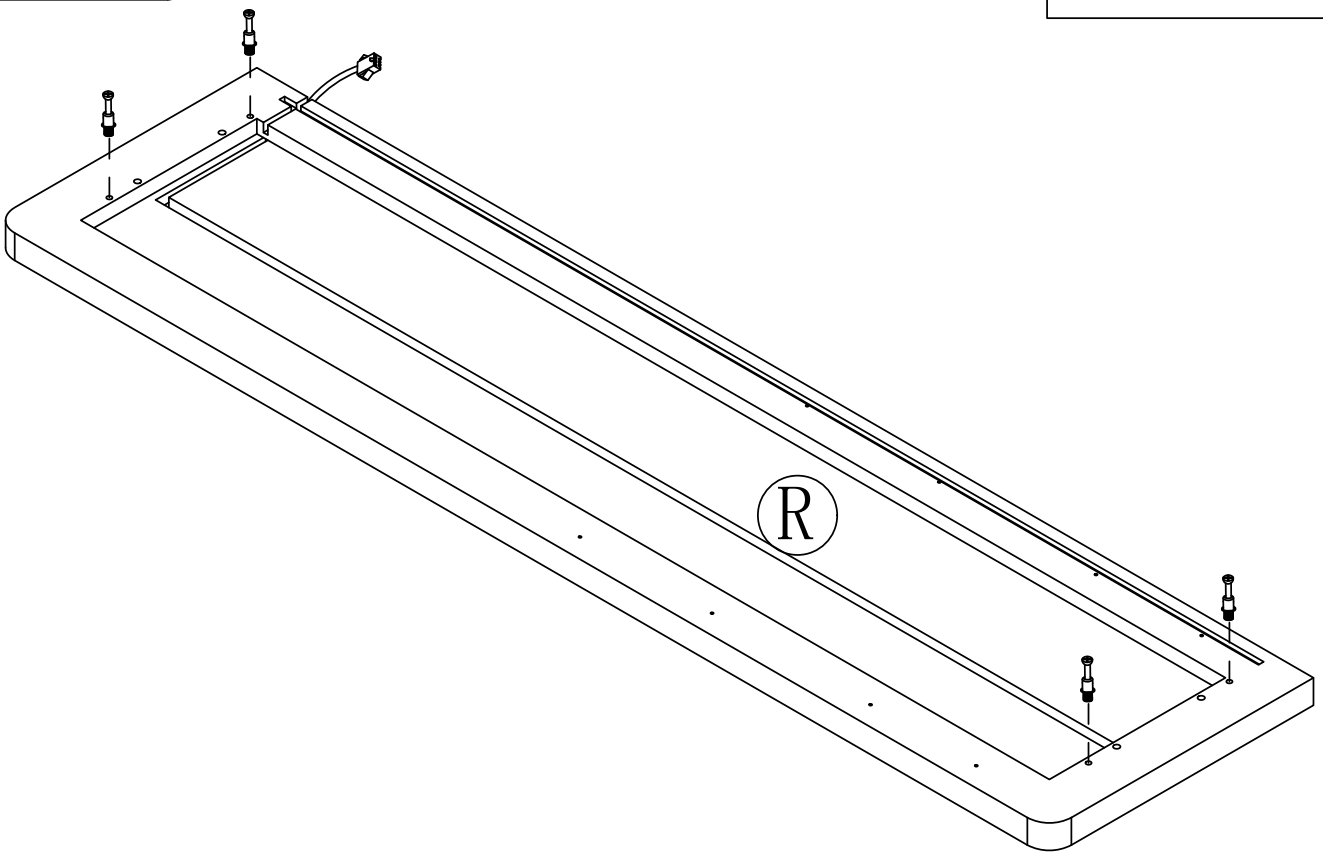


Step 36

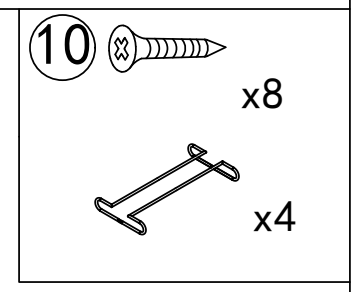

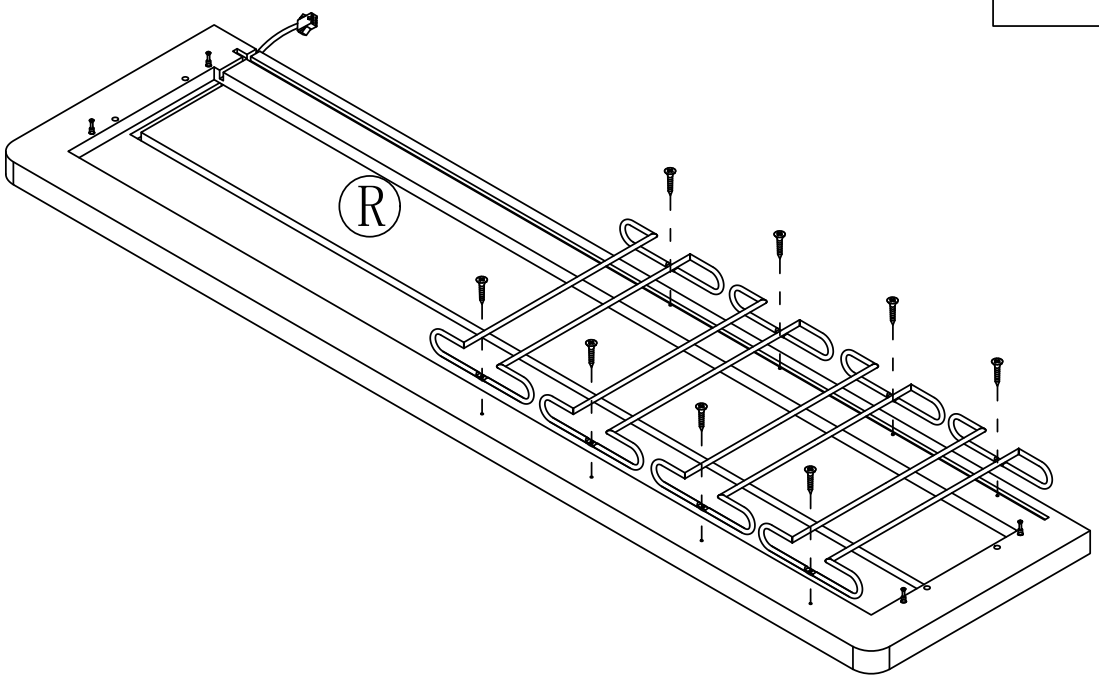


Step 37

2 x4

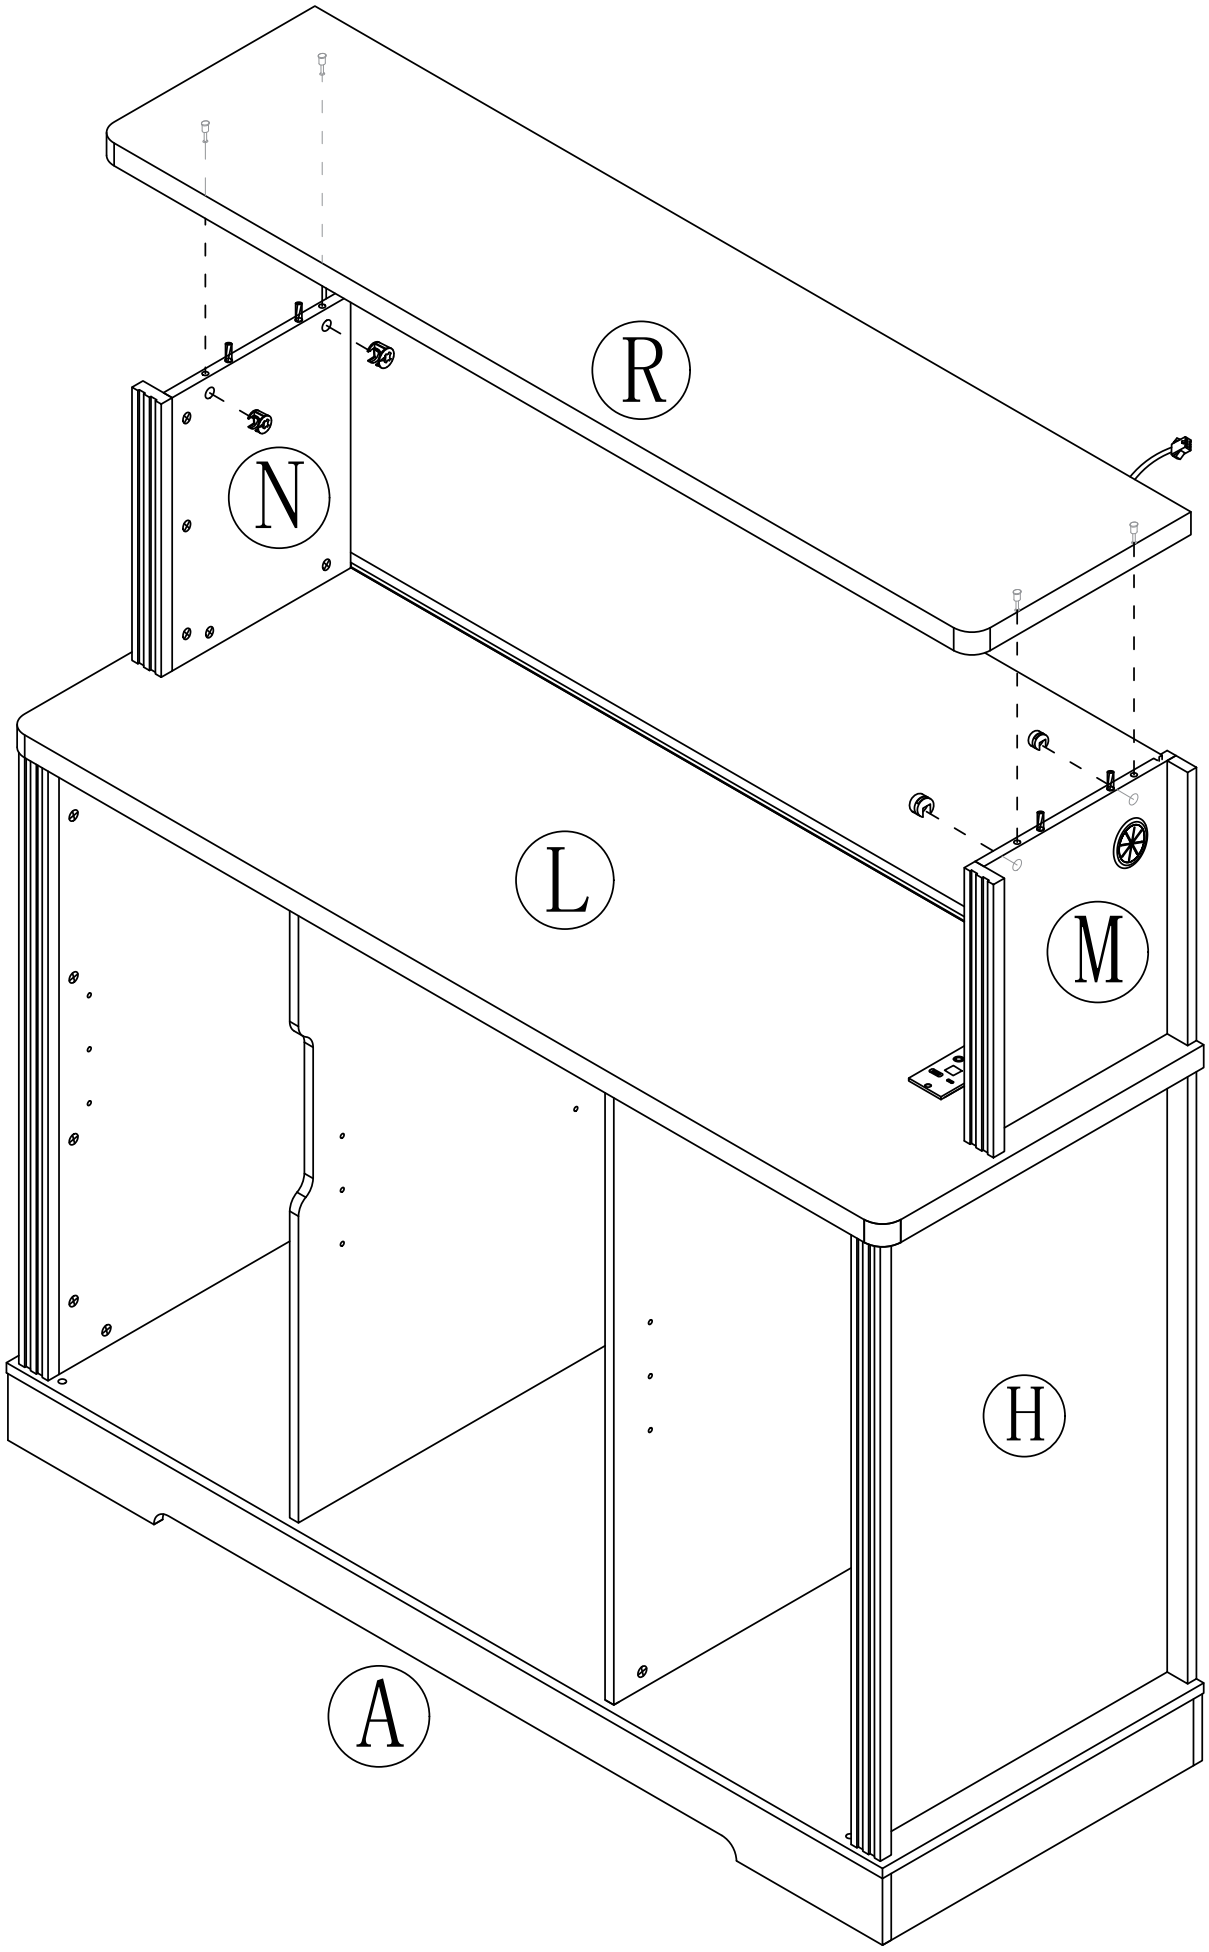


Step 38

8 x12

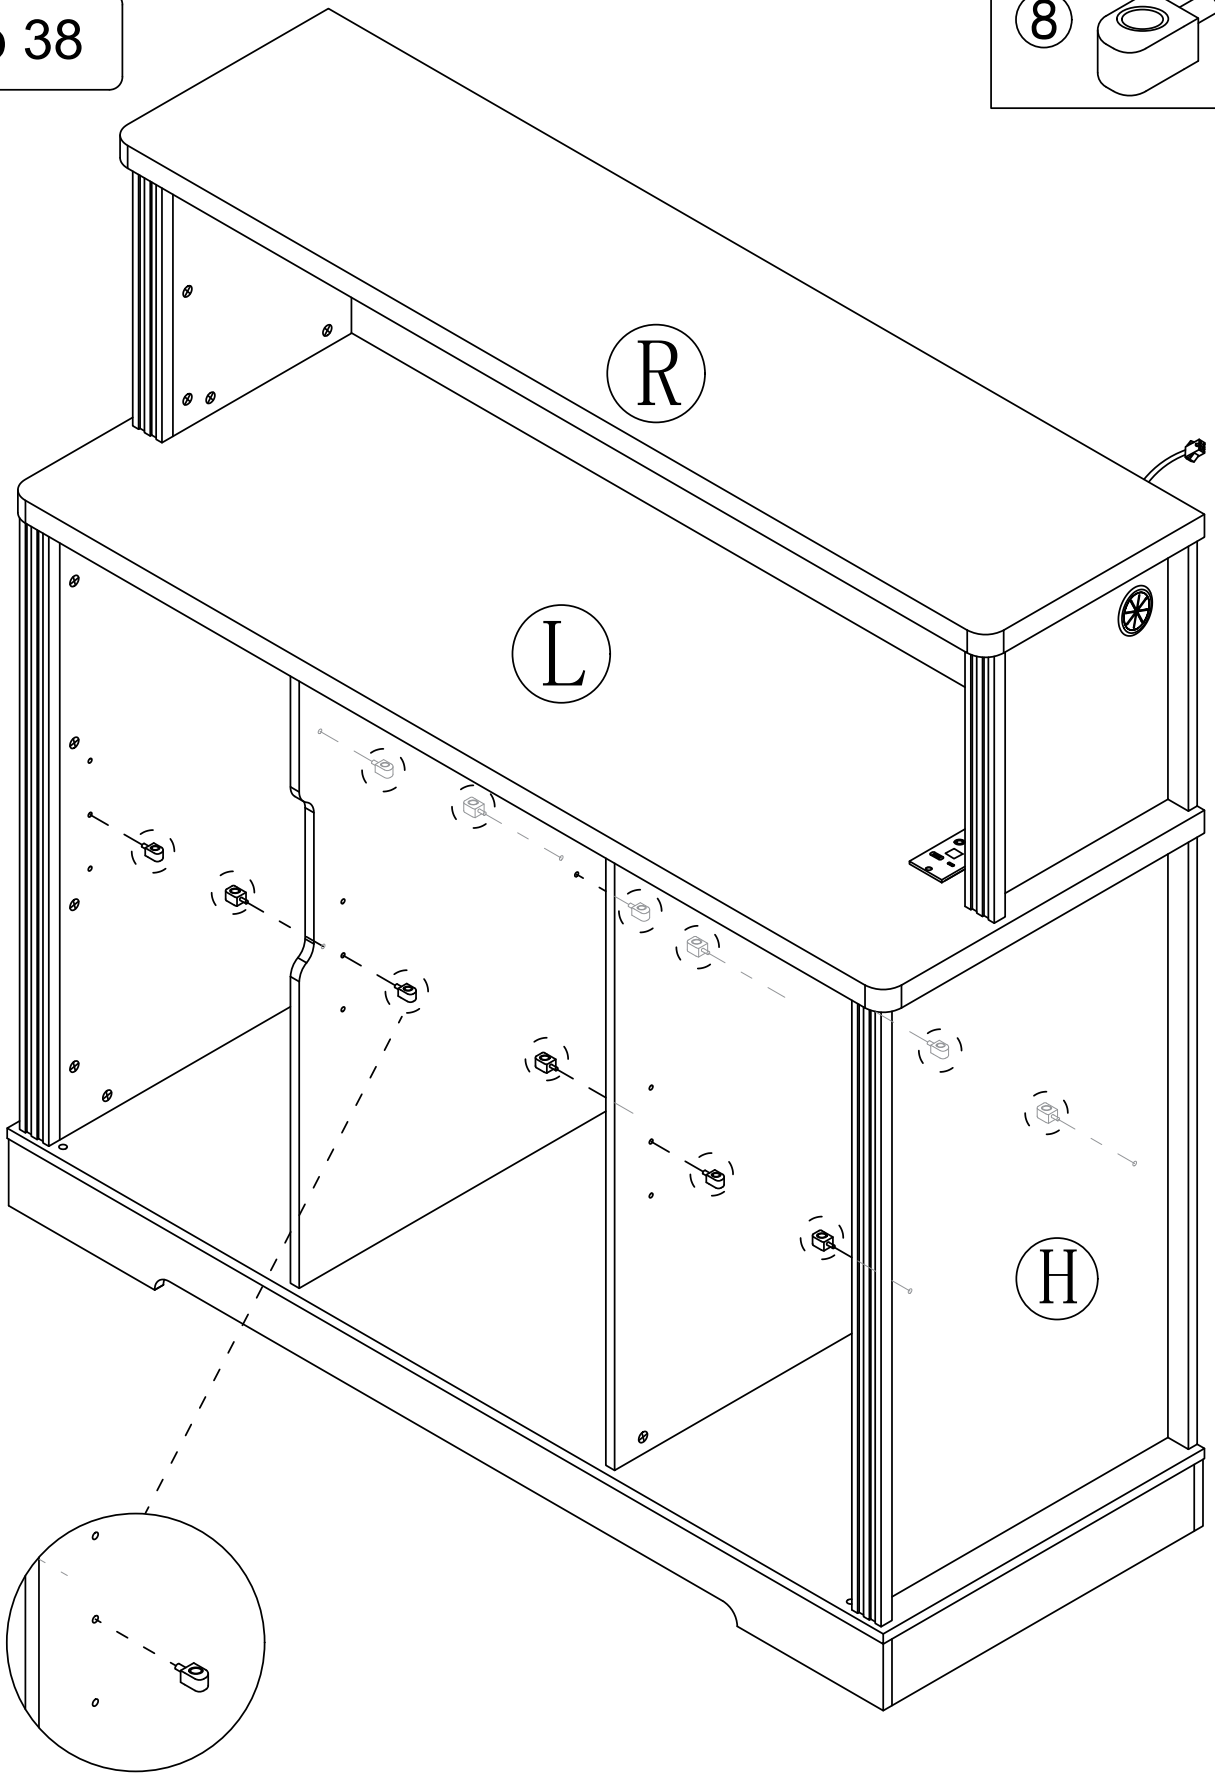


It can be adjusted up and down.

Step 39

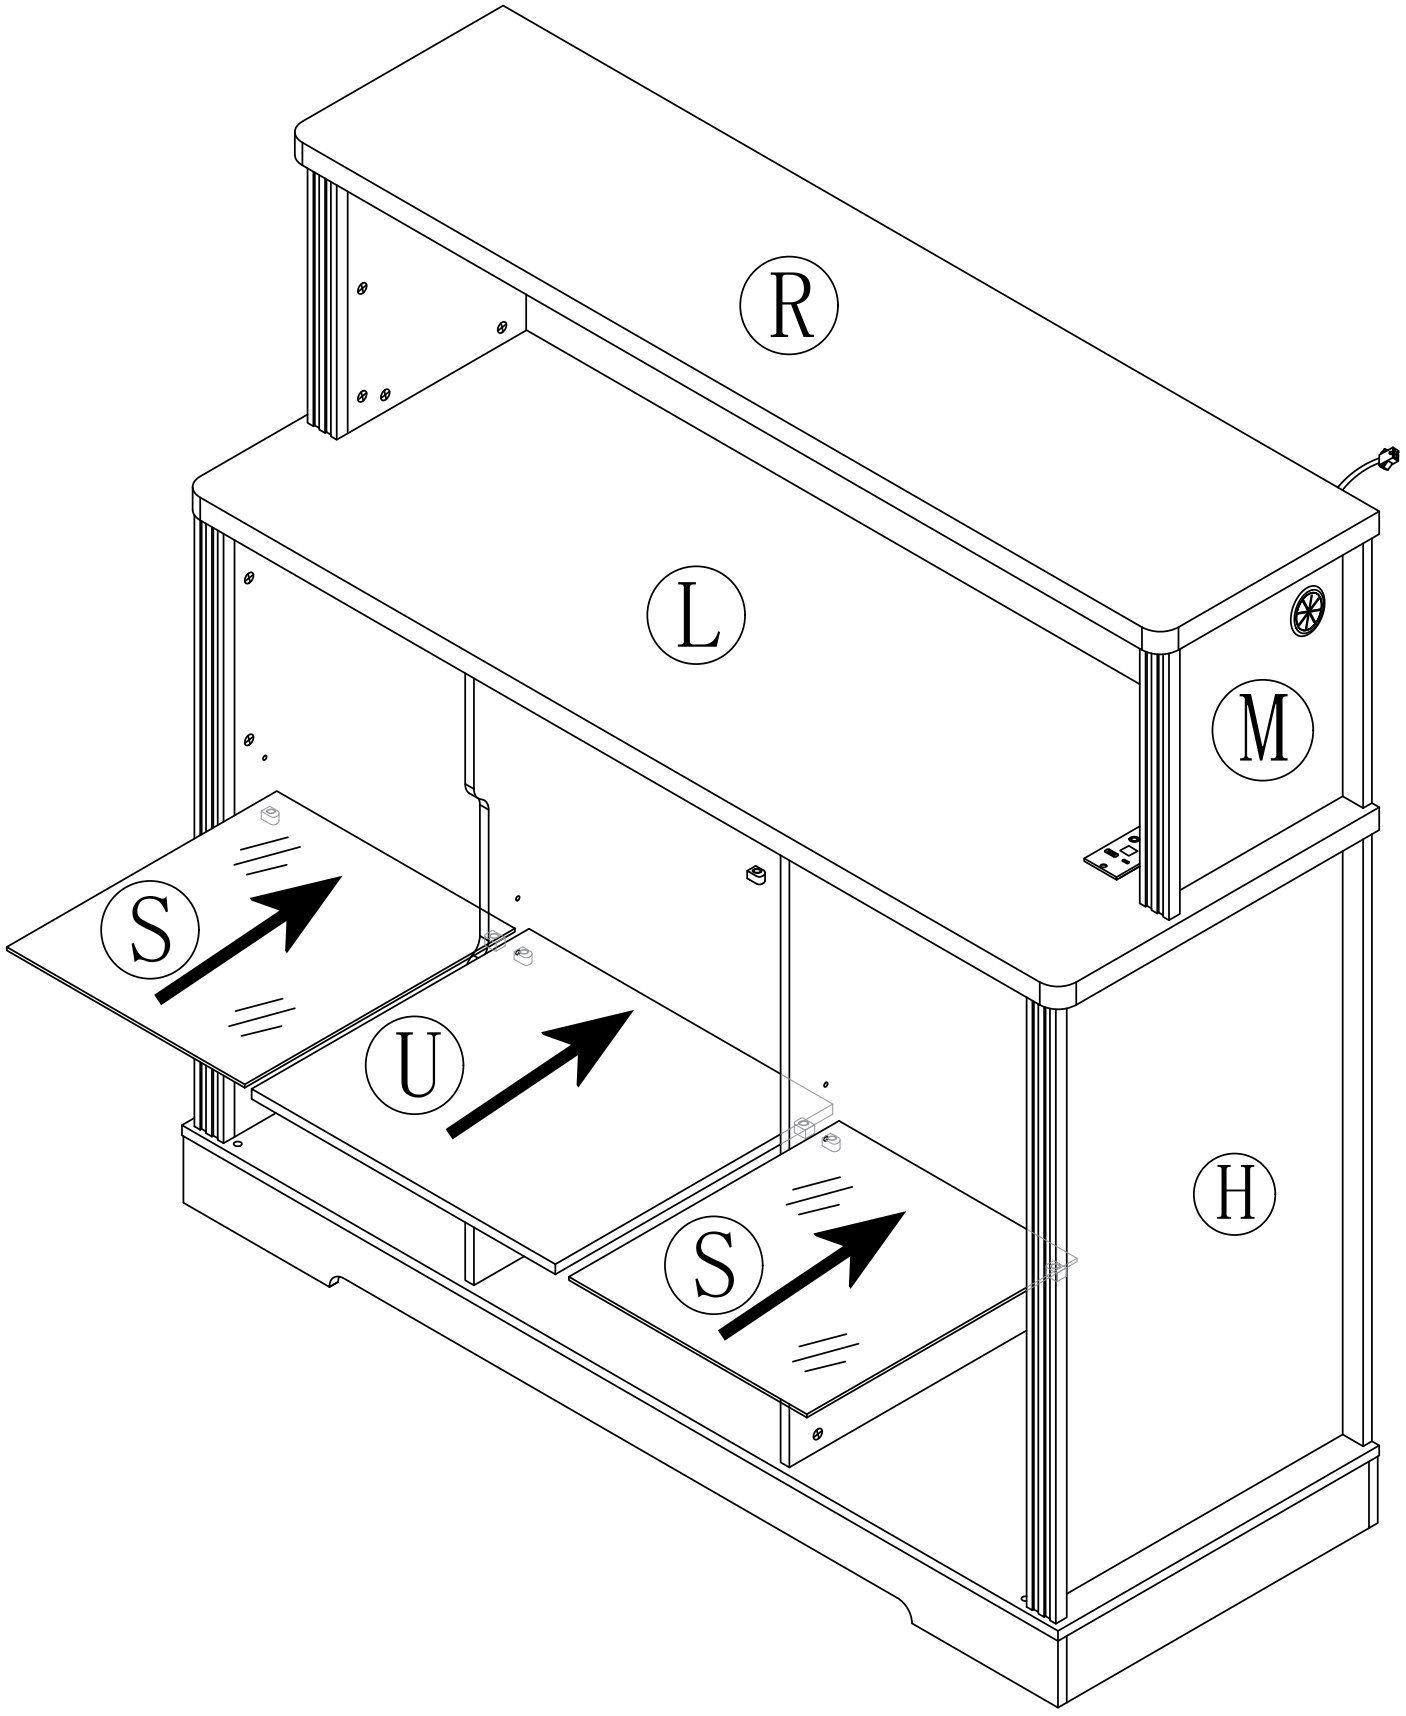


Step 40


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

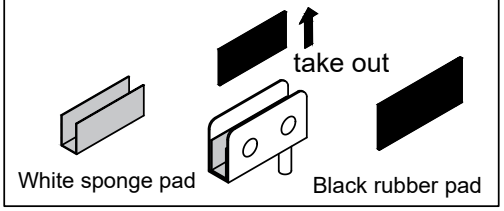


6 x1



x1




Left door

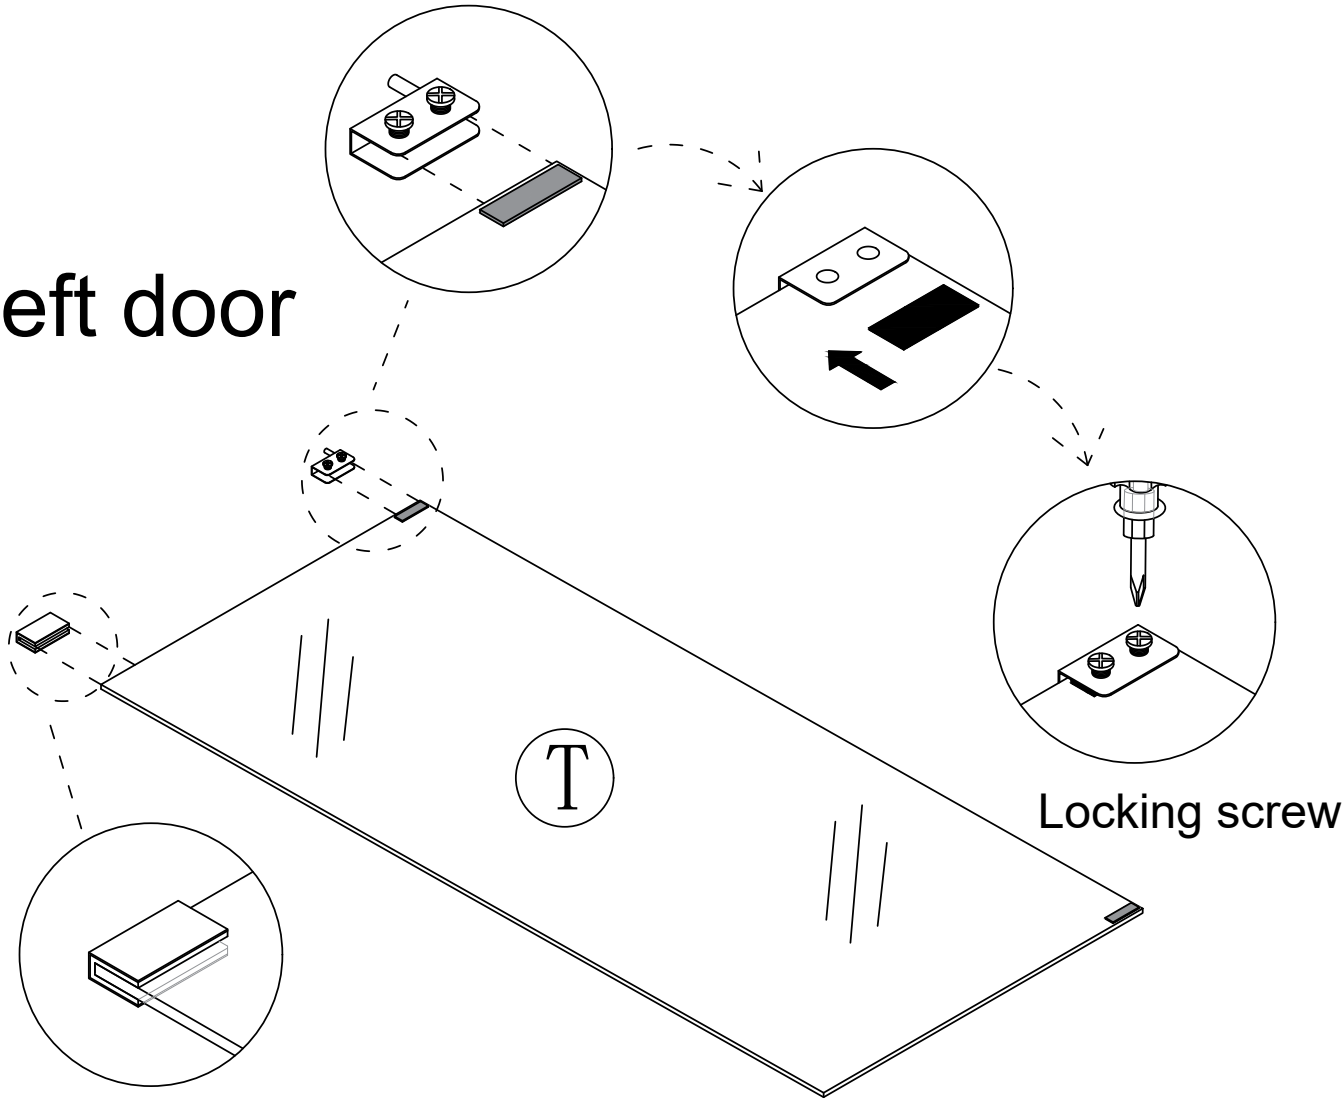


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 41




Right door

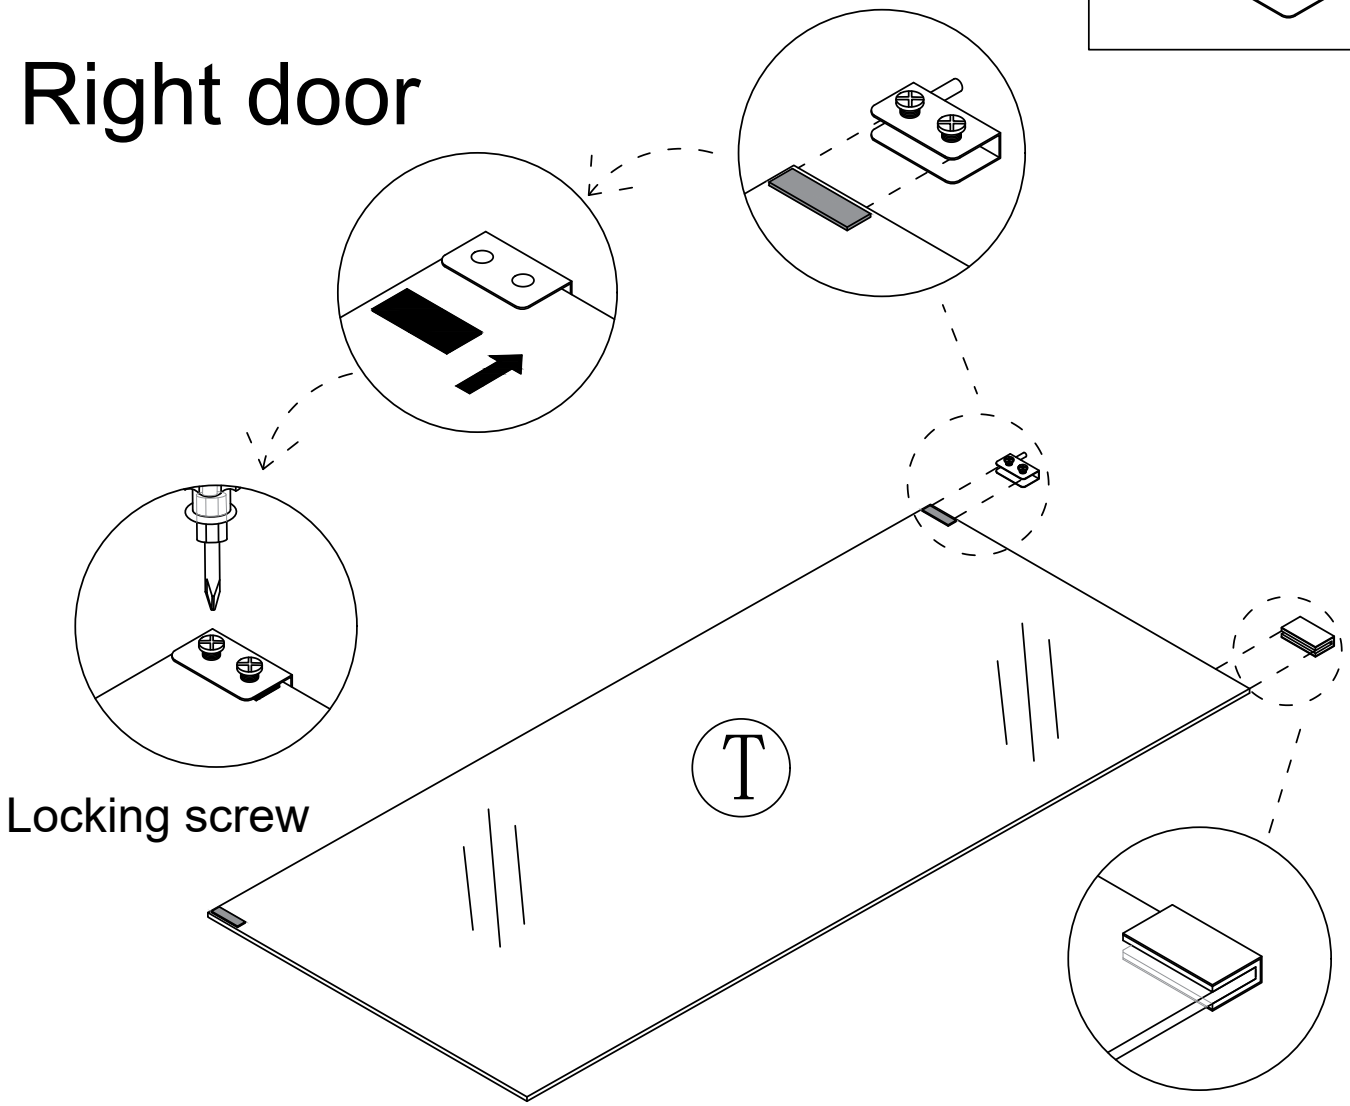

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 42




Step 43

6 x2




first




second

After installing the glass door, place the black gasket on the side where the screws are installed

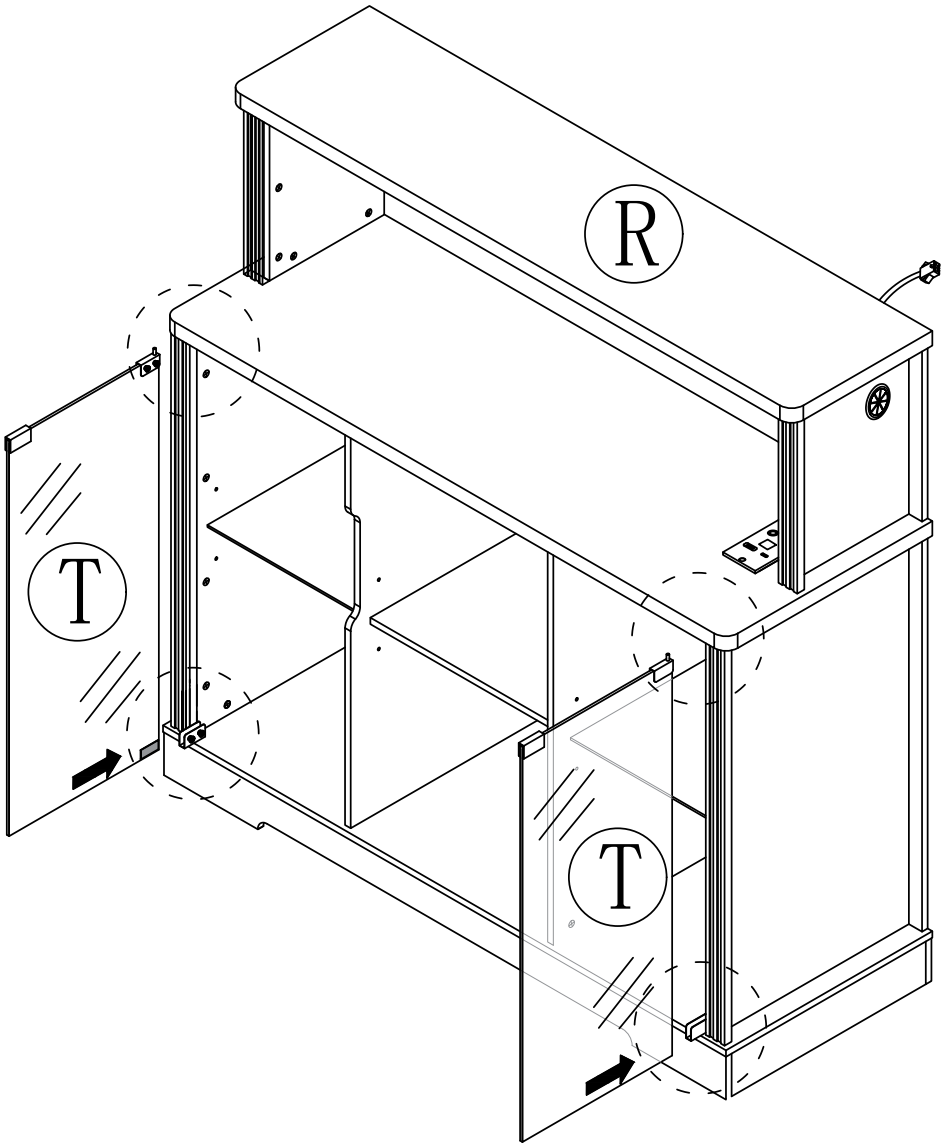

Pay attention to the direction of the door hinge during installation



third


Locking screw

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.


Step 44


The rebound device automatically opens and closes by pressing

Open the glass door

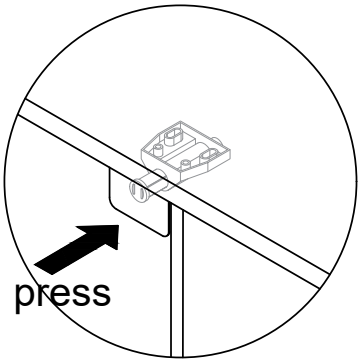


Close the glass door

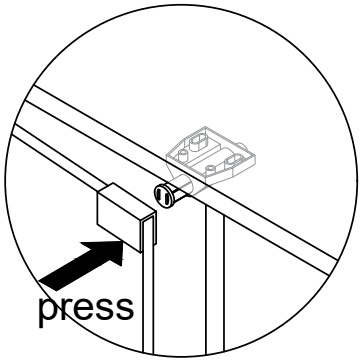


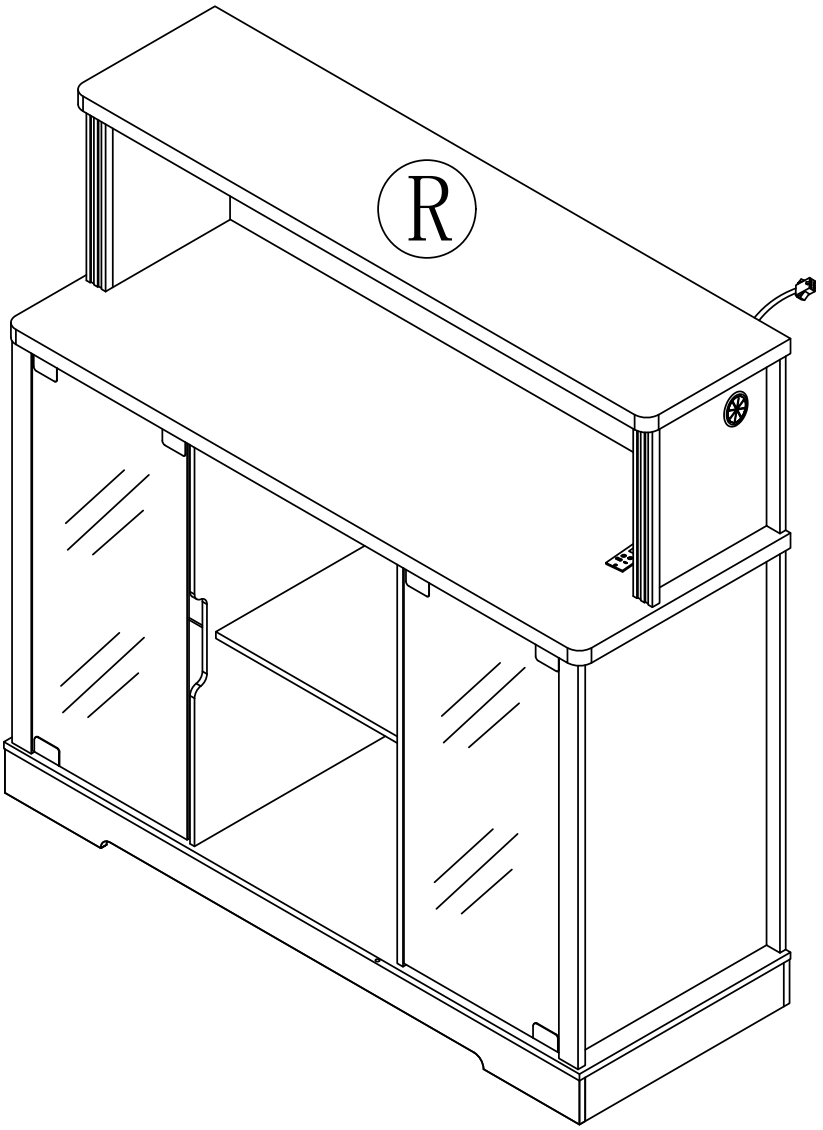

Step 45


9 x24

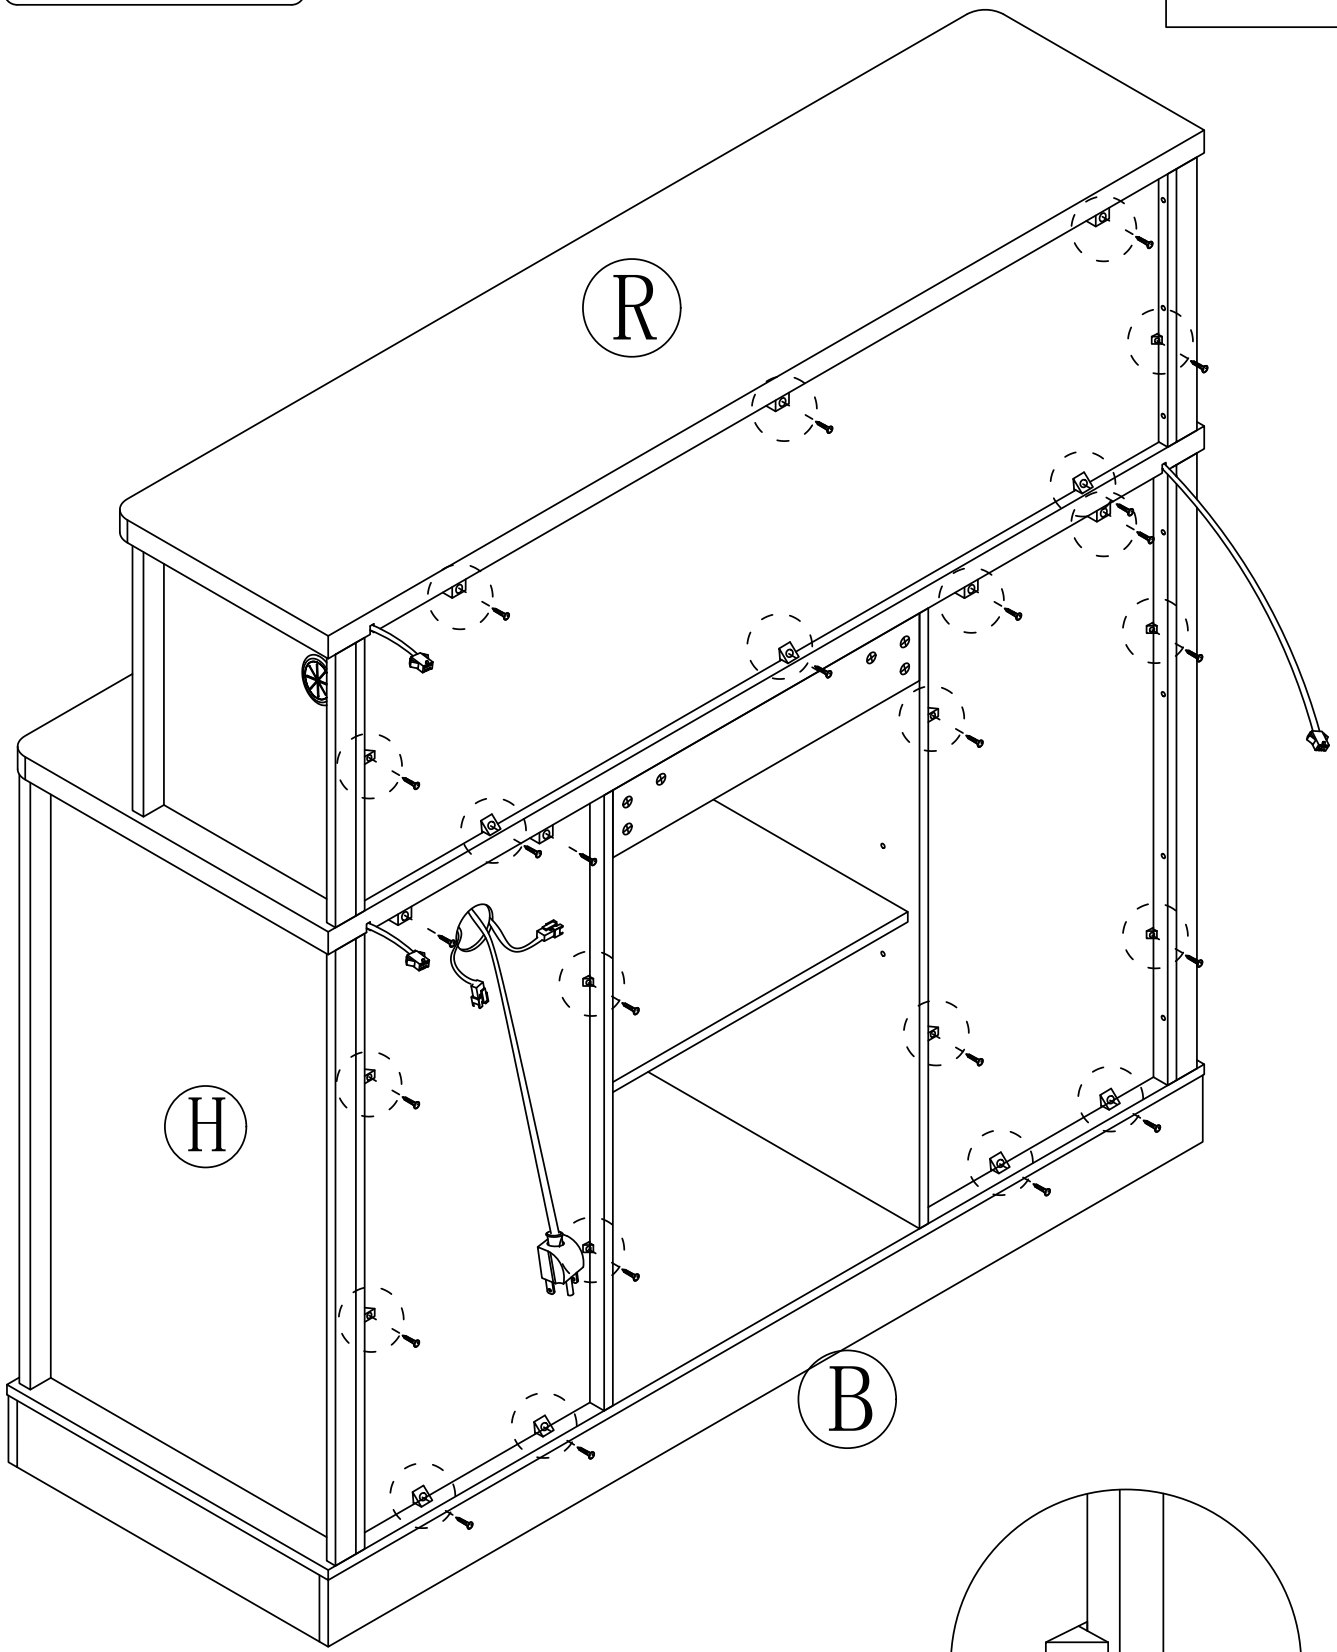

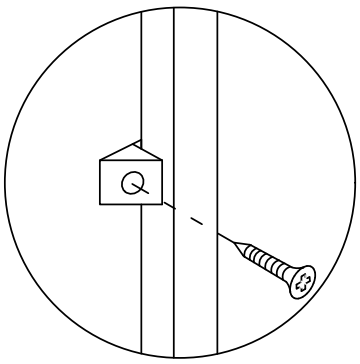


Step 46

12 x1

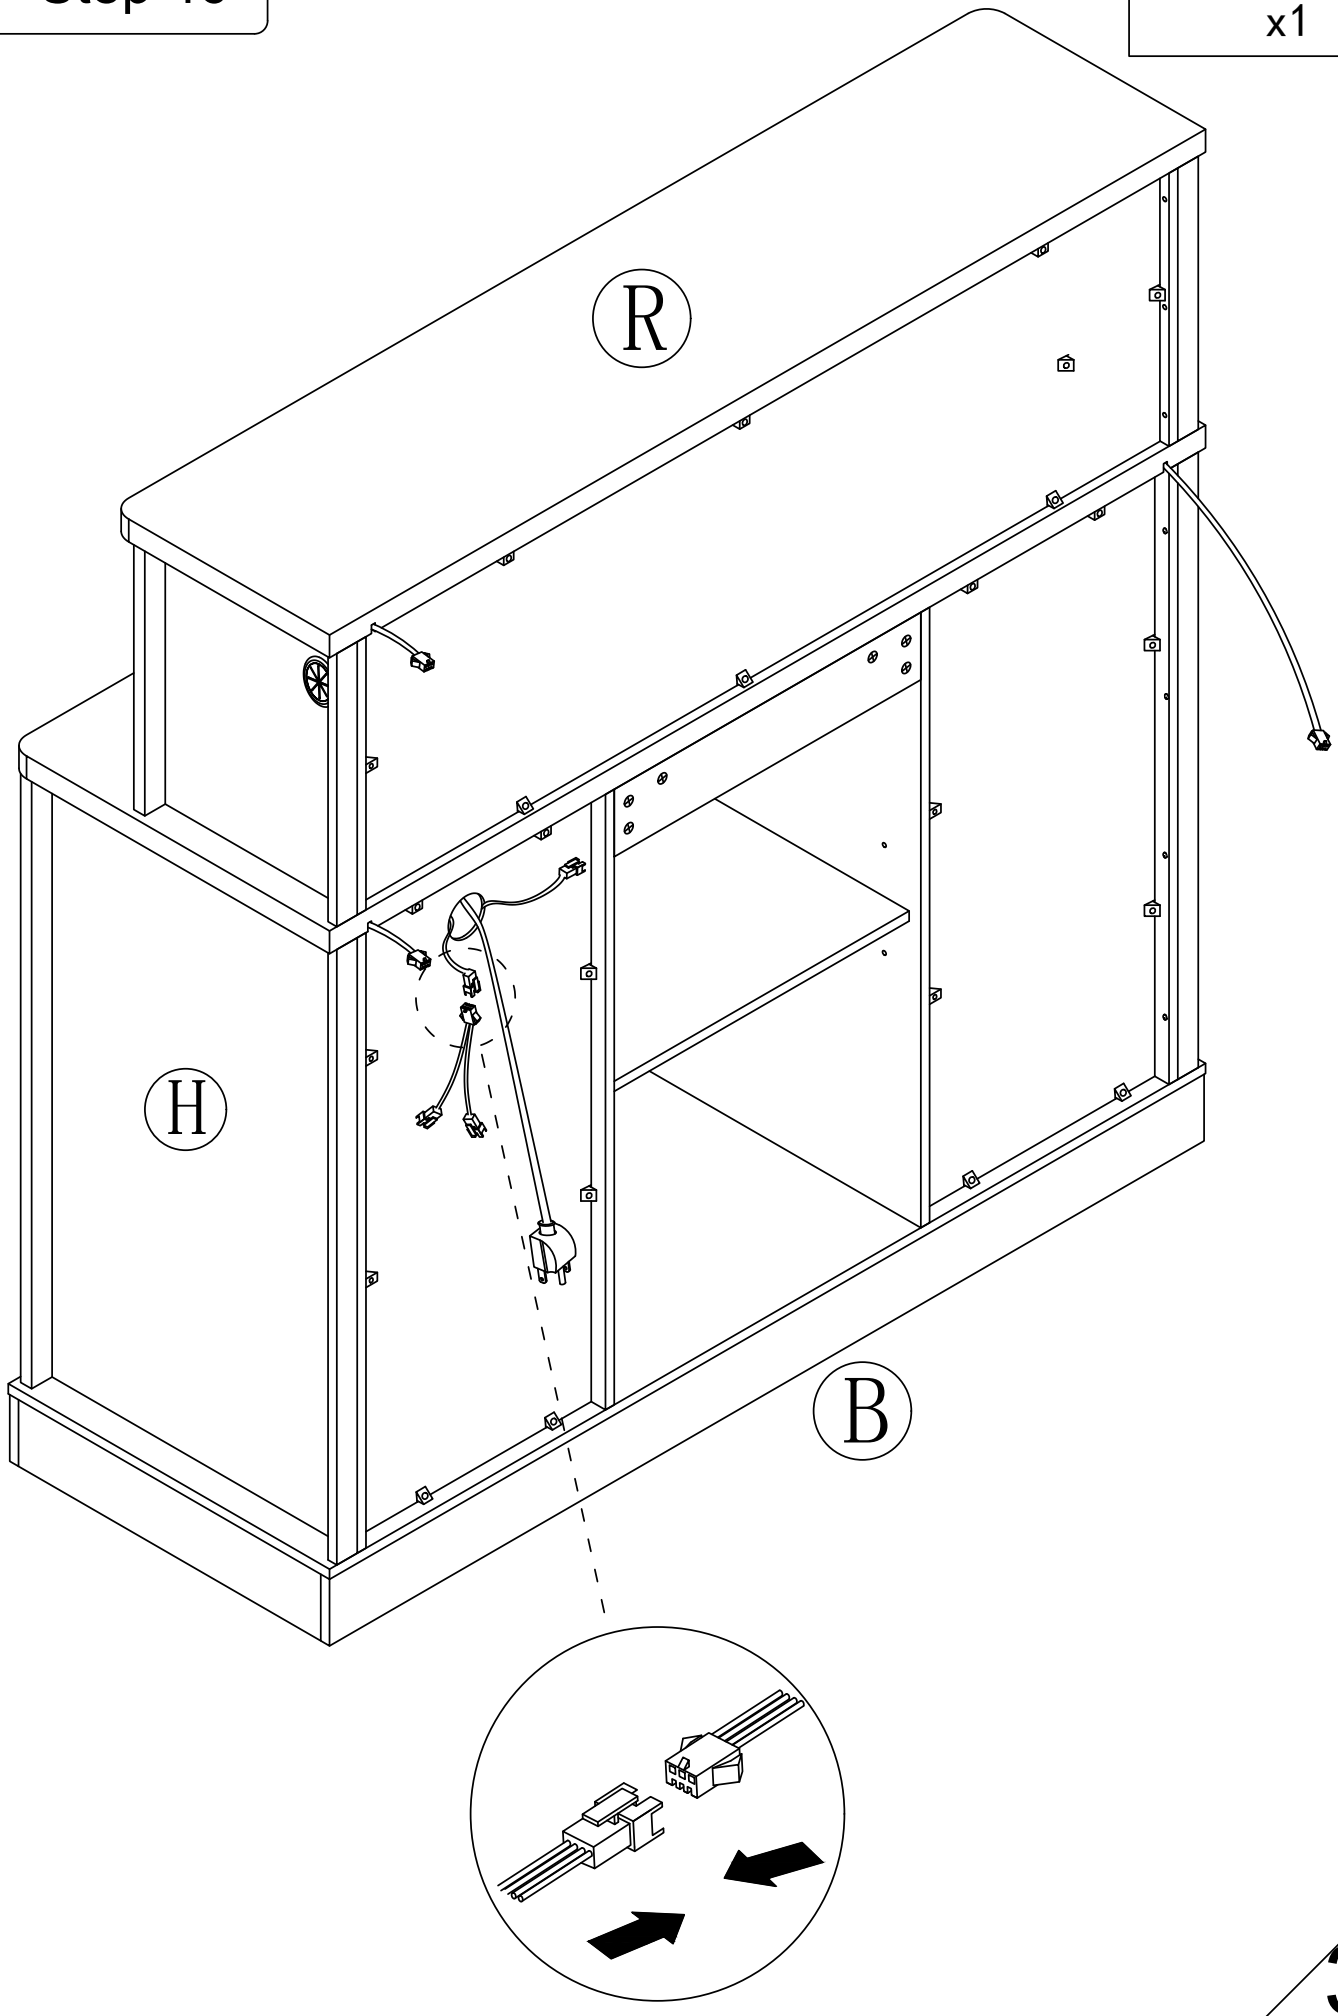


Step 47

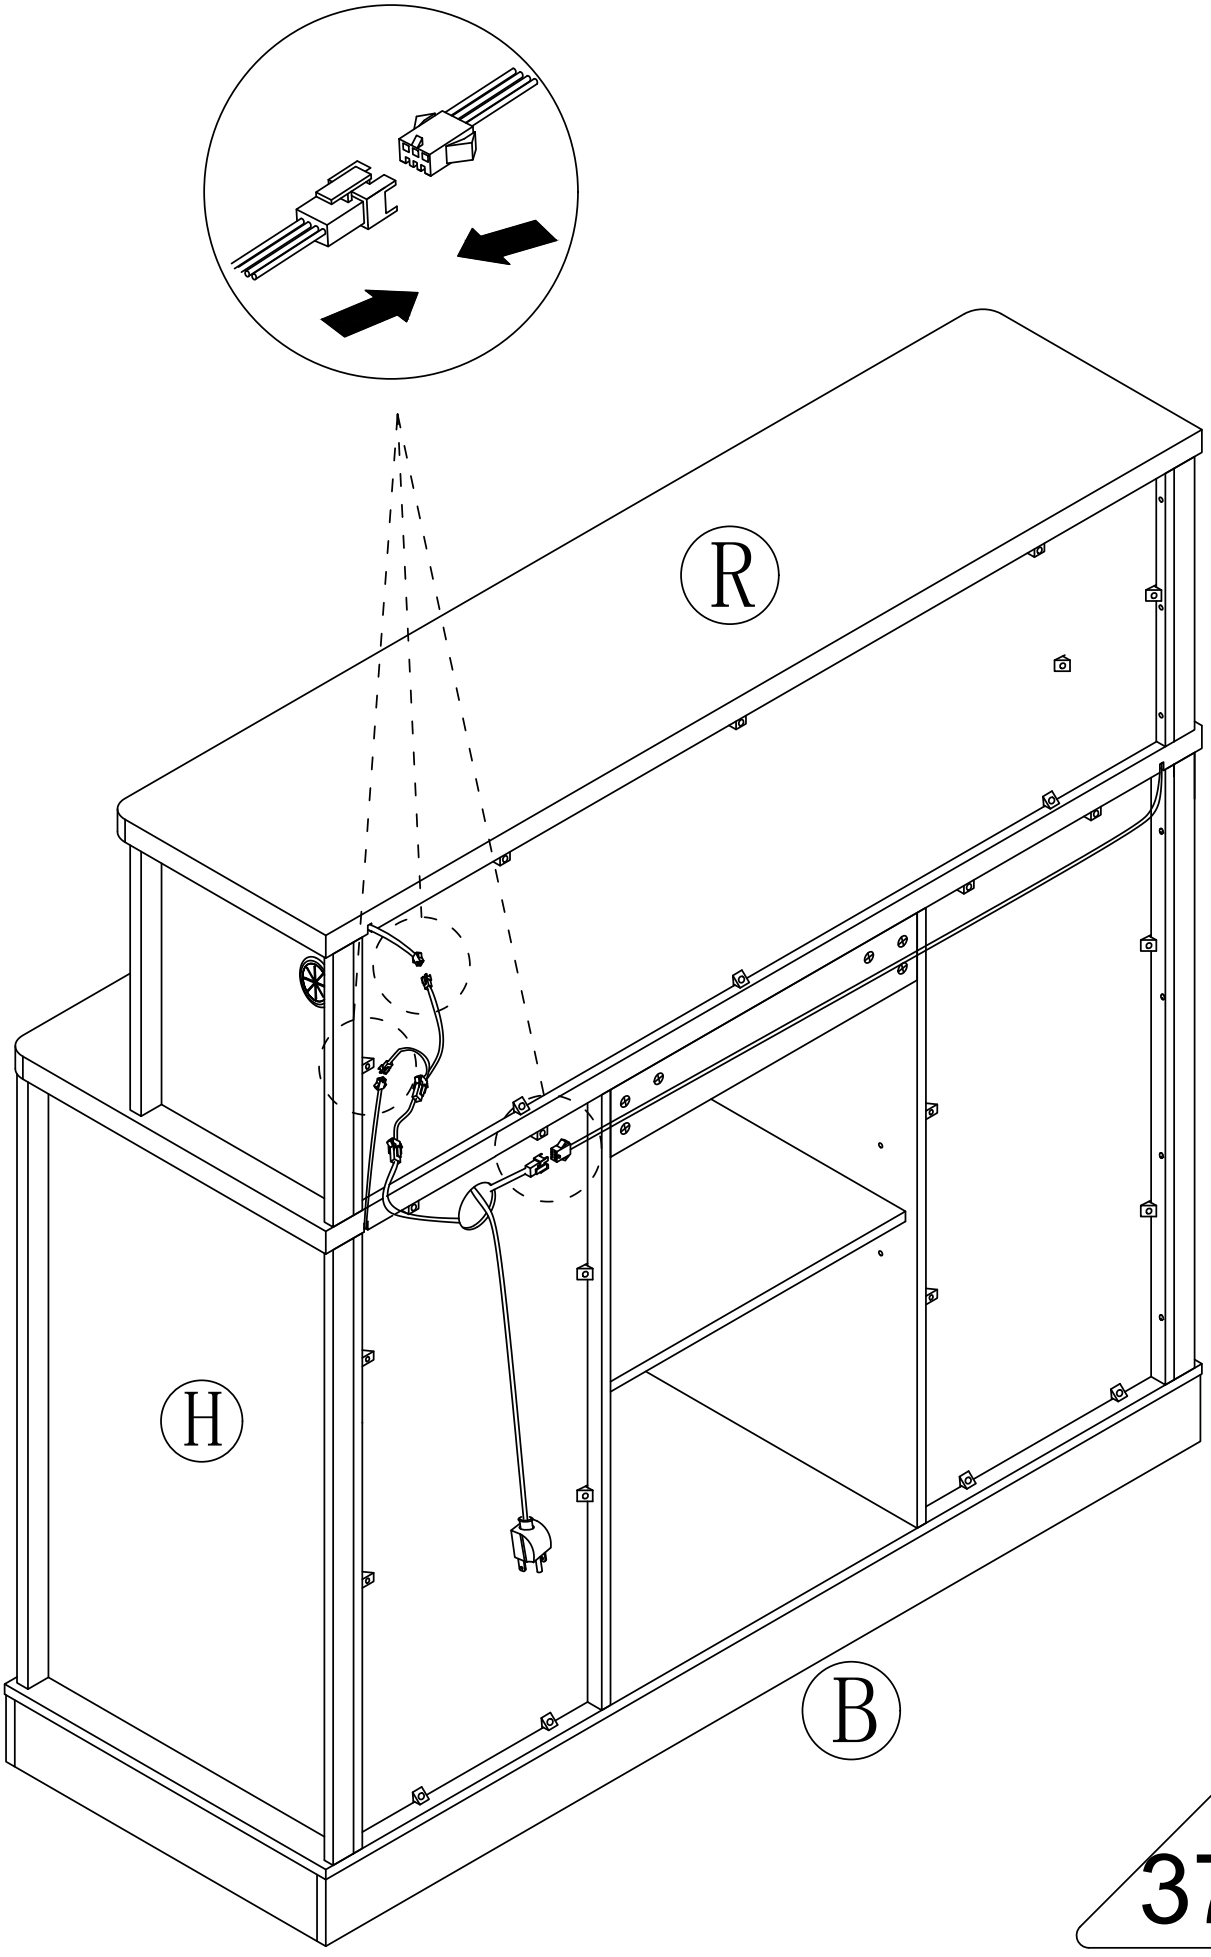



Step 48

⑬ x3

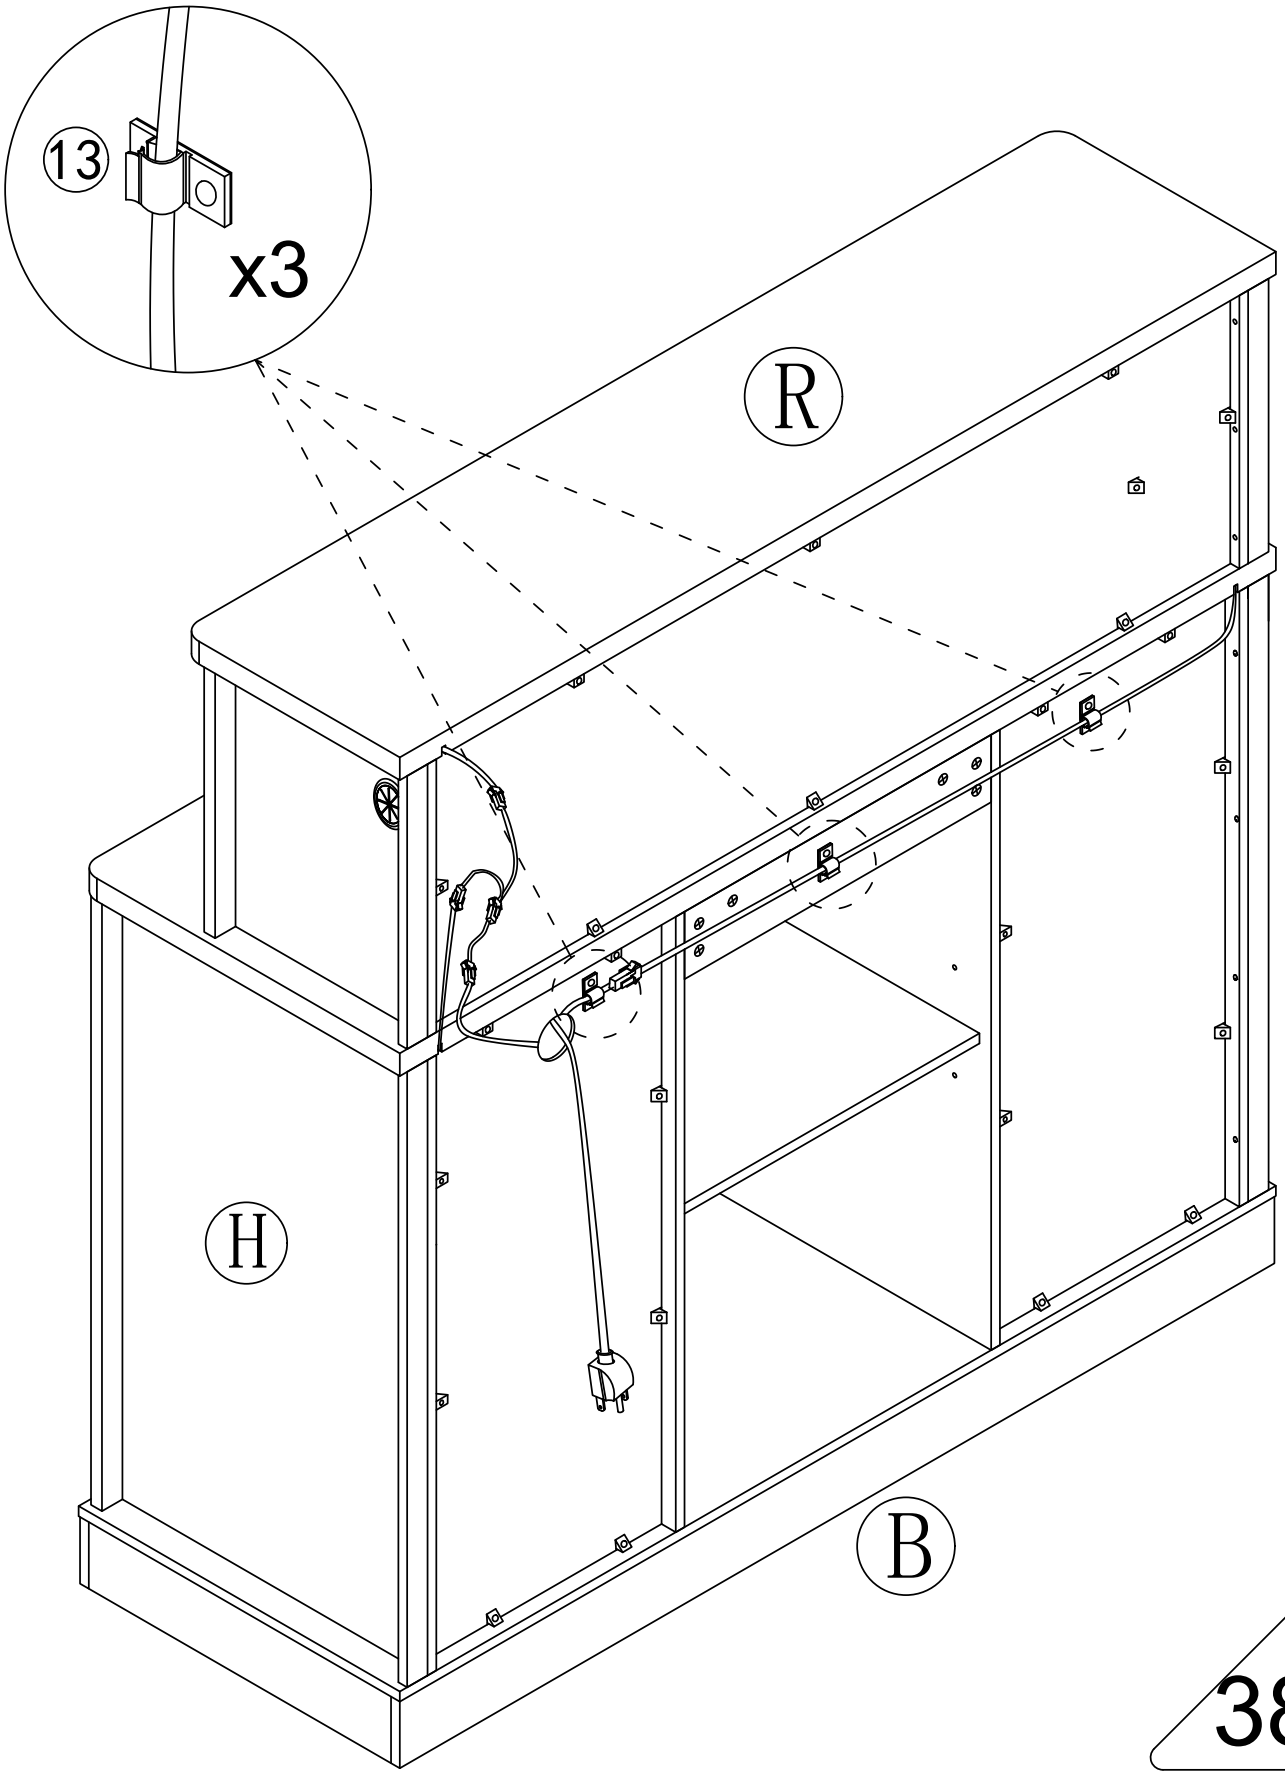


Step 49




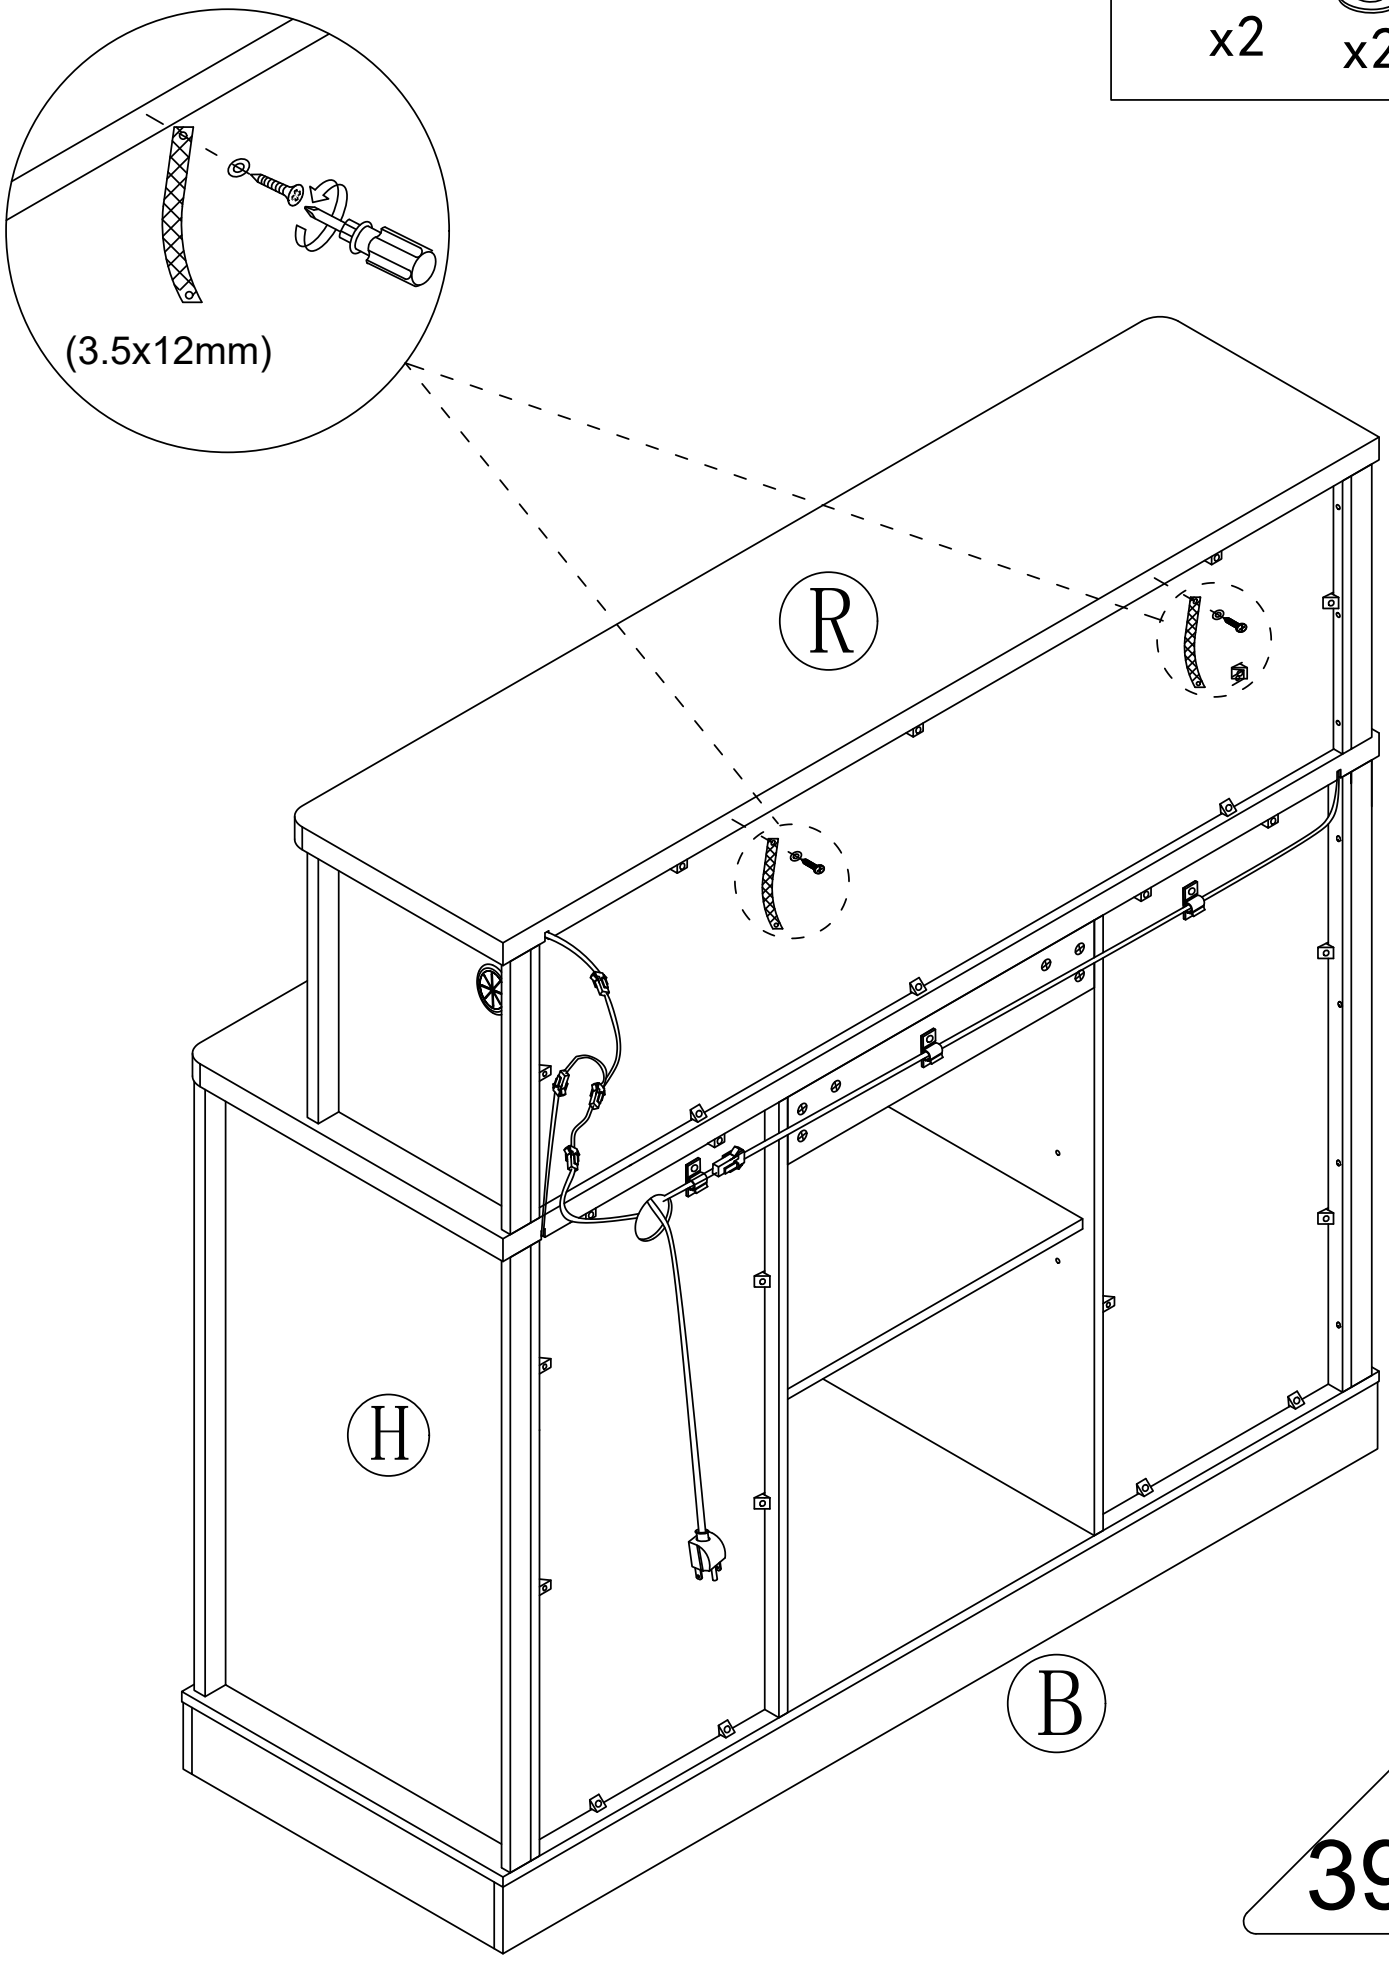

Step 50

use a ruler to measure theapproximate height of the producton the wall, and then mark it witha pencil.

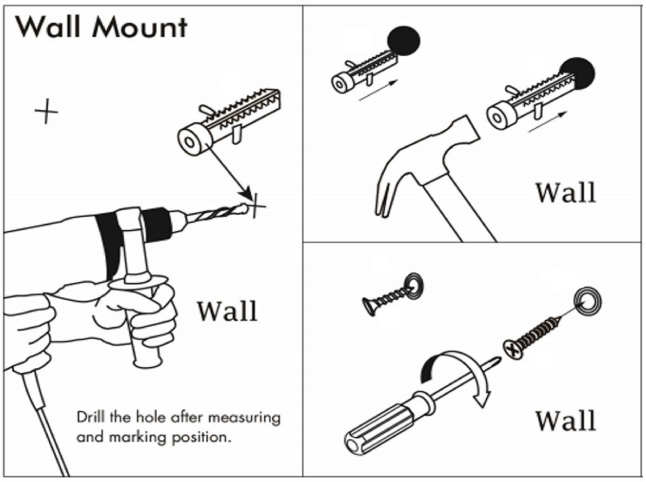


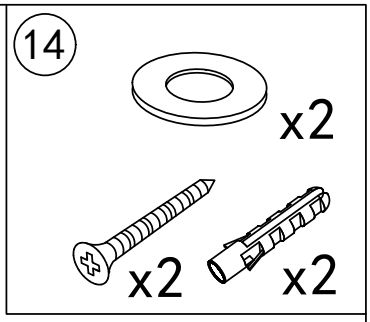


Put the expansion bolt into the hole.

Pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.


Use a tape drill to make holesin the wall that are suitable for theproduct screws.

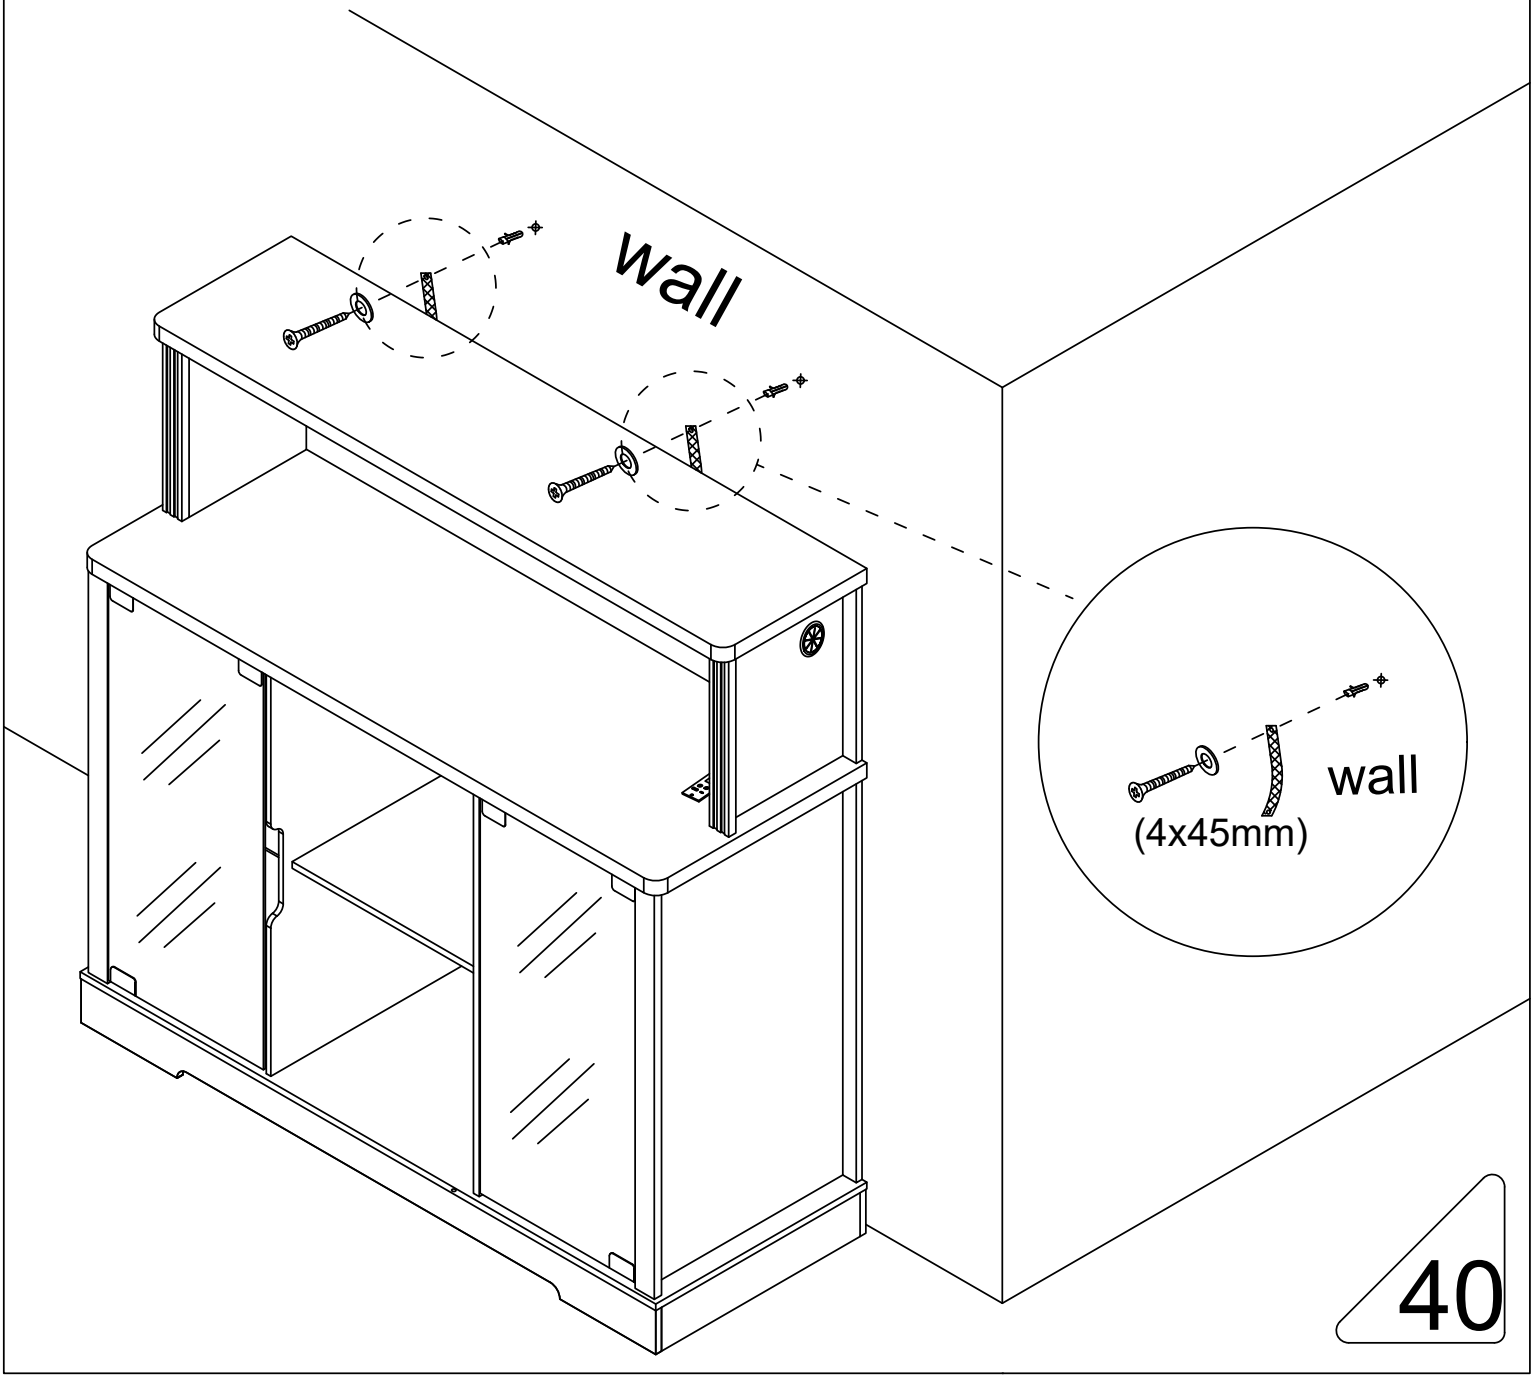

Step 51

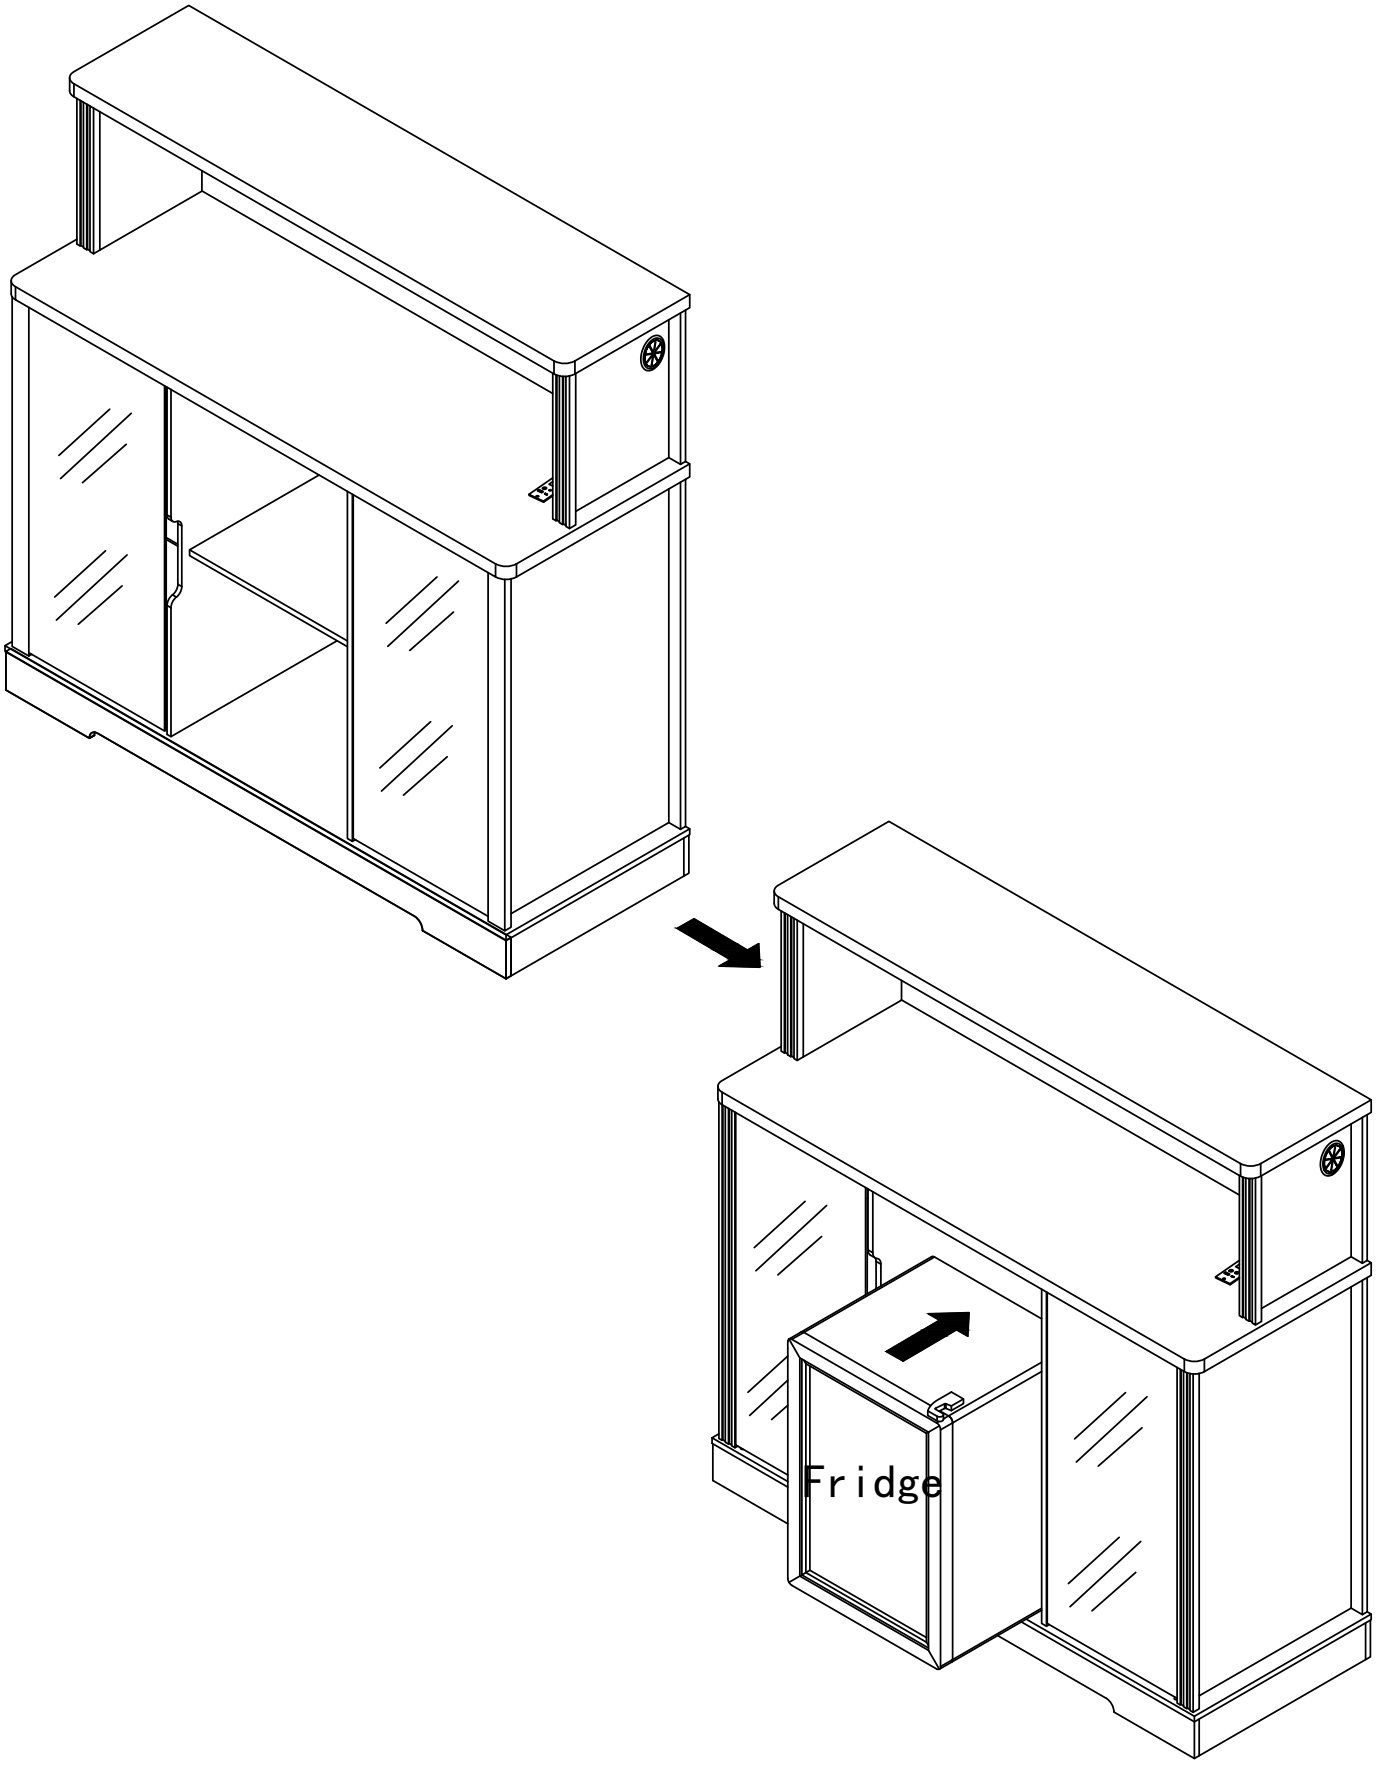


NOTE:You can remove the activity shelf and place the refrigerator at this position.

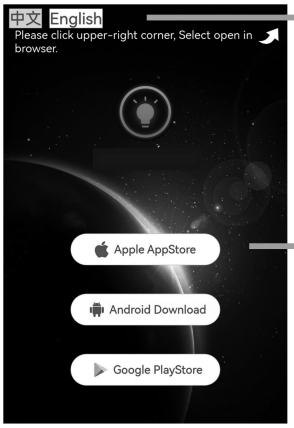


Select English Language

Select the corresponding device to download.
Note: If the download fails,
please turn off the "Enhanced Protection"
in the Pure Mode settings of the device.

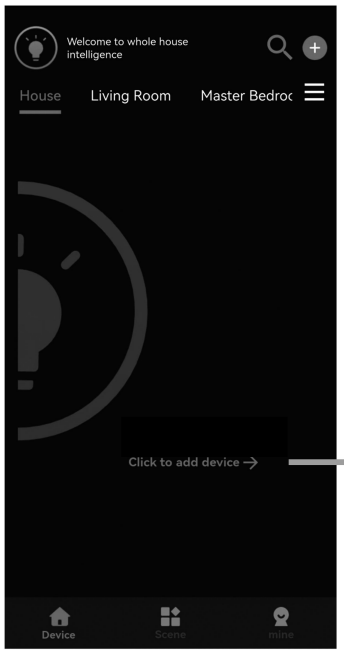


①

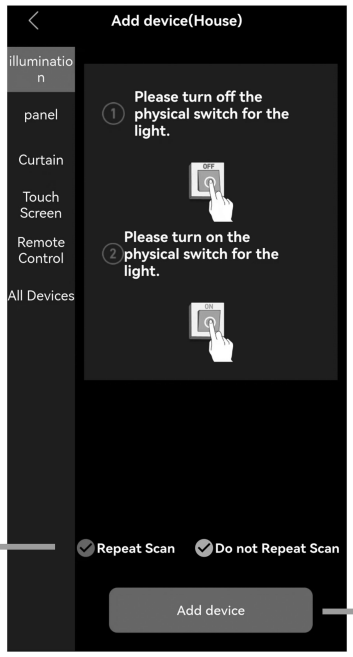

②

It turns blue after clicking


③

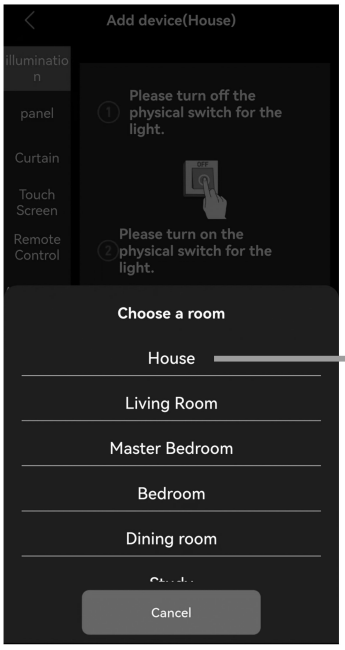

④





⑤ Unplug the smart box

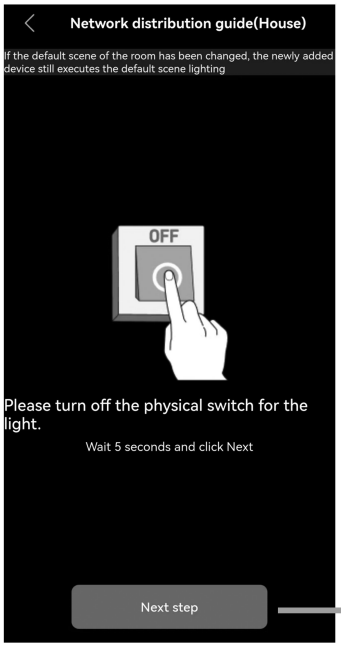

⑥


⑦Plug in the smart box power plug.

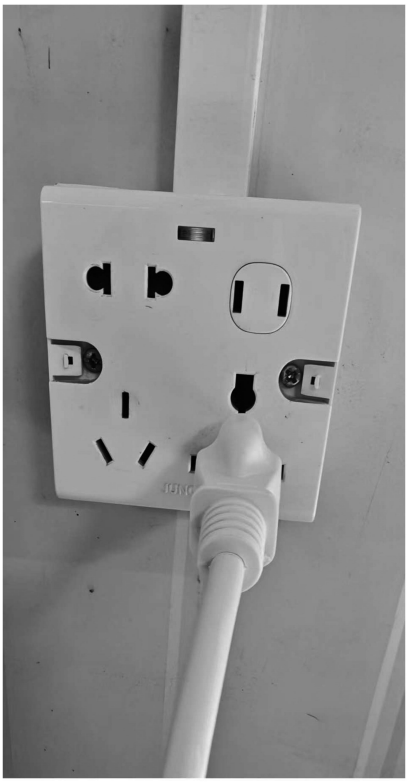

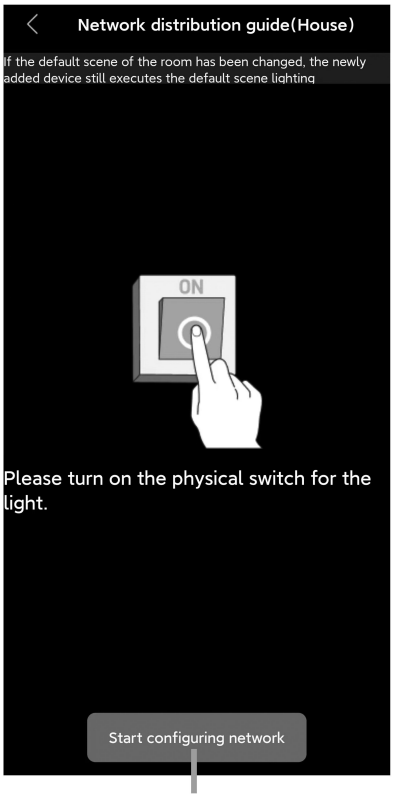


⑧


The appearance of this program icon indicates that the matching is complete

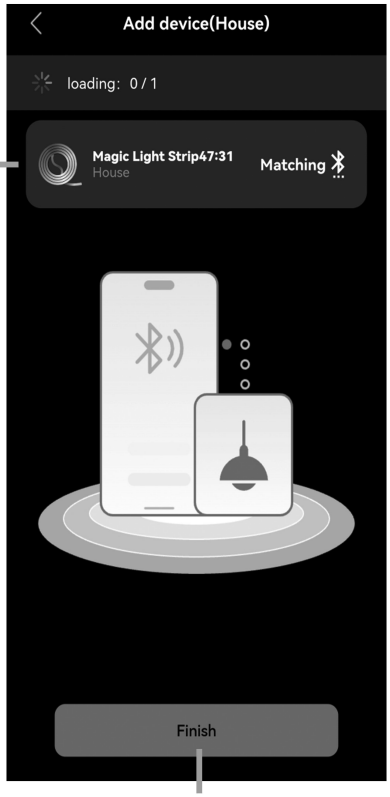

⑨

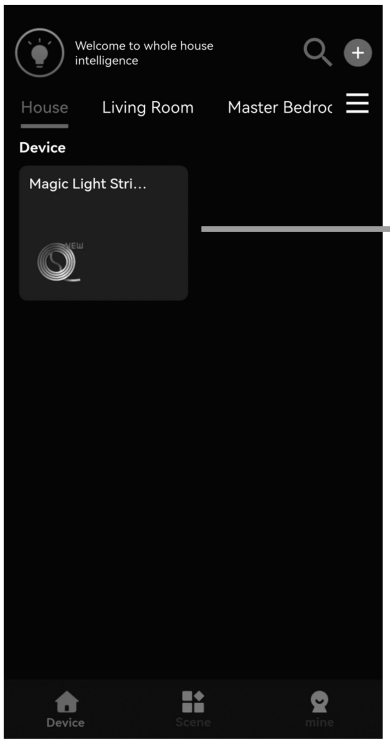

⑩

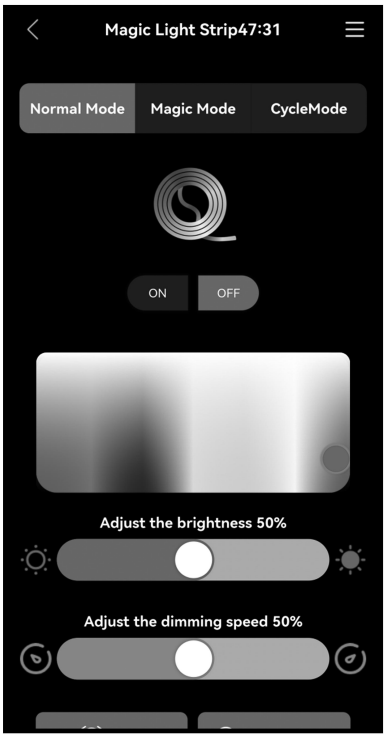

Now you can freely adjust the lighting according to your preferences



User's Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller.

It has 1 USB output port 1 Type-c port, and 2 socket outlets.

With 2 touch buttons, it can and turn ON/OFF the induction function,

turn ON/OFF the light,adjust the light luminance, and change light colors.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.

i. Single Click: Turn the light on/off.

ii. Quick Double-Click: Switch between 7 static RGB colors.

iii. Long Press (2+ seconds): Adjust the light luminance.




This touch button is used to switch dynamic phantom colors and turn ON/OFF the induction function.

i. Single Click:Switch to Phantom Mode, with 5 magical color transformations available.

ii. Human Body Sensing Control:Long Press (3+ seconds): Turn on The key press indicator light is on.)

Long Press (3+ seconds): Turn off （The key press indicator light is off.)

By default, the human body sensing is enabled upon initial power-on, and the indicator light is on.

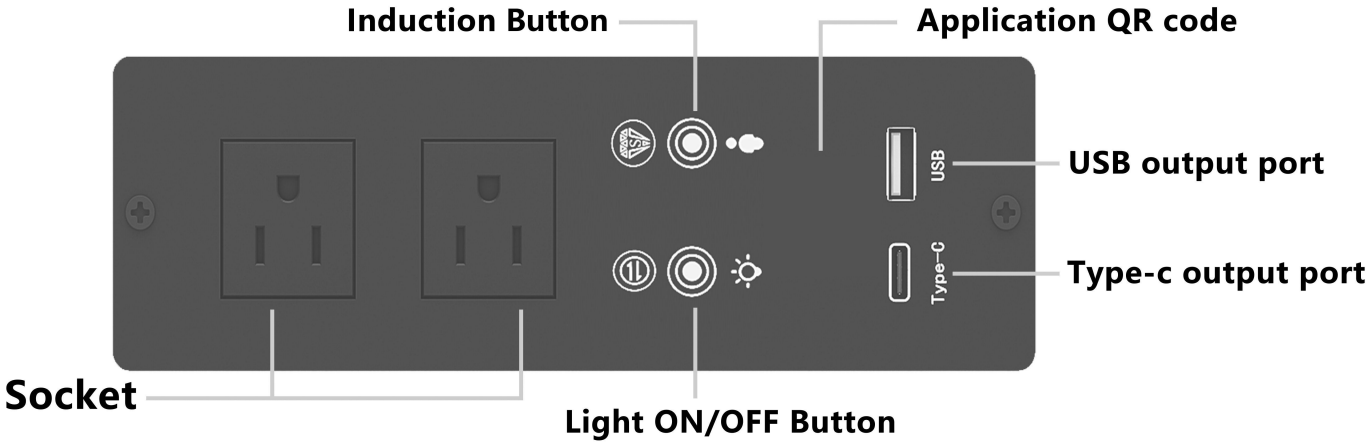

⚠ ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.

2. If you have any questions when installing, please feel free to contact us. Thank you.