



Cimarron® | K-3828-RA

One-piece elongated toilet, 1.28 gpf

Features

- Large 3-1/4" canister flush valve features a powerful jet action, providing rapid water delivery from tank to bowl
- High-efficiency system offers bulk flushing performance and best-in-class cleanliness
- Significant water savings of as much as 16,500 gallons of water annually over a 3.5 gallon toilet
- Qualifies as an HET(High-Efficiency Toilet). Consumer rebates are available in some municipalities
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System
- Right-hand Polished Chrome trip lever
- Includes Reveal® Quiet-Close™ seat
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 18:56 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit

1265114 12" Toilet Supply Line

K-23726 Drain treatment

K-9466-R Right-hand trip lever

K-5420 Low-profile toilet bolt caps

K-4108 Elongated bidet toilet seat with remote control

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Exposed
Water Surface Size:	11-3/4" x 8" (298 mm x 203 mm)
Rim to Water Surface:	6-1/8" (156 mm)




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 18:56 - US-CA

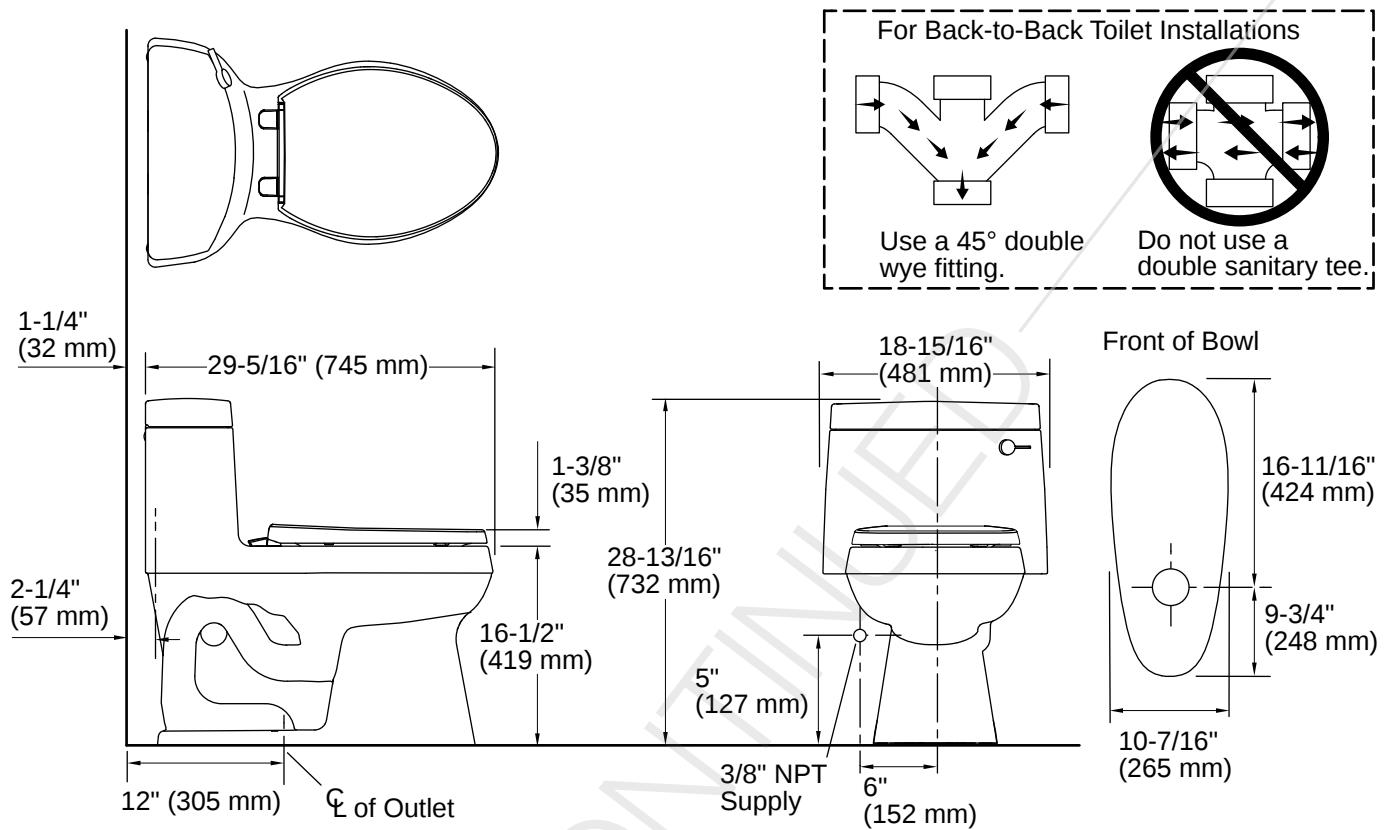

Installation

- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and

elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 18:56 - US-CA