

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** CBJKTX

**Supplier's address:** CBJKTX, Am Juliusturm 53, 13599 Berlin, DE

**Model identifier:** JCK-HB

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	led		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	55	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 130 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 888 or 3 960 or 5 940
On-mode power ( $P_{on}$ ), expressed in W	55,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	74
Outer dimensions without separate control gear, lighting control	Height	350	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	350	
	Depth	90	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,370 0,360
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	-10	Survival factor	1,00
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

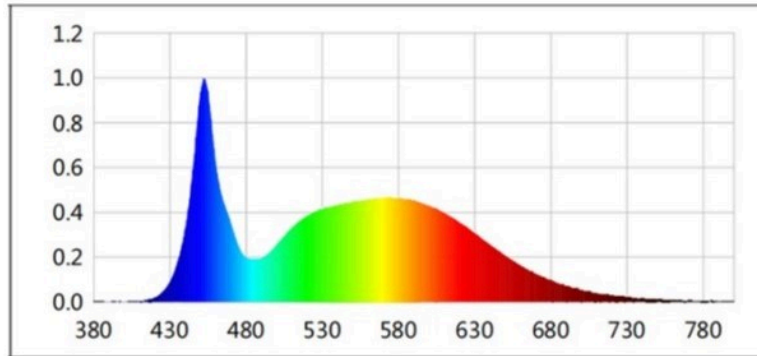

Model placed on the Union market from 24/04/2024



**EPREL registration number:** 2008334

<https://eprel.ec.europa.eu/qr/2008334>

**Supplier:** ZMH Lichtstein GmbH (Manufacturer)

**Website:**

**Customer care service:**

**Name:** CBJKTX

**Website:**

**Email:** [zmh-lichtstein@hotmail.com](mailto:zmh-lichtstein@hotmail.com)

**Phone:** 004915776852543

**Address:**

Am Juliusturm 53  
13599 Berlin  
Germany