












# PARTS & ASSEMBLY SHEET

This fixture assembled PO:\_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name:_____ Co. Account #:_____	
		to be filled out by retailer	
Canopy 1ea D5"xH1"		Wire Connectors 3ea P4 Orange	
Chain 1ea 6ft x3.8mm		Junction Box Screw 2ea 8/32" x 1"	
Chain Connector 2ea @4.2X50mm		Canopy Loop with Collar 1ea @3/8 x 40mm x 5mm	
Mounting Strap w/ ground screw 1ea 3/4"x4"		Hex Nut 2ea @3/8 x 3mm	
Top Loop 1ea W60 x 70mm		Spring Washer 1ea @15 x 2mm	
Nipple 1ea @3/8 x 40mm			
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	( missing, scratched, broken glass, bent, bad finish)		
Comments _____			

## FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet before assembling the fixture.

1. Use Deco Nuts (S) to attach Circular End Cap (T) to Metal Frame (N).

2. Carefully slide Glass Panels (U) into Metal Frame (N). Then, lower the other Circular End Cap (T) over the Metal Frame.

**Note: Glass edges may be sharp. Wear gloves for protection during installation to avoid injury. If the glass can not be successfully placed into the framework, please relax and adjust the iron bar slightly. It is suggested that this be completed by two people.**

Fig. 1

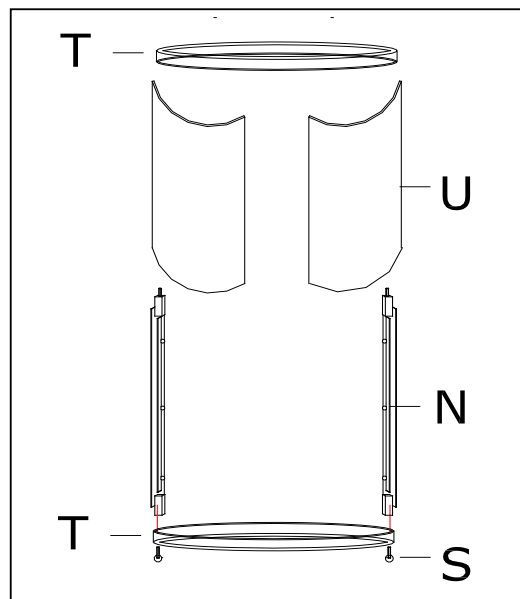

For Customer Service, contact the place of purchase to arrange for replacement parts.

# PARTS & ASSEMBLY SHEET

### ASSEMBLING THE FIXTURE (Fig. 2)

3. Thread Threaded Stem (P) into the coupling at centre of Fixture Body (O).

4. Thread the Top Loop (J) onto Stem (I) and (P). Hand-tighten until snug.

5. Lower the fixture over the glass cage, use the round Deco Nuts (M) to secure Arms (L) to the cage (N).

6. Measure to determine the correct number of links needed for the proper hanging height. Use a pair of pliers to open one link of Chain (K). Then, remove and discard the excess Chain.

7. Use one Chain Connector (L) to attach one end of the chain to Top Loop (J) and close the chain connector.

8. Feed the fixture wires through the chain (every three links) and pull the wires until taut.

9. Slip Canopy Loop Collar (H) over the chain, then do the same with Canopy (G).

10. To complete the installation, use the other chain connector and attach the other end of the chain to the Canopy Loop (F) and close the chain connector.

11. Make sure the weight of the chandelier will be supported by the chain, not the electrical wire.

\* You may now install the fixture.


Note: Complete these remaining steps after the fixture is hung.

12. Install the light bulbs (not provided) in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

13. Carefully press the clips inside of Shade (Q) onto the bulb.

Fig. 2

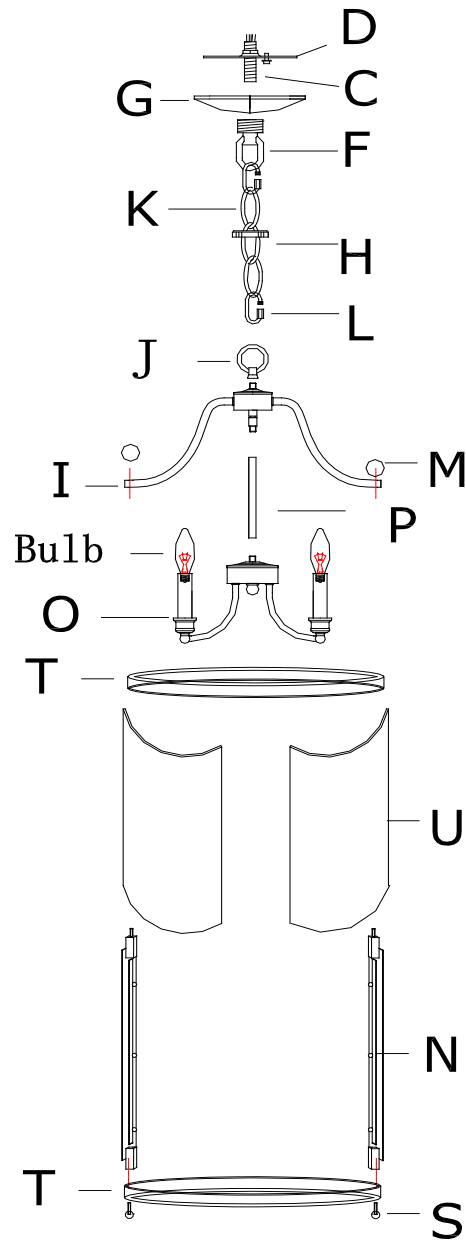

# INSTALLATION INSTRUCTIONS

### For Chandelier Light Fixture

**WARNING! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.**

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and Parts List.
2. Shut off the power at the circuit breaker and remove the old fixture from the ceiling, including the old mounting strap.
3. Thread Nipple (C) into Canopy Loop (F) until snug.
4. Thread the other end of Nipple (C) with the canopy loop attached into Mounting Strap (D).
5. Place Lock Washer (B) over end of Nipple (C) which should protrude through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
6. Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten the screws securely with a screw driver.
7. Unscrew Canopy Loop Collar (H ) from the canopy loop. Take the canopy and pass over the canopy loop. Approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*The canopy loop collar should fit snugly on the canopy loop after the canopy is installed. Remove canopy and canopy lock collar.
8. Assemble the fixture and have an assistant or a secure support to hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

## CONNECTING THE WIRES (Fig 2)

10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
11. Ground wire connection: Connect the fixture ground wire to house ground wire, which usually has green or copper insulation, with the correct size of wire connector. If there is no house ground wire at ceiling junction box then attach fixture ground wire securely onto green grounding screw located on the mounting bar.

**NOTE:** Twist the wires together in the same direction that you twisted the wire connector onto the wires.

12. Tuck the wire connections into the Junction Box.
13. Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy Loop Collar (H) into the Canopy Loop (F)
14. Install the light bulbs and glass shade as per the fixture assembly sheet.

Fig. 1


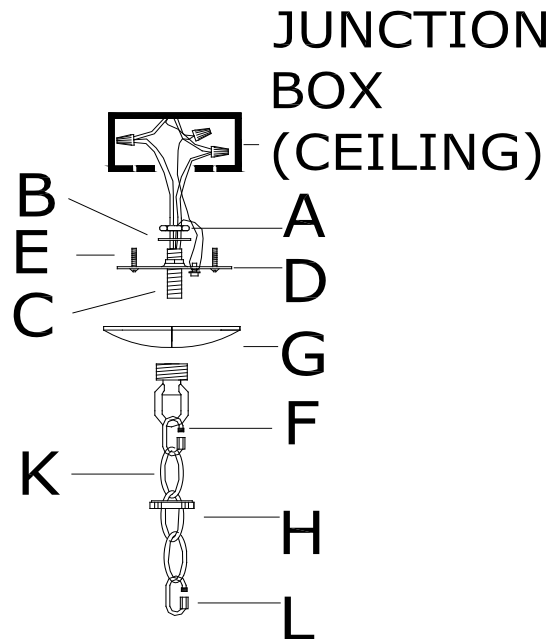


Fig. 2

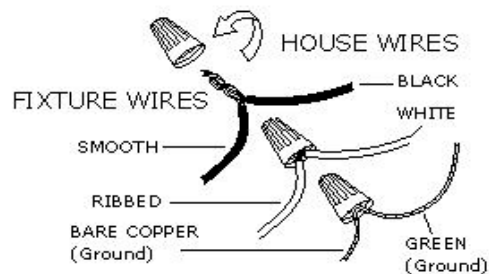

**YOUR INSTALLATION IS NOW COMPLETE. RETURN  
POWER TO THE JUNCTION BOX AND TEST THE  
FIXTURE.**

For Customer Service, contact the place of purchase to arrange for replacement parts.