


Assembly & Installation Instructions

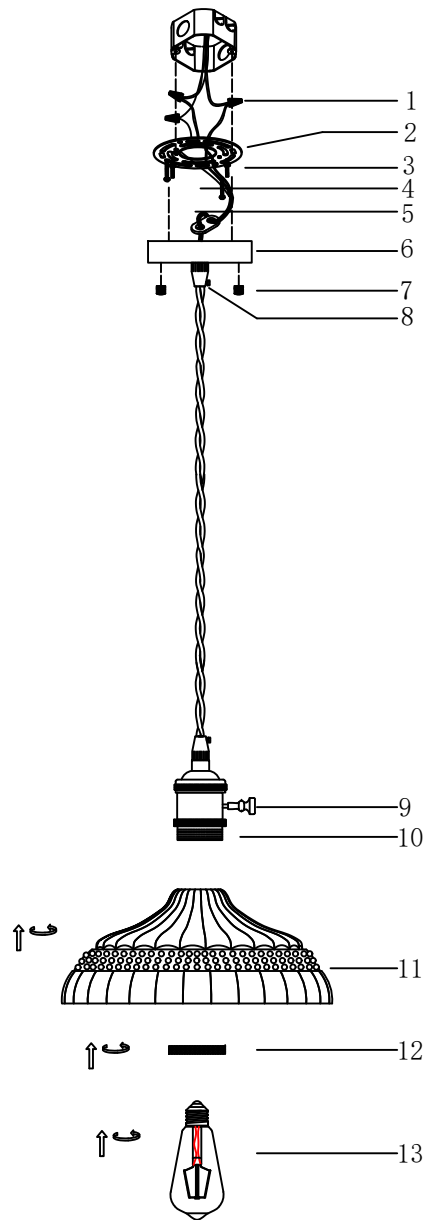

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- A. Turn off the power switch.
- B. Loosen the plastic screw (8), adjust the wire to the desired height with the wire clasp and then tighten it.
- C. Secure the mounting bracket (2) to a U.S.-standard junction box with screws (3).
- D. Connect the wires (4) using wire connectors (1) as follows:
Connect the BLACK wire of the main wire to the LIVE wire.
Connect the WHITE wire to the NEUTRAL wire.
Fix the fixture ground wire with green screws, then using wire connectors (1) to secure it and external ground wire.
- E. Secure the ceiling plate (6) to the mounting bracket (2) with nuts (7).
- F. Fix the lampshade (11) over the light socket (10) using the light socket ring (12).
- G. Install the bulb (NOT included) (13) onto the light socket (10) as indicated.
- H. Turn on the power switch and control it with the knob switch (9) on the side of the light socket.