

## WARRANTY

We strive to offer high-quality products, and we also try our best to satisfy each and every customer that orders from us with product or service as needed. We provide 30 days warranty starting from the time you receive the item. Each customer must provide a record of their order such as the order number, or item receipt for any items that are out of the warranty period you may also still receive replacement parts by purchasing them with our company if they are available.



---

### NOTE:

This brochure contains IMPORTANT safety info. Please read and keep for future reference.

---

# MAINTAINANCE AND WARNING

- Keep furniture away from heat.
- Do not clean furniture with harsh cleansers or polish. Do not use detergents, Solvents, abrasives, spray packs or leather cleaner. Use non-color mild soap with warm water clean spills(Mix 1:10 soap to water)
- Do not place furniture under direct sunlight, material will possibly fade over time.
- Do not use on site dry Cleaning machine.
- Children should not climb or jump on the furniture.
- Do not write on furniture without a padded barrier to protect the surface.
- Not for commercial use, For residential use only.



Weight Limitation

**250LBS**


# PARTS LIST

1



1PC

2

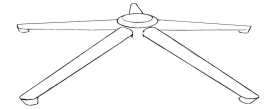

1PC

3



1 PC

4



5 PCS

5




1PC




Estimated Duration Of Assembly

**5-10 MINUTES**

# HARDWARE LIST



4 PCS




1 PC



1 PC

# SPARE


D EXTRA PARTS




1PC

Be sure to check all packing material carefully for small parts, which may have come loose inside the carton during shipment.


# ASSEMBLY INSTRUCTIONS

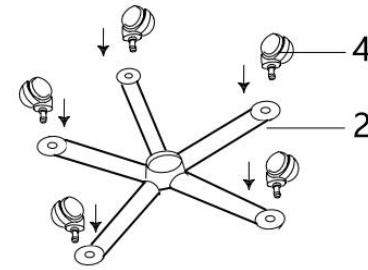


STEP 1: Insert casters 4 to bottom of the spider base 2.

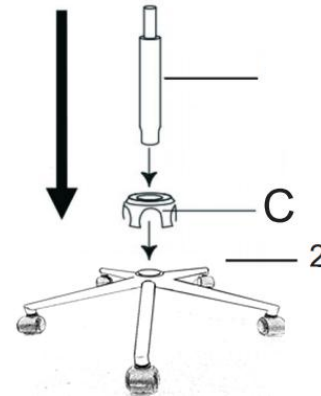

STEP 2: Insert the gas lift 3 and cover C to the center hole of the spider base 2.

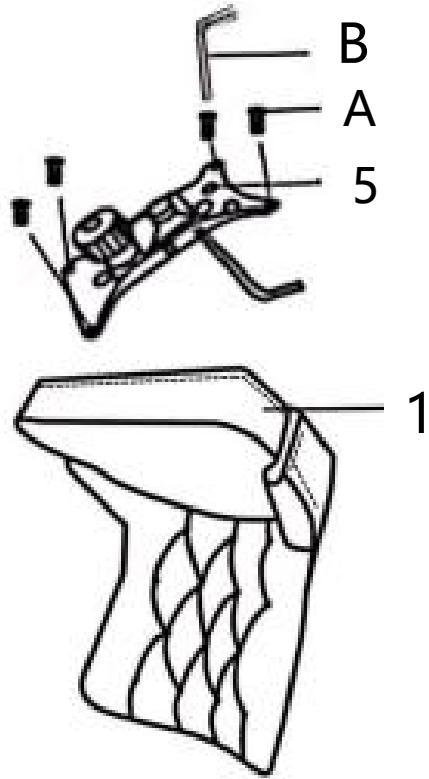

STEP 3: Use bolt A and allen key B to attach mechanism 5 to bottom of the seat 1, make sure the holes align and the arrow in front direction, then fasten bolts to secure.

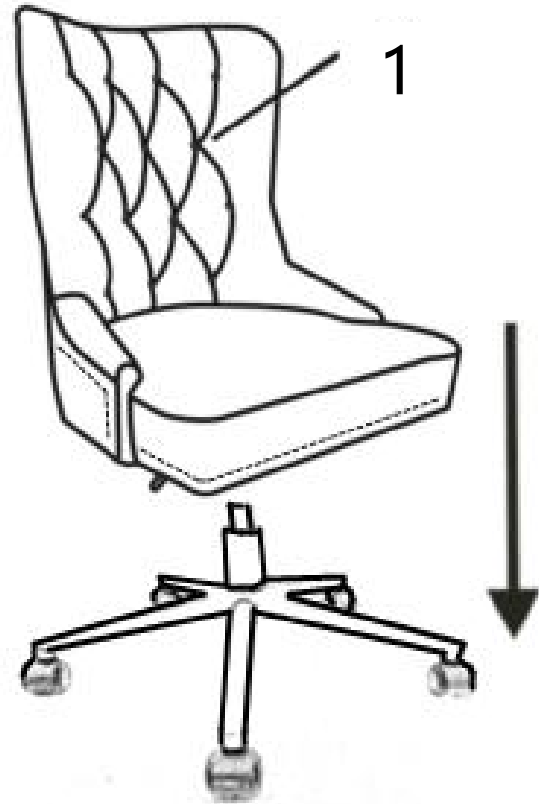

STEP 4: Attach the whole seat to base assembly, make sure top of gas lift align with center hole of mechanism 1 under seat.