

SPECIFICATIONS


Fittings Name	Pictures	Quantity/Set	Material + Finish	Note
Sliding roller		2	Aluminium alloy +Satin	2 pcs roller for simple sliding door.
Track/Rail		1	Aluminium alloy +Satin	1 pc and 2 meter length.It is used for doors not bigger than 1 meter.If you need other size,please contact us.
Door stop		2	POM	2 pcs.It is used for the top of rail and prevent rollers out of control.
Clamp		2	Aluminium alloy +Satin	2pcs for 8-10mm glass.After completed installation,the distance between door and wall is about 2 cm.
Floor guider		1	POM	1 pc.It is used for the bottom of doors.

All illustrations are similar to the original

Pocket Door & Track Installation


Tools Needed

You will need a Pencil, Phillips head screwdriver, 4mm Allen key, Tape measure, Drill, Assorted Drill bits (5/16" & 3/8"), 13mm Wrench, 14mm Wrench, Squaring tool, 4ft Level, Rubber mallet and Safety glasses. A large sturdy workbench or saw horses. Due to the weight of the glass door, 2 people are recommended for any lifting.

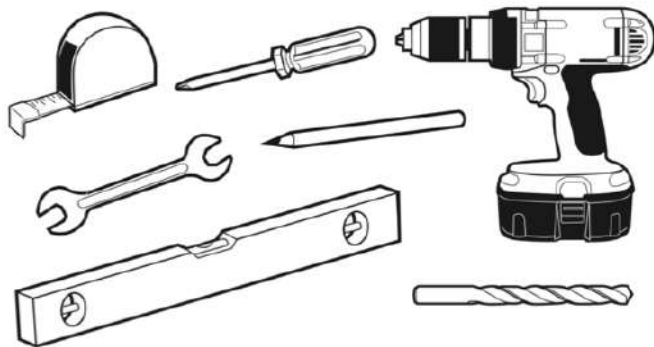

Parts List


Make sure ALL parts are included before beginning

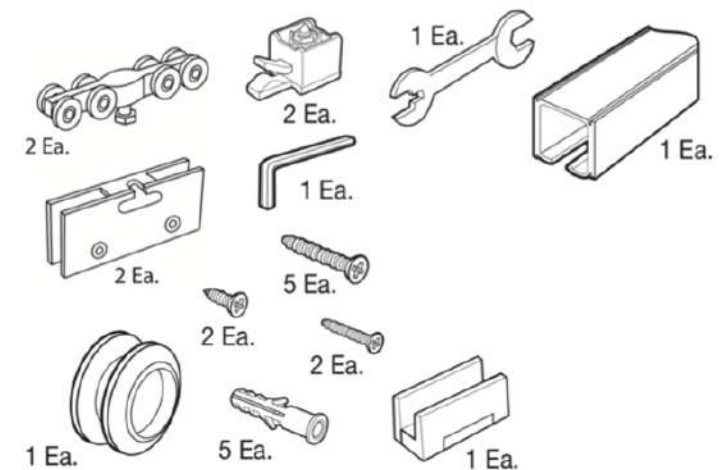

All illustrations are similar to the original


1. Measure for Track Height

In order to determine the proper Height for your Pocket Door Track, add 2-3/8" to the height of the door being installed.

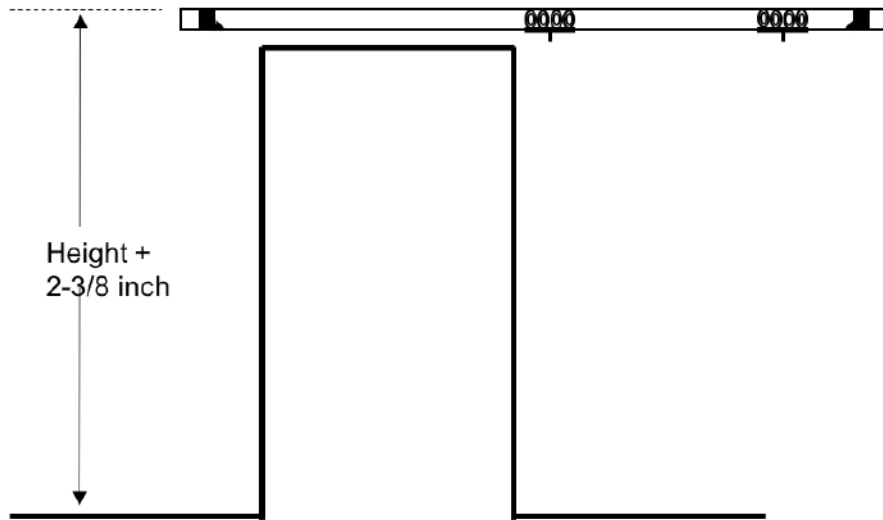

2. Determine Track Location

Measure approx. 2" over from the doorjamb and mark it. This will be the location of the reel.

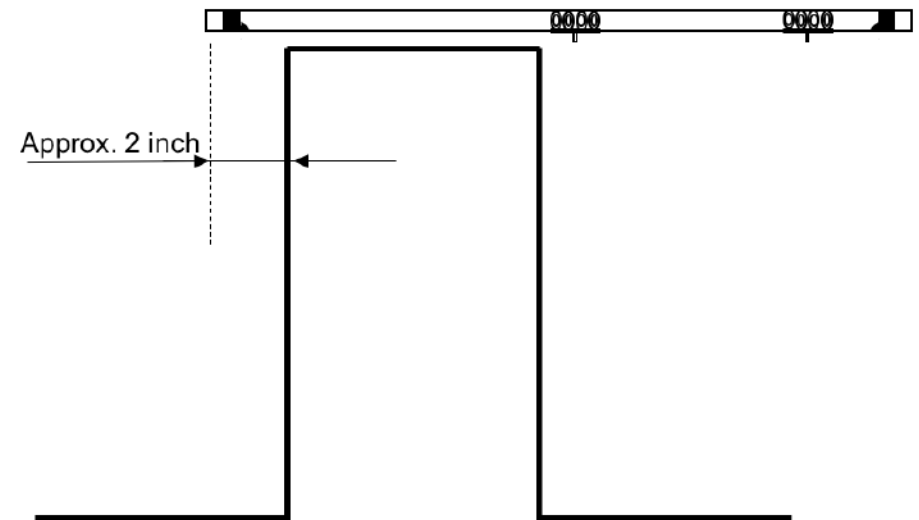


All illustrations are similar to the original

3. Slide the rollers into the track

Place the rail in a horizontal position and insert the two rollers into the track.


Then Insert the 2 doorstoppers into the track, slide both in into the correct position, using a Phillips head screwdriver and tighten the screws in the doorstoppers.

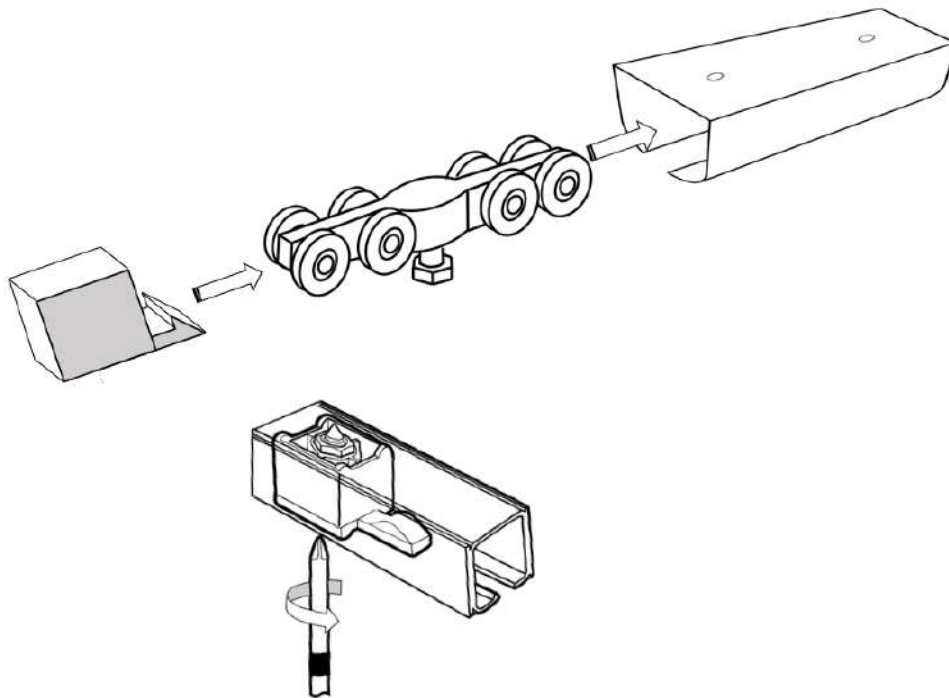

4. Insert Mounting Anchors and Install the rail

! Make sure te lintel is level !


Place the track at the marked position align the rail while marking the remaining holes in the rail. Insert the remaining anchors and secure the rail to the lintel using the screws provided.

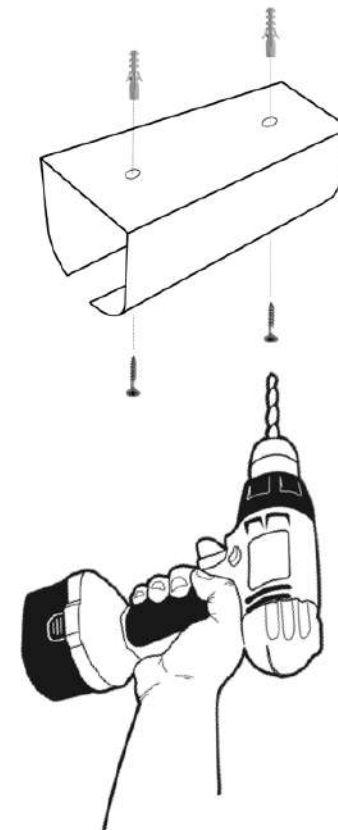



All illustrations are similar to the original

5. Install the Mounting Brackets

Place the door on sturdy work surface
Take one of the mounting brackets, remove
the screws and separate the bracket.

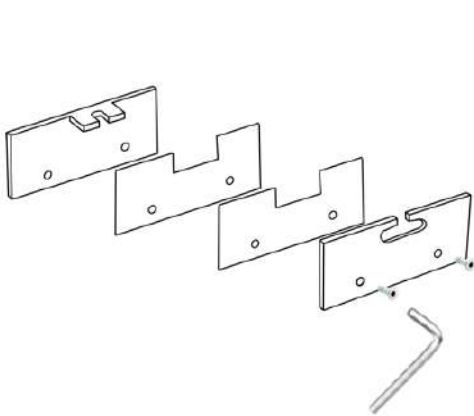


Each side of the bracket should have a rubber plate with 2 holes
in it. Place the threaded side on the bottom of the glass into the
holes provided. then place the top of the bracket with the two
holes above it (always a rubber plate between the glass
and the clamp!) and screw the two clamps together with the two
provided screws

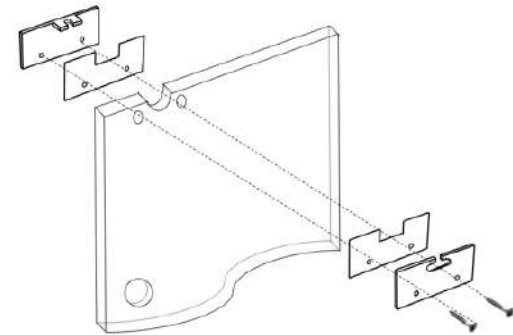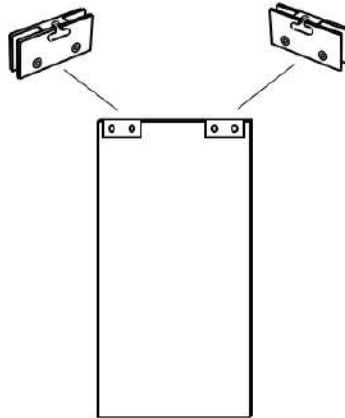

All illustrations are similar to the original


6. Install Handle

Unscrew the doorknob into two pieces and place the thicker piece on the under side of the handle hole. Place the thin piece on the topside of the hole.

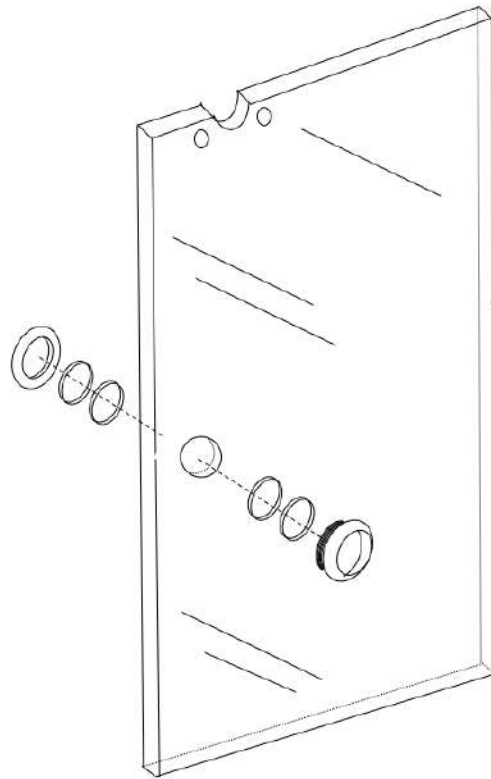

Unscrew the handle into its components, place the handleside with the screws on the underside of the handleholes and the handleside without screws on the topside of the handleholes and tighten the grub screws.

**Always place rubberrings
Between the glass and the
Handle!**

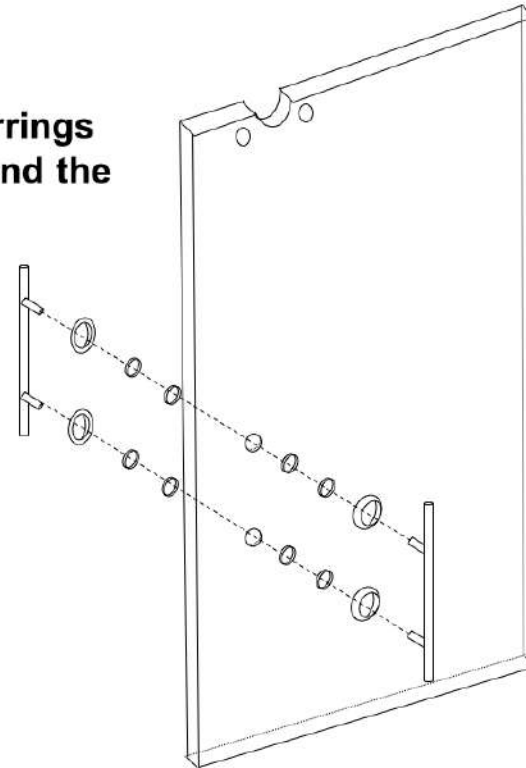


All illustrations are similar to the original


7. hanging the door

7. Place door into the track

Using two people, lift the door and push the screws of the roller into the perforation of the clamps as shown in the picture

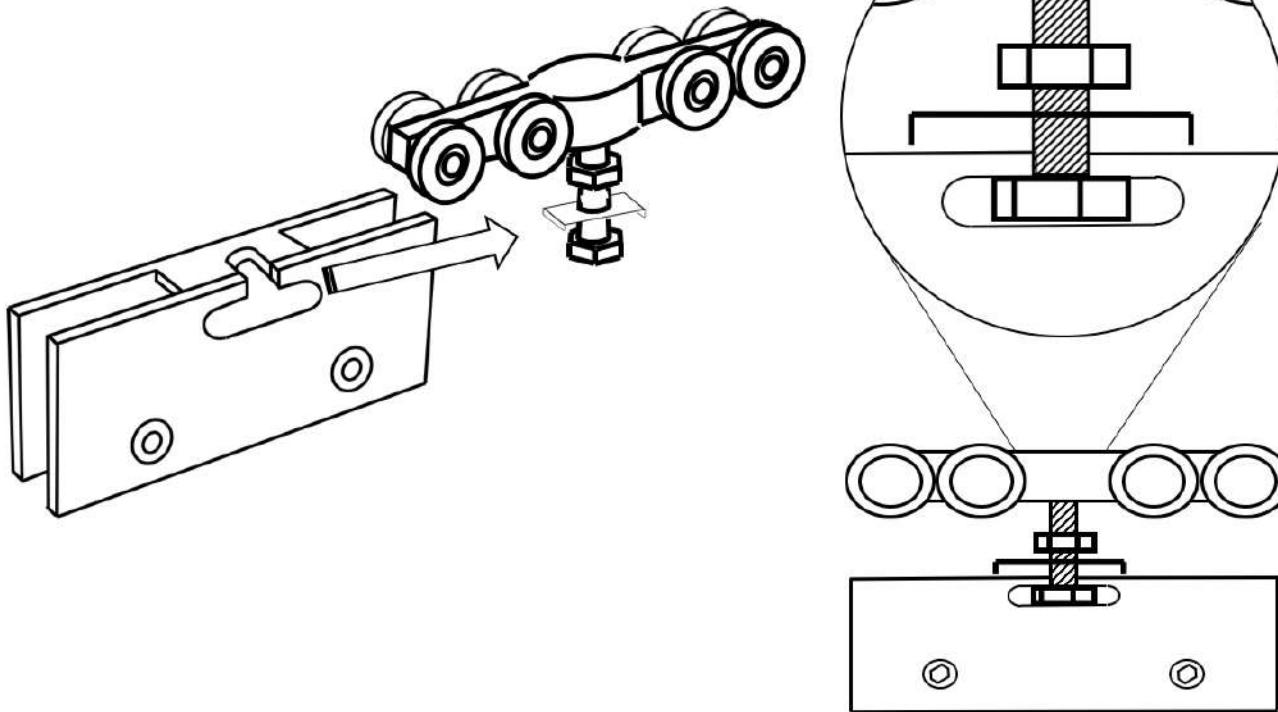

Finally, tighten the nut with the 13mm open-end wrench

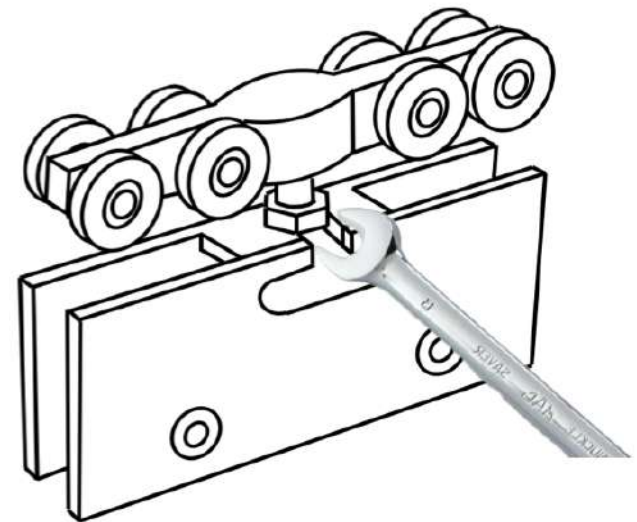


All illustrations are similar to the original

8. Secure the Floor Guide


8. Secure Bottom Floor Guide

The bottom Floor Guide prevents the door from swinging in the wall pocket. To locate the proper position in the floor, slide the door into the closed position and mark the outside edge of the door on the floor. Make sure floor guide location is well marked. Use a drill and the screws provided to secure the guide on the floor. Make sure whether the door is in the open or closed position, the door NEVER leaves the floor guide.

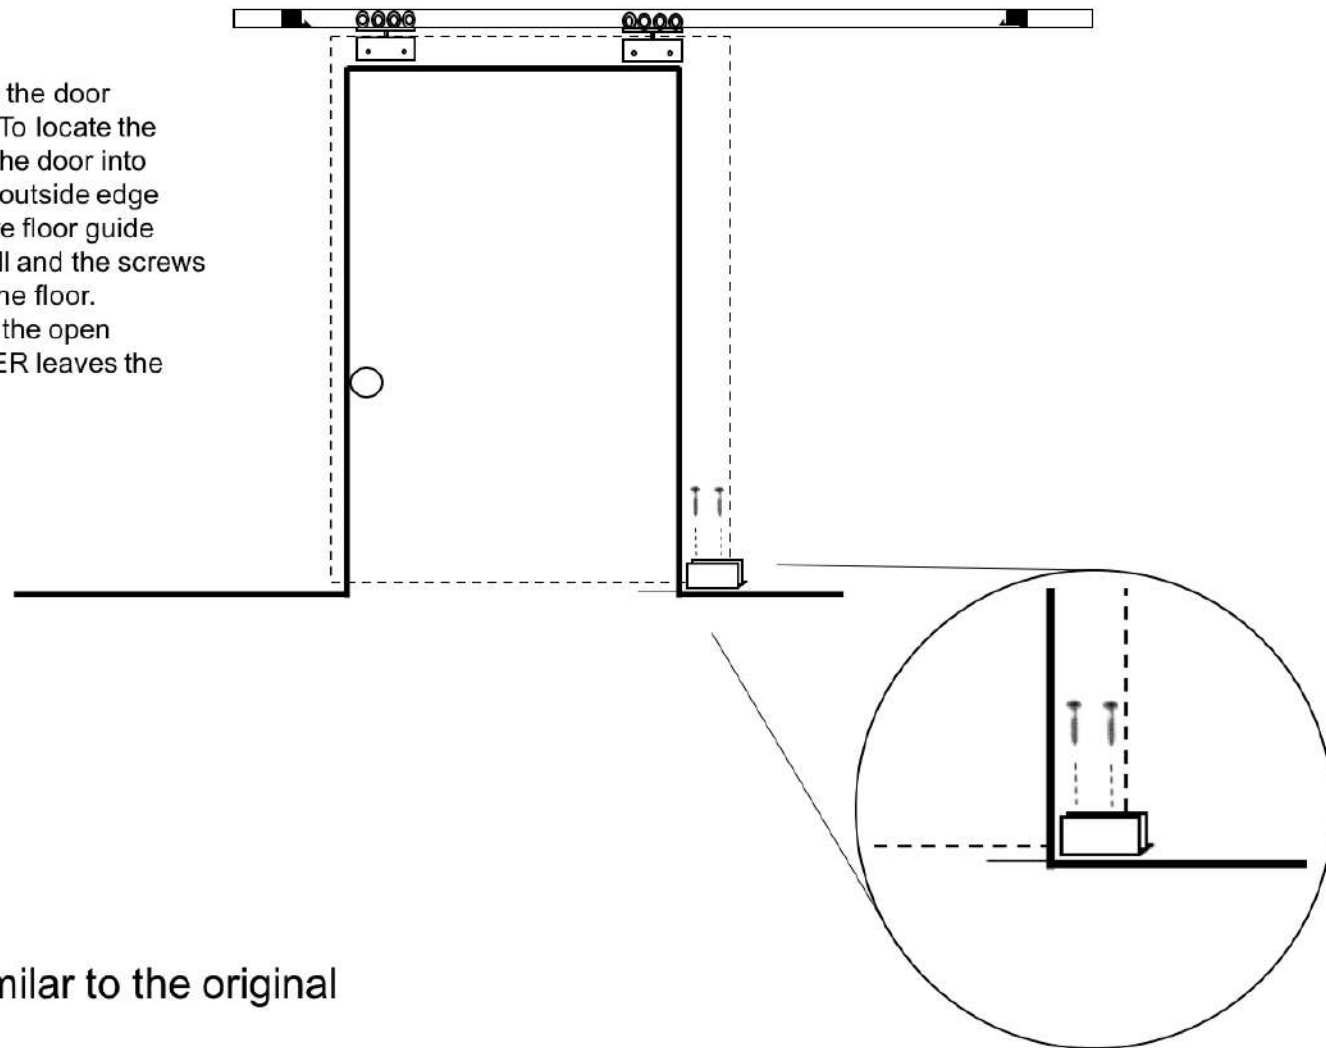

All illustrations are similar to the original

Overview

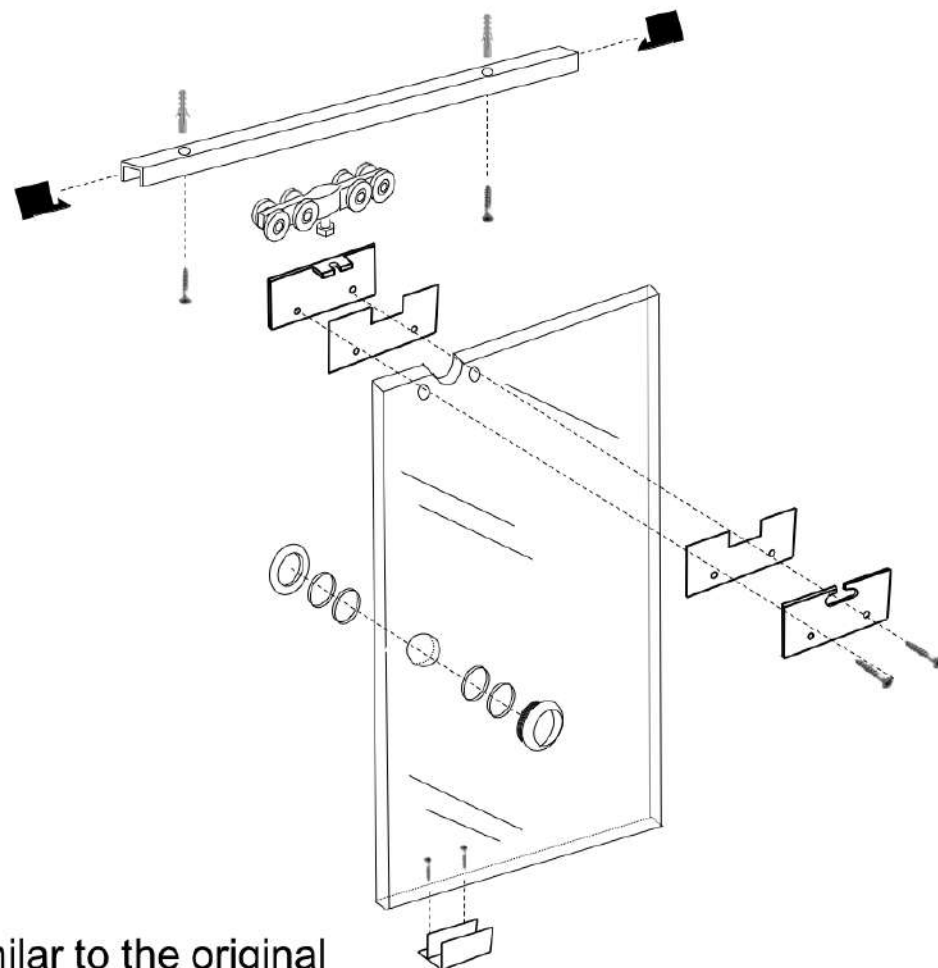

All illustrations are similar to the original