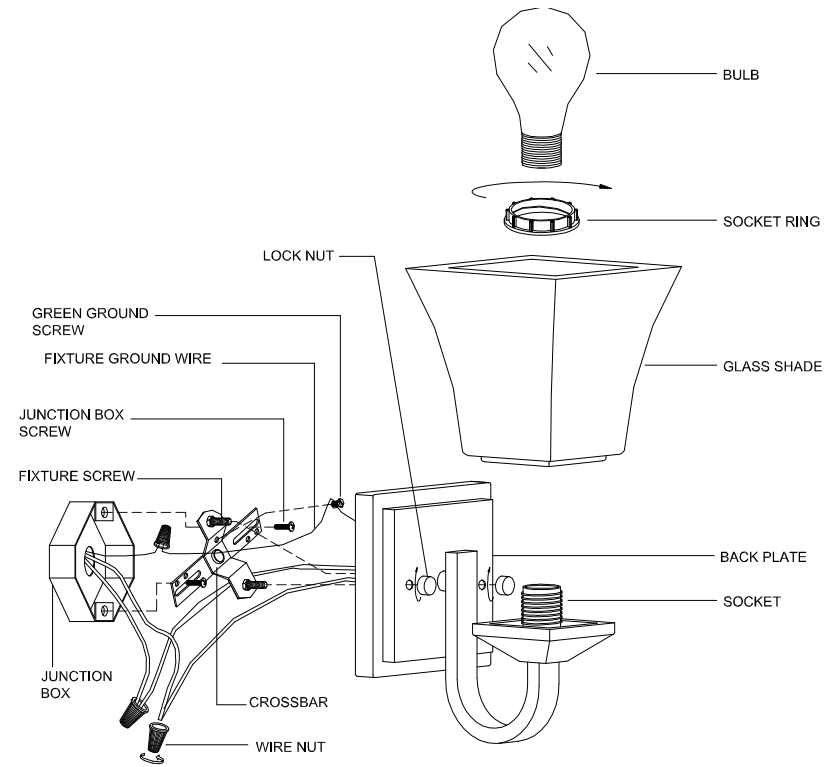


## WALL MOUNT & BATH LIGHT ASSEMBLY/INSTALLATION INSTRUCTIONS


**NOTE:** This fixture is suitable for up or down mounting.

1. Before beginning the installation, carefully unpack and identify all parts referring to Figure 1. Be sure the power to the installation point is OFF.
2. Using 2 JUNCTION BOX SCREWS, securely fasten the CROSSBAR to the JUNCTION BOX.
3. **MAKE THE CONNECTIONS:** (We recommend 2 people for the remainder of installation) Position the FIXTURE in front of the JUNCTION BOX and pass the FIXTURE SUPPLY WIRES and GROUND WIRES through the center of the NIPPLE. Using WIRE NUTS, Connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE and then secure them to the CROSSBAR with GREEN GROUND SCREW; Connect the SUPPLY WHITE WIRE(S) to the FIXTURE WHITE(or RIBBED) LEAD(S); Connect the SUPPLY BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD(S). Wrap all connections with approved electrical tape.
4. Place the BACK PLATE over the CROSSBAR and secure it with 2 LOCK NUTS.
5. Locate the GLASS SHADES and pass over the SOCKETS, Thread SOCKET COLLARS onto end of the SOCKETS. Hand tighten until snug.
6. Install the BULB(s) (Sold separately) referring to fixture markings or labels for maximum wattage. The bulb quantities depend on the style (Refer to Figure 2) you purchased.
7. Restore electrical power to installation point ON. Retain this sheet for future reference.

**FIGURE 1**



**FIGURE 2**

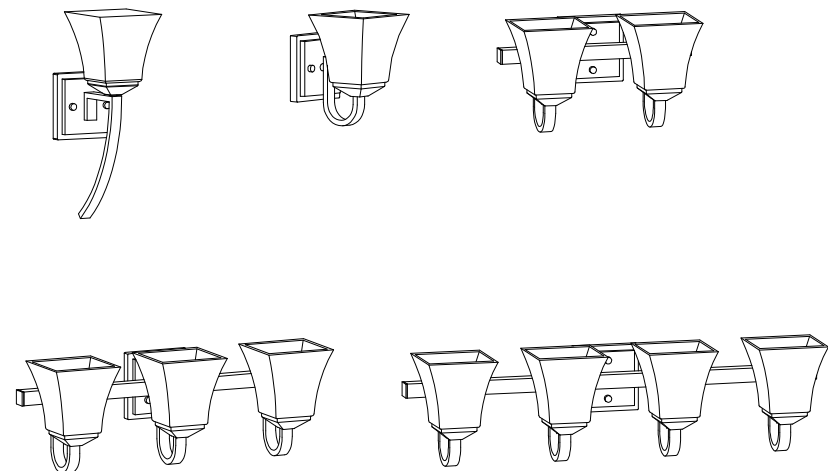

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,  
CONSULT A LICENSED ELECTRICIAN.**