

INSTALLATION MANUAL

NT2503



Try to find a partner to install with you, which can speed up the installation efficiency and shorten the time.



Before You Start



-  Please read all instructions carefully.
-  Retain instructions for future reference.
-  Separate and count all parts and hardware.
-  Read through each step carefully and follow the proper order.
-  We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
-  Always place the product on a flat, steady and stable surface.
-  Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.

Assembly Instructions

We have designed our furniture with you, the customer in mind. Our clear, easy to follow step by step instructions will guide you through the project from start to finish. Feel confident that this will be a fun and rewarding project. The final product will be a quality piece of furniture that will go together smoothly and give years of enjoyment.





Please do not return to the store
Broken or missing Hardware?
Need help with Assembly?
If you have any questions just email us at
ryhome_service@163.com

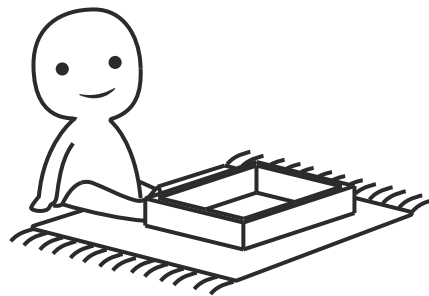

AVOID SCRATCHES!

In order to avoid scratching this furniture should be assembled on a soft layer-could be a rug.

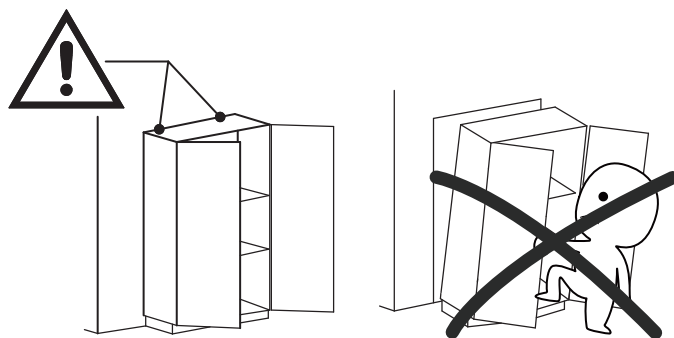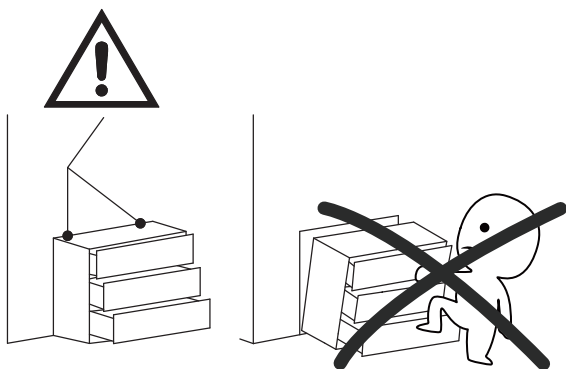

ANTI-TOPPLE WARNING !

Overturned furniture can cause serious or fatal crush injuries. To prevent tipping over, be sure to use the wall attachment, if not included with this product. Please purchase the wall attachment that fit your wall. If unsure, seek professional advice. Please read and follow each step of the instructions carefully.


IMPORTANT !

It is important that any product which is assembled using any kind of screw is re-tightened 2 weeks after assembly, and once every 3 months - in order to assure stability through-out the lifespan of the product.



For regular maintenance and cleaning of the product, for the frame, please use a rag dipped in neutral detergent to fully wipe it, and then dry it with a clean rag. For glass materials, wipe with a rag dampened with water glass cleaner, and then dry with a dry rag.


Do not use an electric screwdriver, and do not use too much force when installing, because the board is easy to break.

Completed Assembly

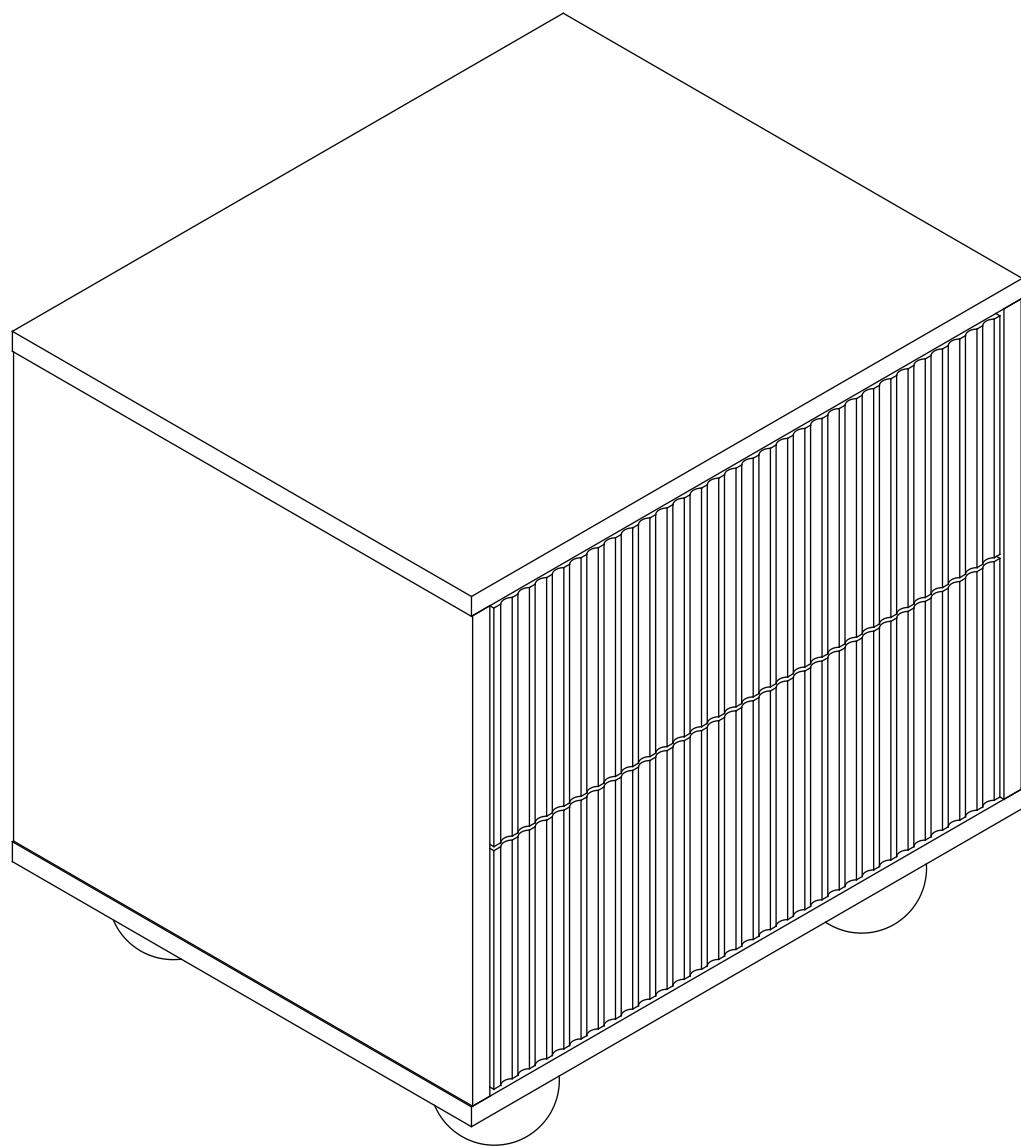


Parts Description

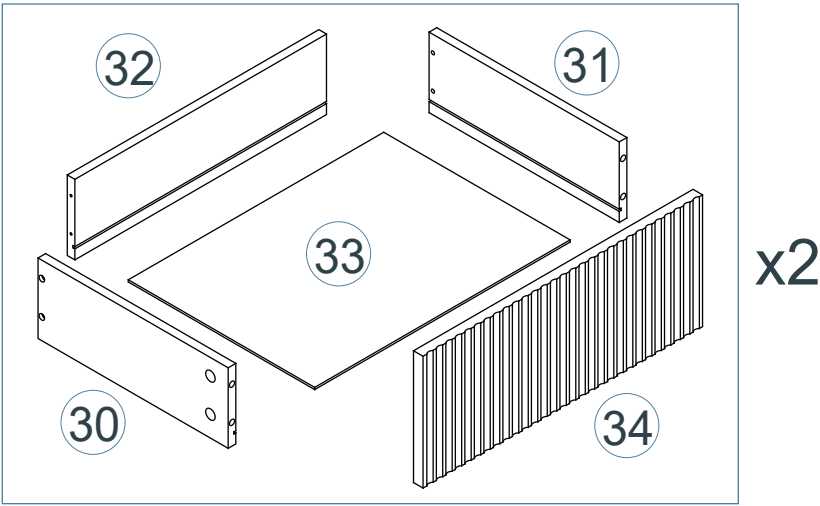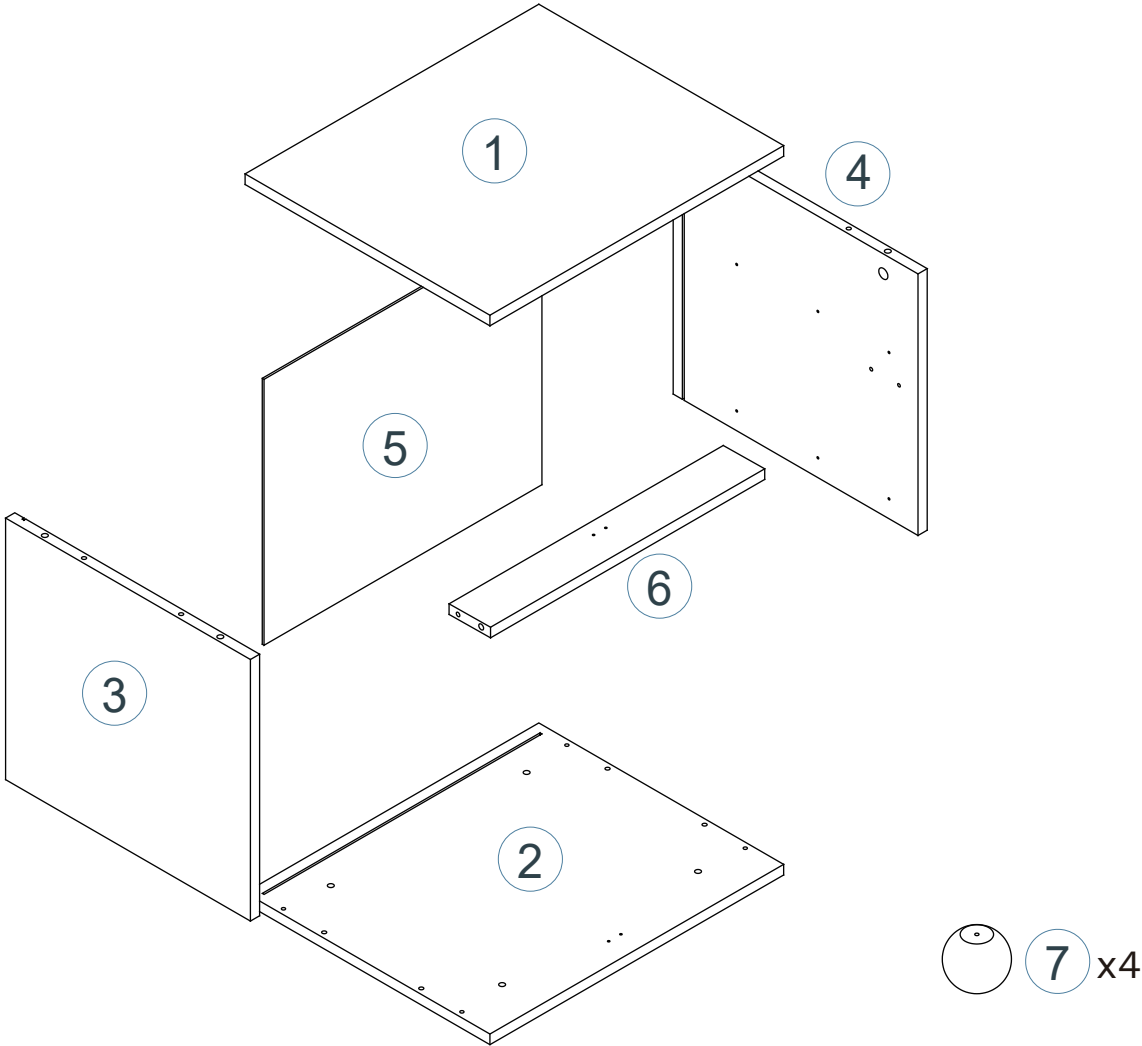


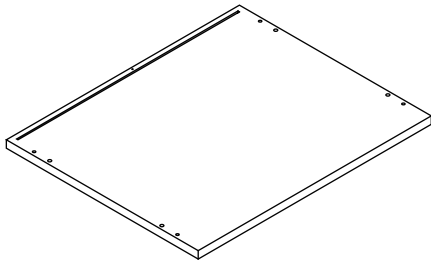


①

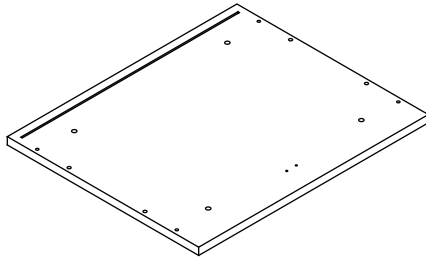


②

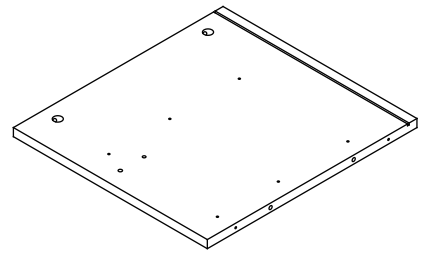


③

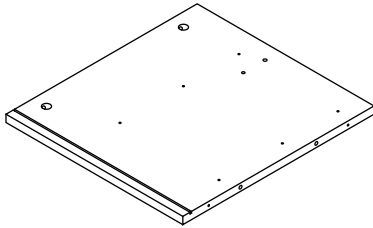


④

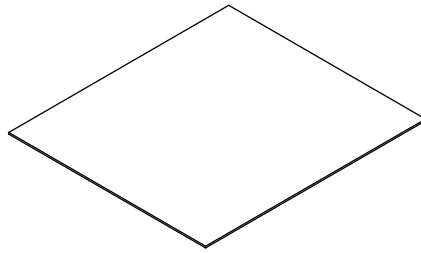


⑤




⑥




⑦ x4




③① x2




③② x2

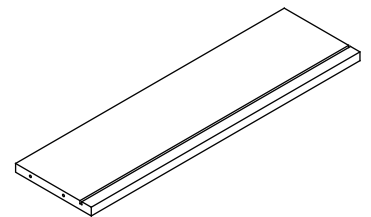














③③ x2



③④ x2

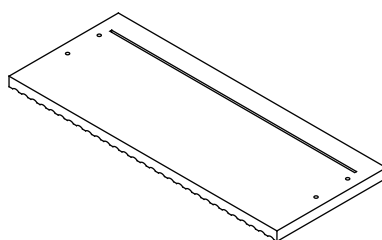

③⑤ x2

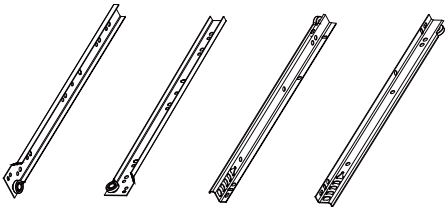A  6X30mm Dowel 10pcs	B  4 x 40mm Screw 4pcs	C  Bolt 14pcs
D  Locking Nut 14pcs	E  3 x 12mm Screw 24pcs	F  4 x 35mm Long Screw 8pcs
G  Wedge 4pcs	H  3 x 16mm Screw 4pcs	I  Felt Pad 4pcs
J  6 x 30mm Screw 4pcs	K  Allen Key 1pc	L  Bracket 2pcs
M  4 x 14mm Screw 4pcs	CL CR DL DR  Slide Rail 2pcs	



Note: Please do not use any power tools. Use of power tools may cause damage and void manufacture warranty.

Instructions For Fastening Cam Bolt and Cam Lock





CAM BOLT





CAM LOCK

Cam Bolt

Place Cam Bolt on the designated pre-drilled hole on the panel. Use a Phillips Screwdriver to screw in Cam Bolt vertically until shoulder is snug and flushed with panel. Do not over-tighten or under-tighten Cam-bolt. See illustrations below.

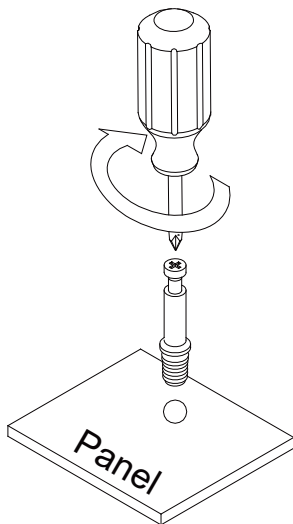



Shoulder is flushed
(on the same level)
with the panel.



Shoulder is
above the panel.


CAM-LOCK

Align the arrow on the Cam-lock to the
Cam-bolt head and insert the Cam-lock.

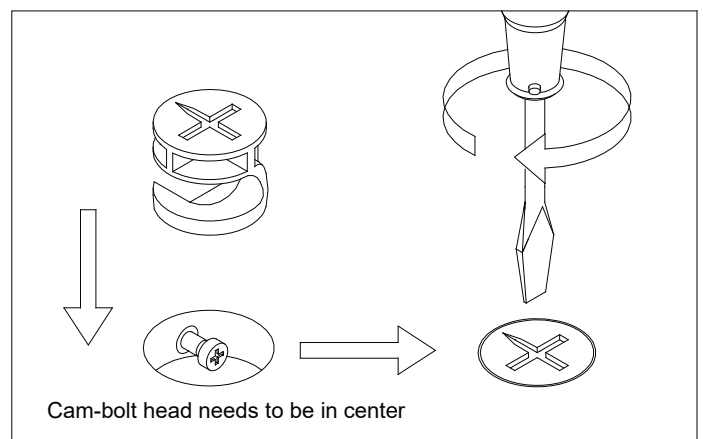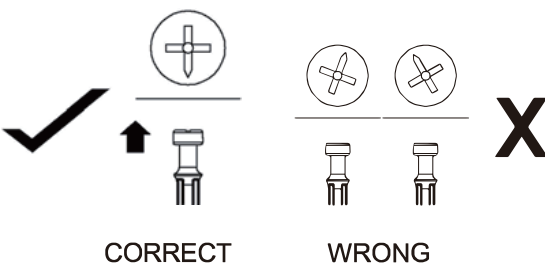


Use a Flat-head Screwdriver to turn Cam Lock clockwise to lock onto the head of the Cam Bolt. Turn until it is snug (about a half turn) – over-tightening could damage Cam Lock and/or Cam Bolt.


Step 1

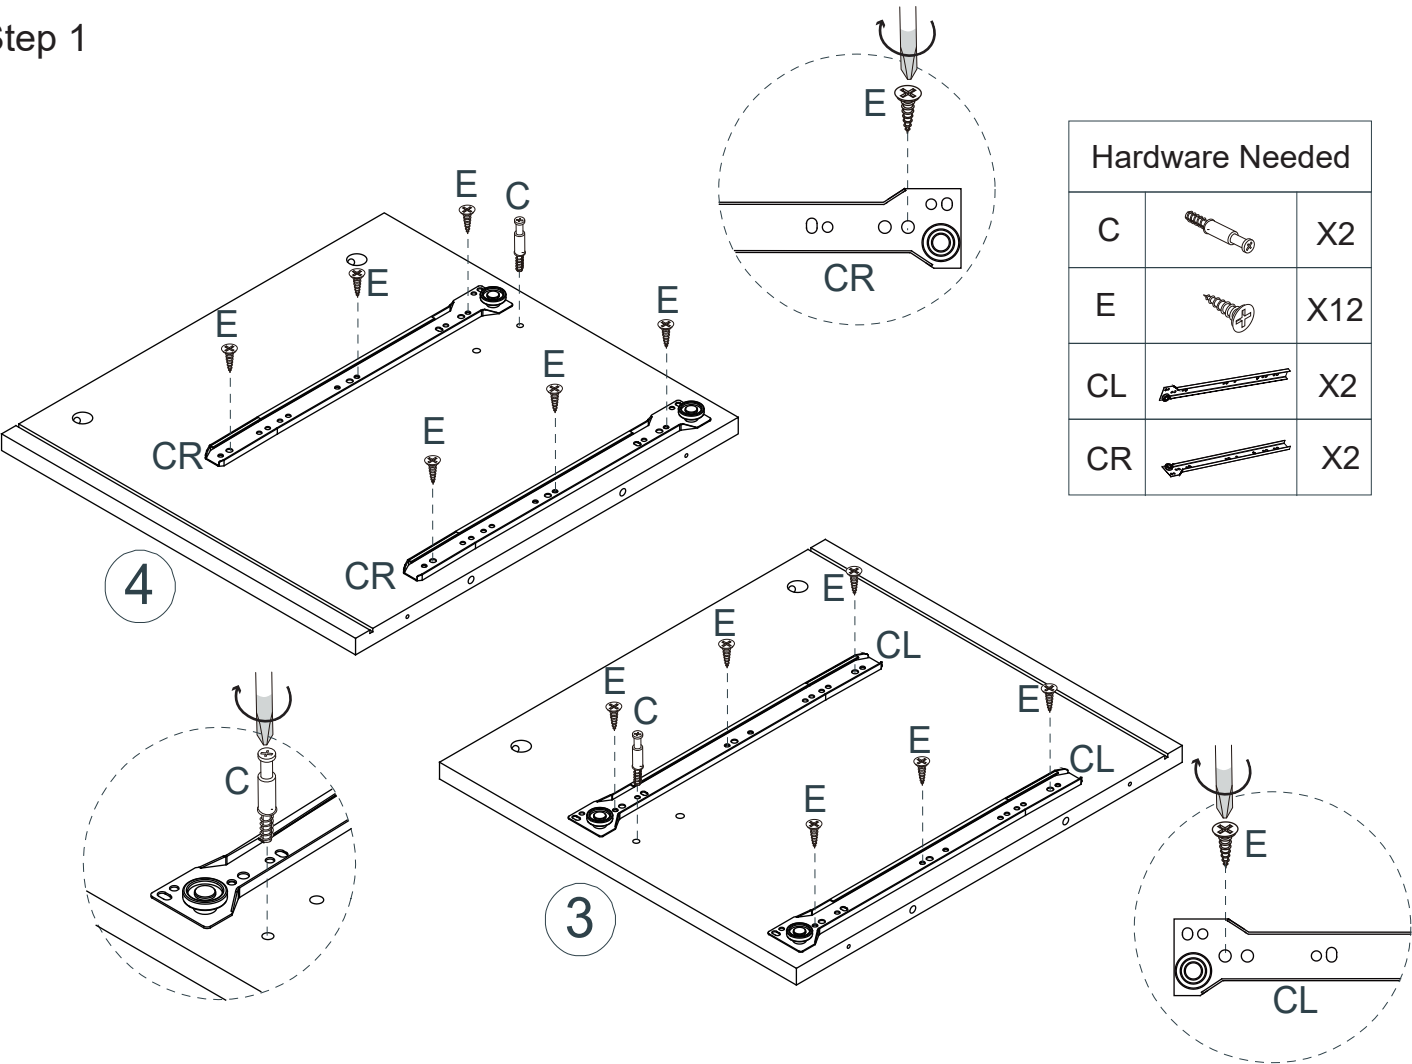


Step 2

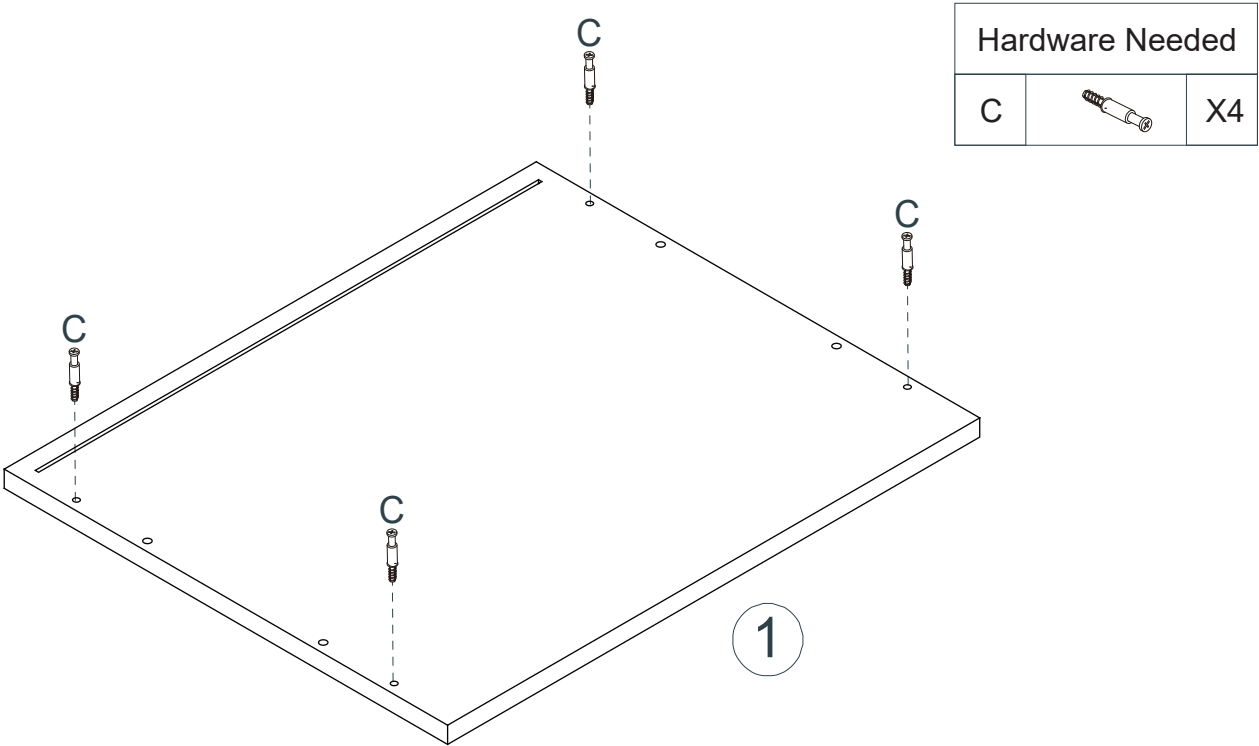


Step 3

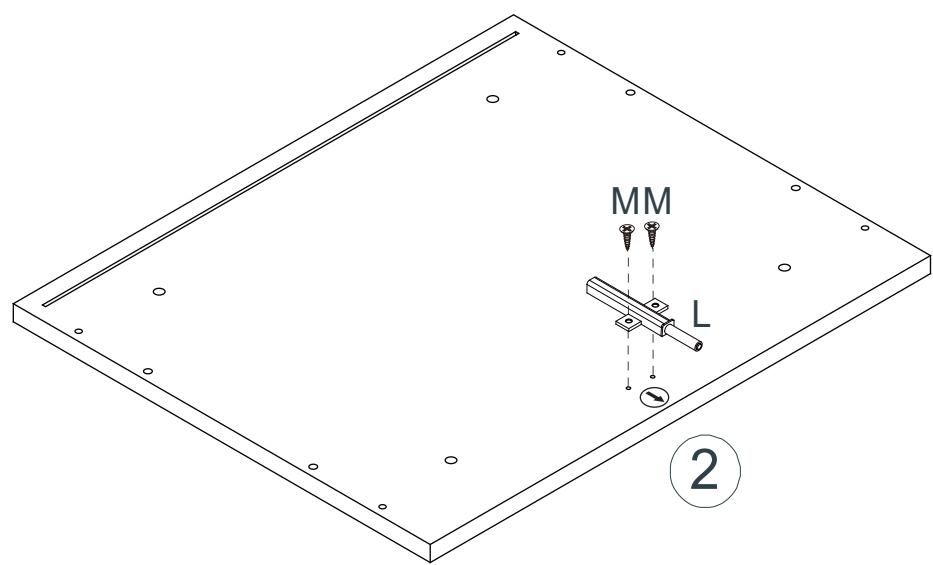


Hardware Needed		
L		X1
M		X2

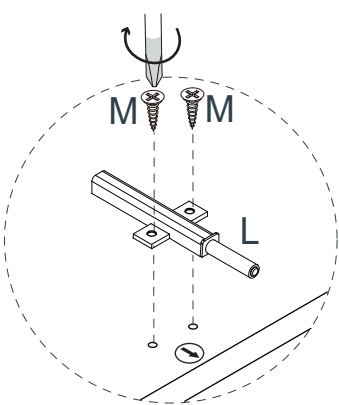


Step 4

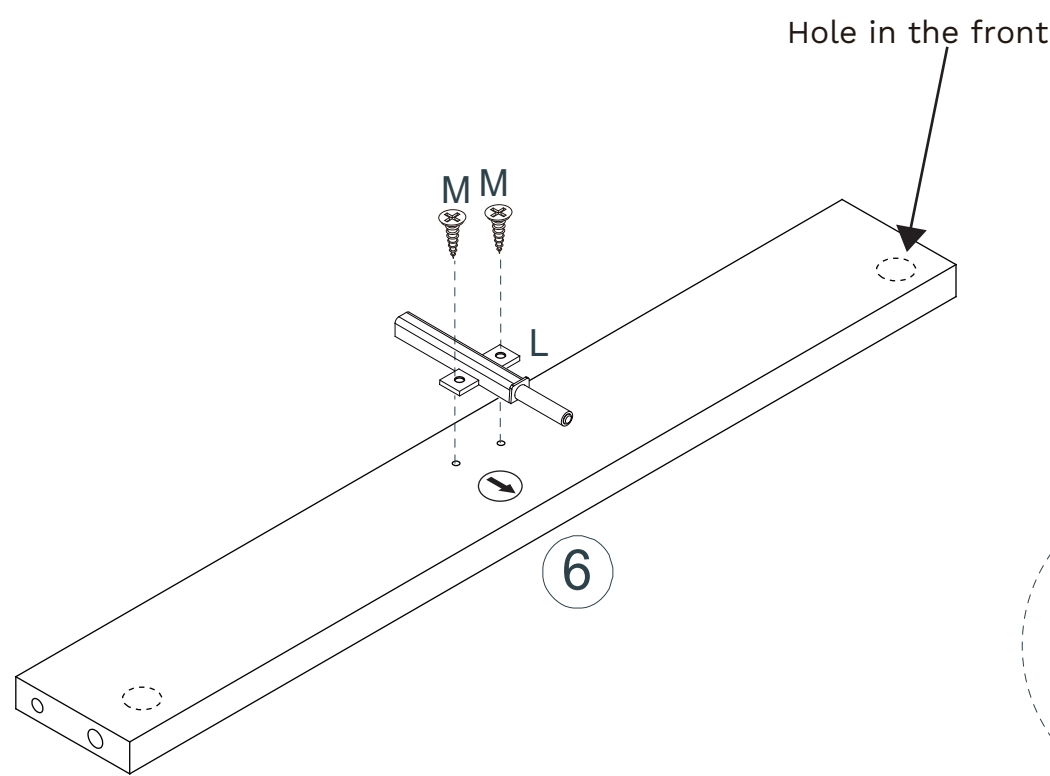


Hardware Needed		
L		X1
M		X2

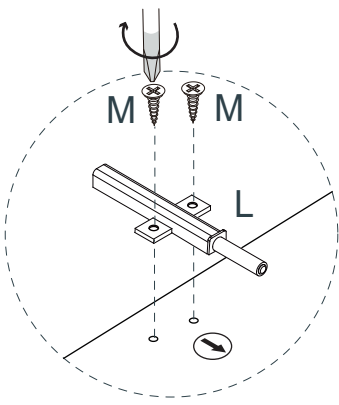


Step 5

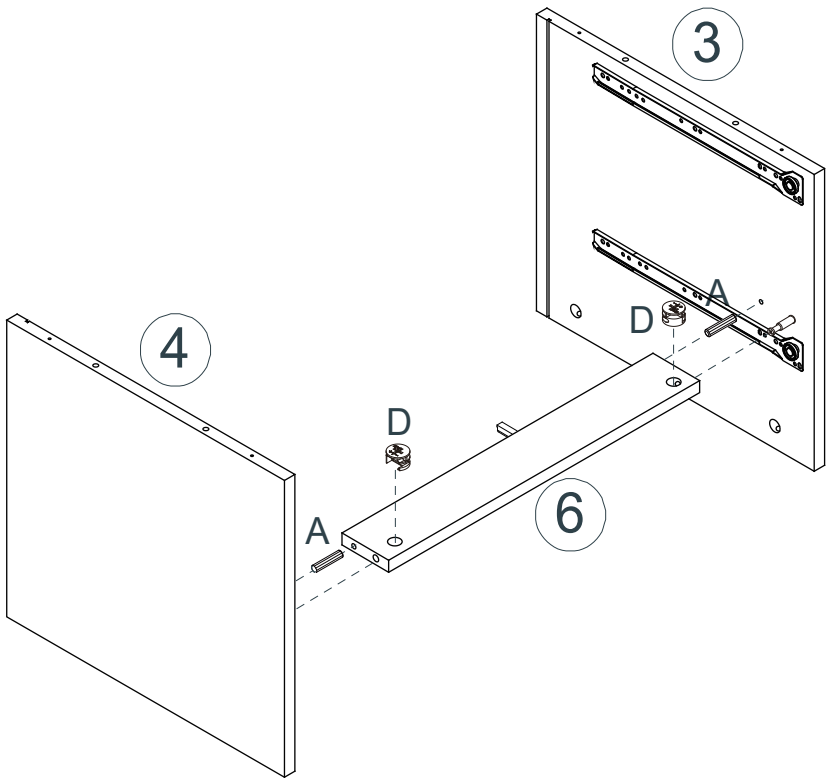


Hardware Needed		
A		X2
D		X2

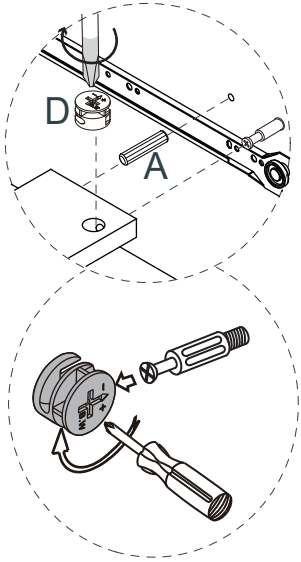


Step 6

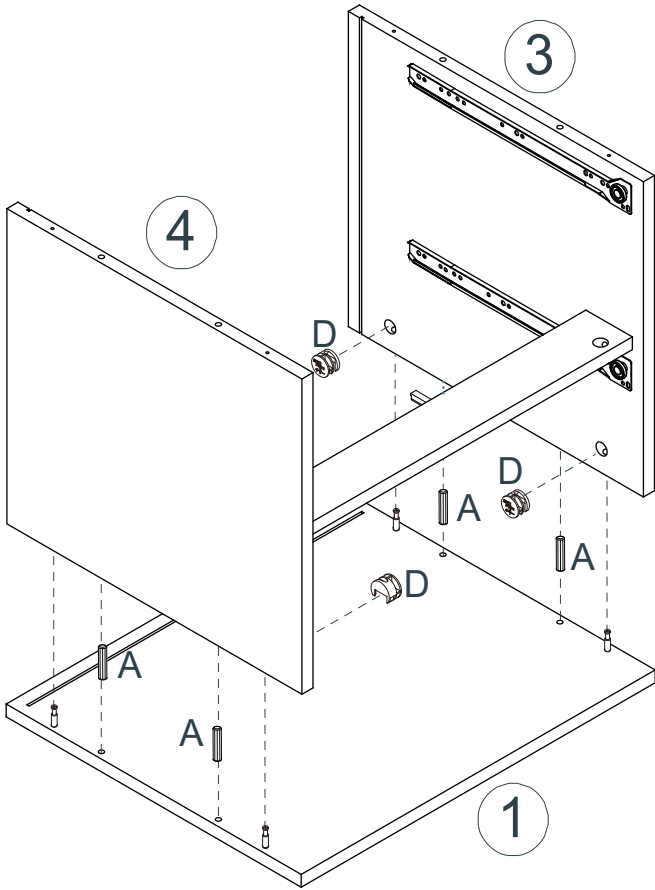


Hardware Needed		
A		X4
D		X4

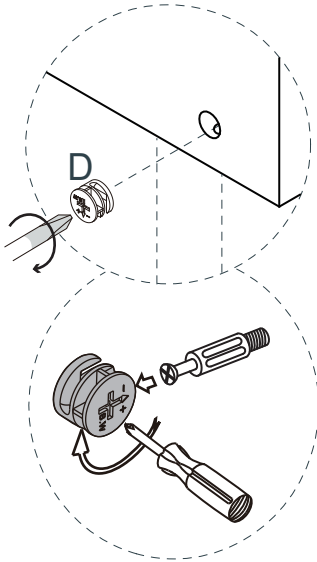


Step 7

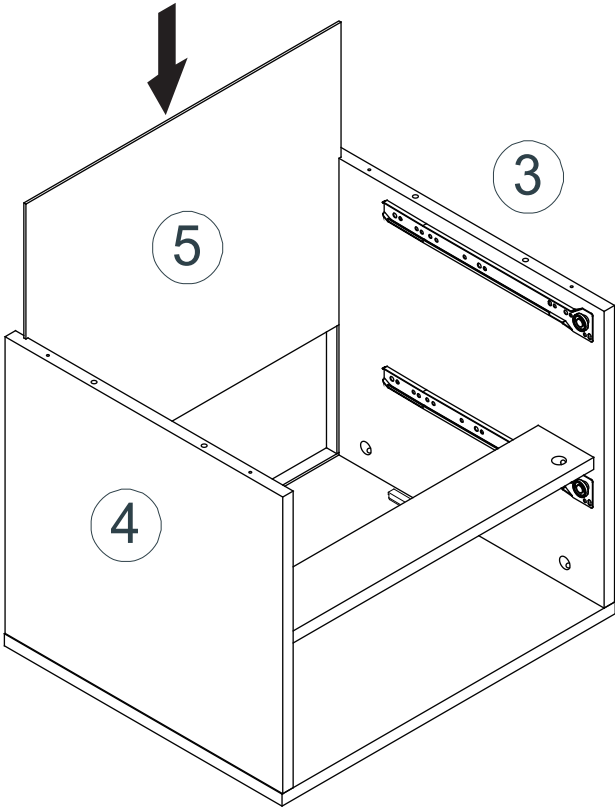


Step 8

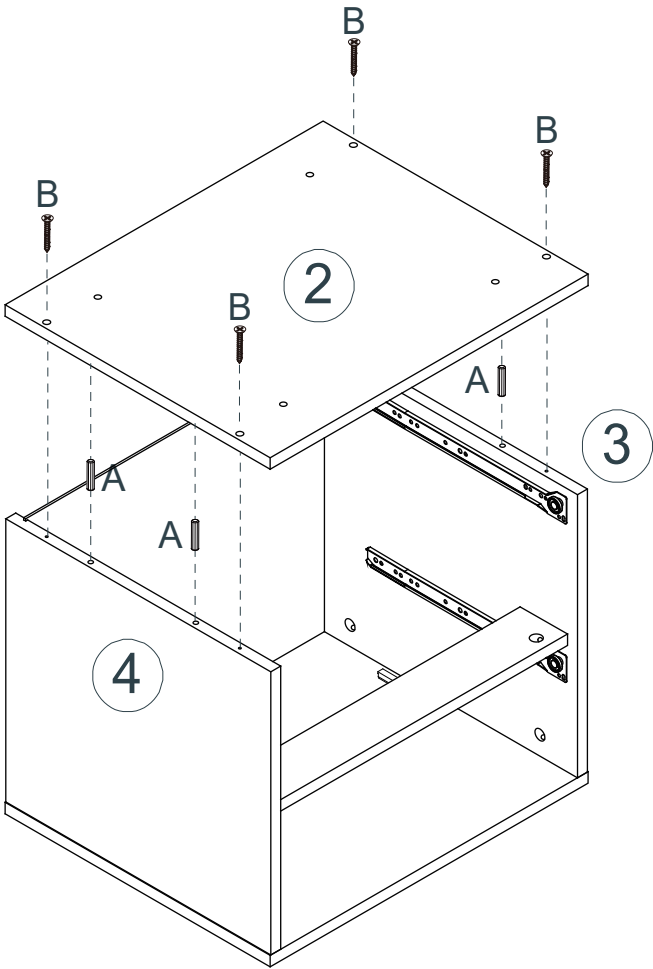


Hardware Needed		
A		X4
B		X4




Step 9

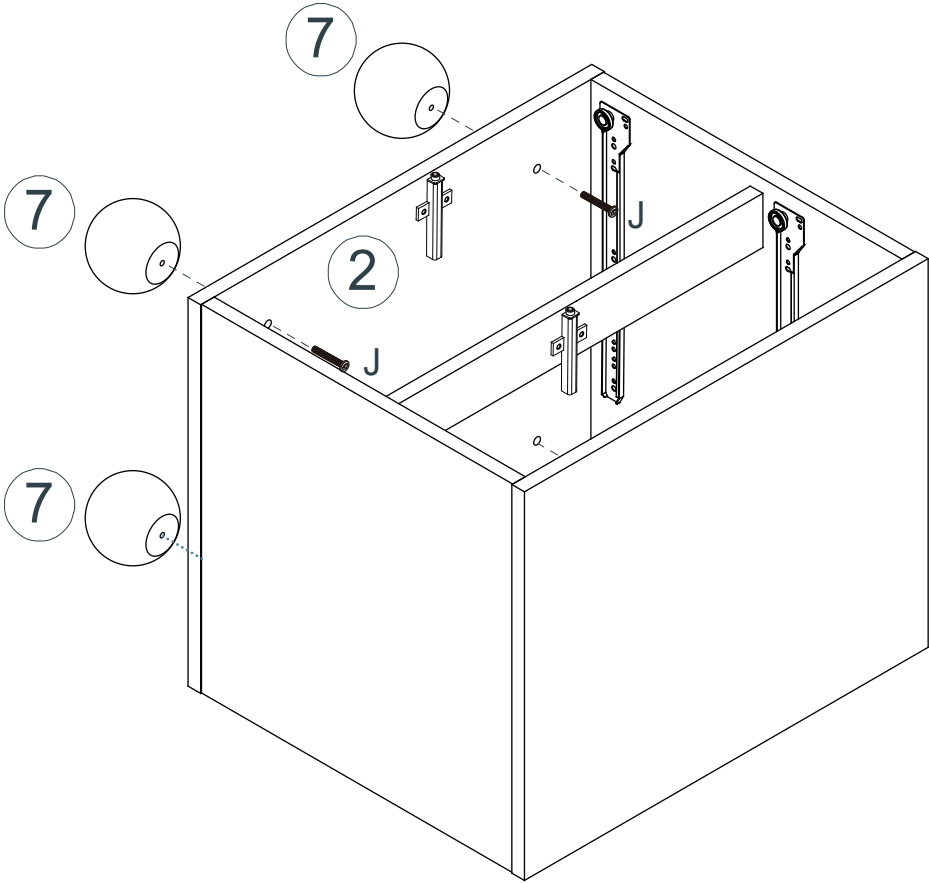


Hardware Needed		
J		x4
K		x1



Step 10

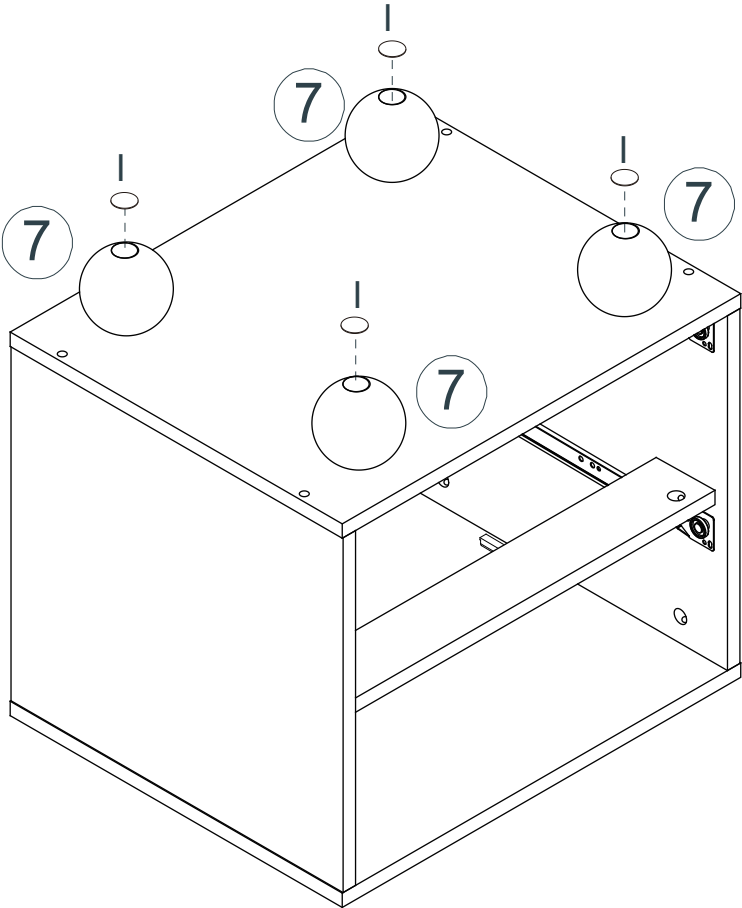


Hardware Needed		
I		x4



Step 11


Hardware Needed		
C		X8

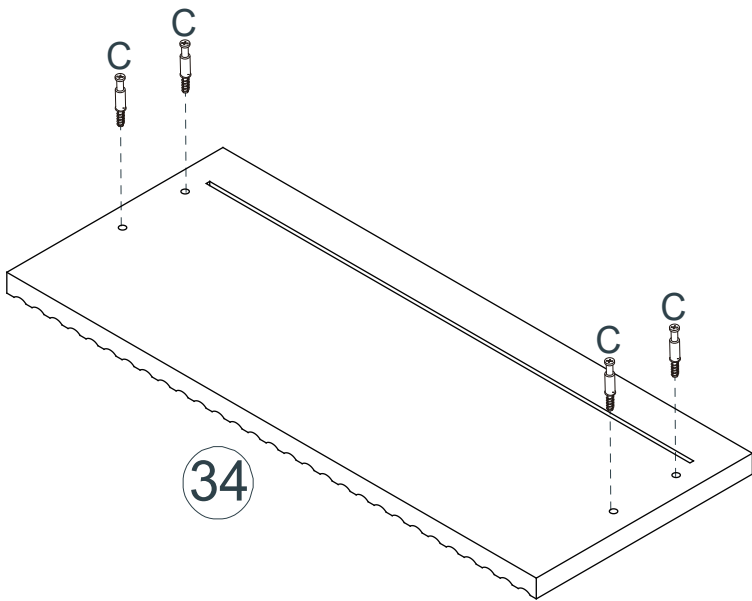

Drawer x2


Step 12

Hardware Needed		
D		X8

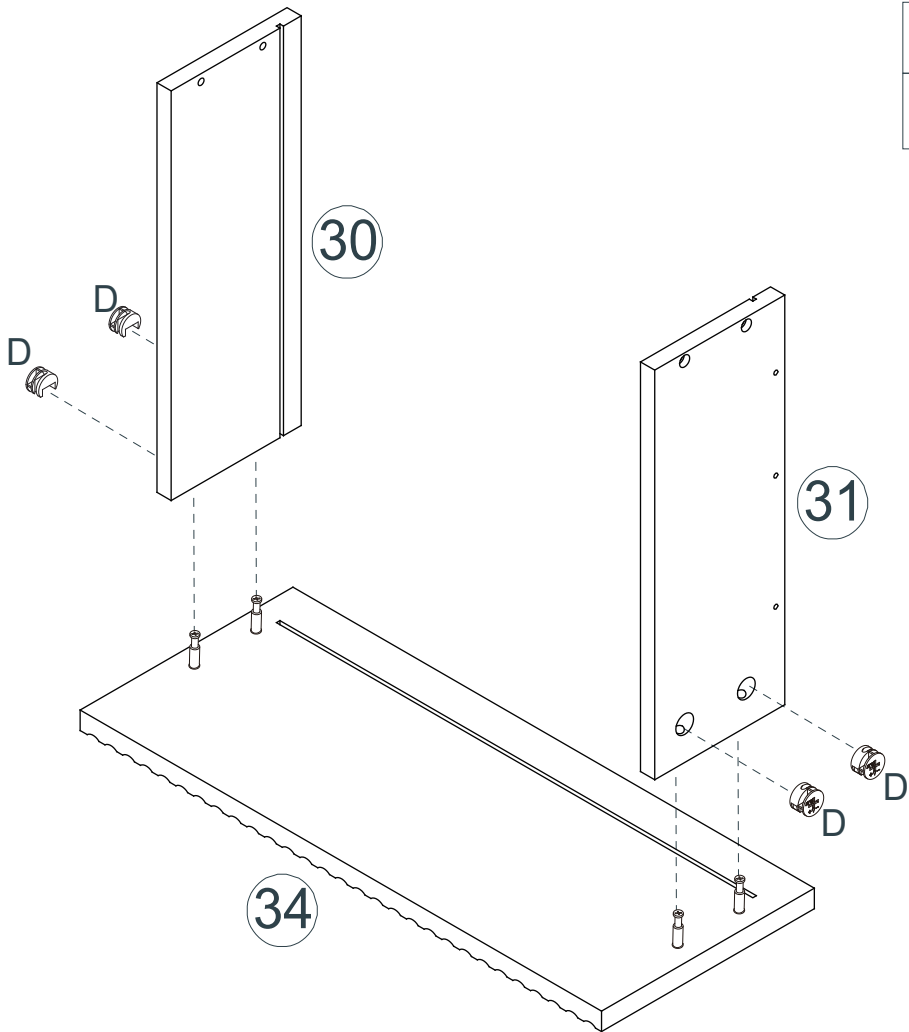


Drawer x2

Step 13

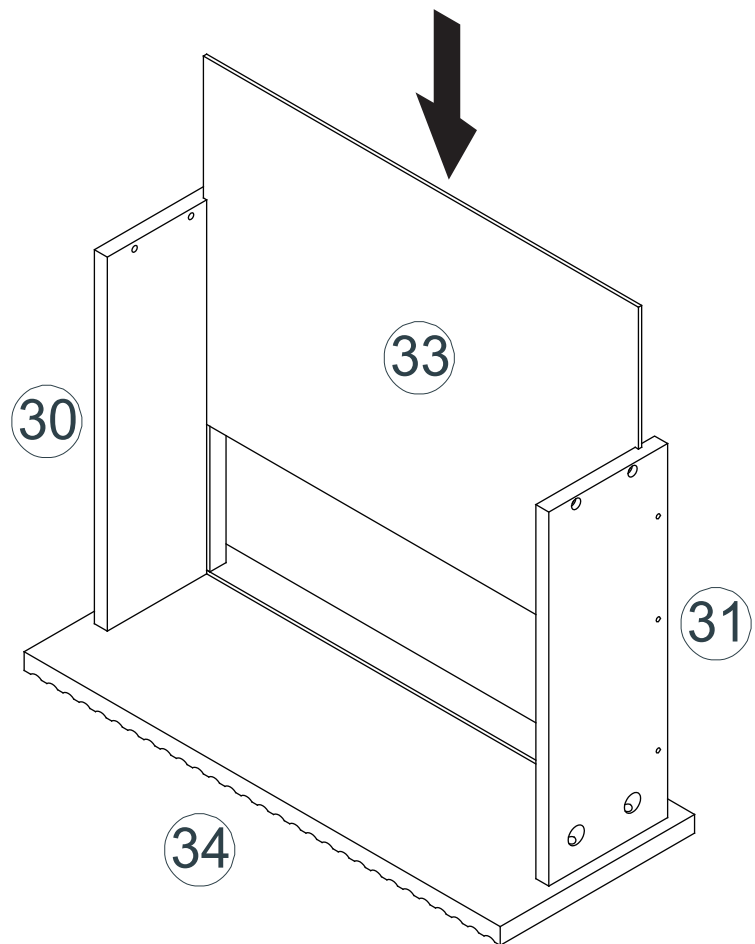

Drawer x2


Step 14

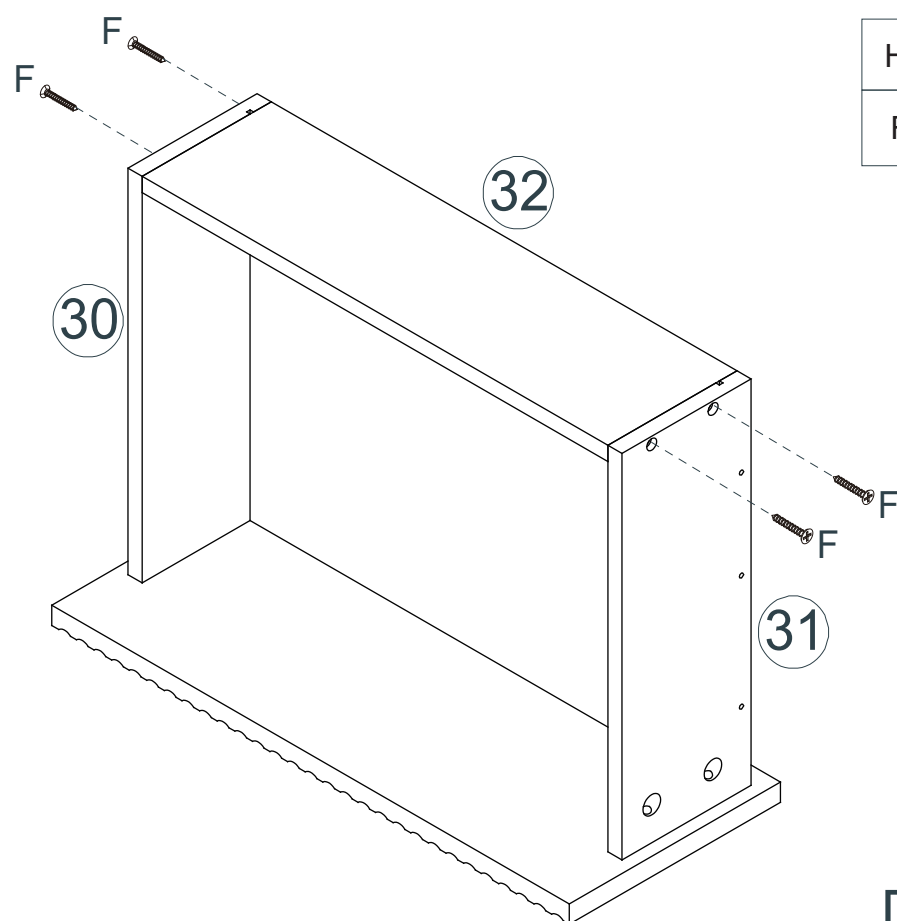

Hardware Needed		
F		X8


Drawer x2

Step 15

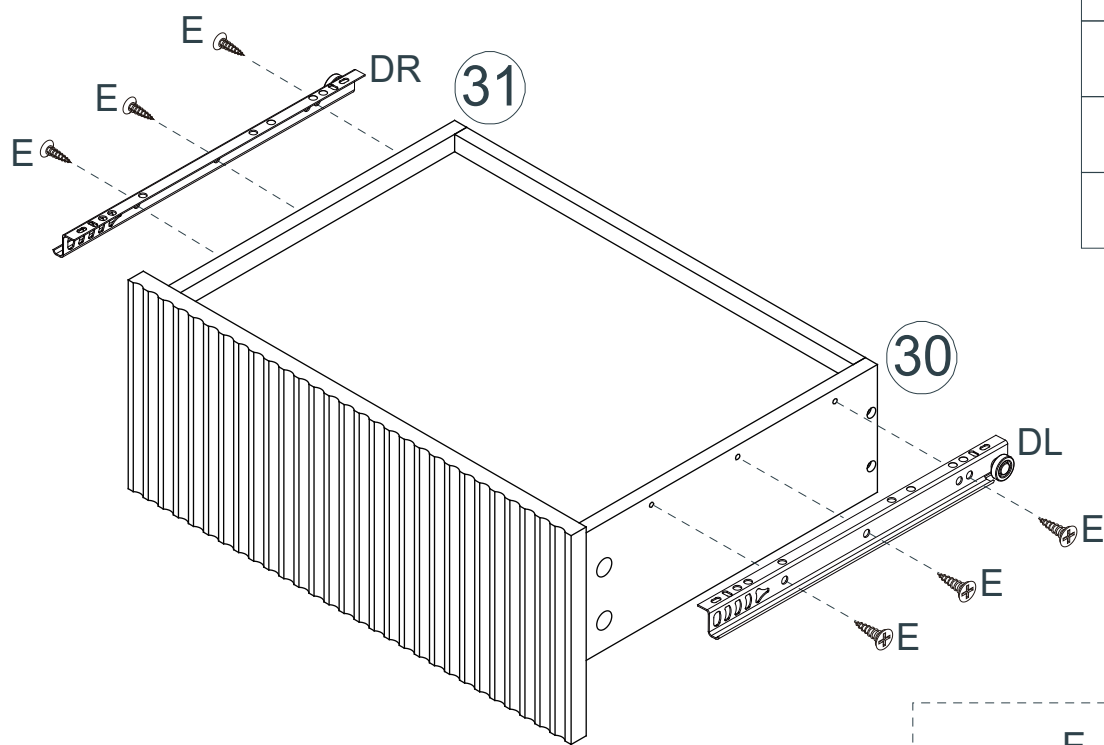


Hardware Needed		
E		X12
DL		X2
DR		X2

Drawer x2

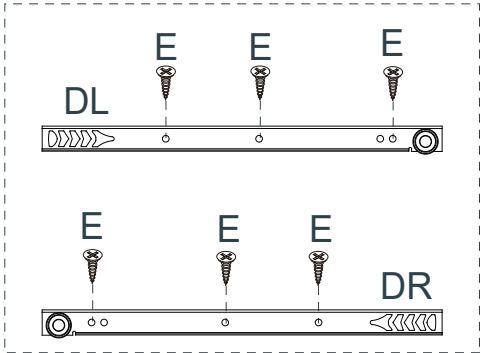


Step 16

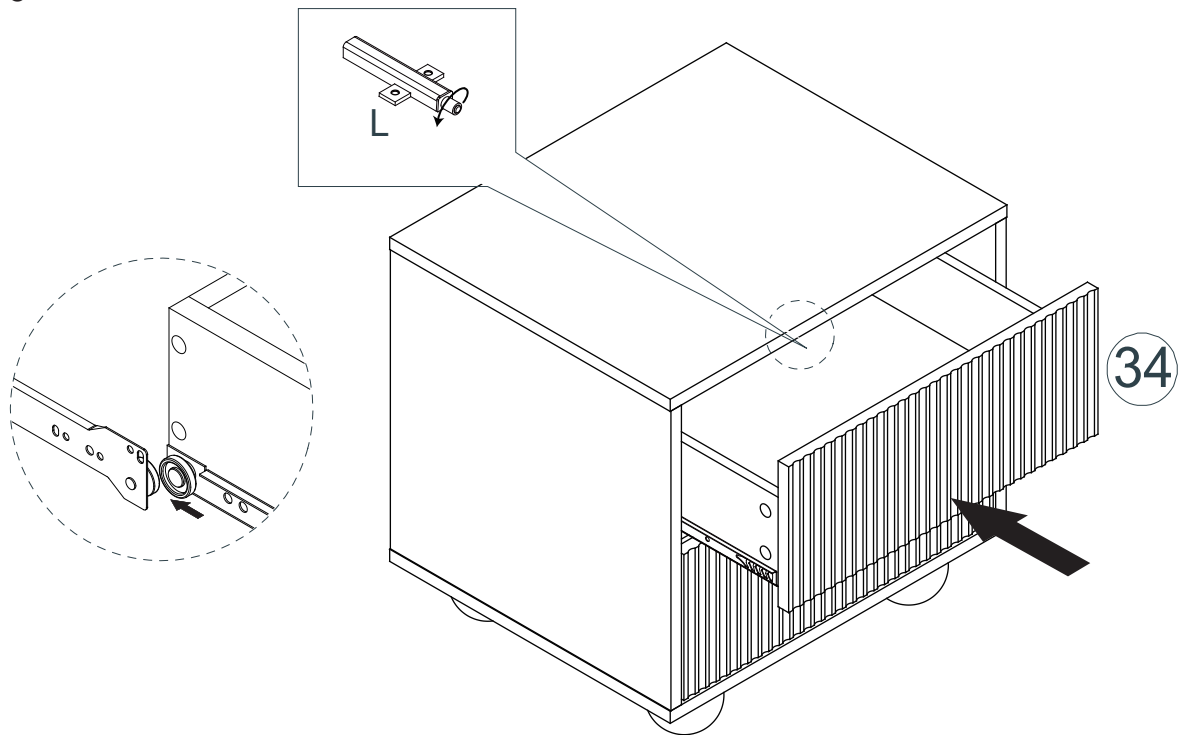


Insert the assembled drawers into the corresponding compartments as shown. Ensure the drawers slide easily along the rails. If the Drawer is not catching or sitting flush, twist the end of the Bracket (L) .


Step 17

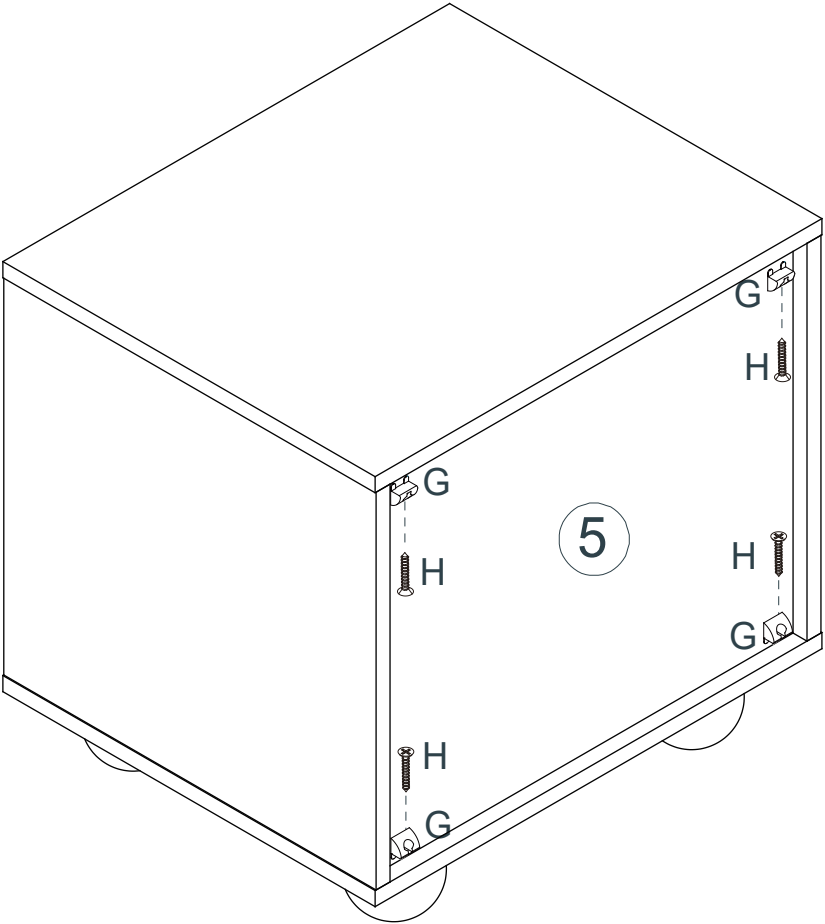


Hardware Needed		
G		X4
H		X4



Step 18

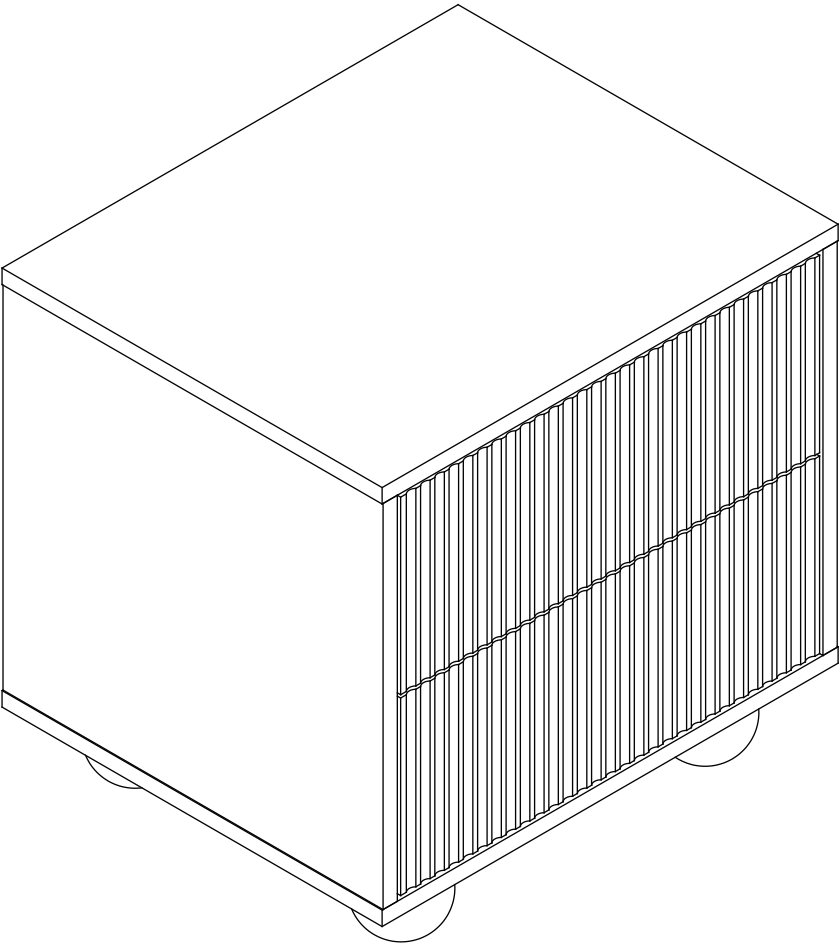



Step 19

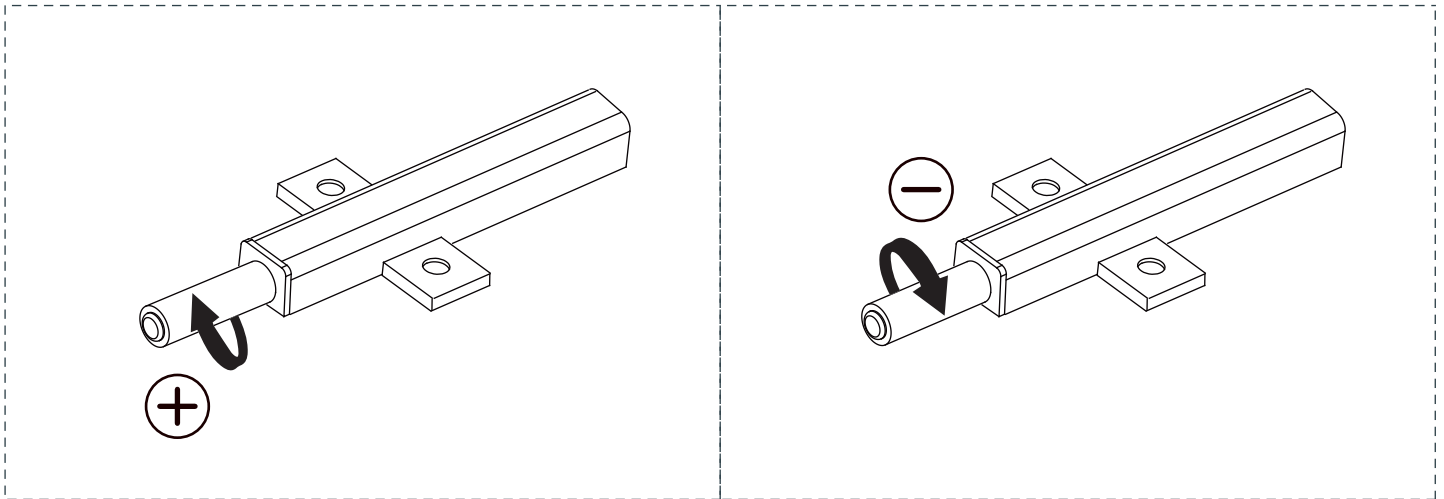



Adjustable 1/4 inch

Adjustable long stroke, make your installation more easy. And features 7 mm of adjustment to fit varying door gap widths, you can finely adjust the distance between the latch and the door to the most ideal state.

(The distance can be adjusted 1-7 mm by rotating the inner core).

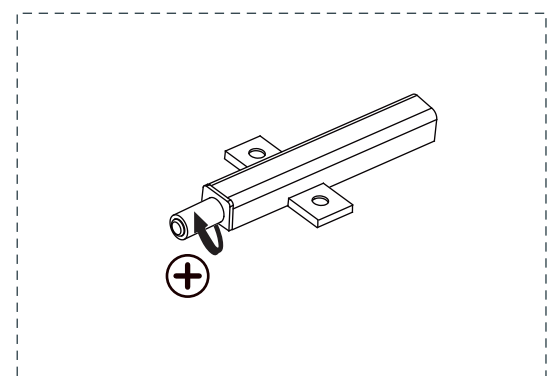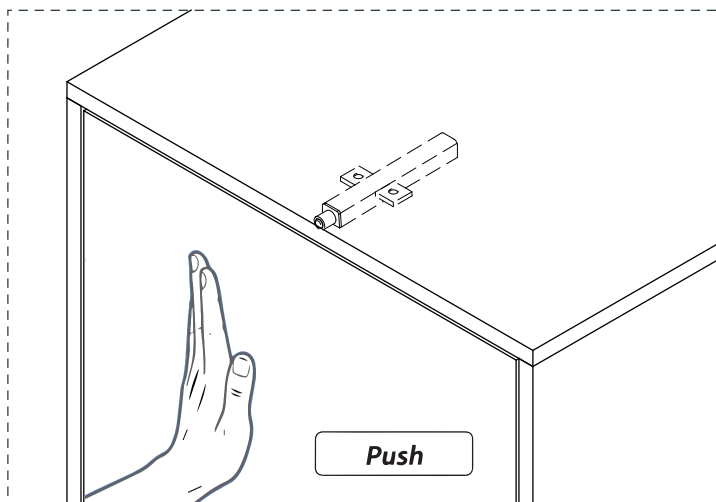

If the door cannot be opened, rotate the inner core counter clockwise.

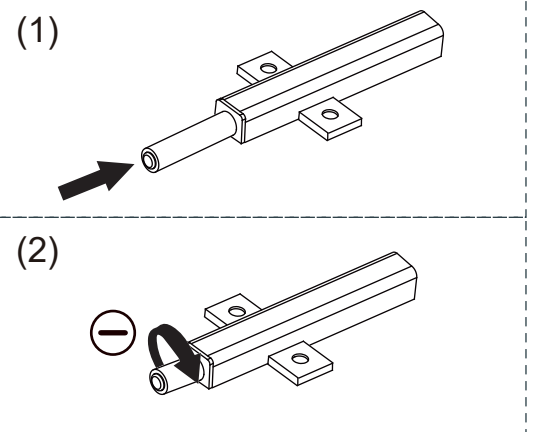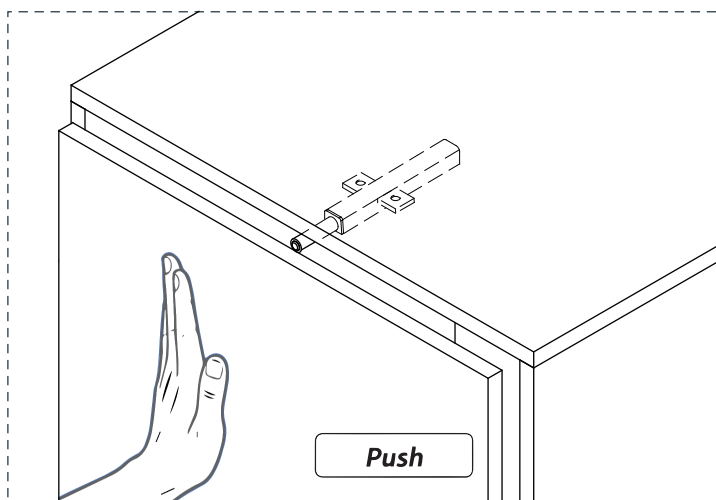

If the door cannot close, press the rotating inner core all the way in first, then turn it clockwise.