


USER'S MANUAL

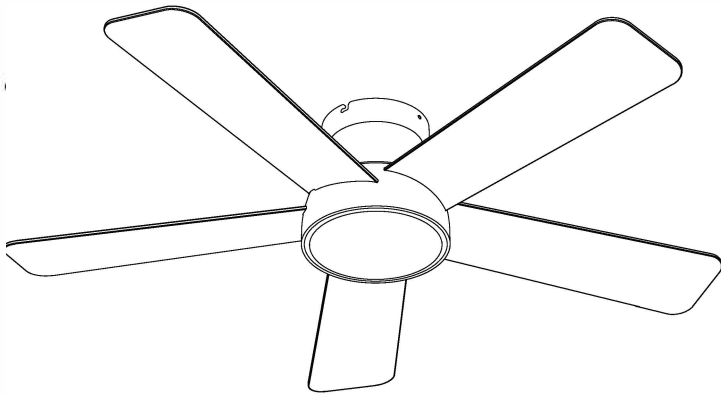

Warm Tips

1. Insert the downrod ball head into the groove of the mounting bracket. (Figure 1)
2. About Light Memory: (Figure 2)
 - Wall switch:
 - *Keep the light needed on over 10 seconds
 - *Turn off the wall switch over 10 seconds
 - * Turn on the wall switch, light will keep the same before turn off.
 - Remote controller:
 - * Just use light on/off button, it will always keep the light setting.
3. Remote control code clearing method:
 - *Power on, press blue + yellow bulb button for 3s.
(Light flashing + Buzzer sound)
4. The lighting kit can be replaced if fault in the future.
5. Using a full range dimmer switch to control fan speed will damage the fan.




Figure 1




Figure 2

WARNING!!!

To avoid fire, shock and serious personal injury, follow these instructions.


1. Read your user manual and safety information before installing your new fan. Review the accompanying assembly diagrams.
2. Before servicing or cleaning the unit, switch off the power at the service panel and lock it to prevent accidental power restoration. If the service disconnecting means cannot be locked, securely fasten a warning device, such as a tag, to the service panel.
3. Exercise caution around the fan and its blades when clearing, repairing, or working near it. Always turn off the power to the ceiling fan before performing any maintenance
4. Do not insert anything into the fan blades while the fan is in operation.
5. This appliance is not intended for use by young children or individuals with disabilities without supervision. Young children should be supervised to ensure they do not play with the appliance.
6. Before installing your ceiling fan, refer to the section on the proper method of wiring your fan. If you feel you lack sufficient wiring knowledge or experience, it is recommended to have your fan installed by a licensed electrician.

Fan Components

NOTE: Place the parts from the loose parts bags in a small container to keep them from being lost. If any parts are missing contact us.




● ————— Mounting Bracket (1)



● ————— Receiver (1)




● ————— Canopy Canopy (1)




● ————— Fan Motor Host (1)





● ————— Fan Blade (5)



● ————— Lamp Body (1)



● ————— Lampshade (1)



Remote Controller

4 (a)



Plastic Expansion Tube

2 (b)



Expansion Screw

2+1 (c)



Balance Kit

16+7 (d)



Blade Screw
Canopy Canopy Screw

16 (e)



Red Washer

3 (f)



Wire Nut

4 (g)



Washers

4 (h)



Self-tapping
Screw

2 (i)



J-box Screw

4 Spare (j)



Host-arm
Screw

1 (k)



Reinforcement
Plate

Energy Saving Usage

Ceiling fan performance and energy savings rely heavily on the proper installation and use of the ceiling fan. Here are a few tips to ensure efficient product performance.

Choosing the Appropriate Mounting Location

Ceiling fans should be installed or mounted in the middle of the room and positioned at least 7 feet above the floor and 18 inches away from the walls.

If the ceiling height allows, it is recommended to install the fan 7~9 feet above the floor to achieve optimal airflow.

Turn Off When Not in the Room

If the room is unoccupied, turn off the ceiling fan to conserve energy.

Using the Ceiling Fan Year Round

Summer Season: Use the ceiling fan in the counterclockwise direction. The airflow created by the ceiling fan produces a wind-chill effect, making you feel cooler. Select a fan speed that provides a comfortable breeze; lower speeds consume less energy.


Winter Season: Reverse the motor and operate the ceiling fan at a low speed in the clockwise direction. This produces a gentle updraft, which pushes the warm air near the ceiling down into the occupied space. Remember to adjust your thermostat when using your ceiling fan. This simple step can lead to additional energy and cost savings.

Electrical and Structural Requirements

Your new ceiling fan will require a grounded electrical supply line of AC 110-130V/60Hz and a 15 Amp circuit. According to electrical codes, it is necessary to use a fan-rated outlet box to support the additional weight and motion associated with a ceiling fan. A fan-rated box will be clearly labeled as such and is typically designed to support ceiling fans weighing up to 70 pounds. Fan-rated outlet boxes are available in various ratings and designs. It is essential to ensure that the rating of your ceiling fan outlet box meets the requirements for the specific ceiling fan you are installing. Please refer to the figures below for different structural configurations that can be used for mounting the outlet box.


Low-profile use (Figure 1)

A 1/2-inch deep pancake box is meant to be screwed to a joist or block. It is used if only one cable is coming into the box. It is also available in a saddle-mount configuration.




Deep-profile use (Figure 2)

A 2-1/4" deep box can be attached to blocking between joists and is roomy enough to handle more than one cable.



Brace Use (Figure 3)

Paired with a deep box, this hanger is meant to span between two joists and takes the place of wooden blocking.



If your fan is to replace an existing light fixture, turn power off at the main fuse box and remove the existing light fixture.


WARNING

To ensure safety and prevent potential electrical shock, it is not sufficient to simply turn off the wall switch. Prior to wiring, make sure to turn off the electricity at the main fuse box. All wiring should be done in accordance with national and local electrical codes. Additionally, it is important to properly ground the ceiling fan as a precautionary measure against possible electrical shock. Following these guidelines will help ensure the safe installation and operation of your ceiling fan.


Do not use a variable (rheostat) wall controller or dimmer switch to operate this fan. Doing so can cause damage to the ceiling fan's remote control unit. It is recommended to only use the provided remote control.

Installation

1




2



- Take out the 2 round hole screws from canopy.
- Loosen the 2 screws and then rotate to remove the bracket.


3

Cement ceiling



4


Wooden ceiling




- Mount the bracket to the ceiling and use appropriate accessory screws to secure it based on the type of ceiling material.
Cement ceiling: Drill holes on the cement ceiling, then use expansion tubes and self-tapping screws for fixing.
- Wood ceiling: Use self-tapping screws to drive into the wooden ceiling.

5

Junction box




6




- Junction box: Use j-box screw and washer to fix the bracket to the ceiling.
(Please choose the corresponding hole size of 3 inches or 4 inches based on the dimensions of the ceiling junction box for installation.)
- Install the reinforcement plate on the ceiling canopy, aligning it with the holes, then tighten the 6 screws.

Installation

7




8

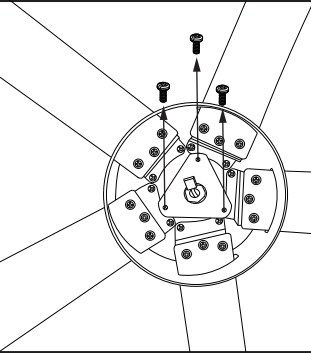


- Insert the fan blade into the holes of the motor housing and secure it using three screws and red washers. (Repeat this step for installing the remaining fan blades.)
- Take out the screws (pre-installed) from the triangular plate.

9




10

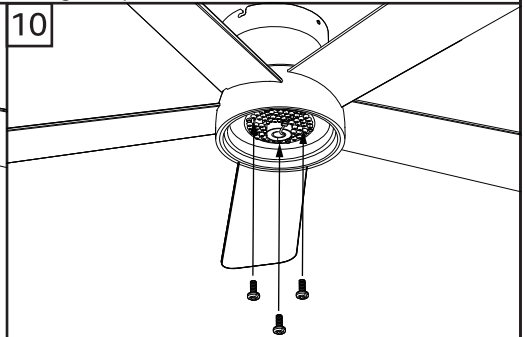


- Connect the LED board wire connector.
- Install the lamp body onto the main body and tighten the screws. (Use the 3 screws from step 8.)

11

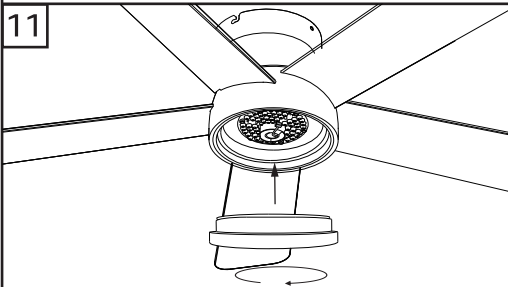

12

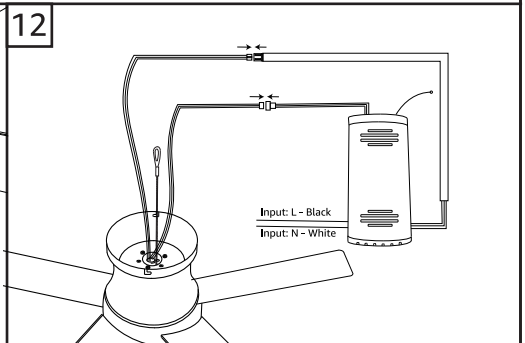


- Locate the locking point of lamp body, and screw in the lamp shade.
- Connect the wires between the controller and the fan motor and light.

Installation


13

Concrete ceiling

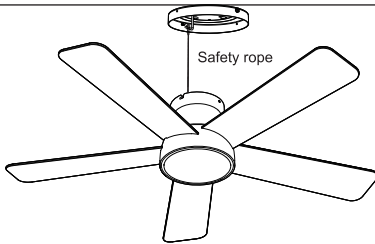

14


Concrete ceiling

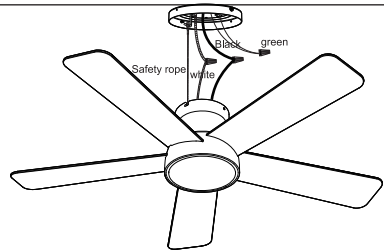


- Use the safety rope to hang the ceiling fan to the bracket hook.
- Wiring:
Connect the "Neutral wire" (white wire) from ceiling to the white wire.
Connect the "Live wire" (black wire) from ceiling to the black wire.
Connect the "Ground wire" (green or yellow/green or bare) from ceiling to the bare wire.

15

Concrete ceiling

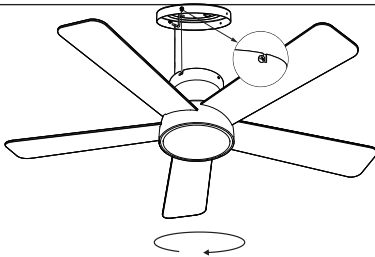


16

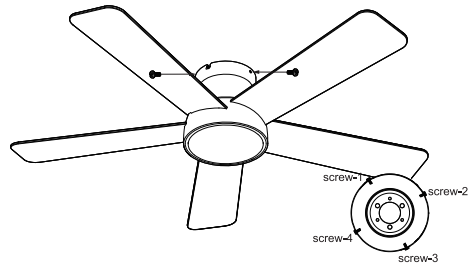

- Align the canopy L slot to the bracket screw, rotate to certain position.
- Lock the other 2 screws and ensure that the 4 screws are tightened.

17

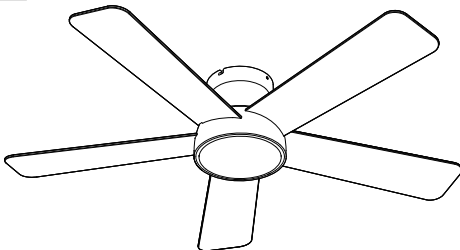

- Installation completed.
Tip: If the lampshade is not centered, slightly adjust the screws in step 10 to center it.

Operate Your Ceiling Fan


IMPORTANT: Using a full range dimmer switch to control fan speed will damage the fan. To reduce the risk of fire or electrical shock, do not use a full range dimmer switch to control the fan speed. (Figure 1).

Only control light on/off via wall fan switch.

Restore electrical power to the outlet box by turning the electricity on at the main fuse box.(Figure 2).




(Figure 1)



(Figure 2)


Installation Recommended

Room Size:

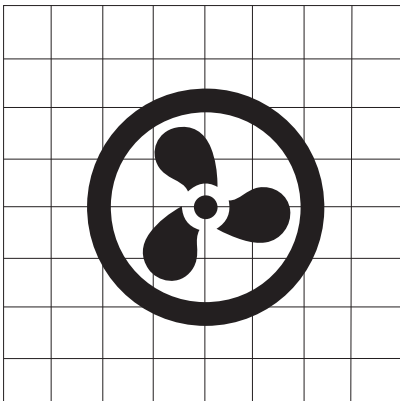


UP TO 10 ft x 10 ft

Room Height:

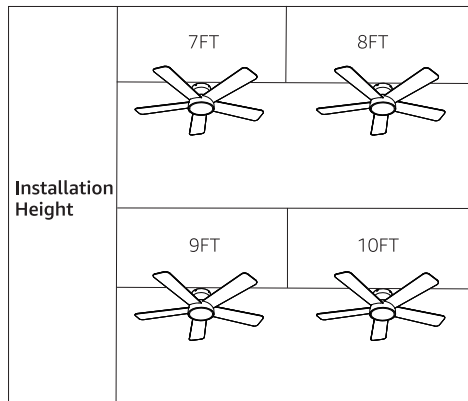


Remote Control

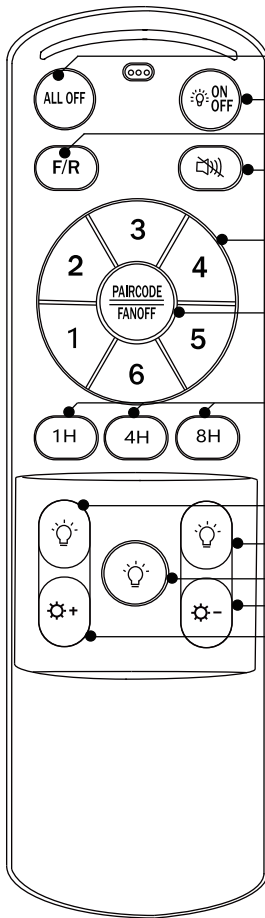

- Light & fan all off
- Light on/off
- Forward or reverse
- Remote controller mute
- Fan speed(fan on)
- Press and hold: pairing button
Click: fan off
- Fan stop & light off after 1/4/8 hours
- Warm light
- Cold light
- Neutral light
- Brightness -
- Brightness +

Installing Wall Plate:
Attach wall plate using the two provided screws.



To operate the fan, please install 2 AAA batteries (included) in the handheld remote transmitter. If not used for extended periods of time, remove the batteries to prevent damage to the transmitter. Store the remote away from excessive temperatures and humidity.

Pairing method: (single/multiple fans)


The remote control transmitter can be used to control multiple receivers.

1. For the ceiling fan you want to pair, turn the main power switch off for at least 10 seconds.
2. Turn on the main power wall switch of the ceiling fan, then within 3 seconds, press and hold button until hearing "beeping", indicating that the code is successful.
3. The pairing process is completed. If the pairing process is unsuccessful, repeat above steps after turning off wall switch 1 minute.




APP Control

NOTE: For iPhone users, you can search for "FanLamp Pro" in the AppStore . For Android users, please scan the QR code to download. (Please enable Bluetooth and pair the fan with app to control it!)

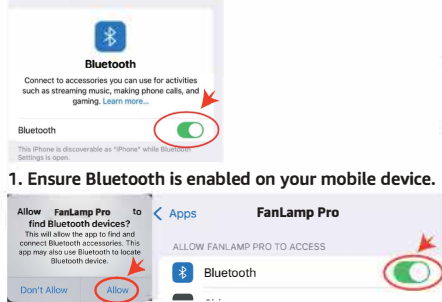

1. Ensure Bluetooth is enabled on your mobile device.

2. Make sure you allow this app to access Bluetooth. (For iPhone users, Android users can ignore this step.)
 Method 1: Click "Allow" when opening the app for the first time.
 Method 2: Go to your phone's settings, find the app, and enable Bluetooth access.

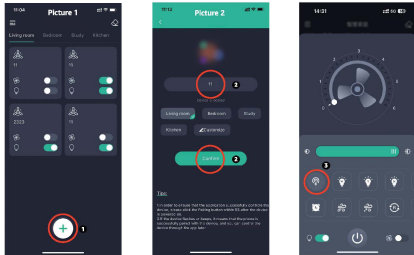

Picture 1

3. Enter the app page and click the plus sign below (Add group).

Picture 2

4. Enter any name, then click Confirm.

Picture 3


5. Turn on the fan's power wall switch, once the light is on, press the pairing button within 5s. The fan light will flash twice to indicate successful pairing.

	Turn on the fan's power wall switch, once the light is on, press the pairing button within 5s. When the fan light flashes twice, it indicates that the fan has been successfully paired with the phone and can now be controlled through the phone.
	Slide to change the fan speed
	Slide to change the brightness of the light
	Quick switch for "Natural" light color
	Quick switch for "Yellow" light color
	Quick switch for "White" light color
	Not available for this model
	Timer the fan
	Natural wind: fan speed will change automatically when use this function
	Sleeping wind
	Night light (10% brightness in neutral white)
	Not available for this model
	Fan moves forwards
	Fan moves reversely
	Not available for this model
	Light off/on
	Fan off/on

Troubleshooting

PROBLEM	SUGGESTED REMEDY
If Fan Does Not Start	<ol style="list-style-type: none"> 1. Check main and branch circuit fuses or circuit breakers. 2. Make sure that the wall control is turned "ON" 3. Check line wire connections to fan and switch wire connections in switch housing. CAUTION: Make sure main power is turned off. 4. Make sure battery has power, change battery(2*AAA) to try again. 5. The remote controller is not paired, check Page.9 to pair. 6. The motor or receiver or remote controller is fault, contact our customer service.
If Fan Sounds Noisy	<ol style="list-style-type: none"> 1. Make sure all screws in motor housing are snug. (not over tightened) 2. Too close to the wall, make sure the blades at least 3ft to the wall. 3. Make sure wire connectors in switch housing are not rattling against each other or against the interior wall of the switch housing. CAUTION: Make sure main power is turned off before entering switch housing. 4. Some fan motors are sensitive to signals from Solid State variable speed controls. DO NOT USE a Solid State variable speed control. 5. Allow "break-in" period of 24 hours. Most noises associated with a new fan will disappear after this period.
If Fan Wobbles	<ol style="list-style-type: none"> 1. Interchanging two adjacent blades could redistribute the weight and possibly result in smoother operation. 2. The balancing kit should only be used if there is an unacceptable amount of fan wobble after completing all the steps: <u>How to use balancing kit:</u> <ol style="list-style-type: none"> (1) Turn the fan on and set the speed control setting to a speed at which the wobble is the greatest. (2) Turn off the fan and allow it to come to a complete stop. Select one blade and place the balance clip on it, halfway between the blade holder and the blade tip on the trailing edge of the blade. (3) Turn the fan on. Note whether the wobble has increased or decreased. Turn the fan off, move the clip to another blade, and retest. Repeat this procedure on all blades, noting the blade on which the greatest improvement is achieved.

Troubleshooting

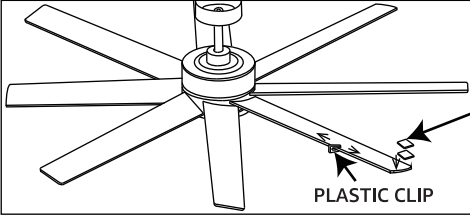PROBLEM	SUGGESTED REMEDY
If Fan Wobbles	<p>(4) Move the clip back to the blade that showed the greatest improvement. Move the clip inward and outward on this blade and operate the fan to find the position where the clip gives the greatest improvement.</p> <p>(5) Remove the clip and install a balancing weight to the top of the blade along the centerline, near the point where the clip was positioned.</p> <p>(6) If the fan wobble problem has not been corrected, you can try to improve the balancing further by using the balancing clip and additional weights.</p>  <p>The diagram shows a top-down view of a ceiling fan with five blades. One blade is highlighted with a dashed line. A small arrow points to a 'PLASTIC CLIP' attached to the inner edge of this blade. Another arrow points to a small notch on the top surface of the blade, labeled 'WEIGHT BALANCING'.</p>
If Light Does Not Work or Flickering	<ol style="list-style-type: none">1. Check for loose or disconnected wires in fan switch housing.2. Check the wiring of receiver to the light kit.3. Check for loose or disconnected wires in light kit, make sure connector is correct inserted.4. Check for faulty light bulbs. (light bulb version only)5. There are too many ceiling fans with different control systems in the same area. Shut down other ceiling fans to check if the flickering still occurs. <p>CAUTION: Make sure the main circuit is turned off before entering the switch housing.</p>

Customer Service

30-Days Full Refund Guarantee

If you are not completely satisfied or the item isn't what you expected, just tell us within 30 days. We will give you a full refund unconditionally.

Friendly Reminder

It's better to contact us than leaving a negative shopping experience. Nothing is more important than your satisfaction, and we will do our best to serve you.

Quick Response within 12 Hours

You can contact us without any hesitation at any time of the day, and we will reply to you within 12 hours. (It would be appreciated if you could provide us with a video or pictures, if available)

2-year Warranty

Your fan light comes with a two-year warranty. If a malfunction occurs due to product quality issues, we will assist in diagnosing the problem and provide replacement parts free of charge to ensure your fan light resumes normal operation.

Contact Information