


Features

- Acrylic
- Integral apron with removable access panel
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- UL listed
- Optional K-9695 metal finish 5 jet trim kit
- 60" (1524 mm) x 36" (914 mm) x 20" (508 mm)

BATH WHIRLPOOL WITH INTEGRAL APRON

K-1239-LA
ALSO K-1239-RA

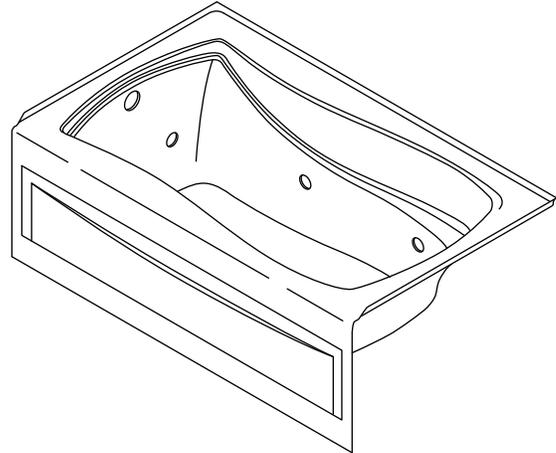

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1239-LA	Bath whirlpool with integral apron – left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1239-RA	Bath whirlpool with integral apron – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	--	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-9695	Metal finish 5 jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
--------	-----------------------------	-----------------------------	-----------------------------	-------------------------------------

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Bath whirlpool shall have an integral apron with removable panel. Bath whirlpool shall have 5 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall be UL listed. Bath whirlpool shall have an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1239-_____-_____.

MARIPOSA®

Technical Information

Fixture*:			
Basin area:			
Bathing well, bottom	46" (1168 mm) x 24" (610 mm)		
Bathing area, top	54" (1372 mm) x 27" (686 mm)		
Weight	105 lbs (47.6 kg)		
To overflow:			
Water depth	14" (356 mm)		
Capacity	63 gal (238.5 L)		
* Approximate measurements for comparison only.			
Pump:			
	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (214 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

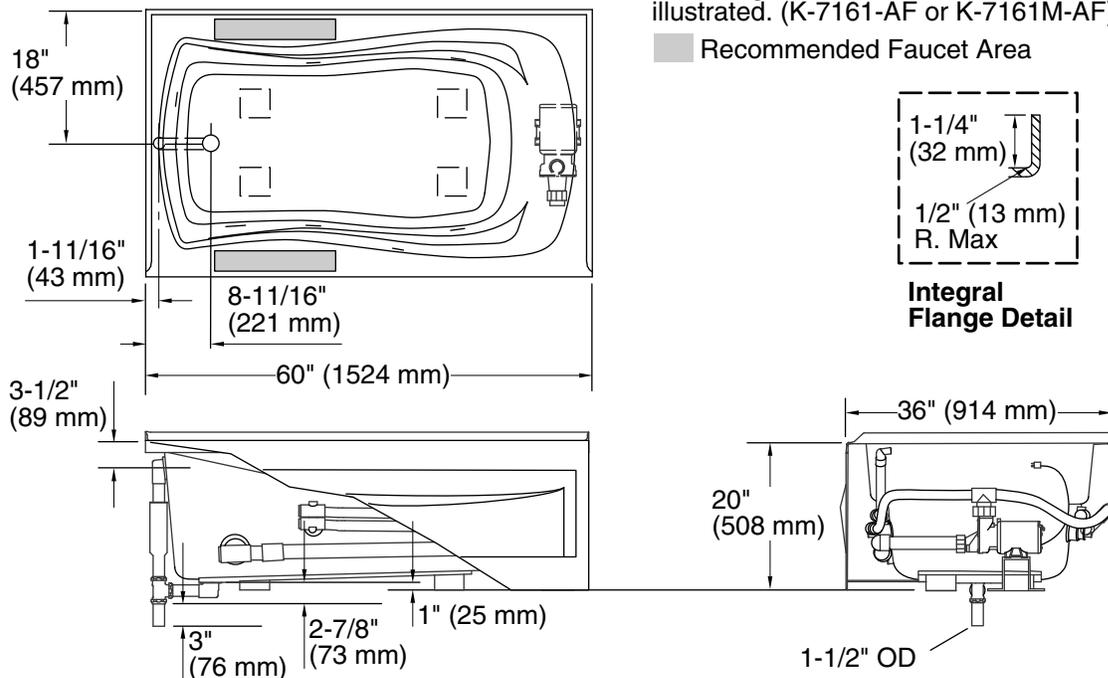

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

■ Recommended Faucet Area



Integral Flange Detail

Product Diagram