

# Assembly Instruction Sheet

Please go to our website for product cleaning tips. Go to the Care + Maintenance selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (3) A19 Medium Base bulb 100W Maximum, Alternate bulb (3) 23W CFL.

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


## Package Contents

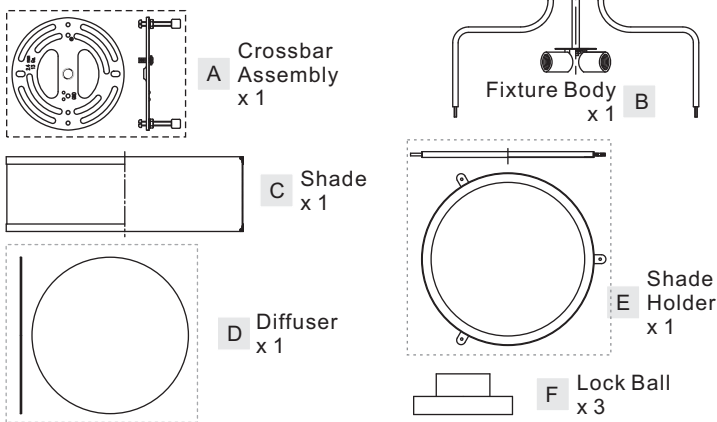

### STEP 1 - Install Crossbar Assembly

- A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.


Figure 1

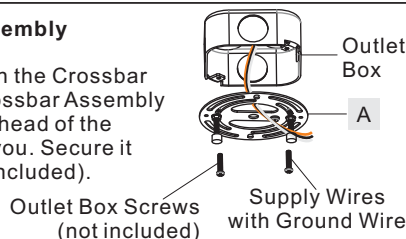

### STEP 2 - Fit Ceiling Canopy to Crossbar Assembly

- A. Unfold Support Arms of the Fixture Body (B) to proper locations. (Refer to Shade Orientation)
- B. Remove mounting balls from the Crossbar Assembly (A). Fit the Canopy (B) to the Crossbar Assembly (A) and secure with mounting balls. Note: The Canopy (B) should be snug against the ceiling and the mounting balls. If not, adjust the length of the nipple on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the Canopy (B) is secure, remove the mounting ball and ceiling canopy and proceed to Step 3.

Figure 2

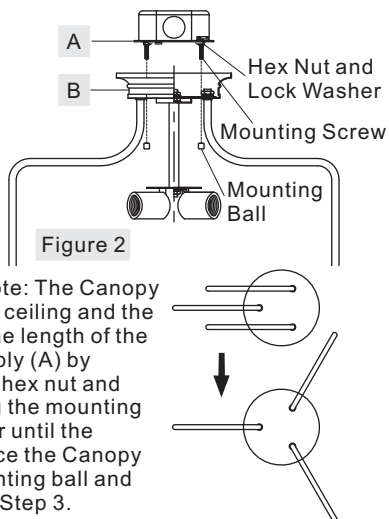

### STEP 3 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

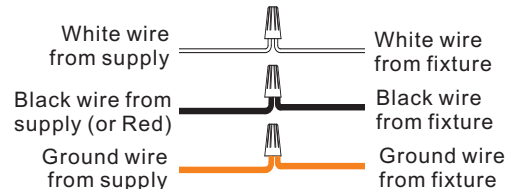


Figure 3

### STEP 4 - Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position the Ceiling Canopy over the outlet box. Align the holes in the Ceiling Canopy with the mounting screws, then attach the Ceiling Canopy using the previously removed mounting balls. Hand tighten until snug.




Figure 4

### STEP 5 - Install Shade, Fixture Body and Side Arm together

- A. Place Shade (C) and Diffuser (D) into the Shade Holder (E) properly.
- B. Pass the Bolt on the Side Arm through the hole on the Shade Holder (E), secure by threading Lock Ball (F) onto the Bolt. Hand tighten until snug.
- C. This fixture uses standard bulb with a medium screw base. Maximum 100 watts. Insert bulb and screw snugly into place.

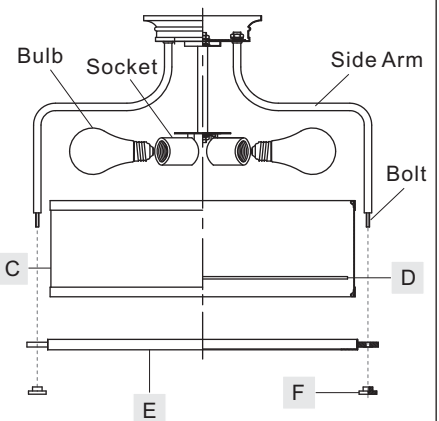



Figure 5

Your fixture is now assembled and ready to use. Enjoy!

Thank you for purchasing our product.

Need assistance with parts or assembly? Call our customer service or visit us on-line.

FINISH: WESTERN BRONZE

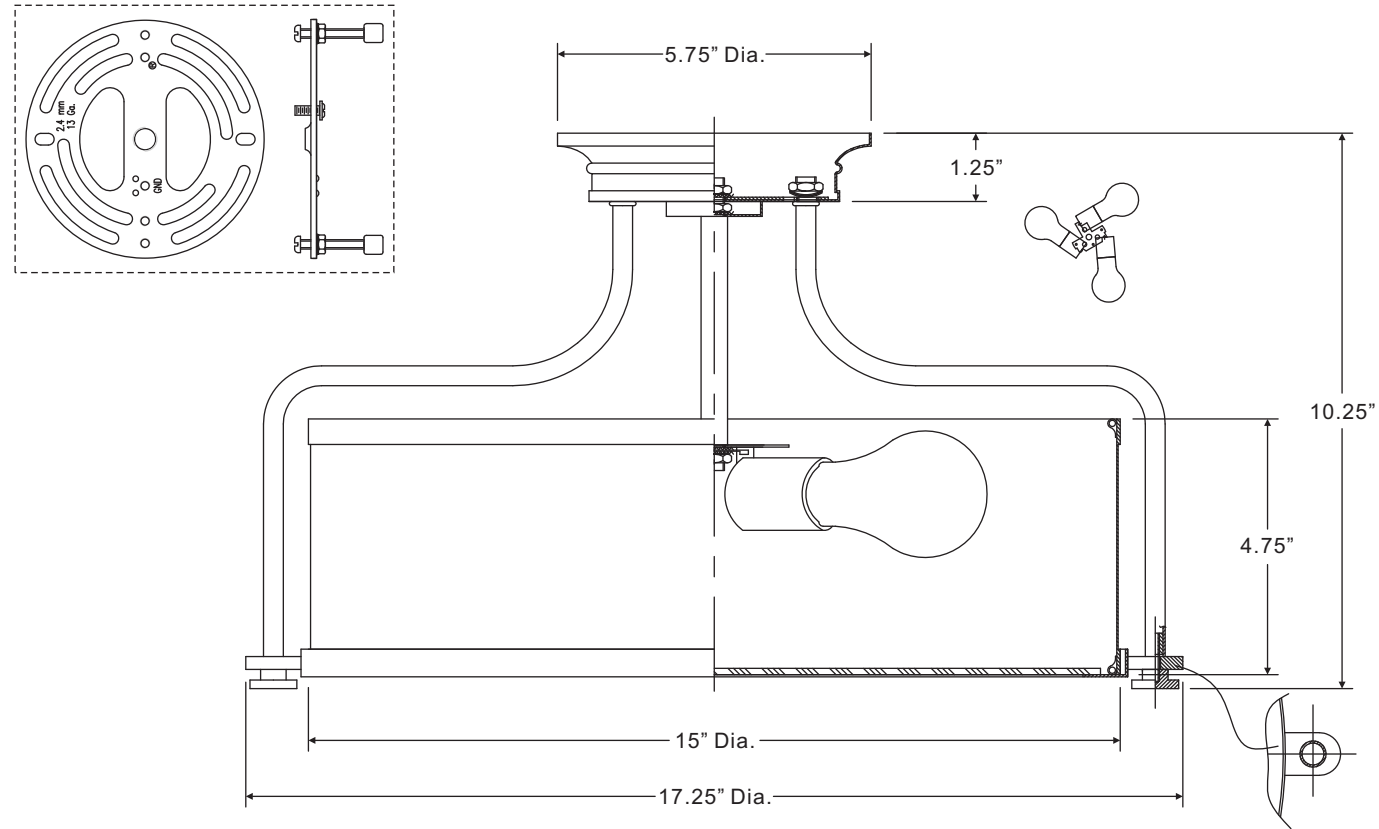

(3) 100W Medium  
Base Bulb  
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

| NO. | REPLACEMENT PART | REQ. |
|-----|------------------|------|
| 1   | GLASS DIFFUSER   | 1    |
| 2   | SHADE            | 1    |

Thank you for purchasing our product.  
Need assistance with parts or assembly? Call our customer service or visit us on-line .