


Features

- 1/4" (6 mm) thick tempered glass available in Crystal Clear or Frosted
- CleanCoat® glass treatment helps maintain glass appearance over time
- New bypass system provides an amazing feel with a modern look
- Innovative roller design simplifies installation and provides out-of-plumb adjustability
- Door tracking system is accomplished with a hidden, cushioned, center guide for smooth, quiet sliding action
- Hardware options inside and outside the shower include a blade handle or gently curved towel bars
- Anodized aluminum hardware prevents rusting or corrosion
- Smooth, easy-to-clean lineals

SLIDING BATH/SHOWER DOORS

K-706000

ALSO K-706001, K-706002

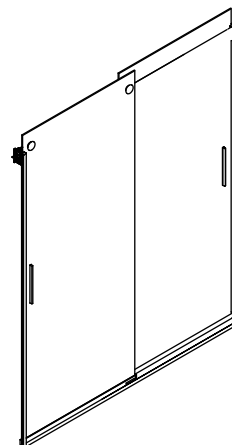

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)
- 16 CFR Part 1201

Glass Options

- L: Clear
- D3: Frosted

Frame Finishes/Colors

- SH: Bright Silver
- MX: Matte Nickel
- ABV: Brushed Bronze

Specified Model

Model	Application	Style	Glass Options		Frame Finishes/Colors		
K-706000	Bath	Handle	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706001	Low bath	Handle	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706002	Low bath	Handle	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706004	Bath	Towel bar	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706005	Low bath	Towel bar	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706006	Low bath	Towel bar	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706008	Shower	Handle	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706009	Shower	Handle	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706014	Shower	Towel bar	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV
K-706015	Shower	Towel bar	☐ L	☐ D3	☐ SH	☐ MX	☐ ABV


Product Specification

Sliding bath or shower door shall have 1/4" (6 mm) thick tempered glass available in Crystal Clear or Frosted. Product shall feature CleanCoat glass treatment that helps maintain glass appearance over time. Door shall feature new bypass system providing a modern look. Door shall have innovative roller design to simplify installation and provide out-of-plumb adjustability. Door shall have door tracking system accomplished with a hidden, cushioned center guide for smooth, quiet sliding action. Door shall have hardware options inside and outside the shower including a blade handle or gently curved towel bars. Door shall have anodized aluminum hardware to prevent rusting or corrosion and smooth, easy-to-clean lineals. Door shall be Kohler Model K-_____-_____-_____.

Installation Notes

Install this product according to the installation guide.

Roughing-In Notes				
Model	A (Max)	B (Wall Jamb Height)	C (Glass Height)	D (Walk Through)
K-706000	59-5/8" (1514 mm)	58" (1473 mm)	62" (1575 mm)	28-1/8" (714 mm)
K-706001	57" (1448 mm)	55-3/4" (1416 mm)	59-3/4" (1518 mm)	26-3/4" (679 mm)
K-706002	59-5/8" (1514 mm)	55-3/4" (1416 mm)	59-3/4" (1518 mm)	28-1/8" (714 mm)
K-706004	59-5/8" (1514 mm)	58" (1473 mm)	62" (1575 mm)	28-1/8" (714 mm)
K-706005	57" (1448 mm)	55-3/4" (1416 mm)	59-3/4" (1518 mm)	26-3/4" (679 mm)
K-706006	59-5/8" (1514 mm)	55-3/4" (1416 mm)	59-3/4" (1518 mm)	28-1/8" (714 mm)
K-706008	47-5/8" (1210 mm)	70" (1778 mm)	74" (1880 mm)	21-5/8" (549 mm)
K-706009	59-5/8" (1514 mm)	70" (1778 mm)	74" (1880 mm)	28-1/8" (714 mm)
K-706014	47-5/8" (1210 mm)	70" (1778 mm)	74" (1880 mm)	21-5/8" (549 mm)
K-706015	59-5/8" (1514 mm)	70" (1778 mm)	74" (1880 mm)	28-1/8" (714 mm)

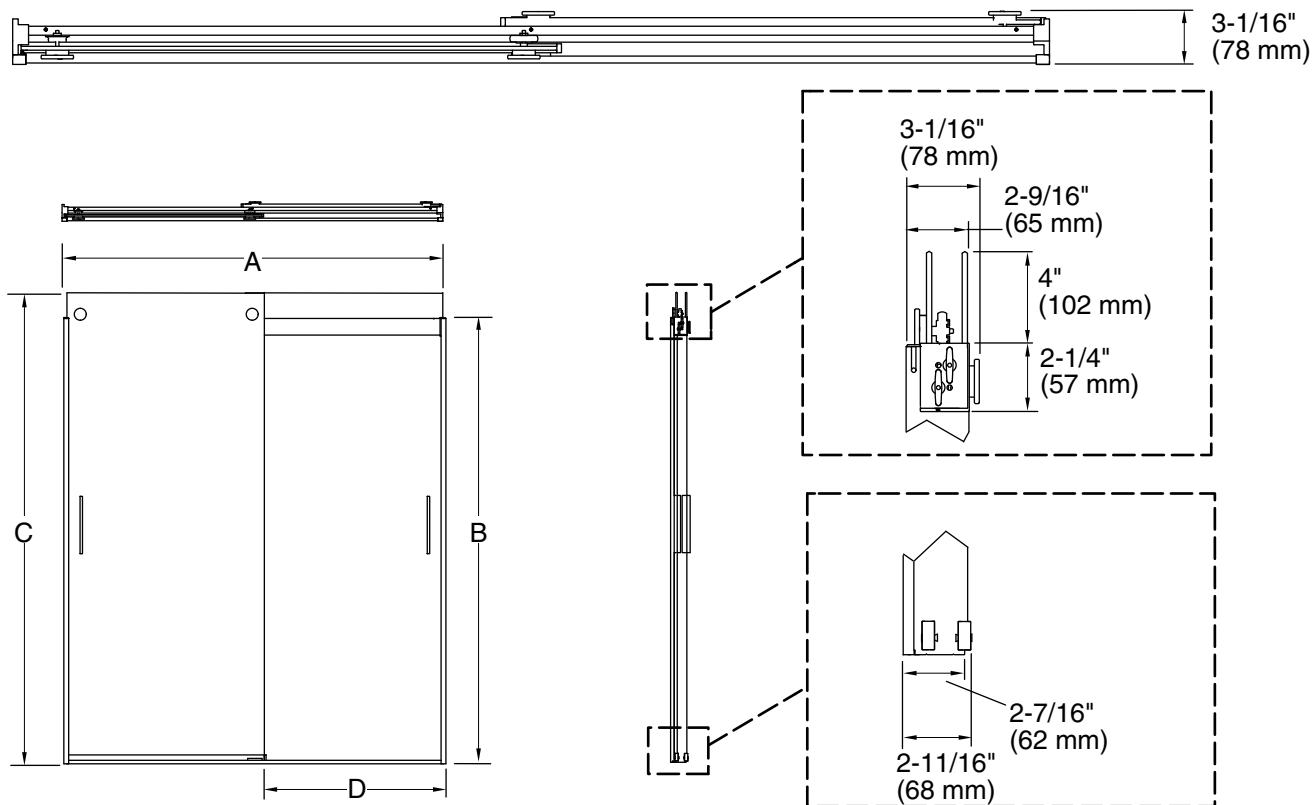

Product Diagram