


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning










To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	F	Canopy Nut		2X
B	Mounting Plate		1X	G	Acrylic Shade		1X
C	Mounting Screw		2X	H	Socket Ring		1X
D	Canopy		1X	I	Bulb		1X
E	Socket		1X				

Installation


Step 1

Unpack all parts from cartons carefully
Separate the Mounting Plate(B) from the Canopy(D).
Attach the Mounting Plate(B) to the junction box and
fix it by turning the Mounting Screw(C) clockwise till tight.

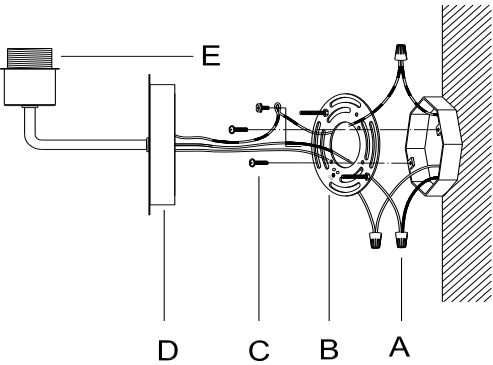


Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 3

Attach the Canopy (D) to the junction box and fix it
by turning the Canopy Nut (F) clockwise.
Unscrew the Socket Ring(H) from the Socket (E).
Place the Acrylic Shade(G) over the socket(E) and fix it
by turning the Socket Ring(H) clockwise.
Insert the bulb (I) into the Socket (E). Be sure to use
the bulb with wattage not exceed than specified on this fixture.

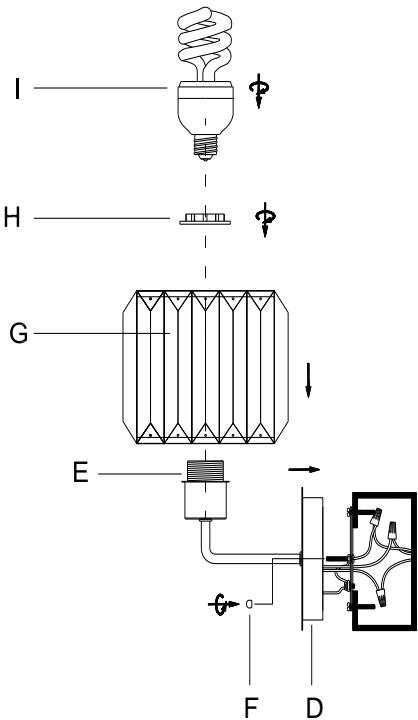

**PLEASE USE ON/OFF TYPE "A" BULB MAX 40-WATT
OR CFL BULB MAX 9-WATT
THERE IS CFL 9-WATT BULB IN THE BOX.**

Step 4

Consult a qualified electrician to ensure correct branch
circuit conductor

ENJOY YOUR LAMP