


# HOTEL SPA<sup>®</sup> DESIGNED IN FRANCE FOR LUXURIOUS SPA EXPERIENCE

Items 1417 & 1419

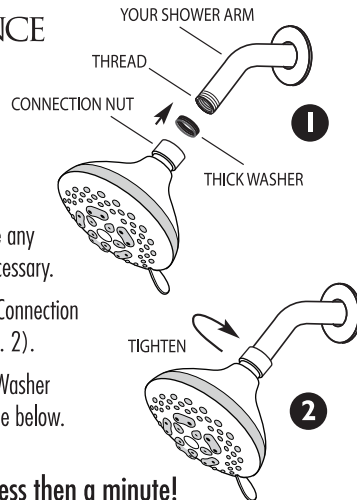

1. Remove old shower head by turning it counter-clockwise. Remove any excess material left on Shower Arm threads. Use steel wool if necessary.
2. Make sure Thick Washer is positioned FLAT and STRAIGHT inside Connection Nut (Fig. 1). Hand tighten Connection Nut onto Shower Arm (Fig. 2).

**WARNING:** DO NOT OVERTIGHTEN Connection Nut as it may cause Washer to dislocate and be squeezed into Shower Arm. If leakage occurs, see below.


## Have a Leak? Make your shower 100% leak-free in less than a minute!

Leakage between Connection Nut and your Shower Arm is often caused by Washer inside Connection Nut not pressing evenly against edge of Shower Arm Thread (fig. 3). This is usually the result of Washer not nested correctly. To seal properly, Washer must stay FLAT and STRAIGHT inside Connection Nut (Fig.3).

### You can eliminate this leak by simply re-positioning Thick Washer:

Unscrew Shower Head from Shower Arm and adjust position of Washer by pushing it down and pressing around its edges with your finger or pointed tool, until it nests completely FLAT and STRAIGHT inside Nut (fig. 3).

If Washer is positioned correctly but leak remains, it is likely the result of Damaged Washer Surface or Worn Shower Arm Threads. If you suspect Damaged Washer Surface, using screwdriver or pointed metal tool, gently pull out Washer from Connection Nut, turn it up-side-down and nest back into Nut. If the leak is caused by Worn Shower Arm Threads, wrap some Plumber's Tape around Shower Arm threads.

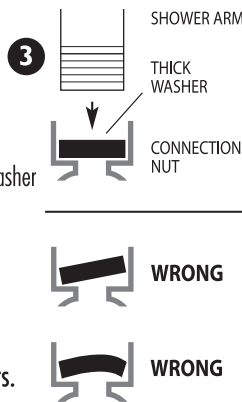

**IMPORTANT:** Hand tighten connections ONLY. DO NOT use wrench or pliers.

DO NOT overtighten - this may cause washer to bend and be pushed into shower arm. Use plumber's tape ONLY if Washer fails to stop leakage.

NOTE: If your shower arm has a ball on the end of it instead of thread, it will not work with this shower unit and will need to be replaced with a standard shower arm available at most plumbing supply stores.

## To Set Shower Head Settings


Turn Dial Lever (Fig. 4) to select desired water pattern, while holding Shower Head with free hand to prevent loosening of its connection. Choose from 5 full and 2 combination settings.

## To Set Shower Head Angle

Swivel Shower Head around Ball Joint to desired angle.

## To Save Water while Lathering or Shampooing

To reduce water flow, turn Dial Lever to Economy Rain mode.

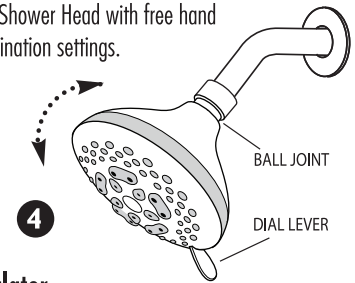


## Low Water Pressure? You can remove Water Flow Regulator.

As mandated by U.S. federal law, this shower head is equipped with water flow regulator that limits maximum water flow to 2.5 gallons (9.5 liters) per minute at 80 psi water pressure. In areas with extremely low water pressure causing the shower water flow to be unsatisfactory, the flow regulator may be removed to improve the water flow in the shower head.

## To Remove Water Flow Regulator

1. Using sharp-point metal object or screwdriver tip, pull out Washer (Fig. 5).
2. Use screwdriver and any short screw to penetrate screw through Regulator, then grab screw head with standard pliers and pull out screw together with Regulator. You can also use drill to drill through Regulator in order to create larger opening for water flow.



## Cleaning Instructions

Cleaning may be required when mineral deposits appear on jet tips.

Clean flexible nozzles by rubbing with a finger or soft bristled toothbrush. Do not clean or rinse any part with harsh chemicals, heavy-duty cleaners or abrasives. This may damage parts or finish and may void warranty.

*If you have installation problem or missing parts, please DO NOT return this product before calling us first. We can easily solve it on the phone or will quickly send needed parts.*

Made in China

For Questions/Part Replacement, Call Toll Free

**1-888-869-4010**

Monday - Friday 9:00 AM - 4:00 PM Eastern Time

For other products visit us at [www.itlk.com](http://www.itlk.com)

Interlink Products 1315 E. Elizabeth Ave., Linden, NJ 07036

## LIFETIME LIMITED WARRANTY

Interlink will repair or replace any of this product's parts that exhibit defects in workmanship or materials for above stated period from date of purchase. If malfunction occurs, send only defective part(s) with proof of purchase to Customer Service Department at the address listed below. Your warranty does not cover malfunction or damage due to accident, misuse, or failure to follow any written instructions accompanying this product.