

# Installing your **SCHWUNG** Odyssey Single MD

Collection

Odyssey

2023



Our goal is to bring energy, warmth and pleasure into your personal space. It's great to be here.

Safety  
instructions 6

---

Components  
and features 7

---

Assembly  
instructions 8

---

Cleaning and  
maintenance 12

---

Troubleshooting 13

# Safety instructions



**We recommend installation  
by a licensed electrician.**

## **Safety instructions**

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

1. Turn off electricity at the main circuit breaker panel before beginning installation.
2. This direct wire fixture must be installed by a certified and licensed electrician. The customer should not attempt to install.
3. This fixture has been rated for up to 1 (E) 40W max E12 base bulb. To avoid the risk of fire, do not exceed the recommended wattage.
4. If any special control devices are used with this fixture, follow the instructions to assure full compliance with the N.E.C. requirements.
5. This fixture should only be used with a trailing edge dimmer.
6. Mounting hooks and wall anchors are not included. To select the proper type of mounting hook /wall anchor for your wall/ceiling please contact your local hardware store for assistance. If you have any questions, contact a licensed electrical contractor.

## **Warnings**



- Do not mount or unmount the glass cylinders if the fixture or light bulbs are hot.
- All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- Do not use if the light cable/cord is damaged.
- To reduce the risk of fire, electrical shock or personal injury, always turn off the light fixture and allow it and the globes to cool prior to replacing light bulb.
- When mounting the fixture, always use the cotton gloves included.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.

# Components and features

## FEATURES

- Hand-crafted in brass
- Mouth-blown glass cylinder

## COMPONENTS

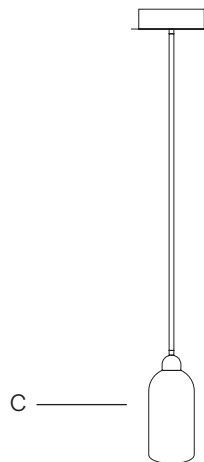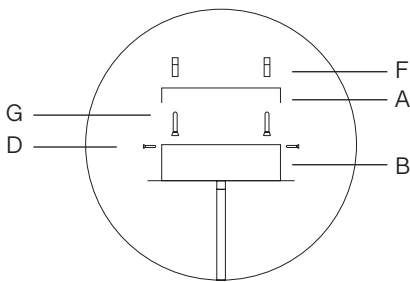

- A Ceiling crossbar (1x)
- B Canopy (1x)
- C Glass cylinder (1x)
- D Canopy bolts (2x)
- E Light bulb (1x):  
Max wattage 40W  
Bulb base E12  
Max length 90mm


- Not Included**  
(recommended for installation):
- F Anchors (2x)
  - G Screws (2x)
  - Flat-head screwdriver
  - Electric drill
  - Pencil

# Assembly instructions




Make sure you cut off power supply at the main fuse box/circuit breaker before commencing any work.

1



After removing the lamp from the box, use a Phillips screwdriver to unscrew the 2 bolts [D] attached to the ceiling crossbar.

2




Turn Power Off!

Place the ceiling crossbar [A] flush against the ceiling in proximity to the ceiling electrical wires and mark 2 anchor spots. Drill holes in the marked spots and place anchors [F] in.


**NOTE:** Consult your local hardware store for proper anchors.

3



Screw the anchor screws [G] in to secure the crossbar to the ceiling.


4



Lift the fixture up and hold under the ceiling crossbar [A] to make electrical connections.

**NOTE: Two people are recommended for this action and the two following steps.**


5



Junction boxes may vary depending on location. The diagram on the left shows the most common markings and manner of connecting the cords


**NOTE: We recommend installation by a licensed electrician.**

6



Lift the canopy [B] up and hold it against the crossbar [A] so that the openings in the canopy match the openings in the crossbar. Use canopy bolts [D] to screw the canopy to the crossbar.

7



Remove the retainer ring from the socket and place the glass cylinder onto the bulb socket.

8



Screw the retainer ring onto the socket to secure the glass cylinder.

9



Restore power and enjoy your Schwung Lamp.



# Cleaning and maintenance



Make sure you cut off power supply to the lamp before commencing cleaning operations.

Components	Maintenance	Tools
Brass Frame	Clean every month using a soft cloth, dampened slightly with water. Make sure the frame is dry before switching the lamp back on.	Soft cloth, water
Glass cylinders	Clean regularly with a soft dry cloth. Clean only the outside of the cylinder. If especially dirty, use a wet cloth first. Grease can be removed with a gentle glass cleaner.	Soft cloth, Cotton gloves (!)
Light bulbs	Make sure your power supply is off before changing the bulb. Unscrew the globe where bulb needs replacing. Gently remove the bulb by pulling it out and replace with a LED bulb of the same parameters.	LED bulbs, Cotton gloves (!)

**NOTE:** Please remember, solid brass may tarnish over time. This is a natural process. Make sure you follow our guidelines to preserve the great look of Schwung lighting for years.

# Troubleshooting

Problem	Possible Cause	Action
Tarnishing	Oxidation of brass is a natural process. Although it is lacquered, its color may change slightly over time.	No action is necessary apart from regular cleaning. See the Maintenance section.
Crooked hanging	Wrong positioning of cylinders.	Loosen the retainer ring and position the cylinder correctly. Turn the retainer ring gently to secure the position.

**NOTE:** Dear client, please be assured our team strives to deliver highest quality products. The handmade nature of the products offers a unique aesthetic experience and allows for small imperfections, which is inherent in crafts. If solutions offered below are not sufficient, please do not hesitate and contact our customer service.

# Having trouble?

We're sorry to hear that.

Our enlightened objects are designed for longevity.

Each piece is made by hand to ensure the highest possible quality and a unique aesthetic experience.

This means you may encounter small surface imperfections. We like to think of them as whispered greetings from our craftspeople. But should you have any concerns about your product and the previous solutions fail to help, please don't hesitate to email us at [info@schwung.design](mailto:info@schwung.design)