

shown in Red with metal blades and decorative cage

shown in Brushed Nickel with wood blades

- 
Safety cage compatible
- 
Proudly assembled with American labor
- 
Handmade

The largest 360° rotational fan in the collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, carries a limited lifetime warranty.

Matte Black	Bronze (Plate)	Bronzette (Powdercoat)	Brushed Brass	Polished Brass	Agua Marinha	Safira	Ametista	Ouro
Brushed Nickel	Polished Chrome	Polished Copper	Brushed Copper	Polished Chrome Damp	Jade	Esmeralda	Rubi	
Standard Finishes				Brushed Nickel Damp	Gloss White	Special Order Finishes		

# TECHNICAL SPECIFICATIONS

## FAN SPECIFICATIONS

Fan Weight	24 lbs
Voltage	110 or 220
Motor Type	AC
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

### NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood <sup>1</sup>	Metal with Guard
Fan Diameter	62 inches / 157 cm	60 inches / 152 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight fines <sup>2</sup>
Blade Pitch	19°	31°
CFM (Low / High)	2644 / 4519	1372 / 2278
RPM (Low / High)	715 / 1209	685 / 1139
Watts (High)	91.63	94.76
CFM / Watt (High)	49.32	24.04

## SKU NAMING CONVENTION

SKU#	IV-XX-XXX (Model+Finish+Fan Blade)	
Standard Finishes	Black	— BK
	Bronze	— BZ
	Bronzette	— BZZT
	Brushed Nickel	— BN
	Polished Chrome	— CR
Special Order	Polished Copper	— CP
	Brushed Brass	— BRBR
	Polished Brass	— PB
	Brushed Copper	— BRCP
	Polished Chrome Damp	— CRDAMP
	Brushed Nickel Damp	— BNDAMP
	Gloss White	— WH
	Agua Marinha	— LTBLUE
	Safira	— BLUE
	Ametista	— LTPURPLE
	Ouro	— GOLD
	Jade	— LTGREEN
	Esmeralda	— GREEN
Rubi	— RED	
Fan Blade	Wood Blade	— WD
	Metal Blade	— MTL

<sup>1</sup> Brazilian mahogany is ecologically harvested.


<sup>2</sup> Safety cages with tight fines are for use in low ceiling applications: 7 ft in USA and 8.2 ft in Canada

### STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm


Flat ceiling canopy

Decora-style, 3-speed wall control in white



### OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

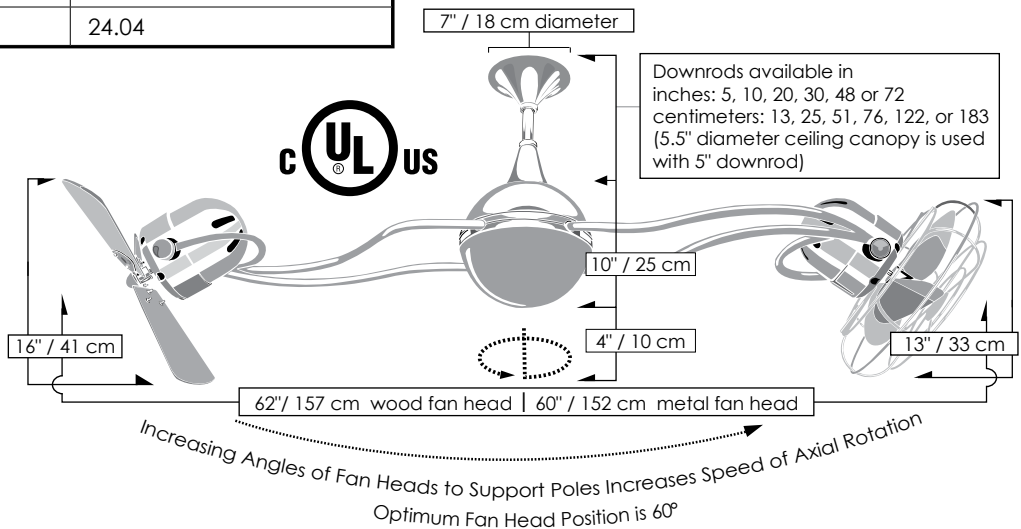

### CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

### CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths Field cuttable Non-threaded
10 ft or less	5 inches / 13 cm <i>Use safety cage if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm