



# Installing Peel and Stick Glass Tile

This installation guide should be used as a reference, installation should be completed by a professional and certified tile installer. Glass has sharp edges, please always use protective gear

**PLEASE NOTE: PEEL AND STICK GLASS TILES SHOULD NEVER BE INSTALLED ON THE FLOOR, WET, HIGH MOISTURE AREAS OR OUTDOORS**

## Before you start your project

- 1) Measure the area to determine the amount of tiles you will need. We also recommend you purchase at least 10% more material to account for wastage.
- 2) Inspect the purchased material for any imperfections.
- 3) Ensure the area that you will install the tile on is clean, flat and dry. If you are installing the tile in the kitchen, do not install the tiles in areas directly exposed to heat or any water/moisture. Peel and stick glass tile should never be installed in wet and high moisture areas. We also recommend unscrewing any electric plates so you can install the tiles under the plates.
- 4) Use a level or spacers as a guide and draw a grid or a tile pattern that you wish to install the tiles as. This also helps you to see where you might need to cut the tiles.
- 5) **Grout is optional. If use grout, un-sanded grout is recommended with a grout joint less than 1/8".**

## Tools for Installation

Gloves (Cut Resistant Gloves)



Goggles



Tile Cutter



Sponge



## Installation Instruction


- 1) Layout your tile in the pattern you would like to install. If any need cutting, please use a tile cutter to cut tiles to the correct size before step 2 (taking the adhesive protective layer off).



- 2) Start with one tile at a time, turn it to the back and carefully lift the back of the adhesive protective layer. The red film layer should come off very easily, exposing the adhesive.



3) Install the tile onto the wall. You do not need to leave space between the tiles. They can be installed right next to each other. The adhesive is very strong, once installed if you do attempt to remove it please note that it might damage the tile, wall or compromise the adhesive strength. The tile is not meant to be reused multiple times.

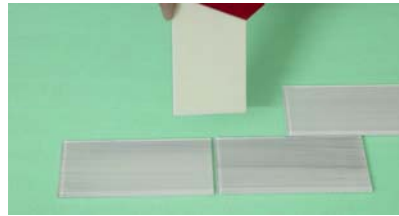

4) Grouting is optional. You must use un-sanded grout with a recommended grout joint less than 1/8". If you choose to grout, please wait at least 12 hours for the adhesive to dry before grouting.

If you do not wish to grout, please wait at least 12 hours before cleaning the tile surface with a damp sponge.



- Grout is not necessary, but if you wish to grout, please follow all grout application instructions.
- If you wish to use a tile sealer, then you must grout before applying tile sealer.
- Peel and Stick Tiles are not reusable, once installed and removed, the adhesive layer will be compromised.
- Peel and Stick Tiles should never be installed on the floor, wet, high moisture areas or outdoor areas.