


Assembly Instruction Sheet for Model HL409449

Package Contents

Part	Description	Quantity
A	Fixture Arm	8 pcs.
B	Ceiling Canopy	1 pc.
C	Metal Cage Frame	8 pcs.
D	Mounting Bracket	1 pc.

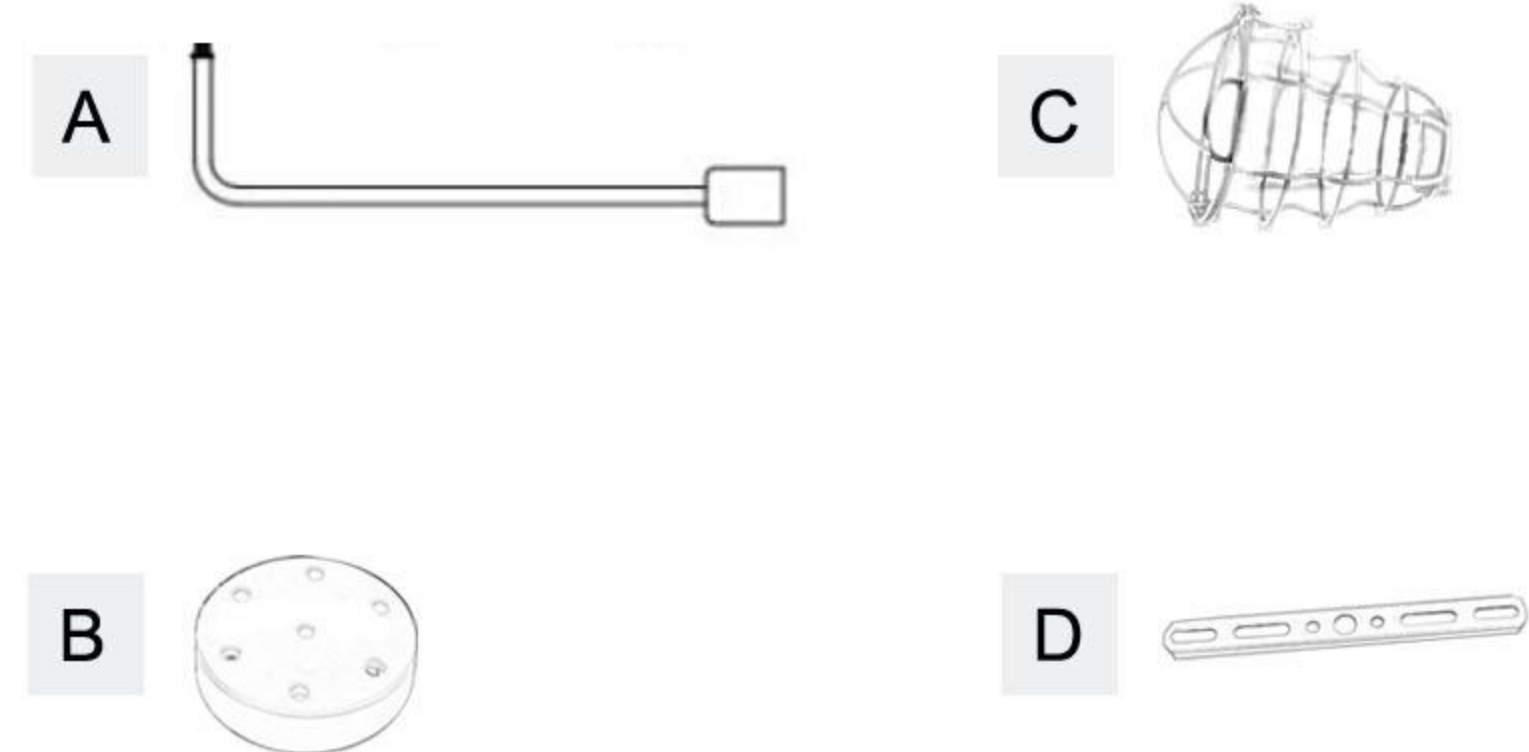

STEP 1

Thread the wire from the Fixture Arm(A) through the Ceiling Canopy(B).
Fix the Fixture Arm(A) to the holes of Ceiling Canopy(B).

STEP 2

Remove the socket ring from the lamp socket of Fixture Arm(A).
Place the Metal Cage Frame(C) to the lamp socket of Fixture Arm(A).
Screw the socket ring back to the lamp socket to stabilize the Metal Cage Frame(C).

STEP 3

Connect wire color Red/Black from the Fixture Arm(A) as one strand of wire.
Connect wire color Blue/White from the Fixture Arm(A) as the other strand.

STEP 4

Remove the Mounting Bracket(D) from the Ceiling Canopy(B).
Mark the drilling position on ceiling with the help of the Mounting Bracket(D).
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Mounting Bracket(D) to the expansion anchors with self-tapping screws.

STEP 5

Hold the fixture close to ceiling.
Connect live line to wire color Black/Red from the Fixture Arm(A).
Connect neutral line to wire color White/Blue from the Fixture Arm(A).

STEP 6

Attach the Canopy(B) to the Mounting Bracket(D).

STEP 7

Insert your bulb to the bulb base.

Your fixture is now assembled and ready to use.