

CHANDELIER



INSTALLATION MANUAL

TOOLS REQUIRED




Ladder



Pliers




Wire Strippers



Screwdrivers


01

PACKING LIST

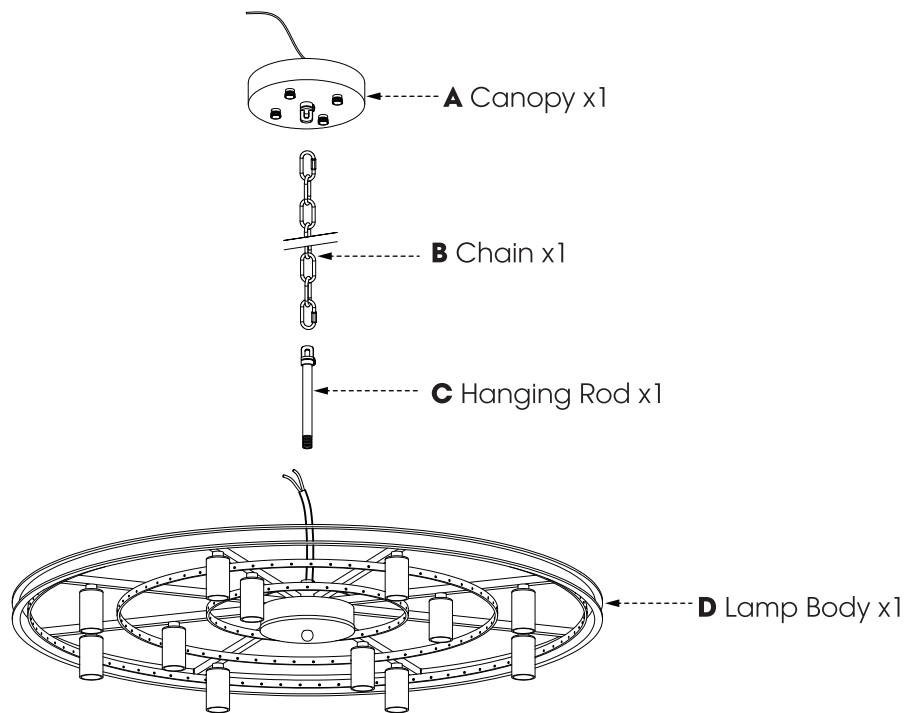

02

INSTALLATION KIT

AA 1X  Mounting Bracket	BB 2X  Outlet Box Screw	CC 4X  Knurled Nut
DD 1X  Ground Screw	EE 3X  Wire Nut	FF 1X  M4 Screw
GG 192X  Butterfly Clip	HH 192X  Rectangle Crystal	II 1X  Gloves

NOTE:

1. AA/CC/DD has already been pre-installed with Canopy (A).
2. FF have already been pre-installed with Lamp Body (D).
3. Some extra hardware may be included. The quantity listed above is the number required for installation.


03

MOUNTING AND WIRE

1. Install the Mounting Bracket

Step 1: Loosen the Knurled Nut (CC), then remove the Mounting Bracket (AA) from the Canopy (A).


Step 2: Secure the Mounting Bracket (AA) to the ceiling with the Outlet Box Screw (BB).

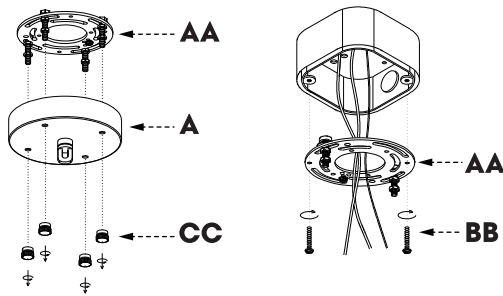

2. Pass the Wires

Step 1: Pass the wire of the Lamp Body (D) through in the order C/B/A.

Step 2: Open the Quick Link on Chain (B), then connect the Quick Link on both ends of Chain (B) to the Hanging Rod (C) and Canopy (A), and finally lock the Quick Link tightly.

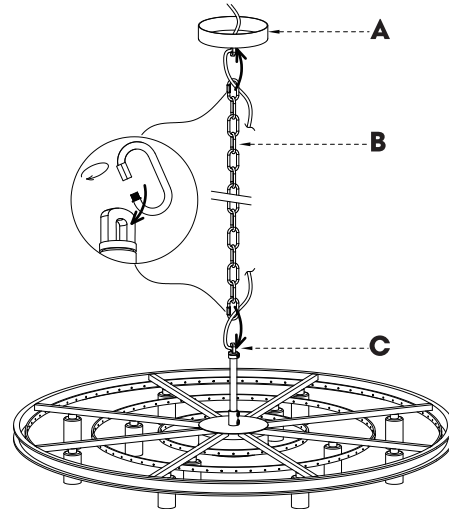


3. Connect the Wires

Step 1: Wrap the ground wire from the outlet box around the Ground Screw (DD) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.


Step 2: Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

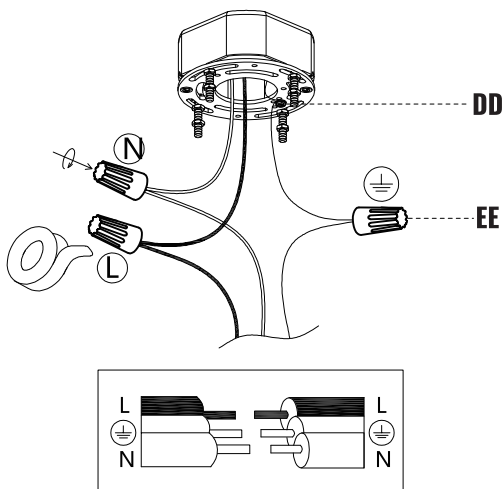

4. Install the Canopy

Install the Canopy (A) onto the Mounting Bracket (AA) with the Knurled Nut (CC).


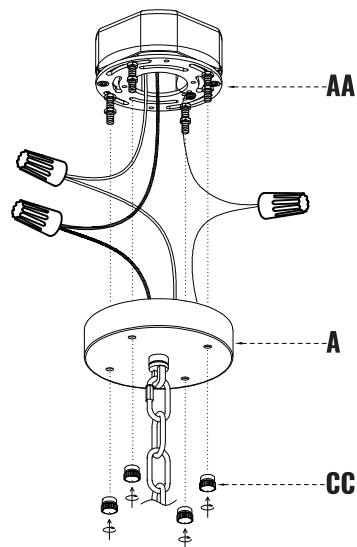


04

INSTALLING CRYSTALS AND BULBS

Step 1: Insert the Butterfly Clip (GG) into the Rectangle Crystal (HH).

Step 2: Insert the Butterfly Clip (GG) with the Rectangle Crystal (HH) into the holes of the Lamp Body (D) and bend to secure.

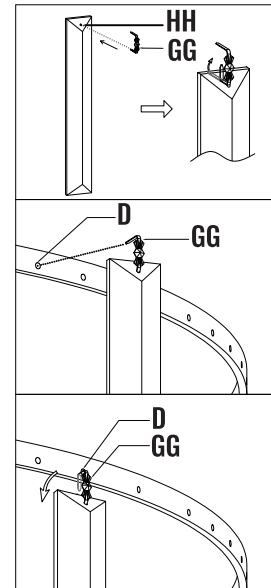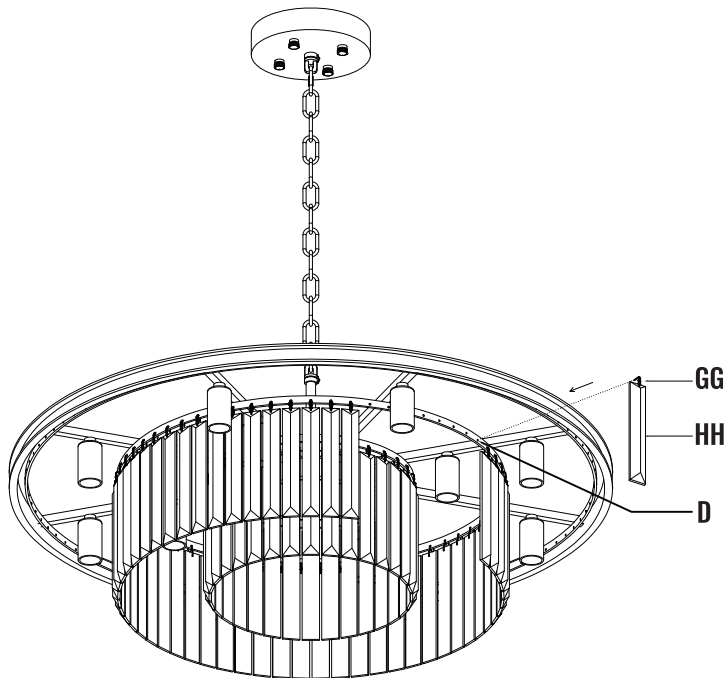

Install the E12 x 12pcs bulbs (not included).

NOTE:

This lamp uses E12 bulbs base and can only be used in conjunction with LED bulbs up to 40W.

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

