


TOOLS REQUIRED



goggles




Drill




5/16" diamond
drill bit



Tape




Sealant



Flat
Shovel



Philips
screwdriver




Flat
screwdriver



Wrench



Pipe
Wrench




Expoxy

IMPORTANT: We strongly recommends that this product be installed by a licensed plumber. Ensure that installation complies with applicable plumbing and building codes.



Installation

- 1 Put the sink onto the countertop to determine the optimal placement before installation. (Note: Minimum clearance distance is required for the sink faucet)


Place the sink in the desired position on the countertop and mark the centerline of the drain and faucet holes with a pencil.

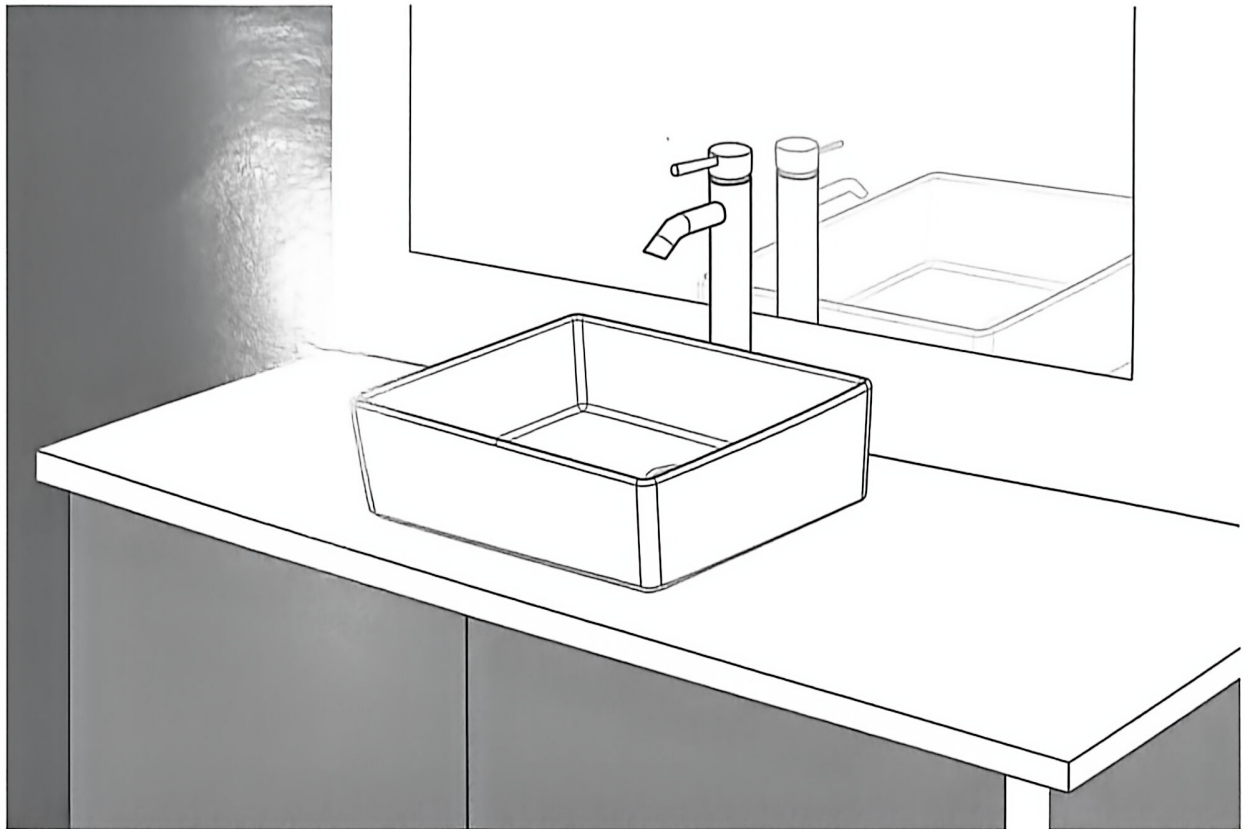


- 2 Once the position is confirmed, mark the center of the drain hole and set aside the vessel sink. Draw a 3-inch diameter circle around the center of the drain hole. Use a jigsaw or a power tool to cut the opening on the countertop.

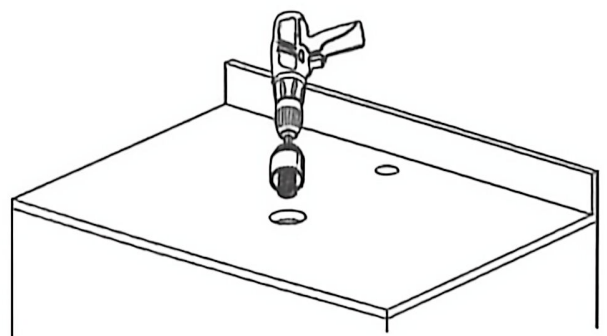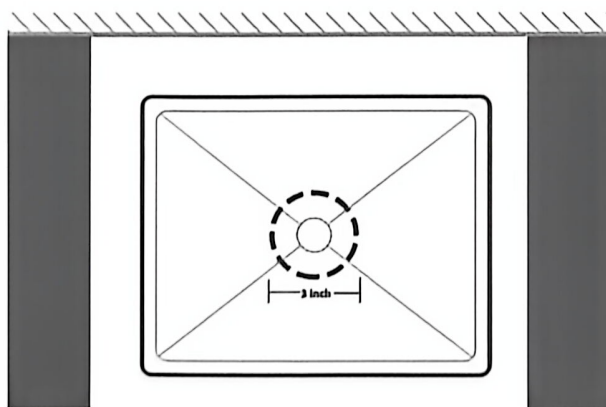


- 3** Install the drain according to manufacturer's installation instructions.
(Note: The drain is not included in the package. Do not overtighten the drain, which will damage the sink surrounding area.)

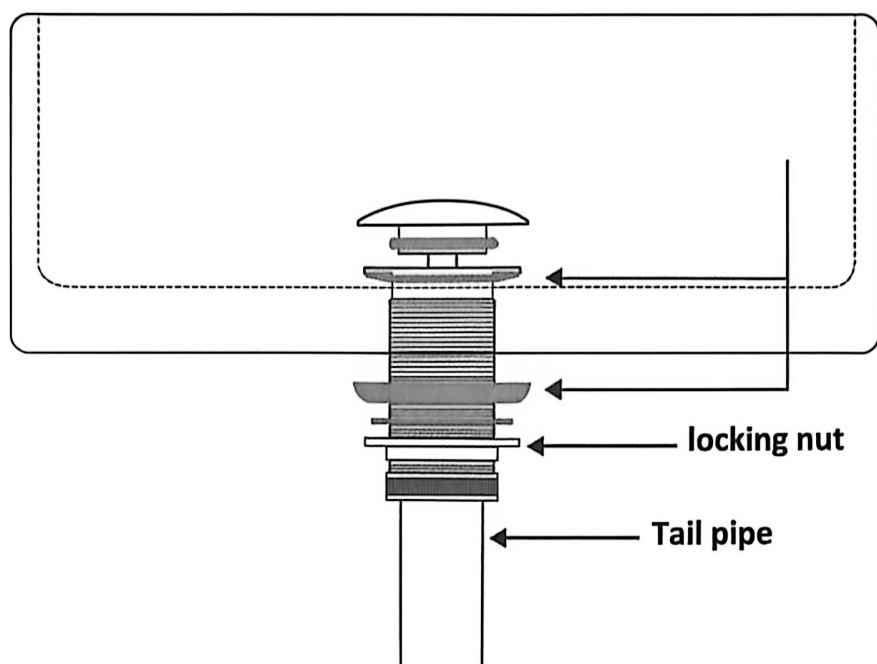

- 4** Apply silicone adhesive around the bottom rim of the vessel sink and place the sink onto the countertop. Plumber's putty can be used to level the sink.

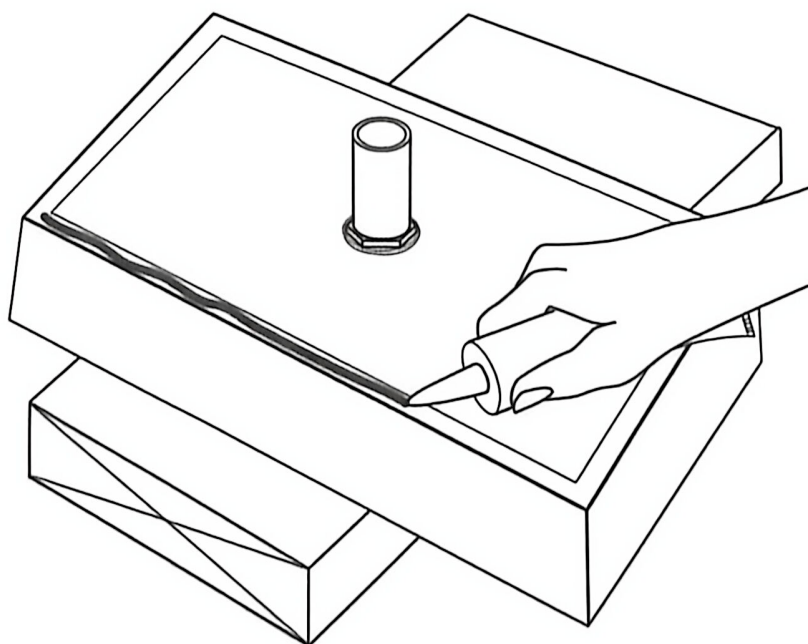

- 5** Install the sink well and connect P-trap to the drain and check for alignment. Apply some caulking around the base of the sink to seal any gap between the sink and the countertop.

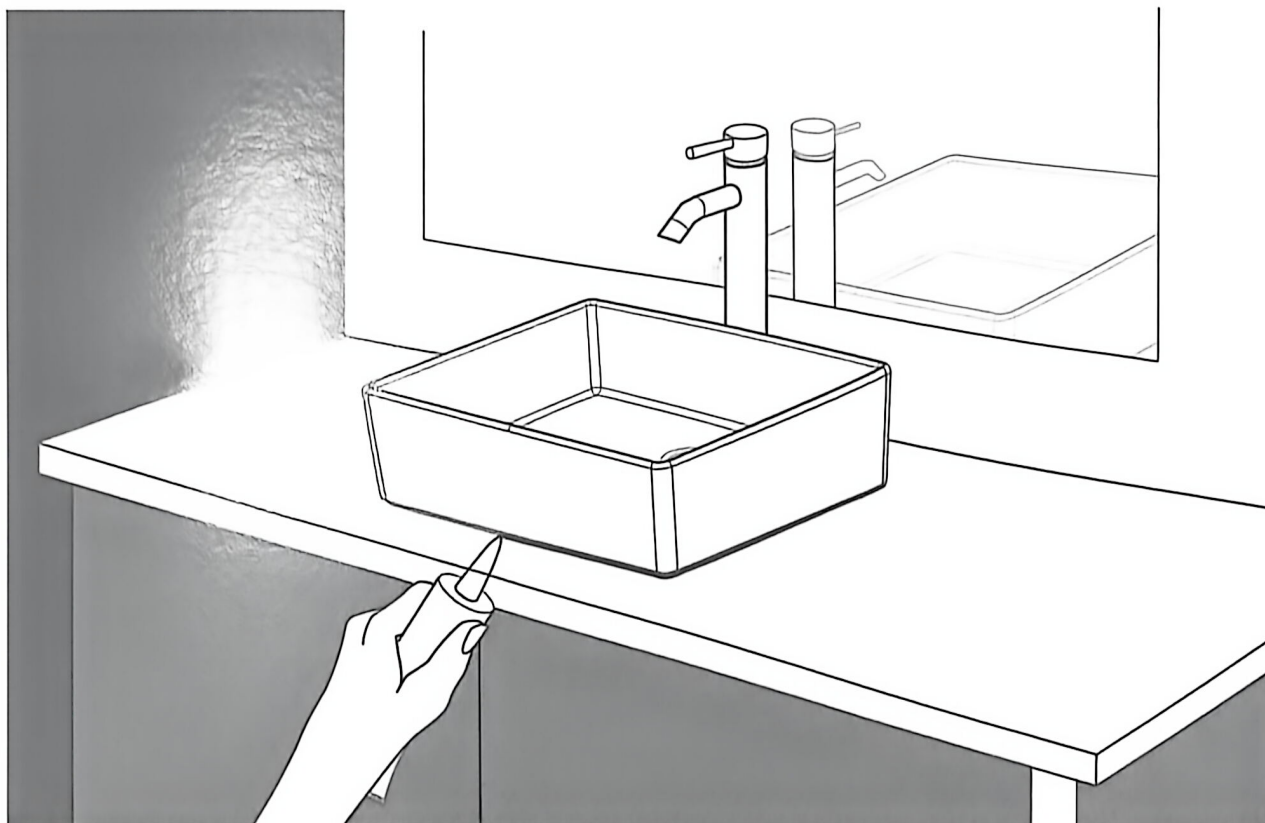

Care and Cleaning

For best results in caring for your sink, we suggest the following:

- Clean the outside surface with mild soap, warm water, and a soft cloth.
- On stubborn stains, use a powdered detergent and damp sponge or nylon scouring pad.
- Never use abrasive scouring powders, cleansers, or pads because they will scratch, damage, and dull the surface.