

IMPORTANT SAFETY INSTRUCTIONS


- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.

INSTALLATION INSTRUCTIONS

1. Measure Canopy (D) height with measuring tape. Adjust Canopy Screws (E) on Mounting Plate (A) to the height of measured Canopy (D) plus 1/4" to allow them to protrude through Canopy (D) during installation. Lock Canopy Screws (E) in place with the hex nuts.
2. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure Mounting Plate (A) is positioned with the threads of Canopy Screws (E) pointing down towards the floor.
3. Place Canopy (D) flush against ceiling with Canopy Screws (E) protruding through the holes in Canopy (D). Verify that 1/4" of the threaded portion of Canopy Screws (E) are visible. Remove Canopy (D) and set aside.
Note: If 1/4" of Canopy Screws (E) are not visible, remove Canopy (D) and re-adjust Canopy Screws (E) to proper height and lock them in place with the hex nuts.
4. Secure the center tubes on both Fixture Arms (J) into Fixture Body (K) with Hex Screws (L.1) and screwdriver. Secure each end of Fixture Arms (J) to the notches on Fixture Body (K). Secure in place with Hex Screws (L.2) and wrench.
Note: The arms should sit under the notches.
5. Secure Shade (Q) to Socket (M) with Socket Cap (R) and Socket Ring (S). Tighten with Tightening Tool (T).
6. Secure Panels (V) to holes on the side of Fixture Body (K) using Panel Screws (U).

7. Determine hanging length by selecting desired Downrods (G) for each side. Secure each set of Downrods (G) together, ensuring that one set of Downrods (G) has a Sloped Ceiling Adapter (I) on one end.
8. Thread Wires (H) from top of the fixture up through Downrods (G). Secure Downrods (G) to the top of the fixture body. Pull through any necessary Wires (H).
9. Thread Wires (H) through Canopy (D). Secure non-adapter side of Downrod (G) to Canopy (D), then ensure the side with Sloped Ceiling Adapter (I) protrudes through the hole on the other side of Canopy (D).
10. Slide first Washer (O) over the threading on Sloped Ceiling Adapter (I) until flush with Canopy (D). Secure Ground Wire (P) and second Washer (O) over the threading.
11. Screw Hex Nut (N) over both Washers (O) and the Ground Wire (P) onto the threading on Sloped Ceiling Adapter (I) and tighten with a wrench to secure in place.
12. Use wire cutters to cut Wire (H) 10" beyond the length of Downrods (G) to allow for easier wire connection.
13. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

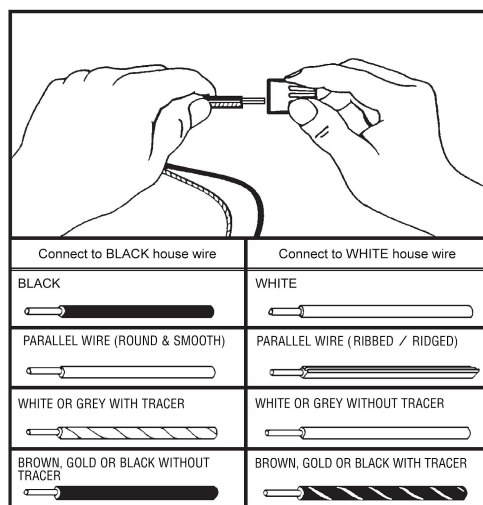

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

14. Place all Wires (H) and Wire Connectors (C) back into the junction box.
15. With a friend, lift the fixture. Place Canopy (D) against the ceiling, ensuring Canopy Screws (E) are protruding through the holes in Canopy (D). Secure Canopy (D) and the fixture in place with Decorative Caps (F).

Note: If fixture doesn't sit flush against the ceiling, remove fixture and readjust Decorative Caps (F) and hex nuts.
16. Install bulbs (not included) into Sockets (M).

Enjoy your new fixture!

PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape

