


**MODEL NUMBER:**

- **3875.509 Colony Soft Widespread**  
Metal Speed Connect Pop-up drain.

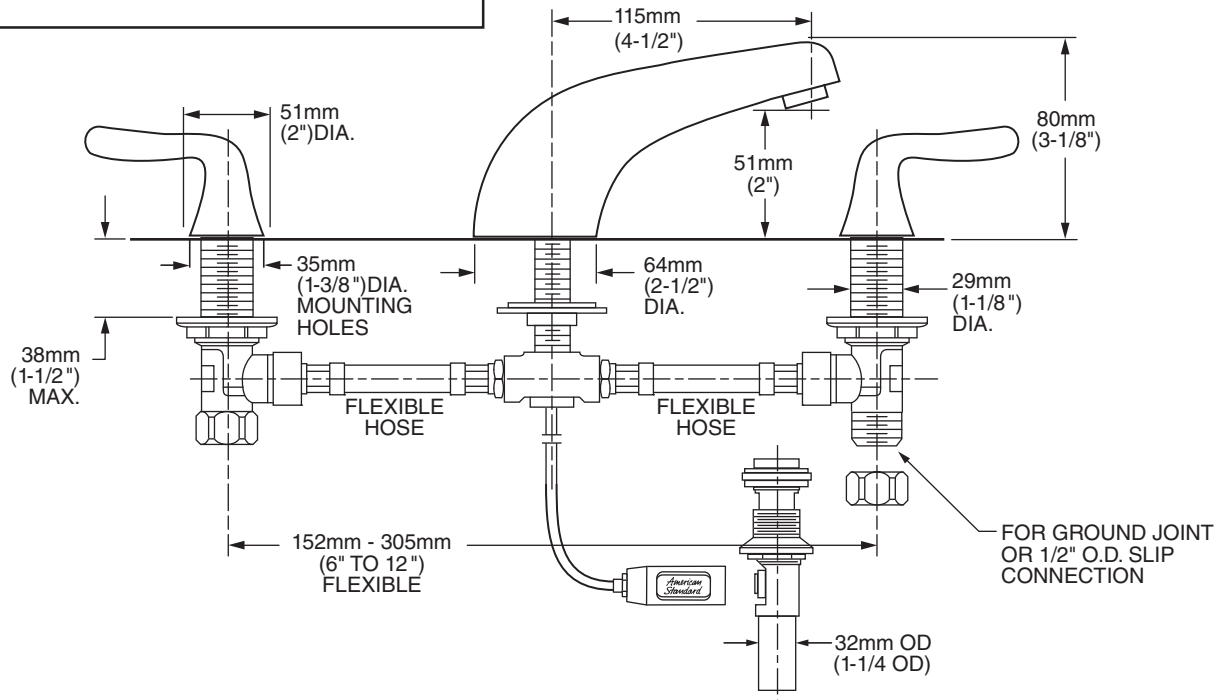

**GENERAL DESCRIPTION:**

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Cast brass spout. One-half inch brass male inlets with brass coupling nuts. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Brass Construction:** Durable. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Smooth handle operation and assures a lifetime of drip-free performance.

**Exclusive Speed Connect Metal Drain:**

- Fewer Parts - installs in less time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

**Choice of Finishes**

**SUGGESTED SPECIFICATION:**

Two handle widespread lavatory faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 3875.509.\_\_\_\_.





# COLONY® SOFT TWO-HANDLE WIDESPREAD LAVATORY FAUCET WITH LEVER HANDLES


## CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1  
ASME A112.18.1  
CSA B 125  
NSF 61/Section 9 and Annex G

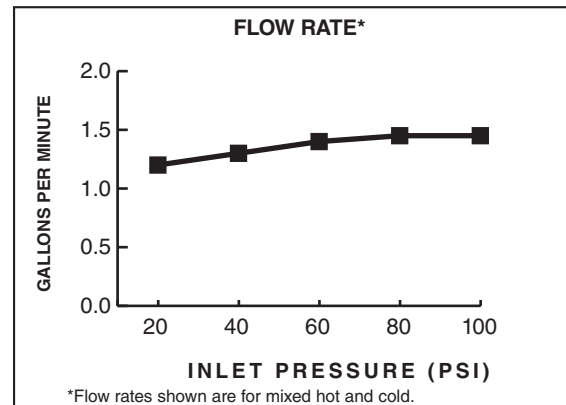

Product Number	Description	Finish Options	
		Polished Chrome	PVD Satin Nickel
		002	295
3875.509	Colony Soft Widespread. With Lever Handles. Metal Speed Connect Pop-up drain. 		



 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
0.5gpm (1.9Lpm) PCA* Spray	___F05
0.5gpm (1.9Lpm) Vandal Resistant PCA Spray	___V05
1.0gpm (3.8Lpm) PCA Aerator	___F10
1.0gpm (3.8Lpm) Vandal Resistant PCA Aerator	___V10
1.5gpm (5.7Lpm) Vandal Resistant PCA Aerator	___V15

\*PCA — Pressure Compensating

\*\*To modify a product, add suffix after the 4th digit (ex. 2064**F05**101.002)

\*\*\*Modified product models are **NOT** WaterSense certified.

AVAILABLE MODIFICATIONS***	Part Suffix**
 Less Pop-Up Drain; Less Hole	___LDH
 Indexed Installed(Red & Blue) Handles	___RB